

Submittal Data Information 1600 Series Pumps (1619 Custom Model)


301-004

EFFECTIVE: September 27, 2016

SUPERSEDES: November 1, 2014

1750 RPM MODEL 1619

JOB	ENGINEER					
CONTRACTOR			REP.			
ITEM NO.	MODEL NO.	IMPELLER DIA.	G.P.M.	T.D.H.	H.P.	ELEC. CHAR.
NSF 61 Certified				WEIGHT	PUMP/MOT	OR

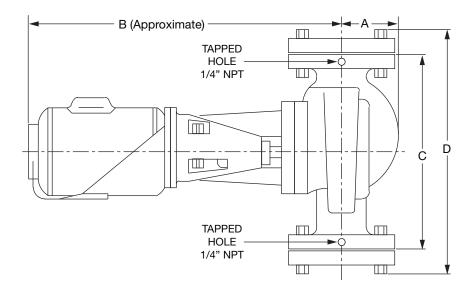

DIMENSIONS:

CUSTOM MODEL	FLANGE SIZE	POWER HP (KW)	DIMENSIONS			
NUMBER			Α	В	С	D
1619	2 (51)	3⁄4 (0.56)	3 (76)	18.5 (470)	- 14½ (368)	17¾ (441)
		1 (0.75)		19.0 (483)		
		1½ (1.10)		21.0 (533)		
		2 (1.50)		23.0 (584)		

English dimensions are in inches. Metric dimensions are in millimeters. Metric data is presented in ($\$). Do not use for construction purposes unless certified.


MATERIALS OF CONSTRUCTION

Item	Standard	Optional	
Casing	Cast Iron	304 Stainless Steel	
Impeller	304 Stainless Steel	N/A	
Shaft	Hardened Alloy Steel	Stainless Steel 416	
Shaft Sleeve	Cupro-Nickel	N/A	
Bracket	Cast Iron	Cast Iron with Stainless Steel Face Plate	
N/A - Not Availa	able		

SPECIFICATIONS

MOTORS	1750 RPM, Three Phase 200V or 230/460V, 60Hz. Also available in Single Phase with overload protection except 3HP (2238 Watts).
BODY	Flanged in-line connections. Companion flanges are included.
FLANGES	Flanges are tapped for gauges ($\frac{1}{4}$ " NPT).
IMPELLER	Closed, dynamically balanced
DRIVE COUPLING	Non-Metallic, vibration dampening
FRAME	Ball bearing type, permanently lubricated. REMOVABLE BEARING CARTRIDGE FITS ALL MODELS.
MECHANICAL SEAL	Type 21 2 Piece Standard – 250°F (121°C) Operating Temperature or Optional High Temperature – 300°F (149°C) Operating Temperature
WORKING PRESSURE	175 PSI (1207 kpa). In accordance with ANSI Standard B16.1.

MODEL 1619 CUSTOM UNIT PERFORMANCE CURVE (1750 RPM)

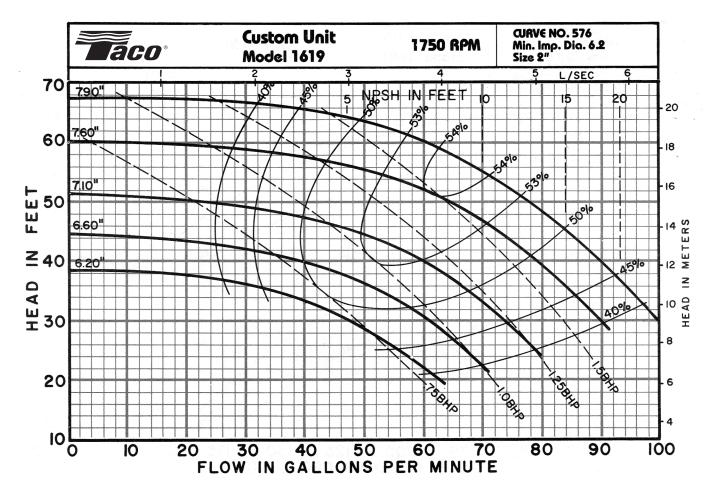

Comments:

