


<b>JOB:</b>   <b>UNIT TAG:</b> <b>ENGINEER:</b> <b>CONTRACTOR:</b>	<b>REPRESENTATIVE:</b>   <b>ORDER NO.:</b> <b>SUBMITTED BY:</b> <b>APPROVED BY:</b>	<b>DATE:</b> <b>DATE:</b> <b>DATE:</b>
---	--	--



## 2E

# Series 1531

### Close-Coupled Centrifugal Pumps

**SPECIFICATIONS**

FLOW \_\_\_\_\_ HEAD \_\_\_\_\_

HP \_\_\_\_\_ RPM \_\_\_\_\_

VOLTS \_\_\_\_\_

CYCLE \_\_\_\_\_ PHASE \_\_\_\_\_

ENCLOSURE \_\_\_\_\_

APPROX. WEIGHT \_\_\_\_\_

SPECIALS \_\_\_\_\_

\_\_\_\_\_

**MATERIALS OF CONSTRUCTION**


BRONZE FITTED     ALL IRON

**MAXIMUM WORKING PRESSURE**


175 psi (12 bar) W.P.  
with 125# ANSI flange drilling

**TYPE OF SEAL**

- 1531 Standard Seal  
(Buna-Carbon/Ceramic)
- 1531 -F Standard Seal w/ Flush Line  
(Buna-Carbon/Ceramic)
- 1531 -S Stuffing Box construction w/ Flushed  
Mechanical Single Seal  
(EPR-Tungsten Carbide/Carbon)
- 1531 -D Stuffing Box construction w/ Flushed  
Double Mechanical Seal  
(EPR-Carbon/Ceramic)  
Requires external water source
- 1531 -PF Stuffing Box Construction  
w/ Flushed Packing  
(Graphite Impregnated Teflon)

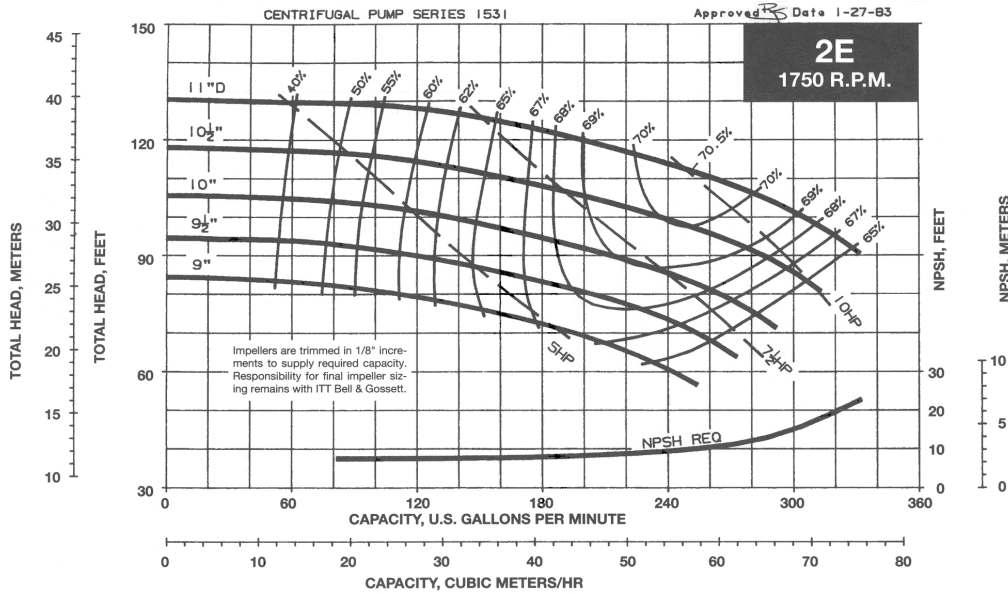

<b>JOB:</b>   <b>UNIT TAG:</b> <b>ENGINEER:</b> <b>CONTRACTOR:</b>	<b>REPRESENTATIVE:</b>   <b>ORDER NO.</b> <b>SUBMITTED BY:</b> <b>APPROVED BY:</b>	<b>DATE:</b> <b>DATE:</b> <b>DATE:</b>
---	---	--



# 2E

## Series 1531

### Close-Coupled Centrifugal Pumps

**SPECIFICATIONS**

FLOW \_\_\_\_\_ HEAD \_\_\_\_\_

HP \_\_\_\_\_ RPM \_\_\_\_\_

VOLTS \_\_\_\_\_

CYCLE \_\_\_\_\_ PHASE \_\_\_\_\_

ENCLOSURE \_\_\_\_\_

APPROX. WEIGHT \_\_\_\_\_

SPECIALS \_\_\_\_\_

**MATERIALS OF CONSTRUCTION**


BRONZE FITTED     ALL IRON


**MAXIMUM WORKING PRESSURE**

175 psi (12 bar) W.P.  
with 125# ANSI flange drilling

**TYPE OF SEAL**

- 1531 Standard Seal  
(Buna-Carbon/Ceramic)
- 1531 -F Standard Seal w/ Flush Line  
(Buna-Carbon/Ceramic)
- 1531 -S Stuffing Box construction w/ Flushed  
Mechanical Single Seal  
(EPR-Tungsten Carbide/Carbon)
- 1531 -D Stuffing Box construction w/ Flushed  
Double Mechanical Seal  
(EPR-Carbon/Ceramic)  
Requires external water source
- 1531 -PF Stuffing Box Construction  
w/ Flushed Packing  
(Graphite Impregnated Teflon)

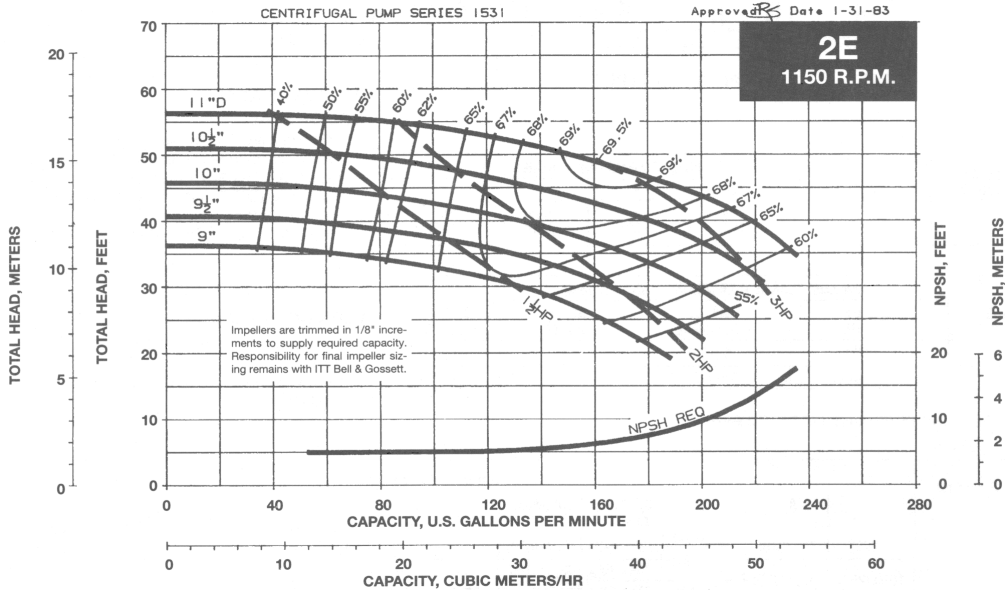

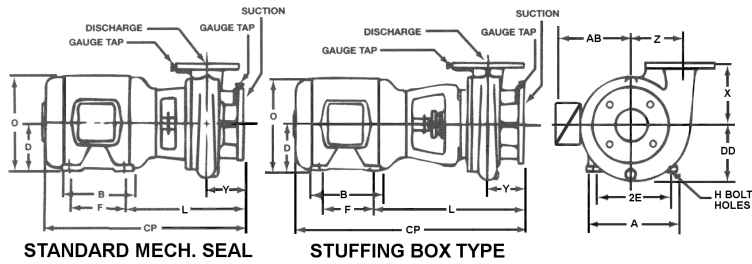

SIZE OF PUMP AND DISCHARGE	SUCTION	PUMP DIMENSIONS IN INCHES (MM)			
		DD	X	Y	Z
2E	3	7-5/8 (194)	8 (203)	5-1/2 (140)	6-1/2 (165)

125# ANSI FLANGE DIMENSIONS - INCHES (MM)				
PIPE SIZE OF FLANGE	O.D. OF FLANGE	DIA. OF BOLT CIRCLE	NO. OF BOLTS	SIZE OF BOLTS
3	8 (203)	6 (152)	4	5/8 (16)
2	6-1/4 (159)	4-3/4 (121)	4	5/8 (16)

DIMENSIONS – Inches (mm)

STANDARD SEAL 1531, 1531-F

MOTOR FRAME	A (Max)	AB (Max)	B (Max)	CP (Max)	D	2E	F	H	L	O (Max)
213JM	10-1/2 (267)	10-3/4 (273)	7-1/2 (190)	25-7/8 (657)	5-1/4 (133)	8-1/2 (216)	5-1/2 (140)	13/32 (10)	14-3/16 (360)	11-1/8 (283)
215JM	10-1/2 (267)	10-3/4 (273)	9 (229)	27-3/8 (695)	5-1/4 (133)	8-1/2 (216)	7 (178)	13/32 (10)	14-3/16 (360)	11-1/8 (283)
254JP	12-1/2 (318)	12-5/8 (321)	10-3/4 (273)	33-5/8 (854)	6-1/4 (159)	10 (254)	8-1/4 (210)	17/32 (13)	17-15/16 (456)	13-1/8 (333)

STUFFING BOX 1531-PF, 1531-S, 1531-D

MOTOR FRAME	A (Max)	AB (Max)	B (Max)	CP (Max)	D	2E	F	H	L	O (Max)
182JP	9 (229)	8-1/2 (216)	6-1/2 (165)	26-3/4 (679)	4-1/2 (114)	7-1/2 (190)	4-1/2 (114)	13/32 (10)	16-5/16 (414)	9-3/8 (238)
184JP	9 (229)	8-1/2 (216)	7-1/2 (190)	26-3/4 (679)	4-1/2 (114)	7-1/2 (190)	5-1/2 (140)	13/32 (10)	16-5/16 (414)	9-3/8 (238)
213JP	10-1/2 (267)	10-3/4 (273)	7-1/2 (190)	29-1/8 (740)	5-1/4 (133)	8-1/2 (216)	5-1/2 (140)	13/32 (10)	17-7/16 (443)	11-1/8 (283)
215JP	10-1/2 (267)	10-3/4 (273)	9 (229)	30-5/8 (778)	5-1/4 (133)	8-1/2 (216)	7 (178)	13/32 (10)	17-7/16 (443)	11-1/8 (283)
254JP	12-1/2 (318)	12-5/8 (321)	10-3/4 (273)	33-5/8 (854)	6-1/4 (159)	10 (254)	8-1/4 (210)	17/32 (13)	17-15/16 (456)	13-1/8 (333)

Dimensions are subject to change. Not to be used for construction purposes unless certified.

Xylem Inc.  
 8200 N. Austin Avenue  
 Morton Grove, IL 60053  
 Phone: (847)966-3700  
 Fax: (847)965-8379  
 www.bellgossett.com

