


| ELECTRICAL DATA | |
|--------------------|---------|
| Volts | 115 |
| Amps | .46 |
| Watts | 36 |
| H.P. | 1/100 |
| Phase | 1 |
| Hertz | 60 |
| Open Drip Proof | Auto |
| Therm. Protect | Yes |
| R.P.M. | 1550 |
| UL FILE NUMBER | |
| Motor Construction | E-40513 |



TJERNLUND PRODUCTS, INC.

1601 Ninth Street • White Bear Lake, MN 55110-6794
 PHONE (800) 255-4208 • (651) 426-2993 • FAX (651) 426-9547
 Visit our web site • www.tjernlund.com

EF-10 FAN CURVE

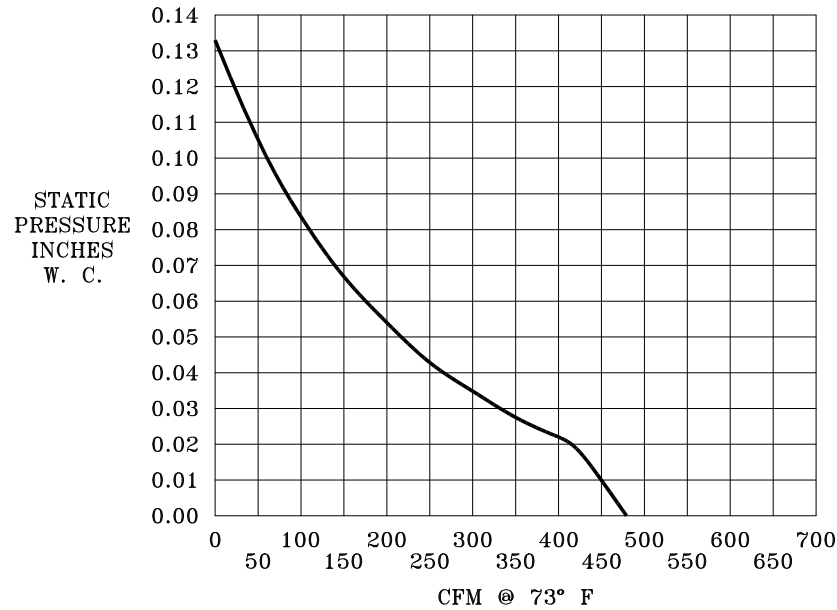

APPLICATION:

Used as a means of increasing air flow through duct work or as an exhaust fan to vent non-combustible air or fumes from enclosed spaces. The maximum air flow operating temperature for the EF-Series is 150° F. (65° C.)

ACCESSORIES:

The EF-10 can be activated with the optional model PS1503 Duct Airstat.

The EF-10 can utilize the optional model SC-1 Speed Control.

CAUTION: This device is not designed to vent bi-products of combustion or combustible fumes.

NOTE: Tjernlund Products reserves the right to make changes to specifications without notification.

