


ELECTRICAL DATA	
Volts	115
Amps	1.25
Watts	96
H.P.	1/35
Phase	1
Hertz	60
Open Drip Proof	Auto
Therm. Protect	Yes
R.P.M.	1550
UL FILE NUMBER	
Motor Construction	E-40513



## TJERNLUND PRODUCTS, INC.

1601 Ninth Street • White Bear Lake, MN 55110-6794  
 PHONE (800) 255-4208 • (651) 426-2993 • FAX (651) 426-9547  
 Visit our web site • [www.tjernlund.com](http://www.tjernlund.com)

### EF-12 FAN CURVE

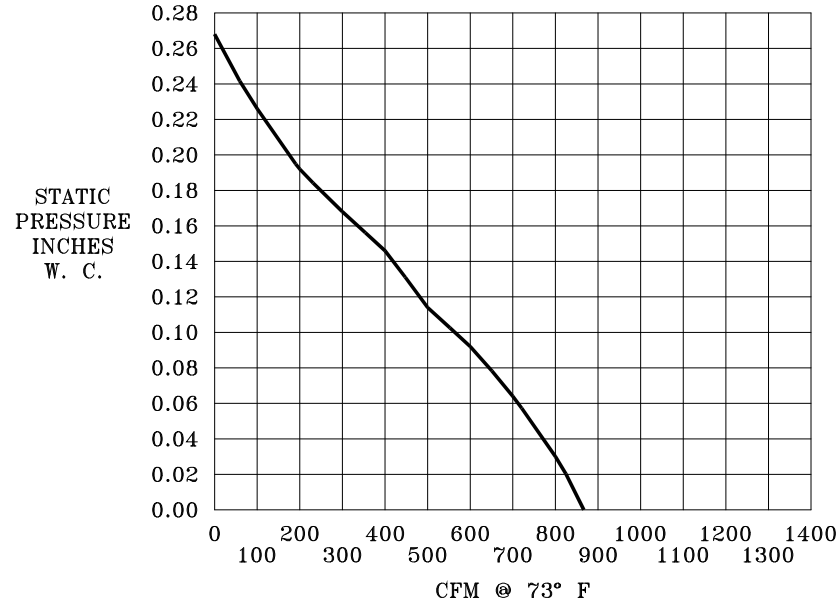

#### APPLICATION:

Used as a means of increasing air flow through duct work or as an exhaust fan to vent non-combustible air or fumes from enclosed spaces. The maximum air flow operating temperature for the EF-Series is 150° F. (65° C.)

#### ACCESSORIES:

The EF-12 can be activated with the optional model PS1503 Duct Airstat.

**CAUTION:** This device is not designed to vent bi-products of combustion or combustible fumes.

**NOTE:** Tjernlund Products reserves the right to make changes to specifications without notification.

