
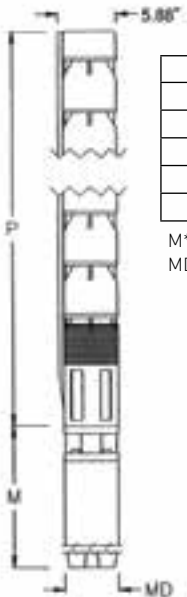


# BERKELEY® 6T-225

## Submersible Turbine

Nominal RPM: 3450  
Based on Fresh Water @ 68 F.  
Maximum Working Pressure: 580 PSI

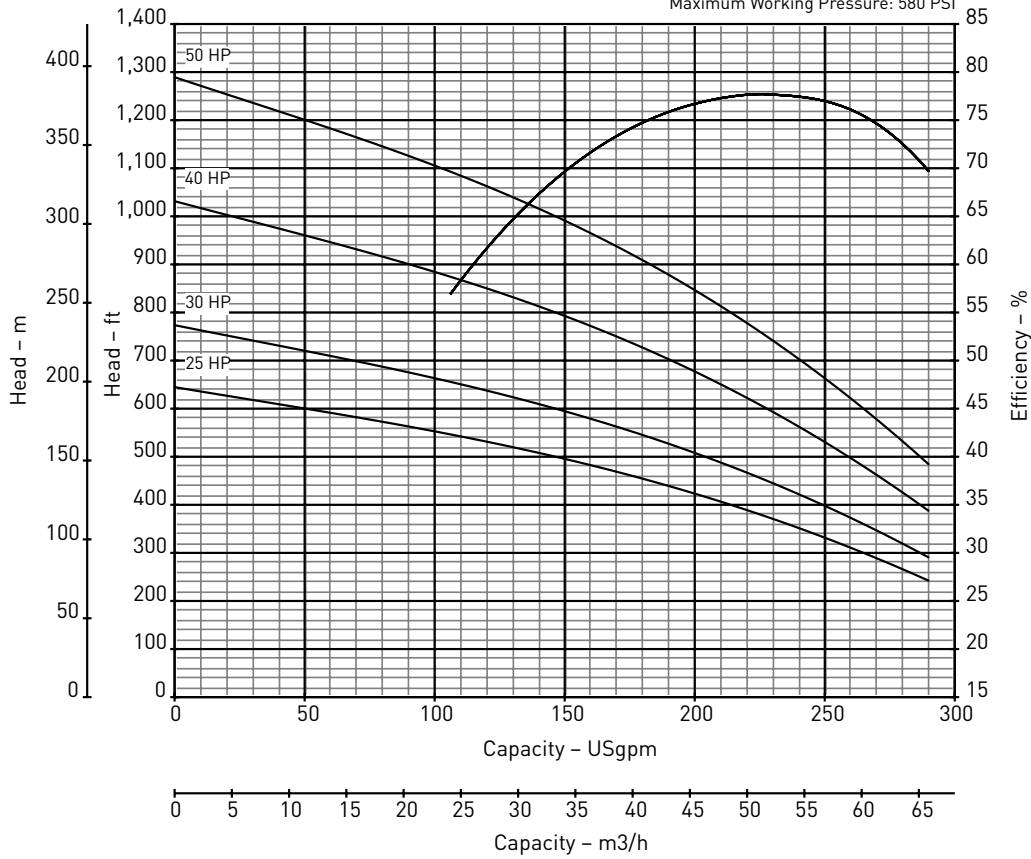

### Outline Dimensions / Weights

HP	Stages	Motor Size	P Length	M* Length	MD* Diameter	Motor Weight	Pump Weight
25	10	6"	63.98	47.20	5.51	224	230
30	12	6"	73.98	49.50	5.51	236	269
40	16	6"	93.98	50.30	5.51	239	346
50	20	6"	113.98	52.20	5.51	251	424

Note: Dimensions=Inches; Weight=U.S. Lbs.

M\*-Maximum Length (Pentair Motor)  
MD\*-Motor Diameter (Pentair Motor)

### Specifications


Minimum Well I.D.	6.0 Inches
Minimum Submergence @ BEP (above inlet)	10.0 Feet
Capacity Range	100 - 300 GPM
Discharge	4" F NPT

See manufacturer's data for motor cooling requirements

# BERKELEY® 6T-225

## Submersible Turbine - Single Stage Performance


Nominal RPM: 3450  
Based on Fresh Water @ 68 F.  
Maximum Working Pressure: 580 PSI

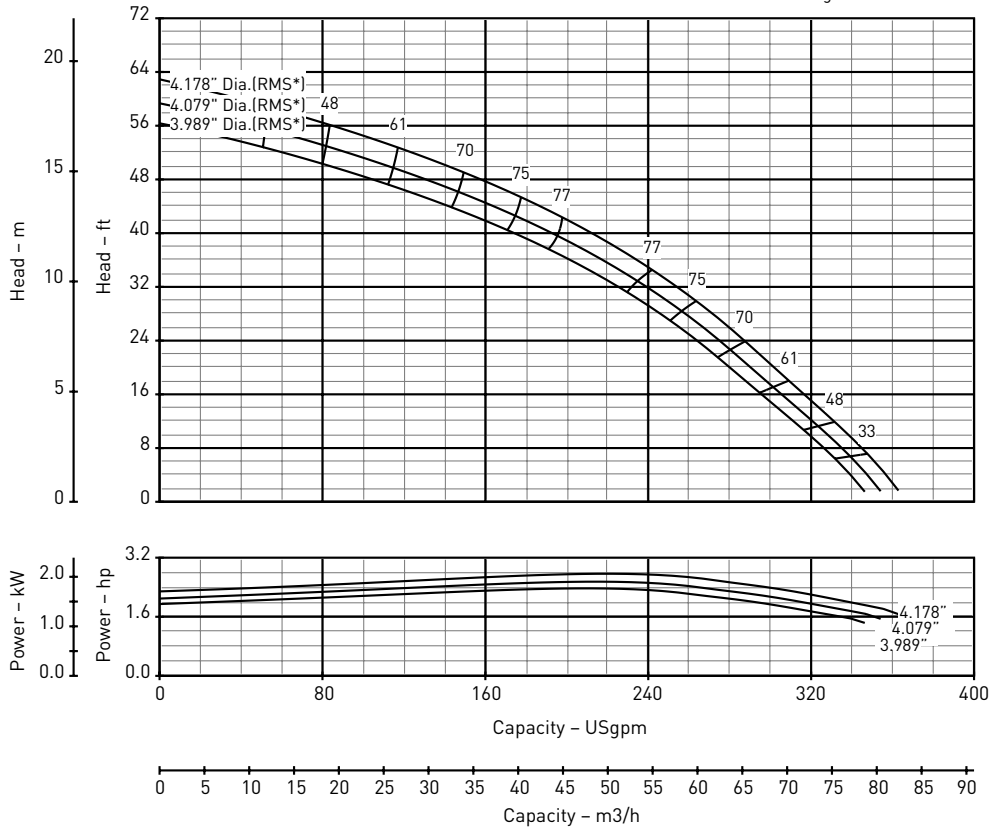

### Impeller Dimensions

RMS* Diameter	A Diameter	B Diameter	C Angle
4.178	4.500	3.830	32
4.079	4.400	3.730	32
3.989	4.310	3.640	32

\*Root-Mean-Square

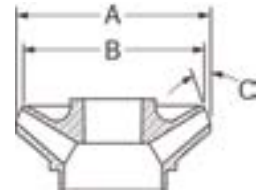

### Materials of Construction

Part Name	Common Material Name	Material Spec Number
Discharge Adapter	Cast Iron	ASTM A48 Class 30
Top Bowl	Cast Iron	ASTM A48 Class 30
Intermediate Bowl	Cast Iron	ASTM A48 Class 30
Bearings, Top and Suction Case	Rubber	Neoprene
Impeller	Stainless Steel	ASTM A743 UNS C30400
Pump Shaft	Stainless Steel	ASTM AISI 416
Impeller Collets	Steel	AISI 1226
Suction Bracket	Cast Iron	ASTM A48 Class 30
Bowl Bearing	Rubber	Neoprene
Strainer	Stainless Steel	AISI 302 UNS S30200
Cable Guard	Stainless Steel	AISI 302 UNS S30200
Shaft Coupling	Stainless Steel	AISI 416 UNS S41600

Note: Efficiency based on average staging

