
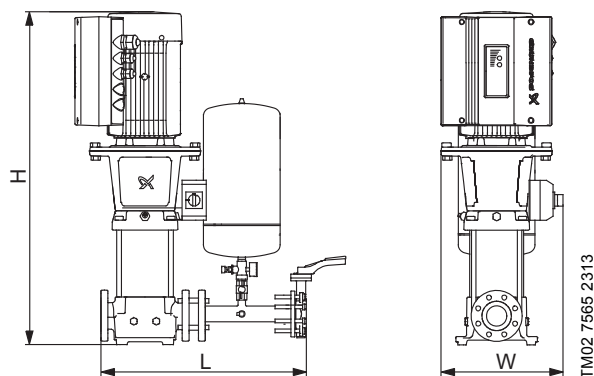


## Hydro Solo-E with CRE 15

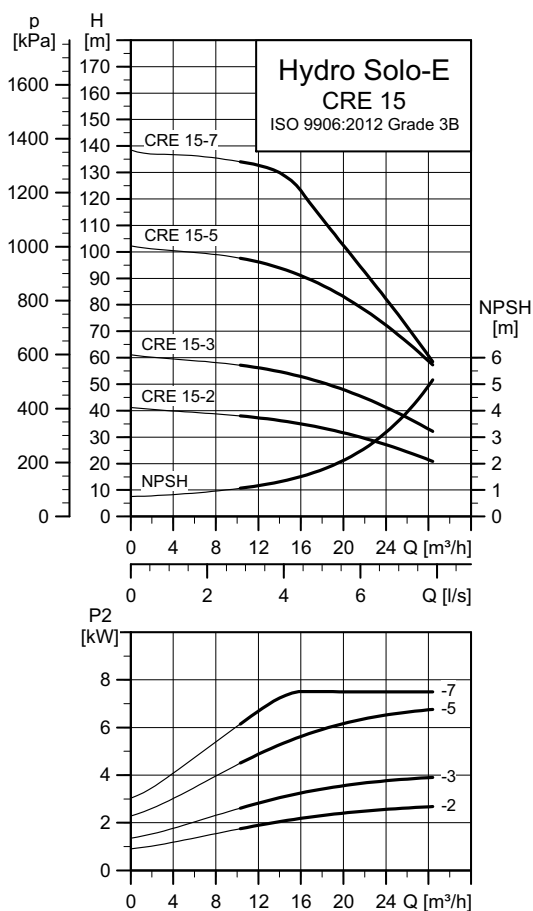

## Electrical data, dimensions and weights

### International range

Pump type	Motor [kW]	Full-load current [A]	Supply voltage [V]	Tank volume [m <sup>3</sup> ]	Connection		Weight [kg]		Packing [m <sup>3</sup> ]	Total height [mm]	Dimensions		
					Inlet	Outlet	Net weight	Gross weight			A [mm]	H [mm]	L [mm]
CRE 15-2	3	6.20 - 5.00	3 x 380-480	18	DN 50	Rp 2"	86	89	0.6	755	425	755	700
CRE 15-3	4	8.10 - 6.60	3 x 380-480	18	DN 50	Rp 2"	98	101	0.6	837	425	837	700
CRE 15-4	5.5	11.0 - 8.80	3 x 380-480	18	DN 50	Rp 2"	110	121	0.6	933	425	933	700
CRE 15-5	7.5	14.10 - 11.20	3 x 380-500	12	DN 50	Rp 2"	111	135	0.6	976	425	976	787
CRE 15-7	7.5	14.10 - 11.20	3 x 380-500	12	DN 50	Rp 2"	115	139	0.6	1066	425	1066	787

### Southern European range

Pump type	Motor [kW]	Full-load current [A]	Supply voltage [V]	Tank volume [m <sup>3</sup> ]	Connection		Weight [kg]		Packing [m <sup>3</sup> ]	Total height [mm]	Dimensions		
					Inlet	Outlet	Net weight	Gross weight			A [mm]	H [mm]	L [mm]
CRE 15-2	3	6.2 - 5.0	3 x 380-480	25	DN 50	Rp 2"	99	119	0.6	755	425	755	700
CRE 15-3	4	8.1 - 6.6	3 x 380-480	25	DN 50	Rp 2"	111	131	0.6	837	425	837	700
CRE 15-4	5.5	11.0 - 8.8	3 x 380-480	25	DN 50	Rp 2"	130	150	0.6	933	425	933	700
CRE 15-5	7.5	14.1 - 11.2	3 x 380-415	25	DN 50	Rp 2"	110	120	0.6	976	425	976	787
CRE 15-7	7.5	14.1 - 11.2	3 x 380-415	25	DN 50	Rp 2"	114	14	0.6	1066	425	1066	787