
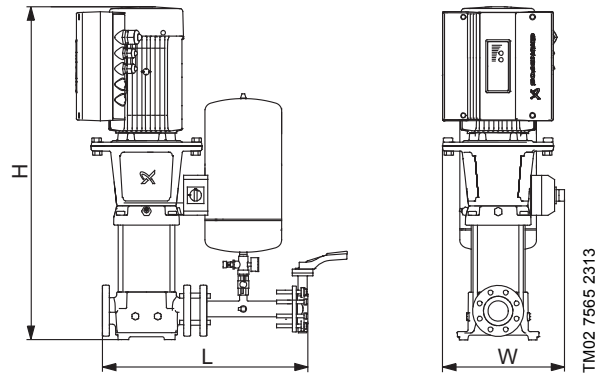


## Hydro Solo-E with CRE 20

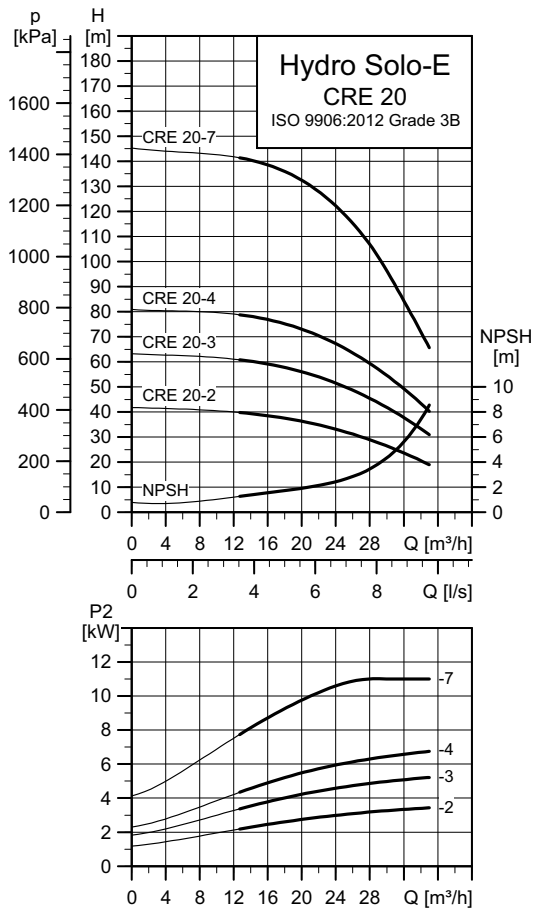

## Electrical data, dimensions and weights

### International range

Pump type	Motor [kW]	Full-load current [A]	Supply voltage [V]	Tank volume [m <sup>3</sup> ]	Connection		Weight [kg]		Packing [m <sup>3</sup> ]	Total height [mm]	Dimensions		
					Inlet	Outlet	Net weight	Gross weight			A [mm]	H [mm]	L [mm]
CRE 20-2	4	8.10 - 6.60	3 x 380-480	18	DN 50	Rp 2"	94	105	0.6	792	425	792	700
CRE 20-3	5.5	11.0 - 8.80	3 x 380-480	18	DN 50	Rp 2"	113	124	0.6	888	425	888	700
CRE 20-4	7.5	14.1 - 11.2	3 x 380-500	33	DN 50	Rp 2"	109	13	0.6	931	425	931	787
CRE 20-7	11	20.3 - 16.0	3 x 380-500	12	DN 50	Rp 2"	138	162	0.6	1160	425	1160	787

### Southern European range

Pump type	Motor [kW]	Full-load current [A]	Supply voltage [V]	Tank volume [m <sup>3</sup> ]	Connection		Weight [kg]		Packing [m <sup>3</sup> ]	Total height [mm]	Dimensions		
					Inlet	Outlet	Net weight	Gross weight			A [mm]	H [mm]	L [mm]
CRE 20-2	4	8.1 - 6.6	3 x 380-480	25	DN 50	Rp 2"	110	130	0.6	792	425	792	700
CRE 20-3	5.5	11.0 - 8.8	3 x 380-480	25	DN 50	Rp 2"	128	148	0.6	888	425	888	700
CRE 20-4	7.5	14.1 - 11.2	3 x 380-415	25	DN 50	Rp 2"	110	120	0.6	931	425	931	787
CRE 20-7	11	20.3 - 16.0	3 x 380-415	25	DN 50	Rp 2"	137	147	0.6	1160	425	1160	787