


JOB: UNIT TAG: ENGINEER: CONTRACTOR:	REPRESENTATIVE: ORDER NO. SUBMITTED BY: APPROVED BY:	DATE: DATE: DATE:
---	---	--



1.5AD

Series e-1510

Centrifugal Pumps - Base Mounted

SPECIFICATIONS

FLOW _____ HEAD _____
 HP _____ RPM _____
 VOLTS _____
 CYCLE _____ PHASE _____
 ENCLOSURE _____
 APPROX. WEIGHT _____
 SPECIALS _____

MATERIALS OF CONSTRUCTION

☒ Stainless Steel Fitted

FEATURES

- ☐ i-ALERT™ Condition Monitor
- ☒ ANSI/OSHA Coupling Guard
- ☒ Center Drop Out Spacer Coupling
- ☒ Fabricated Heavy Duty Baseplate


MAXIMUM WORKING PRESSURE

☐ 175 psi (12 bar) W.P.


TYPE OF SEAL

- ☐ Standard Seal (Buna-Carbon/Ceramic)
- ☐ -F Standard Seal w/ Flush Line (Buna-Carbon/Ceramic)
- ☐ -S Stuffing Box Construction w/ Flushed Mechanical Single Seal (EPR-Tungsten Carbide/Carbon)
- ☐ -PF Stuffing Box Construction w/ Packing (Graphite Impregnated Teflon)

Note: Equipped with NEOPRENE coupling

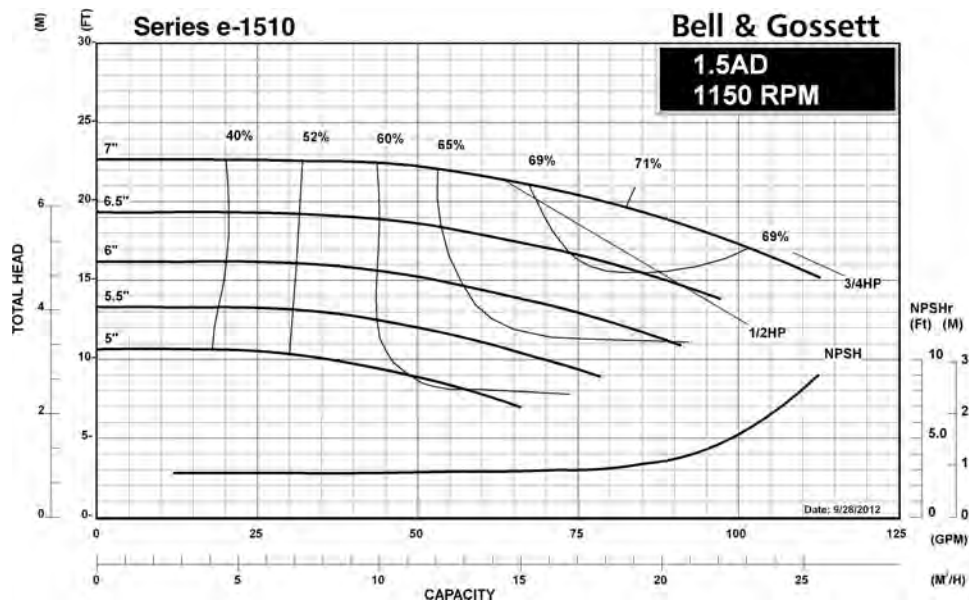

JOB: UNIT TAG: ENGINEER: CONTRACTOR:	REPRESENTATIVE: ORDER NO. SUBMITTED BY: APPROVED BY:	DATE: DATE: DATE:
---	---	--



1.5AD

Series e-1510

Centrifugal Pumps - Base Mounted

SPECIFICATIONS

FLOW _____ HEAD _____
 HP _____ RPM _____
 VOLTS _____
 CYCLE _____ PHASE _____
 ENCLOSURE _____
 APPROX. WEIGHT _____
 SPECIALS _____

MATERIALS OF CONSTRUCTION

☒ Stainless Steel Fitted

FEATURES

- ☐ i-ALERT™ Condition Monitor
- ☒ ANSI/OSHA Coupling Guard
- ☒ Center Drop Out Spacer Coupling
- ☒ Fabricated Heavy Duty Baseplate


MAXIMUM WORKING PRESSURE

☐ 175 psi (12 bar) W.P.


TYPE OF SEAL

- ☐ Standard Seal (Buna-Carbon/Ceramic)
- ☐ -F Standard Seal w/ Flush Line (Buna-Carbon/Ceramic)
- ☐ -S Stuffing Box Construction w/ Flushed Mechanical Single Seal (EPR-Tungsten Carbide/Carbon)
- ☐ -PF Stuffing Box Construction w/ Packing (Graphite Impregnated Teflon)

Note: Equipped with NEOPRENE coupling

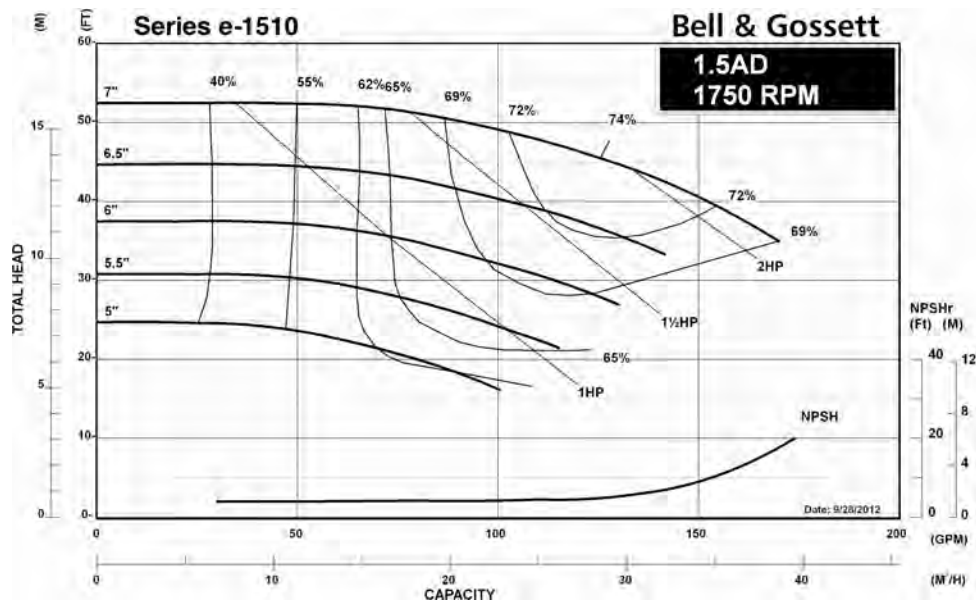

JOB: UNIT TAG: ENGINEER: CONTRACTOR:	REPRESENTATIVE: ORDER NO. SUBMITTED BY: APPROVED BY:	DATE: DATE: DATE:
---	---	--



1.5AD

Series e-1510

Centrifugal Pumps - Base Mounted

SPECIFICATIONS

FLOW _____ HEAD _____
 HP _____ RPM _____
 VOLTS _____
 CYCLE _____ PHASE _____
 ENCLOSURE _____
 APPROX. WEIGHT _____
 SPECIALS _____

MATERIALS OF CONSTRUCTION

☒ Stainless Steel Fitted

FEATURES

- ☐ i-ALERT™ Condition Monitor
- ☒ ANSI/OSHA Coupling Guard
- ☒ Center Drop Out Spacer Coupling
- ☒ Fabricated Heavy Duty Baseplate


MAXIMUM WORKING PRESSURE


☐ 175 psi (12 bar) W.P.

TYPE OF SEAL

- ☐ Standard Seal (Buna-Carbon/Ceramic)
- ☐ -F Standard Seal w/ Flush Line (Buna-Carbon/Ceramic)
- ☐ -S Stuffing Box Construction w/ Flushed Mechanical Single Seal (EPR-Tungsten Carbide/Carbon)
- ☐ -PF Stuffing Box Construction w/ Packing (Graphite Impregnated Teflon)

Note: Equipped with NEOPRENE coupling

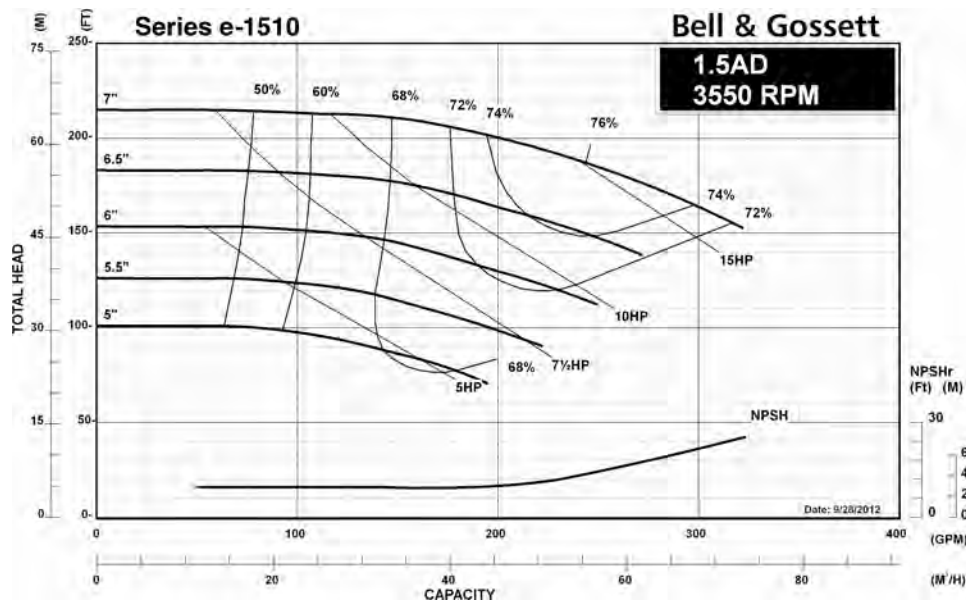

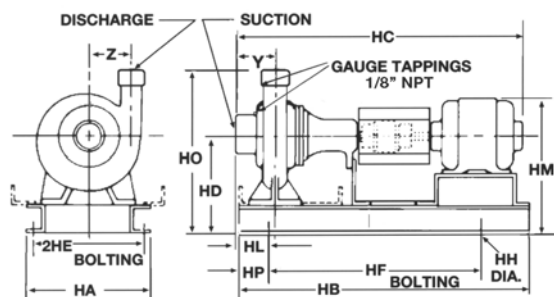

NOZZLE SIZES	
Discharge	1-1/2" N.P.T.
Suction	2" N.P.T.

DIMENSIONS – Inches (mm)

STANDARD SEAL

MOTOR FRAME	HA	HB	HC MAX	HD	2HE	HF	HH	HL	HM MAX	HO	HP	Y	Z
"S" FRAME													
56	12 (305)	28-3/4 (730)	28-1/4 (718)	9-3/4 (248)	10-1/4 (260)	22-1/2 (572)	3/4 (19)	3-1/16 (78)	13-3/8 (340)	15-3/4 (400)	3 (76)	3-1/8 (79)	4-5/8 (117)
143T	12 (305)	28-3/4 (730)	28-3/8 (721)	9-3/4 (248)	10-1/4 (260)	22-1/2 (572)	3/4 (19)	3-1/16 (78)	13-1/2 (343)	15-3/4 (400)	3 (76)	3-1/8 (79)	4-5/8 (117)
145T	12 (305)	28-3/4 (730)	29-3/8 (746)	9-3/4 (248)	10-1/4 (260)	22-1/2 (572)	3/4 (19)	3-1/16 (78)	13-1/2 (343)	15-3/4 (400)	3 (76)	3-1/8 (79)	4-5/8 (117)
182T	14-5/8 (371)	31 (787)	32-1/8 (816)	9-3/4 (248)	12-7/8 (327)	25 (635)	3/4 (19)	1-11/16 (43)	15 (381)	15-3/4 (400)	3 (76)	3-1/8 (79)	4-5/8 (117)
184T	14-5/8 (371)	31 (787)	32-7/8 (835)	9-3/4 (248)	12-7/8 (327)	25 (635)	3/4 (19)	1-11/16 (43)	15 (381)	15-3/4 (400)	3 (76)	3-1/8 (79)	4-5/8 (117)
213T	14-5/8 (371)	34-5/8 (879)	35-3/8 (899)	9-3/4 (248)	12-7/8 (327)	28-5/8 (727)	3/4 (19)	1-11/16 (43)	15-5/8 (397)	15-3/4 (400)	3 (76)	3-1/8 (79)	4-5/8 (117)
215T	14-5/8 (371)	34-5/8 (879)	36-7/8 (937)	9-3/4 (248)	12-7/8 (327)	28-5/8 (727)	3/4 (19)	1-11/16 (43)	15-5/8 (397)	15-3/4 (400)	3 (76)	3-1/8 (79)	4-5/8 (117)
254T	14-5/8 (371)	39-3/8 (1000)	40-5/8 (1032)	10-3/4 (273)	12-7/8 (327)	33-3/8 (848)	3/4 (19)	1-11/16 (43)	17-5/8 (448)	16-3/4 (425)	3 (76)	3-1/8 (79)	4-5/8 (117)
256T	14-5/8 (371)	39-3/8 (1000)	42-3/8 (1076)	10-3/4 (273)	12-7/8 (327)	33-3/8 (848)	3/4 (19)	1-11/16 (43)	17-5/8 (448)	16-3/4 (425)	3 (76)	3-1/8 (79)	4-5/8 (117)

STUFFING BOX

MOTOR FRAME	HA	HB	HC MAX	HD	2HE	HF	HH	HL	HM MAX	HO	HP	Y	Z
"S" FRAME													
56	14-5/8 (371)	34-5/8 (879)	31-7/8 (810)	9-3/4 (248)	12-7/8 (327)	28-5/8 (727)	3/4 (19)	1-11/16 (43)	13-3/8 (340)	15-3/4 (400)	3 (76)	3-1/8 (79)	4-5/8 (117)
143T	14-5/8 (371)	34-5/8 (879)	32 (813)	9-3/4 (248)	12-7/8 (327)	28-5/8 (727)	3/4 (19)	1-11/16 (43)	13-1/2 (343)	15-3/4 (400)	3 (76)	3-1/8 (79)	4-5/8 (117)
145T	14-5/8 (371)	34-5/8 (879)	33 (838)	9-3/4 (248)	12-7/8 (327)	28-5/8 (727)	3/4 (19)	1-11/16 (43)	13-1/2 (343)	15-3/4 (400)	3 (76)	3-1/8 (79)	4-5/8 (117)
182T	14-5/8 (371)	34-5/8 (879)	35-3/4 (908)	9-3/4 (248)	12-7/8 (327)	28-5/8 (727)	3/4 (19)	1-11/16 (43)	15 (381)	15-3/4 (400)	3 (76)	3-1/8 (79)	4-5/8 (117)
184T	14-5/8 (371)	34-5/8 (879)	36-1/2 (927)	9-3/4 (248)	12-7/8 (327)	28-5/8 (727)	3/4 (19)	1-11/16 (43)	15 (381)	15-3/4 (400)	3 (76)	3-1/8 (79)	4-5/8 (117)
213T	14-5/8 (371)	39-3/8 (1000)	39 (991)	9-3/4 (248)	12-7/8 (327)	33-3/8 (848)	3/4 (19)	1-11/16 (43)	15-5/8 (397)	15-3/4 (400)	3 (76)	3-1/8 (79)	4-5/8 (117)
215T	14-5/8 (371)	39-3/8 (1000)	40-1/2 (1029)	9-3/4 (248)	12-7/8 (327)	33-3/8 (848)	3/4 (19)	1-11/16 (43)	15-5/8 (397)	15-3/4 (400)	3 (76)	3-1/8 (79)	4-5/8 (117)
254T	16 (406)	46-1/2 (1181)	44-1/4 (1124)	12 (305)	14 (356)	36-1/2 (927)	7/8 (22)	2-13/16 (71)	18-7/8 (479)	18 (457)	5 (127)	3-1/8 (79)	4-5/8 (117)
256T	16 (406)	46-1/2 (1181)	46 (1168)	12 (305)	14 (356)	36-1/2 (927)	7/8 (22)	2-13/16 (71)	18-7/8 (479)	18 (457)	5 (127)	3-1/8 (79)	4-5/8 (117)


Dimensions are subject to change. Not to be used for construction purposes unless certified.

Xylem Inc.
8200 N. Austin Avenue
Morton Grove, IL 60053
Phone: (847)966-3700
Fax: (847)965-8379
www.bellgossett.com

xylem
Let's Solve Water

Bell & Gossett is a trademark of Xylem Inc. or one of its subsidiaries.
© 2013 Xylem Inc.

JOB: UNIT TAG: ENGINEER: CONTRACTOR:	REPRESENTATIVE: ORDER NO. SUBMITTED BY: APPROVED BY:	DATE: DATE: DATE:
---	---	--



1.5BC

Series e-1510

Centrifugal Pumps - Base Mounted

SPECIFICATIONS

FLOW _____ HEAD _____

HP _____ RPM _____

VOLTS _____

CYCLE _____ PHASE _____

ENCLOSURE _____

APPROX. WEIGHT _____

SPECIALS _____

MATERIALS OF CONSTRUCTION

☒ Stainless Steel Fitted

FEATURES

- ☐ i-ALERT™ Condition Monitor
- ☒ ANSI/OSHA Coupling Guard
- ☒ Center Drop Out Spacer Coupling
- ☒ Fabricated Heavy Duty Baseplate


MAXIMUM WORKING PRESSURE

☐ 175 psi (12 bar) W.P.

TYPE OF SEAL

- ☐ Standard Seal (Buna-Carbon/Ceramic)
- ☐ -F Standard Seal w/ Flush Line (Buna-Carbon/Ceramic)
- ☐ -S Stuffing Box Construction w/ Flushed Mechanical Single Seal (EPR-Tungsten Carbide/Carbon)
- ☐ -PF Stuffing Box Construction w/ Packing (Graphite Impregnated Teflon)

Note: Equipped with NEOPRENE coupling

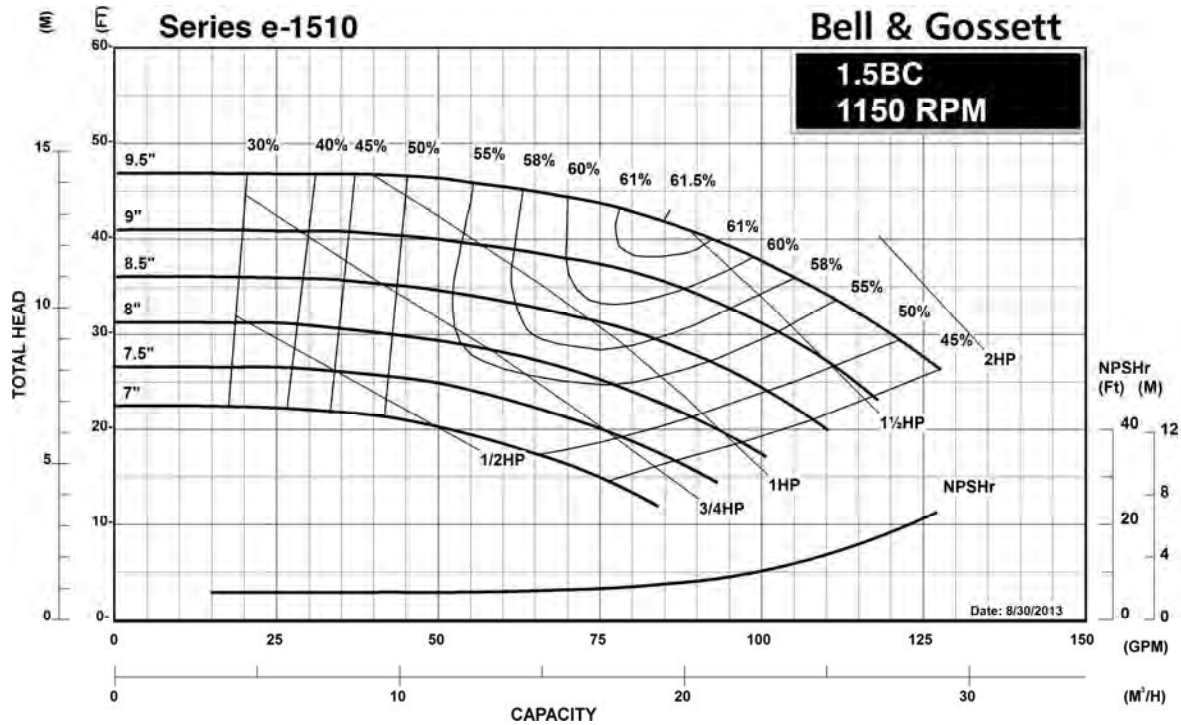

JOB:

REPRESENTATIVE:

UNIT TAG:

ORDER NO.

DATE:

ENGINEER:


SUBMITTED BY:

DATE:

CONTRACTOR:

APPROVED BY:

DATE:



1.5BC Series e-1510 Centrifugal Pumps - Base Mounted

SPECIFICATIONS

FLOW _____ HEAD _____

HP _____ RPM _____

VOLTS _____

CYCLE _____ PHASE _____

ENCLOSURE _____

APPROX. WEIGHT _____

SPECIALS _____

MATERIALS OF CONSTRUCTION

☒ Stainless Steel Fitted

FEATURES

- ☐ i-ALERT™ Condition Monitor
- ☒ ANSI/OSHA Coupling Guard
- ☒ Center Drop Out Spacer Coupling
- ☒ Fabricated Heavy Duty Baseplate


MAXIMUM WORKING PRESSURE

☐ 175 psi (12 bar) W.P.

TYPE OF SEAL

- ☐ Standard Seal (Buna-Carbon/Ceramic)
- ☐ -F Standard Seal w/ Flush Line (Buna-Carbon/Ceramic)
- ☐ -S Stuffing Box Construction w/ Flushed Mechanical Single Seal (EPR-Tungsten Carbide/Carbon)
- ☐ -PF Stuffing Box Construction w/ Packing (Graphite Impregnated Teflon)

Note: Equipped with NEOPRENE coupling

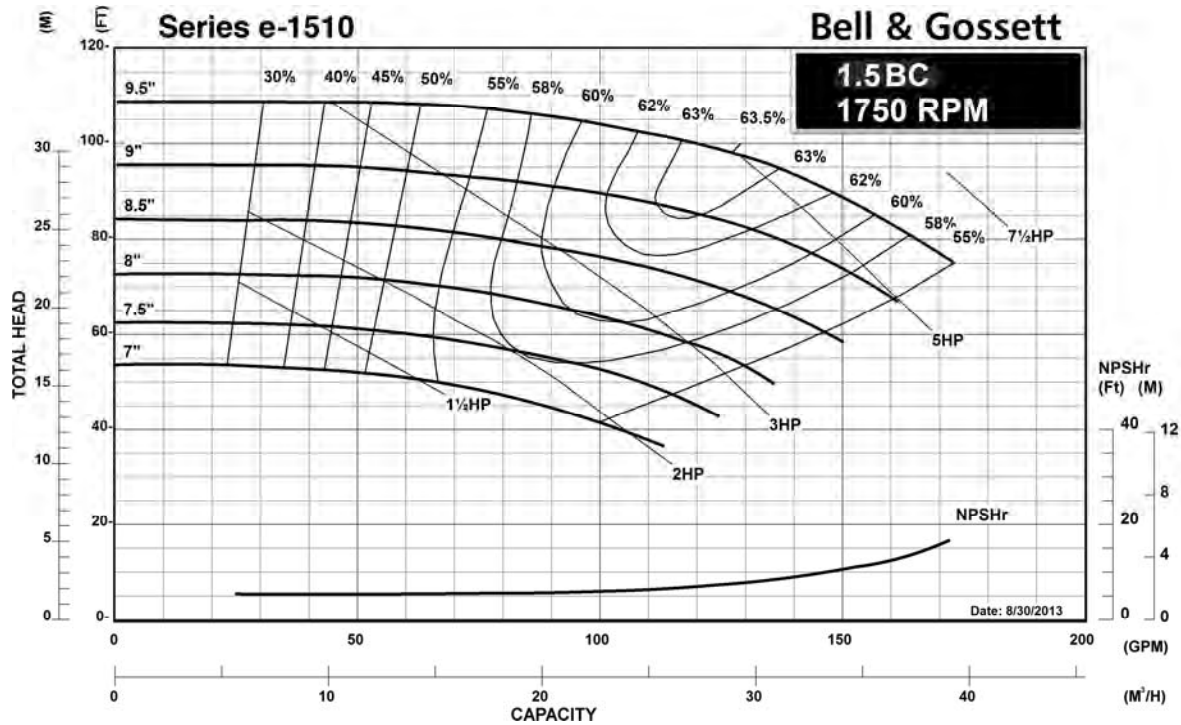

JOB:

REPRESENTATIVE:

UNIT TAG:

ORDER NO.

DATE:

ENGINEER:


SUBMITTED BY:

DATE:

CONTRACTOR:

APPROVED BY:

DATE:



1.5BC Series e-1510 Centrifugal Pumps - Base Mounted

SPECIFICATIONS

FLOW _____ HEAD _____

HP _____ RPM _____

VOLTS _____

CYCLE _____ PHASE _____

ENCLOSURE _____

APPROX. WEIGHT _____

SPECIALS _____

MATERIALS OF CONSTRUCTION

☒ Stainless Steel Fitted

FEATURES

- ☐ i-ALERT™ Condition Monitor
- ☒ ANSI/OSHA Coupling Guard
- ☒ Center Drop Out Spacer Coupling
- ☒ Fabricated Heavy Duty Baseplate


MAXIMUM WORKING PRESSURE


☐ 175 psi (12 bar) W.P.

TYPE OF SEAL

- ☐ Standard Seal (Buna-Carbon/Ceramic)
- ☐ -F Standard Seal w/ Flush Line (Buna-Carbon/Ceramic)
- ☐ -S Stuffing Box Construction w/ Flushed Mechanical Single Seal (EPR-Tungsten Carbide/Carbon)
- ☐ -PF Stuffing Box Construction w/ Packing (Graphite Impregnated Teflon)

Note: Equipped with NEOPRENE coupling

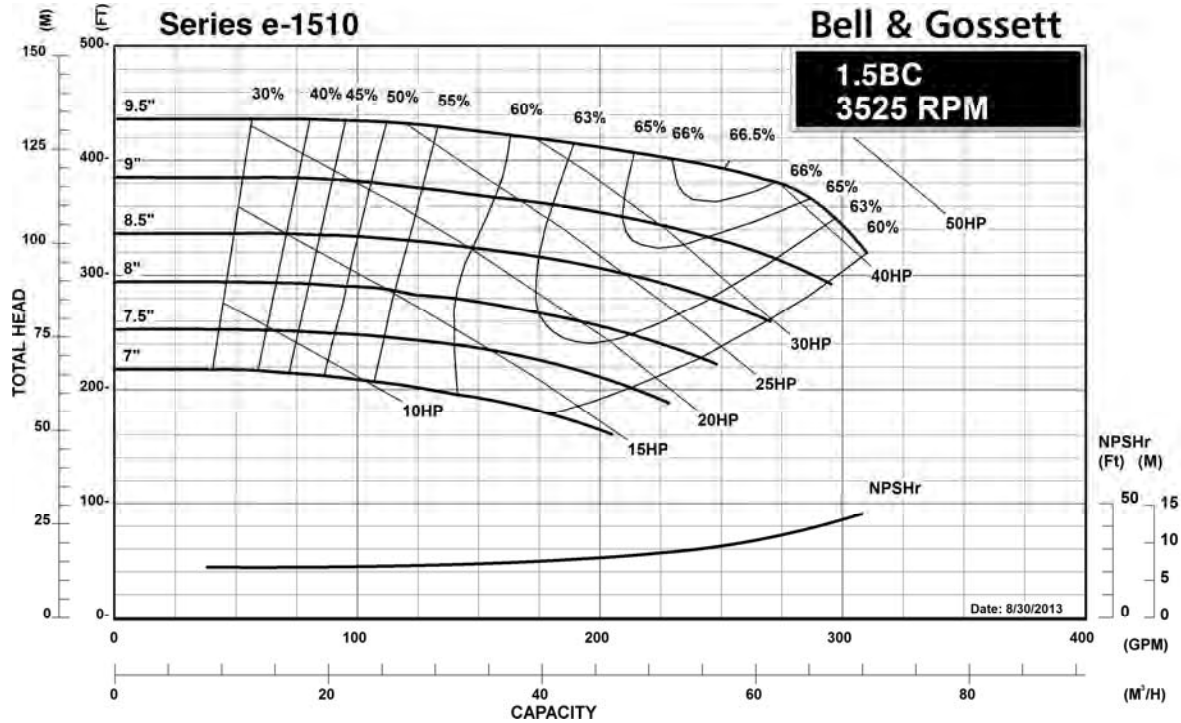

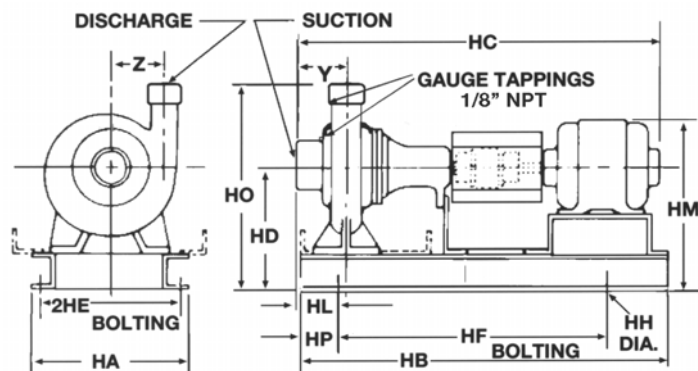

NOZZLE SIZES	
Discharge	1-1/2" N.P.T.
Suction	2" N.P.T.

DIMENSIONS – Inches (mm)

STANDARD SEAL

MOTOR FRAME	HA	HB	HC MAX	HD	2HE	HF ₁	HF ₂	HH	HL	HM MAX	HO	HP	Y	Z
"S" FRAME														
143T	14-5/8 (371)	31 (787)	28-3/8 (721)	10-3/4 (273)	12-7/8 (327)	25 (635)	-	3/4 (19)	1-11/16 (43)	14-1/2 (368)	17-1/4 (438)	3 (76)	3-1/8 (79)	5-3/4 (146)
145T	14-5/8 (371)	31 (787)	29-3/8 (746)	10-3/4 (273)	12-7/8 (327)	25 (635)	-	3/4 (19)	1-11/16 (43)	14-1/2 (368)	17-1/4 (438)	3 (76)	3-1/8 (79)	5-3/4 (146)
182T	14-5/8 (371)	31 (787)	32-1/8 (816)	10-3/4 (273)	12-7/8 (327)	25 (635)	-	3/4 (19)	1-11/16 (43)	16 (406)	17-1/4 (438)	3 (76)	3-1/8 (79)	5-3/4 (146)
184T	14-5/8 (371)	31 (787)	32-7/8 (835)	10-3/4 (273)	12-7/8 (327)	25 (635)	-	3/4 (19)	1-11/16 (43)	16 (406)	17-1/4 (438)	3 (76)	3-1/8 (79)	5-3/4 (146)
213T 1750 RPM	14-5/8 (371)	34-5/8 (879)	36-7/8 (937)	10-3/4 (273)	12-7/8 (327)	28-5/8 (727)	-	3/4 (19)	1-11/16 (43)	16-5/8 (422)	17-1/4 (438)	3 (76)	3-1/8 (79)	5-3/4 (146)
215T 1750 RPM	14-5/8 (371)	34-5/8 (879)	36-7/8 (937)	10-3/4 (273)	12-7/8 (327)	28-5/8 (727)	-	3/4 (19)	1-11/16 (43)	16-5/8 (422)	17-1/4 (438)	3 (76)	3-1/8 (79)	5-3/4 (146)
"L" FRAME														
213T 3500 RPM	14-5/8 (371)	39-3/8 (1000)	41-1/4 (1048)	10-3/4 (273)	12-7/8 (327)	33-3/8 (848)	-	3/4 (19)	1-11/16 (43)	16-5/8 (422)	17-1/4 (438)	3 (76)	3-1/8 (79)	5-3/4 (146)
215T 3500 RPM	14-5/8 (371)	39-3/8 (1000)	41-1/4 (1048)	10-3/4 (273)	12-7/8 (327)	33-3/8 (848)	-	3/4 (19)	1-11/16 (43)	16-5/8 (422)	17-1/4 (438)	3 (76)	3-1/8 (79)	5-3/4 (146)
254T	16 (406)	46-1/2 (1181)	45 (1143)	12 (305)	14 (356)	36-1/2 (927)	18-1/4 (464)	7/8 (22)	2-13/16 (71)	18-7/8 (479)	18-1/2 (470)	5 (127)	3-1/8 (79)	5-3/4 (146)
256T	16 (406)	46-1/2 (1181)	45 (1143)	12 (305)	14 (356)	36-1/2 (927)	18-1/4 (464)	7/8 (22)	2-13/16 (71)	18-7/8 (479)	18-1/2 (470)	5 (127)	3-1/8 (79)	5-3/4 (146)
284TS	16 (406)	46-1/2 (1181)	46-3/4 (1187)	12 (305)	14 (356)	36-1/2 (927)	18-1/4 (464)	7/8 (22)	2-13/16 (71)	18-7/8 (479)	18-1/2 (470)	5 (127)	3-1/8 (79)	5-3/4 (146)
286TS	16 (406)	46-1/2 (1181)	46-1/8 (1172)	13 (330)	14 (356)	36-1/2 (927)	18-1/4 (464)	7/8 (22)	2-13/16 (71)	21 (533)	19-1/2 (495)	5 (127)	3-1/8 (79)	5-3/4 (146)
324TS	16 (406)	46-1/2 (1181)	47-5/8 (1210)	13 (330)	14 (356)	36-1/2 (927)	18-1/4 (464)	7/8 (22)	2-13/16 (71)	21 (533)	19-1/2 (495)	5 (127)	3-1/8 (79)	5-3/4 (146)
326TS	16 (406)	46-1/2 (1181)	49-5/8 (1260)	12 (305)	14 (356)	36-1/2 (927)	18-1/4 (464)	7/8 (22)	2-13/16 (71)	21-1/8 (537)	18-1/2 (470)	5 (127)	3-1/8 (79)	5-3/4 (146)

STUFFING BOX

MOTOR FRAME	HA	HB	HC MAX	HD	2HE	HF ₁	HF ₂	HH	HL	HM MAX	HO	HP	Y	Z
"S" FRAME														
143T	14-5/8 (371)	34-5/8 (879)	32 (813)	10-3/4 (273)	12-7/8 (327)	28-5/8 (727)	-	3/4 (19)	1-11/16 (43)	14-1/2 (368)	17-1/4 (438)	3 (76)	3-1/8 (79)	5-3/4 (146)
145T	14-5/8 (371)	34-5/8 (879)	33 (838)	10-3/4 (273)	12-7/8 (327)	28-5/8 (727)	-	3/4 (19)	1-11/16 (43)	14-1/2 (368)	17-1/4 (438)	3 (76)	3-1/8 (79)	5-3/4 (146)
182T	14-5/8 (371)	34-5/8 (879)	35-3/4 (908)	10-3/4 (273)	12-7/8 (327)	28-5/8 (727)	-	3/4 (19)	1-11/16 (43)	16 (406)	17-1/4 (438)	3 (76)	3-1/8 (79)	5-3/4 (146)
184T	14-5/8 (371)	34-5/8 (879)	36-1/2 (927)	10-3/4 (273)	12-7/8 (327)	28-5/8 (727)	-	3/4 (19)	1-11/16 (43)	16 (406)	17-1/4 (438)	3 (76)	3-1/8 (79)	5-3/4 (146)
213T 1750 RPM	14-5/8 (371)	39-3/8 (1000)	40-1/2 (1029)	10-3/4 (273)	12-7/8 (327)	33-3/8 (848)	-	3/4 (19)	1-11/16 (43)	16-5/8 (422)	17-1/4 (438)	3 (76)	3-1/8 (79)	5-3/4 (146)
215T 1750 RPM	14-5/8 (371)	39-3/8 (1000)	40-1/2 (1029)	10-3/4 (273)	12-7/8 (327)	33-3/8 (848)	-	3/4 (19)	1-11/16 (43)	16-5/8 (422)	17-1/4 (438)	3 (76)	3-1/8 (79)	5-3/4 (146)
"L" FRAME														
213T 3500 RPM	16 (406)	46-1/2 (1181)	43-3/4 (111)	12 (305)	14 (356)	36-1/2 (927)	18-1/4 (464)	7/8 (22)	2-13/16 (71)	17-7/8 (454)	18-1/2 (470)	5 (127)	3-1/8 (79)	5-3/4 (146)
215T 3500 RPM	16 (406)	46-1/2 (1181)	43-3/4 (111)	12 (305)	14 (356)	36-1/2 (927)	18-1/4 (464)	7/8 (22)	2-13/16 (71)	17-7/8 (454)	18-1/2 (470)	5 (127)	3-1/8 (79)	5-3/4 (146)
254T	16 (406)	46-1/2 (1181)	43-3/4 (1111)	12 (305)	14 (356)	36-1/2 (927)	18-1/4 (464)	7/8 (22)	2-13/16 (71)	17-7/8 (454)	18-1/2 (470)	5 (127)	3-1/8 (79)	5-3/4 (146)
256T	16 (406)	51-3/4 (1314)	47-1/2 (1207)	12 (305)	14 (356)	41-3/4 (1060)	20-7/8 (530)	7/8 (22)	2-13/16 (71)	18-7/8 (479)	18-1/2 (470)	5 (127)	3-1/8 (79)	5-3/4 (146)
284TS	16 (406)	51-3/4 (1314)	49-1/4 (1251)	12 (305)	14 (356)	41-3/4 (1060)	20-7/8 (530)	7/8 (22)	2-13/16 (71)	18-7/8 (479)	18-1/2 (470)	5 (127)	3-1/8 (79)	5-3/4 (146)
286TS	16 (406)	51-3/4 (1314)	48-1/2 (1232)	13 (330)	14 (356)	41-3/4 (1060)	20-7/8 (530)	7/8 (22)	2-13/16 (71)	21 (533)	19-1/2 (495)	5 (127)	3-1/8 (79)	5-3/4 (146)
324TS	16 (406)	51-3/4 (1314)	50 (1270)	13 (330)	14 (356)	41-3/4 (1060)	20-7/8 (530)	7/8 (22)	2-13/16 (71)	21 (533)	19-1/2 (495)	5 (127)	3-1/8 (79)	5-3/4 (146)
326TS	16 (406)	51-3/4 (1314)	52 (1321)	12 (305)	14 (356)	41-3/4 (1060)	20-7/8 (530)	7/8 (22)	2-13/16 (71)	21-1/8 (537)	18-1/2 (470)	5 (127)	3-1/8 (79)	5-3/4 (146)


Dimensions are subject to change. Not to be used for construction purposes unless certified.

Xylem Inc.
8200 N. Austin Avenue
Morton Grove, IL 60053
Phone: (847)966-3700
Fax: (847)965-8379
www.xyleminc.com/brands/bellgossett

xylem
Let's Solve Water

Bell & Gossett is a trademark of Xylem Inc. or one of its subsidiaries.
© 2012 Xylem Inc.

JOB: UNIT TAG: ENGINEER: CONTRACTOR:	REPRESENTATIVE: ORDER NO. SUBMITTED BY: APPROVED BY:	DATE: DATE: DATE:
---	---	--



1.25AD

Series e-1510

Centrifugal Pumps - Base Mounted

SPECIFICATIONS

FLOW _____ HEAD _____
 HP _____ RPM _____
 VOLTS _____
 CYCLE _____ PHASE _____
 ENCLOSURE _____
 APPROX. WEIGHT _____
 SPECIALS _____

MATERIALS OF CONSTRUCTION

☒ Stainless Steel Fitted

FEATURES

- ☐ i-ALERT™ Condition Monitor
- ☒ ANSI/OSHA Coupling Guard
- ☒ Center Drop Out Spacer Coupling
- ☒ Fabricated Heavy Duty Baseplate


MAXIMUM WORKING PRESSURE

☐ 175 psi (12 bar) W.P.


TYPE OF SEAL

- ☐ Standard Seal (Buna-Carbon/Ceramic)
- ☐ -F Standard Seal w/ Flush Line (Buna-Carbon/Ceramic)
- ☐ -S Stuffing Box Construction w/ Flushed Mechanical Single Seal (EPR-Tungsten Carbide/Carbon)
- ☐ -PF Stuffing Box Construction w/ Packing (Graphite Impregnated Teflon)

Note: Equipped with NEOPRENE coupling

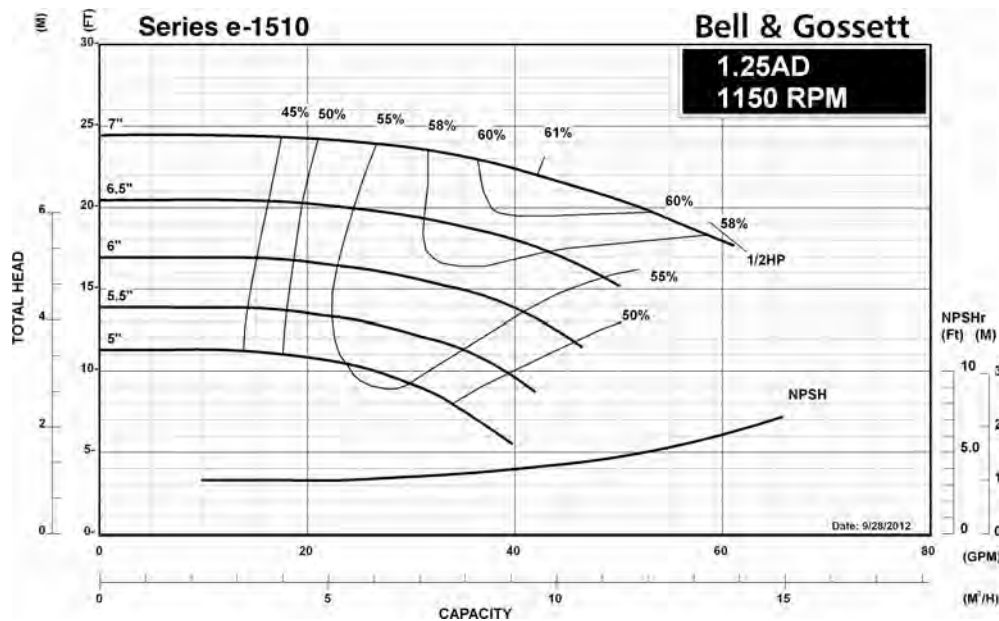

JOB: UNIT TAG: ENGINEER: CONTRACTOR:	REPRESENTATIVE: ORDER NO. SUBMITTED BY: APPROVED BY:	DATE: DATE: DATE:
---	---	--



1.25AD

Series e-1510

Centrifugal Pumps - Base Mounted

SPECIFICATIONS

FLOW _____ HEAD _____
 HP _____ RPM _____
 VOLTS _____
 CYCLE _____ PHASE _____
 ENCLOSURE _____
 APPROX. WEIGHT _____
 SPECIALS _____

MATERIALS OF CONSTRUCTION

☒ Stainless Steel Fitted

FEATURES

- ☐ i-ALERT™ Condition Monitor
- ☒ ANSI/OSHA Coupling Guard
- ☒ Center Drop Out Spacer Coupling
- ☒ Fabricated Heavy Duty Baseplate


MAXIMUM WORKING PRESSURE

☐ 175 psi (12 bar) W.P.


TYPE OF SEAL

- ☐ Standard Seal (Buna-Carbon/Ceramic)
- ☐ -F Standard Seal w/ Flush Line (Buna-Carbon/Ceramic)
- ☐ -S Stuffing Box Construction w/ Flushed Mechanical Single Seal (EPR-Tungsten Carbide/Carbon)
- ☐ -PF Stuffing Box Construction w/ Packing (Graphite Impregnated Teflon)

Note: Equipped with NEOPRENE coupling

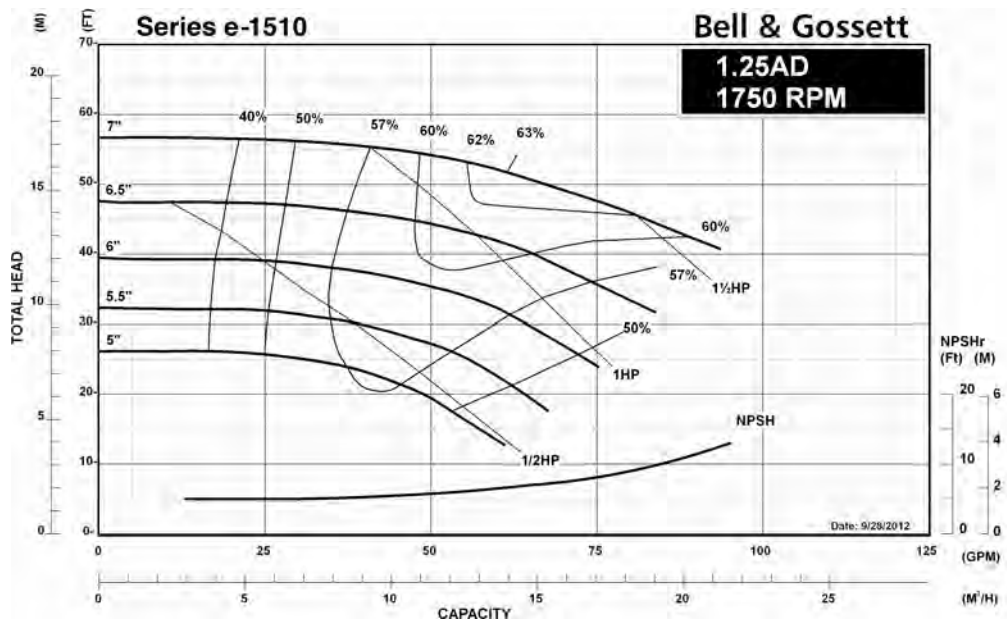

JOB: UNIT TAG: ENGINEER: CONTRACTOR:	REPRESENTATIVE: ORDER NO. SUBMITTED BY: APPROVED BY:	DATE: DATE: DATE:
---	---	--



1.25AD

Series e-1510

Centrifugal Pumps - Base Mounted

SPECIFICATIONS

FLOW _____ HEAD _____

HP _____ RPM _____

VOLTS _____

CYCLE _____ PHASE _____

ENCLOSURE _____

APPROX. WEIGHT _____

SPECIALS _____

MATERIALS OF CONSTRUCTION

☒ Stainless Steel Fitted

FEATURES

- ☐ i-ALERT™ Condition Monitor
- ☒ ANSI/OSHA Coupling Guard
- ☒ Center Drop Out Spacer Coupling
- ☒ Fabricated Heavy Duty Baseplate


MAXIMUM WORKING PRESSURE


☐ 175 psi (12 bar) W.P.

TYPE OF SEAL

- ☐ Standard Seal (Buna-Carbon/Ceramic)
- ☐ -F Standard Seal w/ Flush Line (Buna-Carbon/Ceramic)
- ☐ -S Stuffing Box Construction w/ Flushed Mechanical Single Seal (EPR-Tungsten Carbide/Carbon)
- ☐ -PF Stuffing Box Construction w/ Packing (Graphite Impregnated Teflon)

Note: Equipped with NEOPRENE coupling

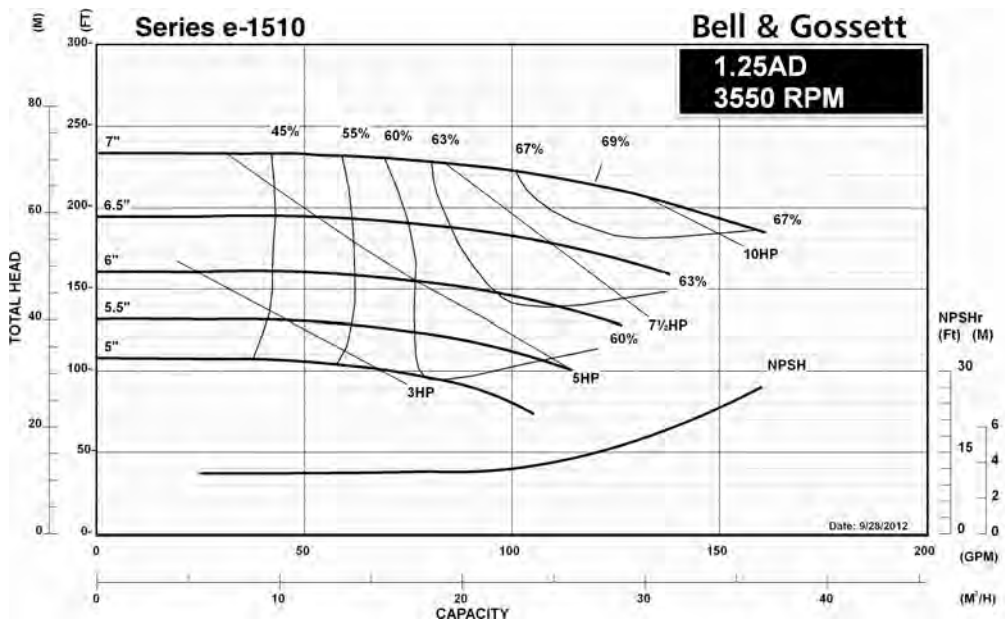

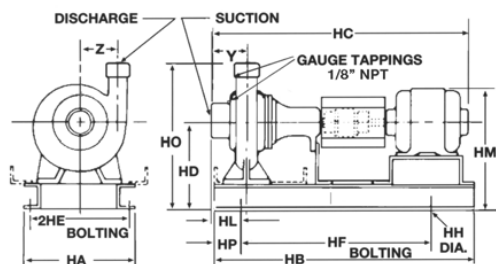

NOZZLE SIZES	
Discharge	1-1/4" N.P.T.
Suction	1-1/2" N.P.T.

DIMENSIONS - Inches (mm)

STANDARD SEAL

MOTOR FRAME	HA	HB	HC MAX	HD	2HE	HF	HH	HL	HM MAX	HO	HP	Y	Z
"S" FRAME													
56	12 (305)	28-3/4 (730)	28-3/8 (721)	9-3/4 (248)	10-1/4 (260)	22-1/2 (572)	3/4 (19)	3-1/8 (79)	13-3/8 (340)	14-3/4 (375)	3 (76)	3-1/4 (83)	4-1/2 (114)
143T	12 (305)	28-3/4 (730)	28-1/2 (724)	9-3/4 (248)	10-1/4 (260)	22-1/2 (572)	3/4 (19)	3-1/8 (79)	13-1/2 (343)	14-3/4 (375)	3 (76)	3-1/4 (83)	4-1/2 (114)
145T	12 (305)	28-3/4 (730)	29-1/2 (749)	9-3/4 (248)	10-1/4 (260)	22-1/2 (572)	3/4 (19)	3-1/8 (79)	13-1/2 (343)	14-3/4 (375)	3 (76)	3-1/4 (83)	4-1/2 (114)
182T	14-5/8 (371)	31 (787)	32-1/4 (819)	9-3/4 (248)	12-7/8 (327)	25 (635)	3/4 (19)	1-3/4 (44)	15 (381)	14-3/4 (375)	3 (76)	3-1/4 (83)	4-1/2 (114)
184T	14-5/8 (371)	31 (787)	33 (838)	9-3/4 (248)	12-7/8 (327)	25 (635)	3/4 (19)	1-3/4 (44)	15 (381)	14-3/4 (375)	3 (76)	3-1/4 (83)	4-1/2 (114)
213T	14-5/8 (371)	34-5/8 (879)	35-1/2 (902)	9-3/4 (248)	12-7/8 (327)	28-5/8 (727)	3/4 (19)	1-3/4 (44)	15-5/8 (397)	14-3/4 (375)	3 (76)	3-1/4 (83)	4-1/2 (114)
215T	14-5/8 (371)	34-5/8 (879)	37 (940)	9-3/4 (248)	12-7/8 (327)	28-5/8 (727)	3/4 (19)	1-3/4 (44)	15-5/8 (397)	14-3/4 (375)	3 (76)	3-1/4 (83)	4-1/2 (114)
254T	14-5/8 (371)	39-3/8 (1000)	40-3/4 (1035)	10-3/4 (273)	12-7/8 (327)	33-3/8 (848)	3/4 (19)	1-3/4 (44)	17-5/8 (448)	15-3/4 (400)	3 (76)	3-1/4 (83)	4-1/2 (114)

STUFFING BOX

MOTOR FRAME	HA	HB	HC MAX	HD	2HE	HF	HH	HL	HM MAX	HO	HP	Y	Z
"S" FRAME													
56	14-5/8 (371)	34-5/8 (879)	32 (813)	9-3/4 (248)	12-7/8 (327)	28-5/8 (727)	3/4 (19)	3-1/8 (79)	13-3/8 (340)	14-3/4 (375)	3 (76)	3-1/4 (83)	4-1/2 (114)
143T	14-5/8 (371)	34-5/8 (879)	32-1/8 (816)	9-3/4 (248)	12-7/8 (327)	28-5/8 (727)	3/4 (19)	3-1/8 (79)	13-1/2 (343)	14-3/4 (375)	3 (76)	3-1/4 (83)	4-1/2 (114)
145T	14-5/8 (371)	34-5/8 (879)	33-1/8 (841)	9-3/4 (248)	12-7/8 (327)	28-5/8 (727)	3/4 (19)	3-1/8 (79)	13-1/2 (343)	14-3/4 (375)	3 (76)	3-1/4 (83)	4-1/2 (114)
182T	14-5/8 (371)	34-5/8 (879)	35-3/4 (908)	9-3/4 (248)	12-7/8 (327)	28-5/8 (727)	3/4 (19)	1-3/4 (44)	15 (381)	14-3/4 (375)	3 (76)	3-1/4 (83)	4-1/2 (114)
184T	14-5/8 (371)	34-5/8 (879)	36-1/2 (927)	9-3/4 (248)	12-7/8 (327)	28-5/8 (727)	3/4 (19)	1-3/4 (44)	15 (381)	14-3/4 (375)	3 (76)	3-1/4 (83)	4-1/2 (114)
213T	14-5/8 (371)	39-3/8 (1000)	39-1/8 (994)	9-3/4 (248)	12-7/8 (327)	33-3/8 (848)	3/4 (19)	1-3/4 (44)	15-5/8 (397)	14-3/4 (375)	3 (76)	3-1/4 (83)	4-1/2 (114)
215T	14-5/8 (371)	39-3/8 (1000)	40-5/8 (1032)	9-3/4 (248)	12-7/8 (327)	33-3/8 (848)	3/4 (19)	1-3/4 (44)	15-5/8 (397)	14-3/4 (375)	3 (76)	3-1/4 (83)	4-1/2 (114)
254T	16 (406)	46-1/2 (1181)	44-3/8 (1127)	12 (305)	14 (356)	36-1/2 (927)	7/8 (22)	2-7/8 (73)	18-7/8 (479)	17 (432)	5 (127)	3-1/4 (83)	4-1/2 (114)


Dimensions are subject to change. Not to be used for construction purposes unless certified.

Xylem Inc.
8200 N. Austin Avenue
Morton Grove, IL 60053
Phone: (847)966-3700
Fax: (847)965-8379
www.bellgossett.com

xylem
Let's Solve Water

Bell & Gossett is a trademark of Xylem Inc. or one of its subsidiaries.
© 2013 Xylem Inc.

JOB: UNIT TAG: ENGINEER: CONTRACTOR:	REPRESENTATIVE: ORDER NO. SUBMITTED BY: APPROVED BY:	DATE: DATE: DATE:
---	---	--



1.25BC

Series e-1510

Centrifugal Pumps - Base Mounted

SPECIFICATIONS

FLOW _____ HEAD _____
 HP _____ RPM _____
 VOLTS _____
 CYCLE _____ PHASE _____
 ENCLOSURE _____
 APPROX. WEIGHT _____
 SPECIALS _____

MATERIALS OF CONSTRUCTION

☒ Stainless Steel Fitted

FEATURES

- ☐ i-ALERT™ Condition Monitor
- ☒ ANSI/OSHA Coupling Guard
- ☒ Center Drop Out Spacer Coupling
- ☒ Fabricated Heavy Duty Baseplate


MAXIMUM WORKING PRESSURE

☐ 175 psi (12 bar) W.P.


TYPE OF SEAL

- ☐ Standard Seal (Buna-Carbon/Ceramic)
- ☐ -F Standard Seal w/ Flush Line (Buna-Carbon/Ceramic)
- ☐ -S Stuffing Box Construction w/ Flushed Mechanical Single Seal (EPR-Tungsten Carbide/Carbon)
- ☐ -PF Stuffing Box Construction w/ Packing (Graphite Impregnated Teflon)

Note: Equipped with NEOPRENE coupling

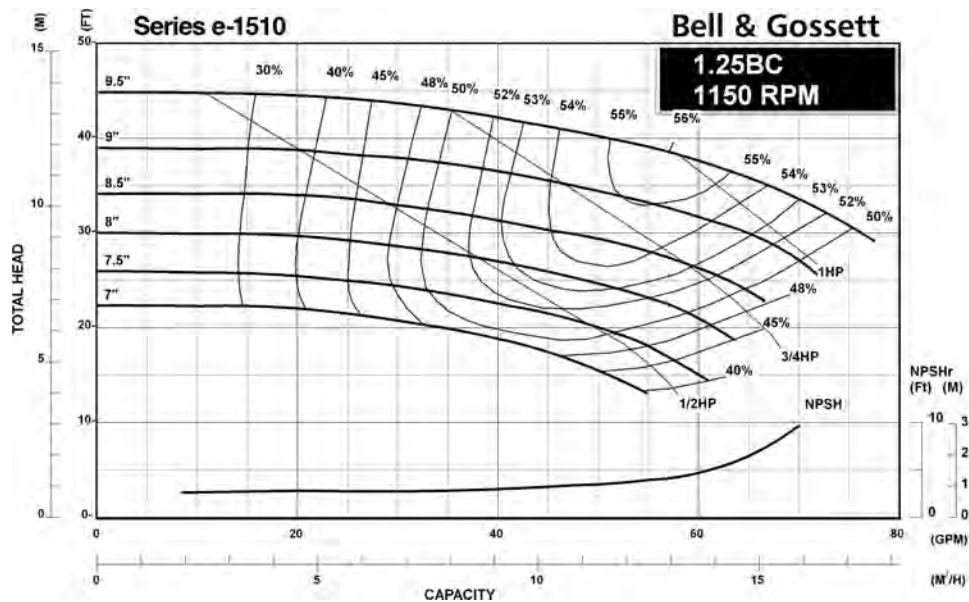

JOB: UNIT TAG: ENGINEER: CONTRACTOR:	REPRESENTATIVE: ORDER NO. SUBMITTED BY: APPROVED BY:	DATE: DATE: DATE:
---	---	--



1.25BC

Series e-1510

Centrifugal Pumps - Base Mounted

SPECIFICATIONS

FLOW _____ HEAD _____
 HP _____ RPM _____
 VOLTS _____
 CYCLE _____ PHASE _____
 ENCLOSURE _____
 APPROX. WEIGHT _____
 SPECIALS _____

MATERIALS OF CONSTRUCTION

☒ Stainless Steel Fitted

FEATURES

- ☐ i-ALERT™ Condition Monitor
- ☒ ANSI/OSHA Coupling Guard
- ☒ Center Drop Out Spacer Coupling
- ☒ Fabricated Heavy Duty Baseplate


MAXIMUM WORKING PRESSURE

☐ 175 psi (12 bar) W.P.


TYPE OF SEAL

- ☐ Standard Seal (Buna-Carbon/Ceramic)
- ☐ -F Standard Seal w/ Flush Line (Buna-Carbon/Ceramic)
- ☐ -S Stuffing Box Construction w/ Flushed Mechanical Single Seal (EPR-Tungsten Carbide/Carbon)
- ☐ -PF Stuffing Box Construction w/ Packing (Graphite Impregnated Teflon)

Note: Equipped with NEOPRENE coupling

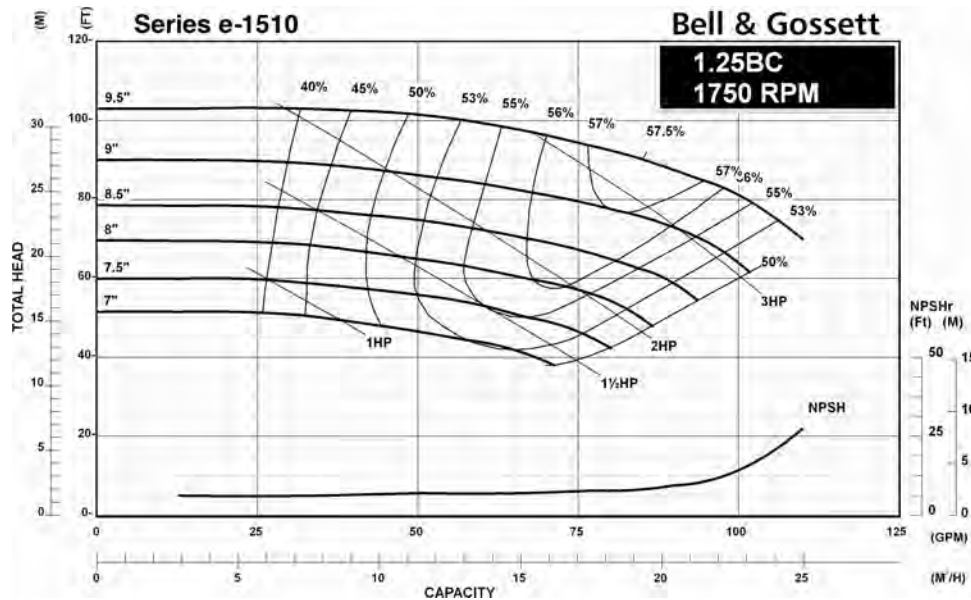

JOB: UNIT TAG: ENGINEER: CONTRACTOR:	REPRESENTATIVE: ORDER NO. SUBMITTED BY: APPROVED BY:	DATE: DATE: DATE:
---	---	--



1.25BC

Series e-1510

Centrifugal Pumps - Base Mounted

SPECIFICATIONS

FLOW _____ HEAD _____
 HP _____ RPM _____
 VOLTS _____
 CYCLE _____ PHASE _____
 ENCLOSURE _____
 APPROX. WEIGHT _____
 SPECIALS _____

MATERIALS OF CONSTRUCTION

☒ Stainless Steel Fitted

FEATURES

- ☐ i-ALERT™ Condition Monitor
- ☒ ANSI/OSHA Coupling Guard
- ☒ Center Drop Out Spacer Coupling
- ☒ Fabricated Heavy Duty Baseplate


MAXIMUM WORKING PRESSURE

☐ 175 psi (12 bar) W.P.

TYPE OF SEAL


- ☐ Standard Seal (Buna-Carbon/Ceramic)
- ☐ -F Standard Seal w/ Flush Line (Buna-Carbon/Ceramic)
- ☐ -S Stuffing Box Construction w/ Flushed Mechanical Single Seal (EPR-Tungsten Carbide/Carbon)
- ☐ -PF Stuffing Box Construction w/ Packing (Graphite Impregnated Teflon)

Note: Equipped with NEOPRENE coupling

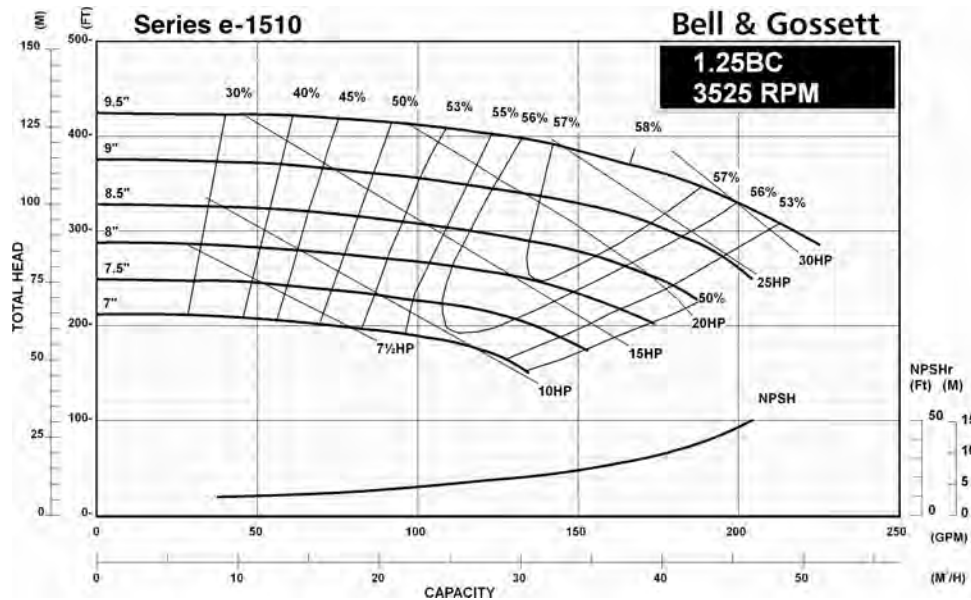

Series e-1510 1.25BC Centrifugal Pump Submittal

B-880.14A

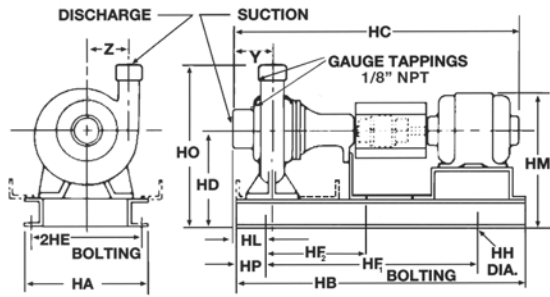

NOZZLE SIZES	
Discharge	1-1/4" N.P.T.
Suction	1-1/2" N.P.T.

DIMENSIONS – Inches (mm)

STANDARD SEAL

MOTOR FRAME	HA	HB	HC MAX	HD	2HE	HF ₁	HF ₂	HH	HL	HM MAX	HO	HP	Y	Z
"S" FRAME														
143T	14-5/8 (371)	31 (787)	28-5/8 (727)	10-3/4 (273)	12-7/8 (327)	25 (635)	-	3/4 (19)	1-13/16 (46)	14-1/2 (368)	18-3/4 (476)	3 (76)	3-1/4 (83)	5-1/2 (140)
145T	14-5/8 (371)	31 (787)	29-5/8 (752)	10-3/4 (273)	12-7/8 (327)	25 (635)	-	3/4 (19)	1-13/16 (46)	14-1/2 (368)	18-3/4 (476)	3 (76)	3-1/4 (83)	5-1/2 (140)
182T	14-5/8 (371)	31 (787)	32-1/4 (819)	10-3/4 (273)	12-7/8 (327)	25 (635)	-	3/4 (19)	1-13/16 (46)	16 (406)	18-3/4 (476)	3 (76)	3-1/4 (83)	5-1/2 (140)
184T	14-5/8 (371)	31 (787)	33 (838)	10-3/4 (273)	12-7/8 (327)	25 (635)	-	3/4 (19)	1-13/16 (46)	16 (406)	18-3/4 (476)	3 (76)	3-1/4 (83)	5-1/2 (140)
"L" FRAME														
213T	14-5/8 (371)	39-3/8 (1000)	39-7/8 (1013)	10-3/4 (273)	12-7/8 (327)	33-3/8 (848)	-	3/4 (19)	1-13/16 (46)	16-5/8 (422)	18-3/4 (476)	3 (76)	3-1/4 (83)	5-1/2 (140)
215T	14-5/8 (371)	39-3/8 (1000)	41-3/8 (1051)	10-3/4 (273)	12-7/8 (327)	33-3/8 (848)	-	3/4 (19)	1-13/16 (46)	16-5/8 (422)	18-3/4 (476)	3 (76)	3-1/4 (83)	5-1/2 (140)
254T	16 (406)	46-1/2 (1181)	45-1/8 (1146)	12 (305)	14 (356)	36-1/2 (927)	18-1/4 (464)	7/8 (22)	2-15/16 (75)	18-7/8 (479)	20 (508)	5 (127)	3-1/4 (83)	5-1/2 (140)
256T	16 (406)	46-1/2 (1181)	46-7/8 (1191)	12 (305)	14 (356)	36-1/2 (927)	18-1/4 (464)	7/8 (22)	2-15/16 (75)	18-7/8 (479)	20 (508)	5 (127)	3-1/4 (83)	5-1/2 (140)
284TS	16 (406)	46-1/2 (1181)	46-1/4 (1175)	13 (330)	14 (356)	36-1/2 (927)	18-1/4 (464)	7/8 (22)	2-15/16 (75)	21 (533)	21 (533)	5 (127)	3-1/4 (83)	5-1/2 (140)
286TS	16 (406)	46-1/2 (1181)	47-3/4 (1213)	13 (330)	14 (356)	36-1/2 (927)	18-1/4 (464)	7/8 (22)	2-15/16 (75)	21 (533)	21 (533)	5 (127)	3-1/4 (83)	5-1/2 (140)

STUFFING BOX

MOTOR FRAME	HA	HB	HC MAX	HD	2HE	HF ₁	HF ₂	HH	HL	HM MAX	HO	HP	Y	Z
"S" FRAME														
143T	14-5/8 (371)	34-5/8 (879)	32-1/8 (816)	10-3/4 (273)	12-7/8 (327)	28-5/8 (727)	-	3/4 (19)	1-13/16 (46)	14-1/2 (368)	18-3/4 (476)	3 (76)	3-1/4 (83)	5-1/2 (140)
145T	14-5/8 (371)	34-5/8 (879)	33-1/8 (841)	10-3/4 (273)	12-7/8 (327)	28-5/8 (727)	-	3/4 (19)	1-13/16 (46)	14-1/2 (368)	18-3/4 (476)	3 (76)	3-1/4 (83)	5-1/2 (140)
182T	14-5/8 (371)	34-5/8 (879)	35-7/8 (911)	10-3/4 (273)	12-7/8 (327)	28-5/8 (727)	-	3/4 (19)	1-13/16 (46)	16 (406)	18-3/4 (476)	3 (76)	3-1/4 (83)	5-1/2 (140)
184T	14-5/8 (371)	34-5/8 (879)	36-5/8 (930)	10-3/4 (273)	12-7/8 (327)	28-5/8 (727)	-	3/4 (19)	1-13/16 (46)	16 (406)	18-3/4 (476)	3 (76)	3-1/4 (83)	5-1/2 (140)
"L" FRAME														
213T	16 (406)	46-1/2 (1181)	42-3/8 (1076)	12 (305)	14 (356)	36-1/2 (927)	18-1/4 (464)	7/8 (22)	2-15/16 (75)	17-7/8 (454)	20 (508)	5 (127)	3-1/4 (83)	5-1/2 (140)
215T	16 (406)	46-1/2 (1181)	43-7/8 (1114)	12 (305)	14 (356)	36-1/2 (927)	18-1/4 (464)	7/8 (22)	2-15/16 (75)	17-7/8 (454)	20 (508)	5 (127)	3-1/4 (83)	5-1/2 (140)
254T	16 (406)	51-3/4 (1314)	47-5/8 (1210)	12 (305)	14 (356)	41-3/4 (1060)	20-7/8 (530)	7/8 (22)	2-15/16 (75)	18-7/8 (479)	20 (508)	5 (127)	3-1/4 (83)	5-1/2 (140)
256T	16 (406)	51-3/4 (1314)	49-3/8 (1254)	12 (305)	14 (356)	41-3/4 (1060)	20-7/8 (530)	7/8 (22)	2-15/16 (75)	18-7/8 (479)	20 (508)	5 (127)	3-1/4 (83)	5-1/2 (140)
284TS	16 (406)	51-3/4 (1314)	48-5/8 (1235)	13 (330)	14 (356)	41-3/4 (1060)	20-7/8 (530)	7/8 (22)	2-15/16 (75)	21 (533)	21 (533)	5 (127)	3-1/4 (83)	5-1/2 (140)
286TS	16 (406)	51-3/4 (1314)	50-1/8 (1273)	13 (330)	14 (356)	41-3/4 (1060)	20-7/8 (530)	7/8 (22)	2-15/16 (75)	21 (533)	21 (533)	5 (127)	3-1/4 (83)	5-1/2 (140)


Dimensions are subject to change. Not to be used for construction purposes unless certified.

Xylem Inc.
8200 N. Austin Avenue
Morton Grove, IL 60053
Phone: (847)966-3700
Fax: (847)965-8379
www.bellgossett.com

xylem
Let's Solve Water

Bell & Gossett is a trademark of Xylem Inc. or one of its subsidiaries.
© 2013 Xylem Inc.

JOB: UNIT TAG: ENGINEER: CONTRACTOR:	REPRESENTATIVE: ORDER NO. SUBMITTED BY: APPROVED BY:	DATE: DATE: DATE:
---	---	--



2.5AC

Series e-1510

Centrifugal Pumps - Base Mounted

SPECIFICATIONS

FLOW _____ HEAD _____

HP _____ RPM _____

VOLTS _____

CYCLE _____ PHASE _____

ENCLOSURE _____

APPROX. WEIGHT _____

SPECIALS _____

MATERIALS OF CONSTRUCTION

☒ Stainless Steel Fitted

FEATURES

- ☐ i-ALERT™ Condition Monitor
- ☒ ANSI/OSHA Coupling Guard
- ☒ Center Drop Out Spacer Coupling
- ☒ Fabricated Heavy Duty Baseplate


MAXIMUM WORKING PRESSURE

- ☐ 175 psi (12 bar) W.P.
- w/ 125# ANSI flange drilling


TYPE OF SEAL

- ☐ Standard Seal
(Buna-Carbon/Ceramic)
- ☐ -F Standard Seal w/ Flush Line
(Buna-Carbon/Ceramic)
- ☐ -S Stuffing Box Construction w/ Flushed
Mechanical Single Seal
(EPR-Tungsten Carbide/Carbon)
- ☐ -PF Stuffing Box Construction w/ Packing
(Graphite Impregnated Teflon)

Note: Equipped with NEOPRENE coupling

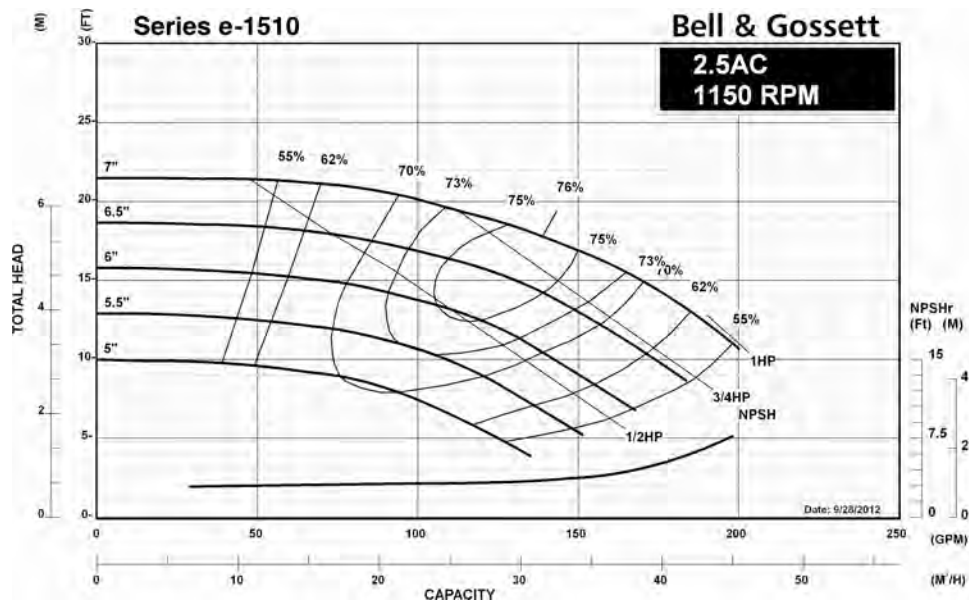

JOB: _____ UNIT TAG: _____ ENGINEER: _____ CONTRACTOR: _____	REPRESENTATIVE: _____ ORDER NO. _____ SUBMITTED BY: _____ APPROVED BY: _____ DATE: _____ DATE: _____ DATE: _____
---	--



2.5AC

Series e-1510

Centrifugal Pumps - Base Mounted

SPECIFICATIONS

FLOW _____ HEAD _____
 HP _____ RPM _____
 VOLTS _____
 CYCLE _____ PHASE _____
 ENCLOSURE _____
 APPROX. WEIGHT _____
 SPECIALS _____

MATERIALS OF CONSTRUCTION

☒ Stainless Steel Fitted

FEATURES

- ☐ i-ALERT™ Condition Monitor
- ☒ ANSI/OSHA Coupling Guard
- ☒ Center Drop Out Spacer Coupling
- ☒ Fabricated Heavy Duty Baseplate


MAXIMUM WORKING PRESSURE

- ☐ 175 psi (12 bar) W.P.
w/ 125# ANSI flange drilling


TYPE OF SEAL

- ☐ Standard Seal
(Buna-Carbon/Ceramic)
- ☐ -F Standard Seal w/ Flush Line
(Buna-Carbon/Ceramic)
- ☐ -S Stuffing Box Construction w/ Flushed
Mechanical Single Seal
(EPR-Tungsten Carbide/Carbon)
- ☐ -PF Stuffing Box Construction w/ Packing
(Graphite Impregnated Teflon)

Note: Equipped with NEOPRENE coupling

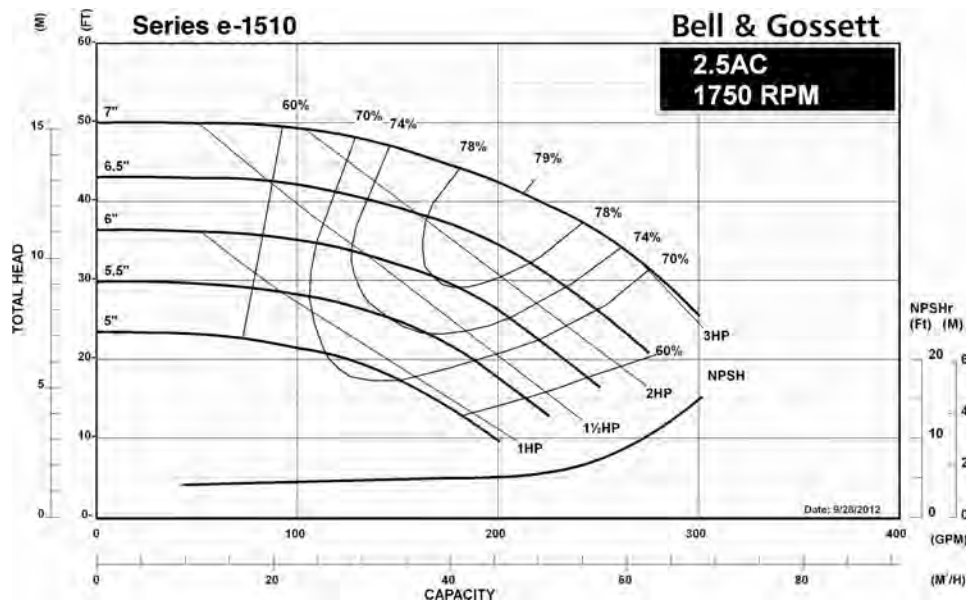

JOB: UNIT TAG: ENGINEER: CONTRACTOR:	REPRESENTATIVE: ORDER NO. SUBMITTED BY: APPROVED BY:	DATE: DATE: DATE:
---	---	--



2.5AC

Series e-1510

Centrifugal Pumps - Base Mounted

SPECIFICATIONS

FLOW _____ HEAD _____
 HP _____ RPM _____
 VOLTS _____
 CYCLE _____ PHASE _____
 ENCLOSURE _____
 APPROX. WEIGHT _____
 SPECIALS _____

MATERIALS OF CONSTRUCTION

☒ Stainless Steel Fitted

FEATURES

- ☐ i-ALERT™ Condition Monitor
- ☒ ANSI/OSHA Coupling Guard
- ☒ Center Drop Out Spacer Coupling
- ☒ Fabricated Heavy Duty Baseplate


MAXIMUM WORKING PRESSURE

- ☐ 175 psi (12 bar) W.P.
w/ 125# ANSI flange drilling

TYPE OF SEAL


- ☐ Standard Seal
(Buna-Carbon/Ceramic)
- ☐ -F Standard Seal w/ Flush Line
(Buna-Carbon/Ceramic)
- ☐ -S Stuffing Box Construction w/ Flushed
Mechanical Single Seal
(EPR-Tungsten Carbide/Carbon)
- ☐ -PF Stuffing Box Construction w/ Packing
(Graphite Impregnated Teflon)

Note: Equipped with NEOPRENE coupling

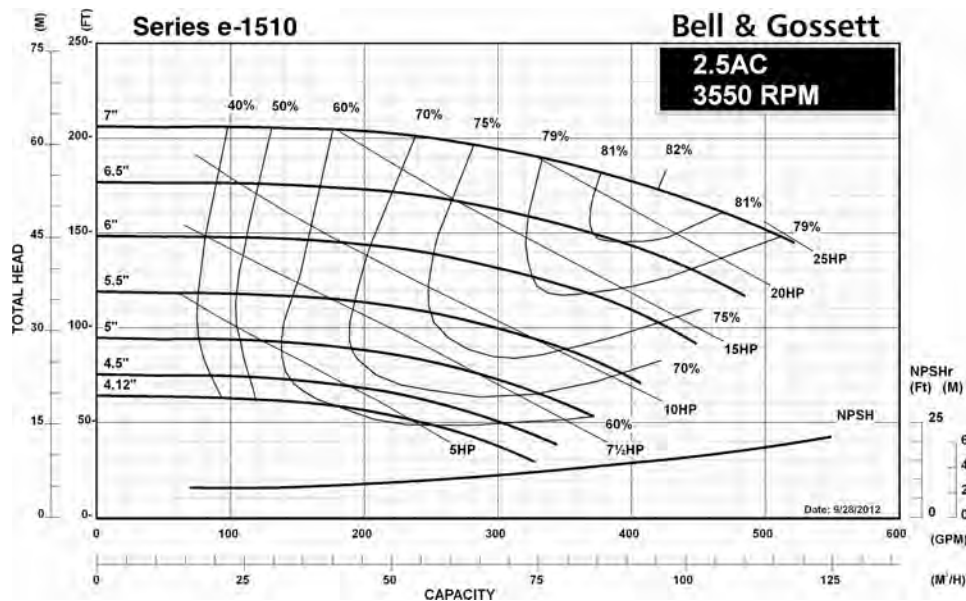

Series e-1510 2.5AC Centrifugal Pump Submittal

B-880.7B

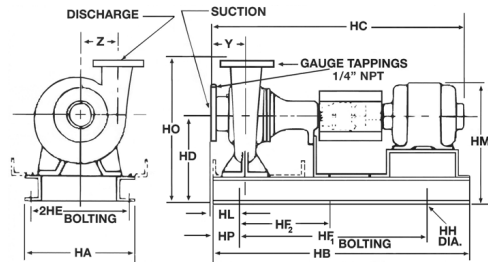

FLANGE DIMENSIONS IN INCHES (MM)			
	SIZE	THICKNESS	O.D.
Discharge	2-1/2" (64)	11/16 (17)	7 (178)
Suction	3" (76)	3/4 (19)	7.5 (191)

FLANGES ARE 125# ANSI - STANDARD

DIMENSIONS - Inches (mm)

STANDARD SEAL

MOTOR FRAME	HA	HB	HC MAX	HD	2HE	HF ₁	HF ₂	HH	HL	HM MAX	HO	HP	Y	Z
"S" FRAME														
56	12 (305)	28-3/4 (730)	29-5/8 (752)	9-3/4 (248)	10-1/4 (260)	22-1/2 (572)	-	3/4 (19)	4-3/8 (111)	13-3/8 (340)	15-3/4 (400)	3 (77)	4-1/4 (108)	4-11/16 (119)
143T	12 (305)	28-3/4 (730)	29-3/4 (756)	9-3/4 (248)	10-1/4 (260)	22-1/2 (572)	-	3/4 (19)	4-3/8 (111)	13-1/2 (343)	15-3/4 (400)	3 (77)	4-1/4 (108)	4-11/16 (119)
145T	12 (305)	28-3/4 (730)	30-3/4 (781)	9-3/4 (248)	10-1/4 (260)	22-1/2 (572)	-	3/4 (19)	4-3/8 (111)	13-1/2 (343)	15-3/4 (400)	3 (77)	4-1/4 (108)	4-11/16 (119)
182T	14-5/8 (305)	31 (787)	33-1/2 (851)	9-3/4 (248)	12-7/8 (327)	25 (635)	-	3/4 (19)	3 (77)	15 (381)	15-3/4 (400)	3 (77)	4-1/4 (108)	4-11/16 (119)
184T	14-5/8 (305)	31 (787)	34-1/4 (870)	9-3/4 (248)	12-7/8 (327)	25 (635)	-	3/4 (19)	3 (77)	15 (381)	15-3/4 (400)	3 (77)	4-1/4 (108)	4-11/16 (119)
213T	14-5/8 (305)	34-5/8 (879)	36-3/4 (933)	9-3/4 (248)	12-7/8 (327)	28-5/8 (727)	-	3/4 (19)	3 (77)	15-5/8 (397)	15-3/4 (400)	3 (77)	4-1/4 (108)	4-11/16 (119)
215T	14-5/8 (305)	34-5/8 (879)	38-1/4 (972)	9-3/4 (248)	12-7/8 (327)	28-5/8 (727)	-	3/4 (19)	3 (77)	15-5/8 (397)	15-3/4 (400)	3 (77)	4-1/4 (108)	4-11/16 (119)
254T	14-5/8 (305)	39-3/8 (1000)	42 (1067)	10-3/4 (273)	12-7/8 (327)	33-3/8 (848)	-	3/4 (19)	3 (77)	17-5/8 (448)	16-3/4 (425)	3 (77)	4-1/4 (108)	4-11/16 (119)
256T	14-5/8 (305)	39-3/8 (1000)	43-3/4 (1111)	10-3/4 (273)	12-7/8 (327)	33-3/8 (848)	-	3/4 (19)	3 (77)	17-5/8 (448)	16-3/4 (425)	3 (77)	4-1/4 (108)	4-11/16 (119)
284TS	16 (406)	46-1/2 (1181)	44.25 (1124)	13 (330)	14 (356)	36-1/2 (927)	18-1/4 (464)	7/8 (22)	4-1/8 (105)	21 (533)	19 (483)	5 (127)	4-1/4 (108)	4-11/16 (119)

STUFFING BOX

MOTOR FRAME	HA	HB	HC MAX	HD	2HE	HF ₁	HF ₂	HH	HL	HM MAX	HO	HP	Y	Z
"S" FRAME														
56	14-5/8 (305)	34-5/8 (879)	33-1/4 (845)	9-3/4 (248)	12-7/8 (327)	28-5/8 (727)	-	3/4 (19)	3 (77)	13-3/8 (340)	15-3/4 (400)	3 (77)	4-1/4 (108)	4-11/16 (119)
143T	14-5/8 (371)	34-5/8 (879)	33-3/8 (848)	9-3/4 (248)	12-7/8 (327)	28-5/8 (727)	-	3/4 (19)	3 (77)	13-3/8 (340)	15-3/4 (400)	3 (77)	4-1/4 (108)	4-11/16 (119)
145T	14-5/8 (371)	34-5/8 (879)	34-3/8 (873)	9-3/4 (248)	12-7/8 (327)	28-5/8 (727)	-	3/4 (19)	3 (77)	13-1/2 (343)	15-3/4 (400)	3 (77)	4-1/4 (108)	4-11/16 (119)
182T	14-5/8 (371)	34-5/8 (879)	37-1/8 (943)	9-3/4 (248)	12-7/8 (327)	28-5/8 (727)	-	3/4 (19)	3 (77)	13-1/2 (343)	15-3/4 (400)	3 (77)	4-1/4 (108)	4-11/16 (119)
184T	14-5/8 (371)	34-5/8 (879)	37-1/8 (943)	9-3/4 (248)	12-7/8 (327)	28-5/8 (727)	-	3/4 (19)	3 (77)	15 (381)	15-3/4 (400)	3 (77)	4-1/4 (108)	4-11/16 (119)
"L" FRAME														
213T	16 (406)	46-1/2 (1181)	43-3/4 (1105)	11 (279)	14 (356)	36-1/2 (927)	18-1/4 (464)	7/8 (22)	4-1/8 (105)	16-7/8 (429)	17 (432)	5 (127)	4-1/4 (108)	4-11/16 (119)
215T	16 (406)	46-1/2 (1181)	45 (1143)	11 (279)	14 (356)	36-1/2 (927)	18-1/4 (464)	7/8 (22)	4-1/8 (105)	16-7/8 (429)	17 (432)	5 (127)	4-1/4 (108)	4-11/16 (119)
254T	16 (406)	51-3/4 (1314)	48-3/4 (1238)	12 (305)	14 (356)	41-3/4 (1060)	20-7/8 (530)	7/8 (22)	4-1/8 (105)	18-7/8 (479)	18 (457)	5 (127)	4-1/4 (108)	4-11/16 (119)
256T	16 (406)	51-3/4 (1314)	50-1/2 (1283)	12 (305)	14 (356)	41-3/4 (1060)	20-7/8 (530)	7/8 (22)	4-1/8 (105)	18-7/8 (479)	18 (457)	5 (127)	4-1/4 (108)	4-11/16 (119)


Dimensions are subject to change. Not to be used for construction purposes unless certified.

Xylem Inc.
8200 N. Austin Avenue
Morton Grove, IL 60053
Phone: (847)966-3700
Fax: (847)965-8379
www.bellgossett.com

xylem
Let's Solve Water

Bell & Gossett is a trademark of Xylem Inc. or one of its subsidiaries.
© 2013 Xylem Inc.

JOB:	REPRESENTATIVE:	
UNIT TAG:	ORDER NO.	DATE:
ENGINEER:	SUBMITTED BY:	DATE:
CONTRACTOR:	APPROVED BY:	DATE:



2.5BB

Series e-1510

Centrifugal Pumps - Base Mounted

SPECIFICATIONS

FLOW _____ HEAD _____

HP _____ RPM _____

VOLTS _____

CYCLE _____ PHASE _____

ENCLOSURE _____

APPROX. WEIGHT _____

SPECIALS _____

MATERIALS OF CONSTRUCTION

☒ Stainless Steel Fitted

FEATURES

- ☐ i-ALERT™ Condition Monitor
- ☒ ANSI/OSHA Coupling Guard
- ☒ Center Drop Out Spacer Coupling
- ☒ Fabricated Heavy Duty Baseplate


MAXIMUM WORKING PRESSURE

- ☐ 175 psi (12 bar) W.P.
w/ 125# ANSI flange drilling


TYPE OF SEAL

- ☐ Standard Seal
(Buna-Carbon/Ceramic)
- ☐ -F Standard Seal w/ Flush Line
(Buna-Carbon/Ceramic)
- ☐ -S Stuffing Box Construction w/ Flushed
Mechanical Single Seal
(EPR-Tungsten Carbide/Carbon)
- ☐ -PF Stuffing Box Construction w/ Packing
(Graphite Impregnated Teflon)

Note: Equipped with NEOPRENE coupling

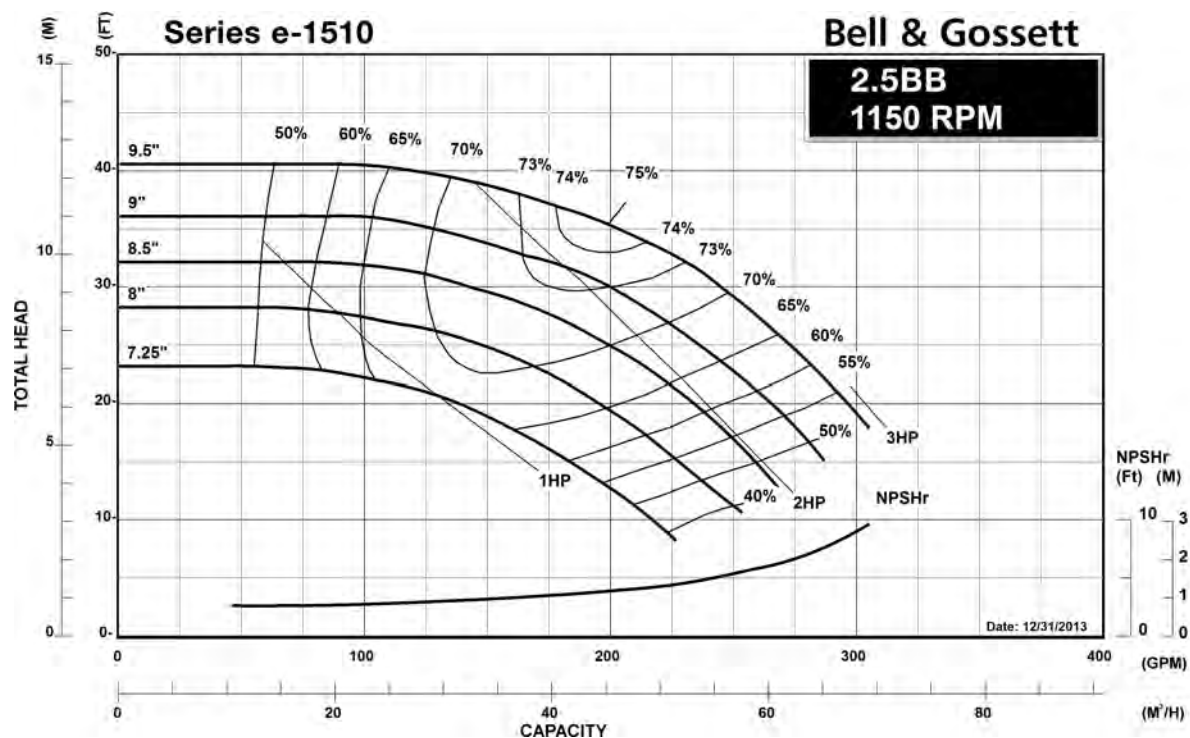

JOB: UNIT TAG: ENGINEER: CONTRACTOR:	REPRESENTATIVE: ORDER NO. SUBMITTED BY: APPROVED BY:	DATE: DATE: DATE:
---	---	--



2.5BB

Series e-1510

Centrifugal Pumps - Base Mounted

SPECIFICATIONS

FLOW _____ HEAD _____
 HP _____ RPM _____
 VOLTS _____
 CYCLE _____ PHASE _____
 ENCLOSURE _____
 APPROX. WEIGHT _____
 SPECIALS _____

MATERIALS OF CONSTRUCTION

☒ Stainless Steel Fitted

FEATURES

- ☐ i-ALERT™ Condition Monitor
- ☒ ANSI/OSHA Coupling Guard
- ☒ Center Drop Out Spacer Coupling
- ☒ Fabricated Heavy Duty Baseplate


MAXIMUM WORKING PRESSURE

- ☐ 175 psi (12 bar) W.P.
w/ 125# ANSI flange drilling


TYPE OF SEAL

- ☐ Standard Seal
(Buna-Carbon/Ceramic)
- ☐ -F Standard Seal w/ Flush Line
(Buna-Carbon/Ceramic)
- ☐ -S Stuffing Box Construction w/ Flushed
Mechanical Single Seal
(EPR-Tungsten Carbide/Carbon)
- ☐ -PF Stuffing Box Construction w/ Packing
(Graphite Impregnated Teflon)

Note: Equipped with NEOPRENE coupling

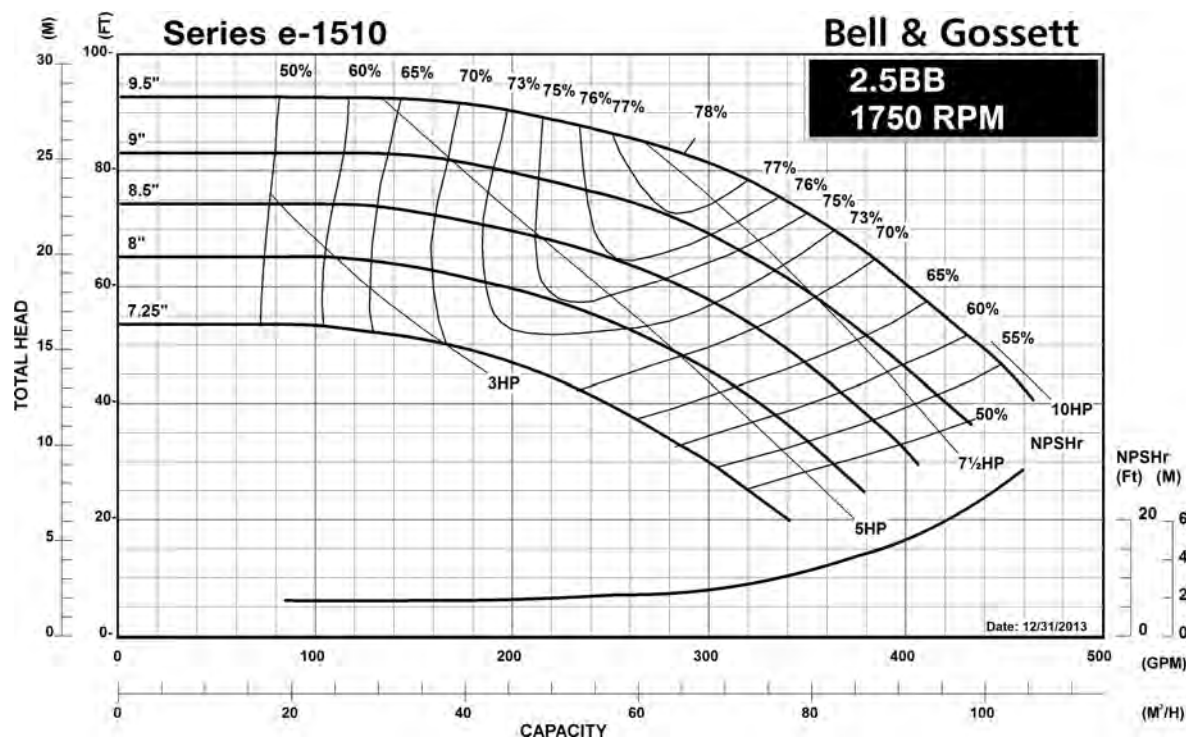

JOB: UNIT TAG: ENGINEER: CONTRACTOR:	REPRESENTATIVE: ORDER NO. SUBMITTED BY: APPROVED BY:	DATE: DATE: DATE:
---	---	--



2.5BB

Series e-1510

Centrifugal Pumps - Base Mounted

SPECIFICATIONS

FLOW _____ HEAD _____

HP _____ RPM _____

VOLTS _____

CYCLE _____ PHASE _____

ENCLOSURE _____

APPROX. WEIGHT _____

SPECIALS _____

MATERIALS OF CONSTRUCTION

☒ Stainless Steel Fitted

FEATURES

- ☐ i-ALERT™ Condition Monitor
- ☒ ANSI/OSHA Coupling Guard
- ☒ Center Drop Out Spacer Coupling
- ☒ Fabricated Heavy Duty Baseplate


MAXIMUM WORKING PRESSURE

- ☐ 175 psi (12 bar) W.P.
w/ 125# ANSI flange drilling

TYPE OF SEAL


- ☐ Standard Seal
(Buna-Carbon/Ceramic)
- ☐ -F Standard Seal w/ Flush Line
(Buna-Carbon/Ceramic)
- ☐ -S Stuffing Box Construction w/ Flushed
Mechanical Single Seal
(EPR-Tungsten Carbide/Carbon)
- ☐ -PF Stuffing Box Construction w/ Packing
(Graphite Impregnated Teflon)

Note: Equipped with NEOPRENE coupling

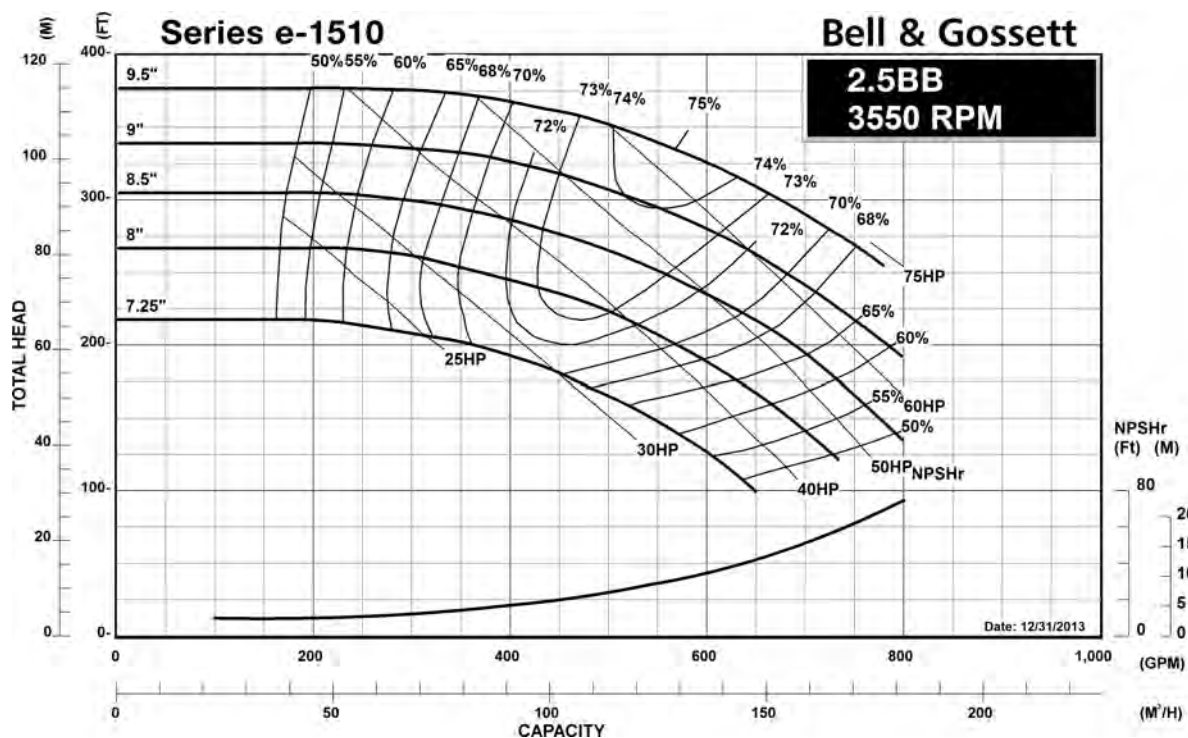

Series e-1510 2.5BB Centrifugal Pump Submittal

B-880.20

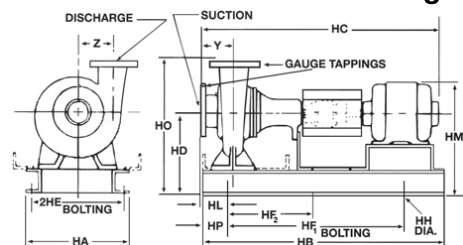

FLANGE DIMENSIONS IN INCHES (MM)			
	SIZE	THICKNESS	O.D.
Discharge	2-1/2"	11/16" (17)	7" (178)
Suction	3"	3/4" (25)	7-1/2" (191)

FLANGES ARE 125# ANSI - STANDARD

DIMENSIONS – Inches (mm)

STANDARD SEAL

MOTOR FRAME	HA	HB	HC MAX	HD	2HE	HF ₁	HF ₂	HH	HL	HM MAX	HO	HP	Y	Z
"S" FRAME														
145T	14-5/8 (371)	31 (787)	32-1/4 (819)	10-3/4 (273)	12-7/8 (327)	25 (635)	–	3/4 (19)	2-3/4 (70)	14-1/2 (368)	17-1/2 (445)	3 (76)	4 (102)	6 (152)
182T	14-5/8 (371)	31 (787)	33-1/4 (845)	10-3/4 (273)	12-7/8 (327)	25 (635)	–	3/4 (19)	2-3/4 (70)	16 (406)	17-1/2 (445)	3 (76)	4 (102)	6 (152)
184T	14-5/8 (371)	31 (787)	34 (864)	10-3/4 (273)	12-7/8 (327)	25 (635)	–	3/4 (19)	2-3/4 (70)	16 (406)	17-1/2 (445)	3 (76)	4 (102)	6 (152)
213T	14-5/8 (371)	34-5/8 (879)	36-1/2 (927)	10-3/4 (273)	12-7/8 (327)	28-5/8 (727)	–	3/4 (19)	2-3/4 (70)	16-5/8 (422)	17-1/2 (445)	3 (76)	4 (102)	6 (152)
215T	14-5/8 (371)	34-5/8 (879)	38 (965)	10-3/4 (273)	12-7/8 (327)	28-5/8 (727)	–	3/4 (19)	2-3/4 (70)	16-5/8 (422)	17-1/2 (445)	3 (76)	4 (102)	6 (152)
"L" FRAME														
254T	16 (406)	46-1/2 (1181)	46-1/8 (1172)	12 (305)	14 (356)	36-1/2 (927)	18-1/4 (464)	7/8 (22)	3-7/8 (98)	18-7/8 (479)	18-3/4 (476)	5 (127)	4 (102)	6 (152)
256T	16 (406)	46-1/2 (1181)	47-7/8 (1216)	12 (305)	14 (356)	36-1/2 (927)	18-1/4 (464)	7/8 (22)	3-7/8 (98)	18-7/8 (479)	18-3/4 (476)	5 (127)	4 (102)	6 (152)
284TS	16 (406)	46-1/2 (1181)	47-1/4 (1200)	13 (330)	14 (356)	36-1/2 (927)	18-1/4 (464)	7/8 (22)	3-7/8 (98)	21 (533)	19-3/4 (502)	5 (127)	4 (102)	6 (152)
286TS	16 (406)	46-1/2 (1181)	48-3/4 (1238)	13 (330)	14 (356)	36-1/2 (927)	18-1/4 (464)	7/8 (22)	3-7/8 (98)	21 (533)	19-3/4 (502)	5 (127)	4 (102)	6 (152)
324TS	16 (406)	46-1/2 (1181)	50-5/8 (1286)	12 (305)	14 (356)	36-1/2 (927)	18-1/4 (464)	7/8 (22)	3-7/8 (98)	21 (533)	18-3/4 (476)	5 (127)	4 (102)	6 (152)
326TS	16 (406)	46-1/2 (1181)	52-3/8 (1330)	12 (305)	14 (356)	36-1/2 (927)	18-1/4 (464)	7/8 (22)	3-7/8 (98)	21 (533)	18-3/4 (476)	5 (127)	4 (102)	6 (152)
364TS	16 (406)	51-3/4 (1314)	54 (1372)	13 (330)	14 (356)	41-3/4 (1060)	20-7/8 (530)	7/8 (22)	3-7/8 (98)	23-1/4 (591)	19-3/4 (502)	5 (127)	4 (102)	6 (152)

STUFFING BOX

MOTOR FRAME	HA	HB	HC MAX	HD	2HE	HF ₁	HF ₂	HH	HL	HM MAX	HO	HP	Y	Z
"S" FRAME														
145T	14-5/8 (371)	34-5/8 (879)	35-3/4 (908)	10-3/4 (273)	12-7/8 (327)	28-5/8 (727)	–	3/4 (19)	2-3/4 (70)	14-1/2 (368)	17-1/2 (445)	3 (76)	4 (102)	6 (152)
182T	14-5/8 (371)	34-5/8 (879)	36-3/4 (933)	10-3/4 (273)	12-7/8 (327)	28-5/8 (727)	–	3/4 (19)	2-3/4 (70)	16 (406)	17-1/2 (445)	3 (76)	4 (102)	6 (152)
184T	14-5/8 (371)	34-5/8 (879)	37-1/2 (953)	10-3/4 (273)	12-7/8 (327)	28-5/8 (727)	–	3/4 (19)	2-3/4 (70)	16 (406)	17-1/2 (445)	3 (76)	4 (102)	6 (152)
213T	14-5/8 (371)	39-3/8 (1000)	40-1/8 (1019)	10-3/4 (273)	12-7/8 (327)	33-3/8 (848)	–	3/4 (19)	2-3/4 (70)	16-5/8 (422)	17-1/2 (445)	3 (76)	4 (102)	6 (152)
215T	14-5/8 (371)	39-3/8 (1000)	41-5/8 (1057)	10-3/4 (273)	12-7/8 (327)	33-3/8 (848)	–	3/4 (19)	2-3/4 (70)	16-5/8 (422)	17-1/2 (445)	3 (76)	4 (102)	6 (152)
"L" FRAME														
254T	16 (406)	51-3/4 (1314)	48-1/2 (1232)	12 (305)	14 (356)	41-3/4 (1060)	20-7/8 (530)	7/8 (22)	3-7/8 (98)	18-7/8 (479)	18-3/4 (476)	5 (127)	4 (102)	6 (152)
256T	16 (406)	51-3/4 (1314)	50-1/4 (1276)	12 (305)	14 (356)	41-3/4 (1060)	20-7/8 (530)	7/8 (22)	3-7/8 (98)	18-7/8 (479)	18-3/4 (476)	5 (127)	4 (102)	6 (152)
284TS	16 (406)	51-3/4 (1314)	49-5/8 (1260)	13 (330)	14 (356)	41-3/4 (1060)	20-7/8 (530)	7/8 (22)	3-7/8 (98)	21 (533)	19-3/4 (502)	5 (127)	4 (102)	6 (152)
286TS	16 (406)	51-3/4 (1314)	52-1/8 (1324)	13 (330)	14 (356)	41-3/4 (1060)	20-7/8 (530)	7/8 (22)	3-7/8 (98)	21 (533)	19-3/4 (502)	5 (127)	4 (102)	6 (152)
324TS	16 (406)	51-3/4 (1314)	53 (1346)	12 (305)	14 (356)	41-3/4 (1060)	20-7/8 (530)	7/8 (22)	3-7/8 (98)	21 (533)	18-3/4 (476)	5 (127)	4 (102)	6 (152)
326TS	16 (406)	51-3/4 (1314)	54-3/4 (1391)	12 (305)	14 (356)	41-3/4 (1060)	20-7/8 (530)	7/8 (22)	3-7/8 (98)	21 (533)	18-3/4 (476)	5 (127)	4 (102)	6 (152)
364TS	16 (406)	51-3/4 (1314)	56-3/8 (1432)	13 (330)	14 (356)	41-3/4 (1060)	20-7/8 (530)	7/8 (22)	3-7/8 (98)	23-1/4 (591)	19-3/4 (502)	5 (127)	4 (102)	6 (152)


Dimensions are subject to change. Not to be used for construction purposes unless certified.

Xylem Inc.
8200 N. Austin Avenue
Morton Grove, IL 60053
Phone: (847)966-3700
Fax: (847)965-8379
www.xyleminc.com/brands/bellgossett

xylem
Let's Solve Water

Bell & Gossett is a trademark of Xylem Inc. or one of its subsidiaries.
© 2012 Xylem Inc.

JOB: UNIT TAG: ENGINEER: CONTRACTOR:	REPRESENTATIVE: ORDER NO. SUBMITTED BY: APPROVED BY:	DATE: DATE: DATE:
---	---	--



2AD

Series e-1510

Centrifugal Pumps - Base Mounted

SPECIFICATIONS

FLOW _____ HEAD _____

HP _____ RPM _____

VOLTS _____

CYCLE _____ PHASE _____

ENCLOSURE _____

APPROX. WEIGHT _____

SPECIALS _____

MATERIALS OF CONSTRUCTION

☒ Stainless Steel Fitted

FEATURES

- ☐ i-ALERT™ Condition Monitor
- ☒ ANSI/OSHA Coupling Guard
- ☒ Center Drop Out Spacer Coupling
- ☒ Fabricated Heavy Duty Baseplate


MAXIMUM WORKING PRESSURE

- ☐ 175 psi (12 bar) W.P.
w/ 125# ANSI flange drilling


TYPE OF SEAL

- ☐ Standard Seal
(Buna-Carbon/Ceramic)
- ☐ -F Standard Seal w/ Flush Line
(Buna-Carbon/Ceramic)
- ☐ -S Stuffing Box Construction w/ Flushed
Mechanical Single Seal
(EPR-Tungsten Carbide/Carbon)
- ☐ -PF Stuffing Box Construction w/ Packing
(Graphite Impregnated Teflon)

Note: Equipped with NEOPRENE coupling

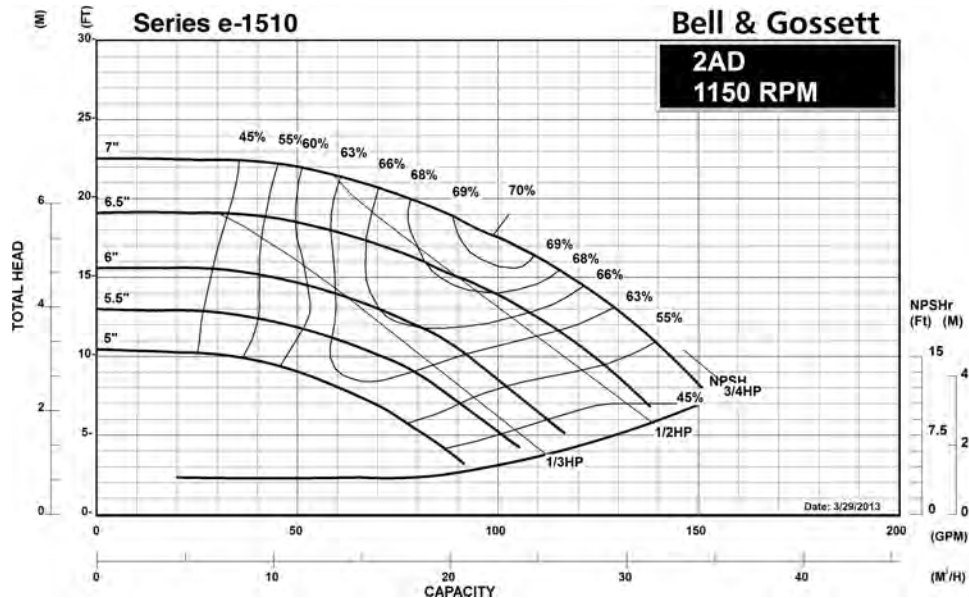

JOB: UNIT TAG: ENGINEER: CONTRACTOR:	REPRESENTATIVE: ORDER NO. SUBMITTED BY: APPROVED BY:	DATE: DATE: DATE:
---	---	--



2AD

Series e-1510

Centrifugal Pumps - Base Mounted

SPECIFICATIONS

FLOW _____ HEAD _____

HP _____ RPM _____

VOLTS _____

CYCLE _____ PHASE _____

ENCLOSURE _____

APPROX. WEIGHT _____

SPECIALS _____

MATERIALS OF CONSTRUCTION

☒ Stainless Steel Fitted

FEATURES

- ☐ i-ALERT™ Condition Monitor
- ☒ ANSI/OSHA Coupling Guard
- ☒ Center Drop Out Spacer Coupling
- ☒ Fabricated Heavy Duty Baseplate


MAXIMUM WORKING PRESSURE

- ☐ 175 psi (12 bar) W.P.
w/ 125# ANSI flange drilling


TYPE OF SEAL

- ☐ Standard Seal
(Buna-Carbon/Ceramic)
- ☐ -F Standard Seal w/ Flush Line
(Buna-Carbon/Ceramic)
- ☐ -S Stuffing Box Construction w/ Flushed
Mechanical Single Seal
(EPR-Tungsten Carbide/Carbon)
- ☐ -PF Stuffing Box Construction w/ Packing
(Graphite Impregnated Teflon)

Note: Equipped with NEOPRENE coupling

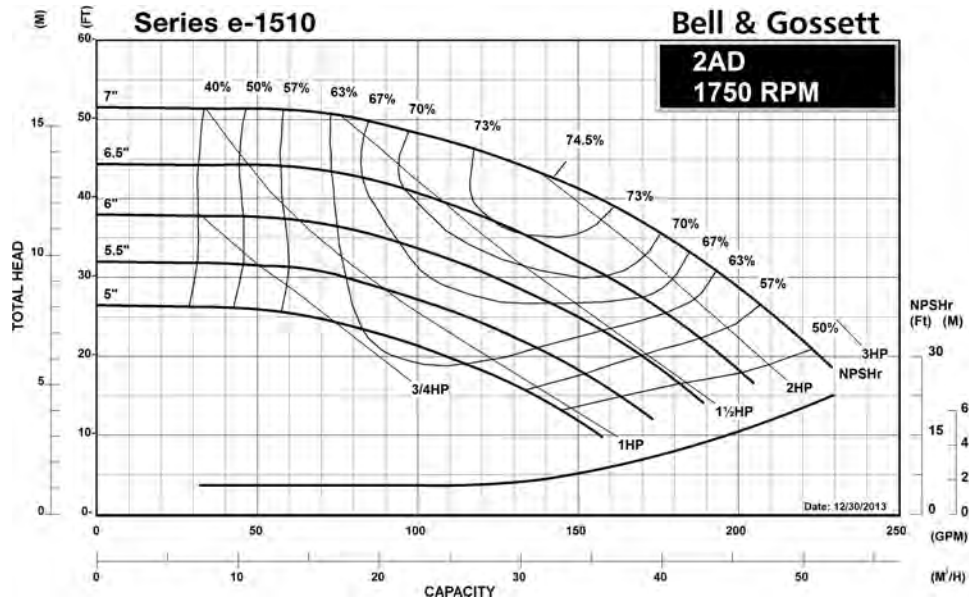

JOB: _____ UNIT TAG: _____ ENGINEER: _____ CONTRACTOR: _____	REPRESENTATIVE: _____ ORDER NO. _____ SUBMITTED BY: _____ APPROVED BY: _____ DATE: _____ DATE: _____ DATE: _____
---	--



2AD

Series e-1510

Centrifugal Pumps - Base Mounted

SPECIFICATIONS

FLOW _____ HEAD _____
 HP _____ RPM _____
 VOLTS _____
 CYCLE _____ PHASE _____
 ENCLOSURE _____
 APPROX. WEIGHT _____
 SPECIALS _____

MATERIALS OF CONSTRUCTION

☒ Stainless Steel Fitted

FEATURES

- ☐ i-ALERT™ Condition Monitor
- ☒ ANSI/OSHA Coupling Guard
- ☒ Center Drop Out Spacer Coupling
- ☒ Fabricated Heavy Duty Baseplate


MAXIMUM WORKING PRESSURE


- ☐ 175 psi (12 bar) W.P.
w/ 125# ANSI flange drilling

TYPE OF SEAL

- ☐ Standard Seal
(Buna-Carbon/Ceramic)
- ☐ -F Standard Seal w/ Flush Line
(Buna-Carbon/Ceramic)
- ☐ -S Stuffing Box Construction w/ Flushed
Mechanical Single Seal
(EPR-Tungsten Carbide/Carbon)
- ☐ -PF Stuffing Box Construction w/ Packing
(Graphite Impregnated Teflon)

Note: Equipped with NEOPRENE coupling

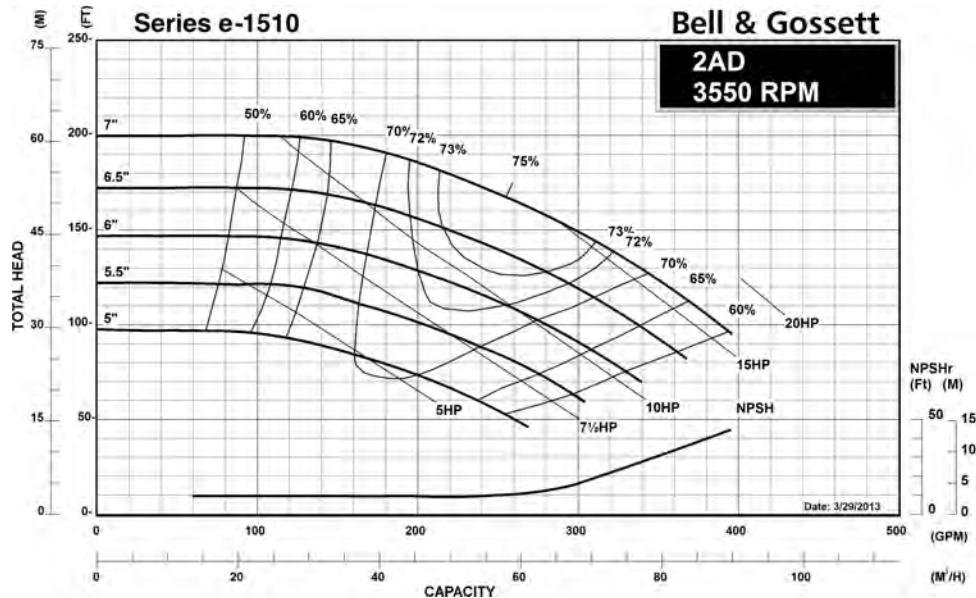

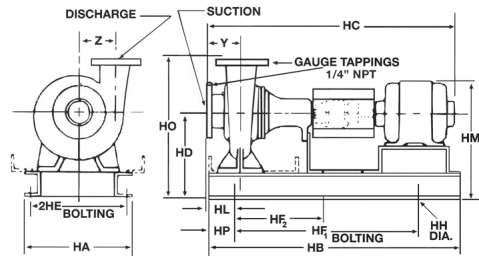

FLANGE DIMENSIONS IN INCHES (MM)			
	SIZE	THICKNESS	O.D.
Discharge	2"	5/8" (16)	6" (152)
Suction	2-1/2"	11/16" (17)	7-1/8" (181)

FLANGES ARE 125# ANSI - STANDARD

DIMENSIONS – Inches (mm)

STANDARD SEAL

MOTOR FRAME	HA	HB	HC MAX	HD	2HE	HF ₁	HF ₂	HH	HL	HM MAX	HO	HP	Y	Z
"S" FRAME														
56	12 (305)	28-3/4 (730)	28-7/8 (733)	9-3/4 (248)	10-1/4 (260)	22-1/2 (572)	–	3/4 (19)	3-9/16 (90)	13-3/8 (340)	16-1/4 (413)	3 (76)	3-1/2 (89)	4-3/4 (121)
143T	12 (305)	28-3/4 (730)	29 (737)	9-3/4 (248)	10-1/4 (260)	22-1/2 (572)	–	3/4 (19)	3-9/16 (90)	13-1/2 (343)	16-1/4 (413)	3 (76)	3-1/2 (89)	4-3/4 (121)
145T	12 (305)	28-3/4 (730)	30 (762)	9-3/4 (248)	10-1/4 (260)	22-1/2 (572)	–	3/4 (19)	3-9/16 (90)	13-1/2 (343)	16-1/4 (413)	3 (76)	3-1/2 (89)	4-3/4 (121)
182T	14-5/8 (371)	31 (787)	32-5/8 (829)	9-3/4 (248)	12-7/8 (327)	25 (635)	–	3/4 (19)	2-3/16 (56)	15 (381)	16-1/4 (413)	3 (76)	3-1/2 (89)	4-3/4 (121)
184T	14-5/8 (371)	31 (787)	33-3/8 (848)	9-3/4 (248)	12-7/8 (327)	25 (635)	–	3/4 (19)	2-3/16 (56)	15 (381)	16-1/4 (413)	3 (76)	3-1/2 (89)	4-3/4 (121)
213T	14-5/8 (371)	34-5/8 (879)	36 (914)	9-3/4 (248)	12-7/8 (327)	28-5/8 (727)	–	3/4 (19)	2-3/16 (56)	15-5/8 (397)	16-1/4 (413)	3 (76)	3-1/2 (89)	4-3/4 (121)
215T	14-5/8 (371)	34-5/8 (879)	37-1/2 (953)	9-3/4 (248)	12-7/8 (327)	28-5/8 (727)	–	3/4 (19)	2-3/16 (56)	15-5/8 (397)	16-1/4 (413)	3 (76)	3-1/2 (89)	4-3/4 (121)
254T	14-5/8 (371)	39-3/8 (1000)	41-1/4 (1048)	10-3/4 (273)	12-7/8 (327)	33-3/8 (848)	–	3/4 (19)	2-3/16 (56)	17-5/8 (448)	17-1/4 (438)	3 (76)	3-1/2 (89)	4-3/4 (121)
256T	14-5/8 (371)	39-3/8 (1000)	43 (1092)	10-3/4 (273)	12-7/8 (327)	33-3/8 (848)	–	3/4 (19)	2-3/16 (56)	17-5/8 (448)	17-1/4 (438)	3 (76)	3-1/2 (89)	4-3/4 (121)

STUFFING BOX

MOTOR FRAME	HA	HB	HC MAX	HD	2HE	HF ₁	HF ₂	HH	HL	HM MAX	HO	HP	Y	Z
"S" FRAME														
56	14-5/8 (371)	34-5/8 (879)	32-3/8 (822)	9-3/4 (248)	12-7/8 (327)	28-5/8 (727)	–	3/4 (19)	2-3/16 (56)	13-3/8 (340)	16-1/4 (413)	3 (76)	3-1/2 (89)	4-3/4 (121)
143T	14-5/8 (371)	34-5/8 (879)	32-1/2 (826)	9-3/4 (248)	12-7/8 (327)	28-5/8 (727)	–	3/4 (19)	2-3/16 (56)	13-1/2 (343)	16-1/4 (413)	3 (76)	3-1/2 (89)	4-3/4 (121)
145T	14-5/8 (371)	34-5/8 (879)	33-1/2 (851)	9-3/4 (248)	12-7/8 (327)	28-5/8 (727)	–	3/4 (19)	2-3/16 (56)	13-1/2 (343)	16-1/4 (413)	3 (76)	3-1/2 (89)	4-3/4 (121)
182T	14-5/8 (371)	34-5/8 (879)	36-1/4 (921)	9-3/4 (248)	12-7/8 (327)	28-5/8 (727)	–	3/4 (19)	2-3/16 (56)	15 (381)	16-1/4 (413)	3 (76)	3-1/2 (89)	4-3/4 (121)
184T	14-5/8 (371)	34-5/8 (879)	37 (940)	9-3/4 (248)	12-7/8 (327)	28-5/8 (727)	–	3/4 (19)	2-3/16 (56)	15 (381)	16-1/4 (413)	3 (76)	3-1/2 (89)	4-3/4 (121)
"L" FRAME														
213T	16 (406)	46-1/2 (1181)	42-3/4 (1086)	11 (279)	14 (356)	36-1/2 (927)	18-1/4 (464)	7/8 (22)	3-5/16 (84)	16-7/8 (429)	17-1/2 (445)	5 (127)	3-1/2 (89)	4-3/4 (121)
215T	16 (406)	46-1/2 (1181)	44-1/4 (1124)	11 (279)	14 (356)	36-1/2 (927)	18-1/4 (464)	7/8 (22)	3-5/16 (84)	16-7/8 (429)	17-1/2 (445)	5 (127)	3-1/2 (89)	4-3/4 (121)
254T	16 (406)	51-3/4 (1314)	48 (1219)	12 (305)	14 (356)	41-3/4 (1060)	20-7/8 (530)	7/8 (22)	3-5/16 (84)	18-7/8 (479)	18-1/2 (470)	5 (127)	3-1/2 (89)	4-3/4 (121)
256T	16 (406)	51-3/4 (1314)	49-3/4 (1264)	12 (305)	14 (356)	41-3/4 (1060)	20-7/8 (530)	7/8 (22)	3-5/16 (84)	18-7/8 (479)	18-1/2 (470)	5 (127)	3-1/2 (89)	4-3/4 (121)

Dimensions are subject to change. Not to be used for construction purposes unless certified.

Xylem Inc.
8200 N. Austin Avenue
Morton Grove, IL 60053
Phone: (847)966-3700
Fax: (847)965-8379
www.bellgossett.com

xylem
Let's Solve Water

Bell & Gossett is a trademark of Xylem Inc. or one of its subsidiaries.
© 2013 Xylem Inc.

JOB:

REPRESENTATIVE:

UNIT TAG:

ORDER NO.

DATE:

ENGINEER:


SUBMITTED BY:

DATE:

CONTRACTOR:

APPROVED BY:

DATE:



2BD Series e-1510 Centrifugal Pumps - Base Mounted

SPECIFICATIONS

FLOW _____ HEAD _____

HP _____ RPM _____

VOLTS _____

CYCLE _____ PHASE _____

ENCLOSURE _____

APPROX. WEIGHT _____

SPECIALS _____

MATERIALS OF CONSTRUCTION

☒ Stainless Steel Fitted

FEATURES

- ☐ i-ALERT™ Condition Monitor
- ☒ ANSI/OSHA Coupling Guard
- ☒ Center Drop Out Spacer Coupling
- ☒ Fabricated Heavy Duty Baseplate


MAXIMUM WORKING PRESSURE

- ☐ 175 psi (12 bar) W.P.
w/ 125# ANSI flange drilling

TYPE OF SEAL

- ☐ Standard Seal
(Buna-Carbon/Ceramic)
- ☐ -F Standard Seal w/ Flush Line
(Buna-Carbon/Ceramic)
- ☐ -S Stuffing Box Construction w/ Flushed
Mechanical Single Seal
(EPR-Tungsten Carbide/Carbon)
- ☐ -PF Stuffing Box Construction w/ Packing
(Graphite Impregnated Teflon)

Note: Equipped with NEOPRENE coupling

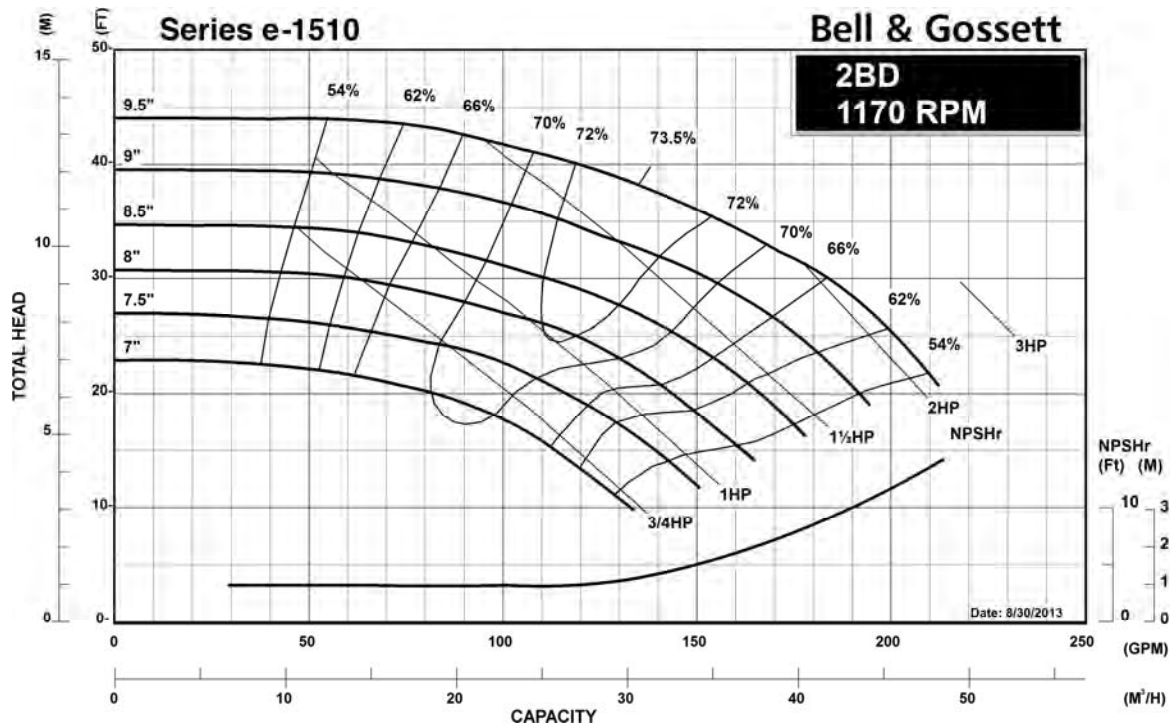

JOB:

REPRESENTATIVE:

UNIT TAG:

ORDER NO.

DATE:

ENGINEER:


SUBMITTED BY:

DATE:

CONTRACTOR:

APPROVED BY:

DATE:



2BD Series e-1510 Centrifugal Pumps - Base Mounted

SPECIFICATIONS

FLOW _____ HEAD _____

HP _____ RPM _____

VOLTS _____

CYCLE _____ PHASE _____

ENCLOSURE _____

APPROX. WEIGHT _____

SPECIALS _____

MATERIALS OF CONSTRUCTION

☒ Stainless Steel Fitted

FEATURES

- ☐ i-ALERT™ Condition Monitor
- ☒ ANSI/OSHA Coupling Guard
- ☒ Center Drop Out Spacer Coupling
- ☒ Fabricated Heavy Duty Baseplate


MAXIMUM WORKING PRESSURE

- ☐ 175 psi (12 bar) W.P.
w/ 125# ANSI flange drilling

TYPE OF SEAL

- ☐ Standard Seal
(Buna-Carbon/Ceramic)
- ☐ -F Standard Seal w/ Flush Line
(Buna-Carbon/Ceramic)
- ☐ -S Stuffing Box Construction w/ Flushed
Mechanical Single Seal
(EPR-Tungsten Carbide/Carbon)
- ☐ -PF Stuffing Box Construction w/ Packing
(Graphite Impregnated Teflon)

Note: Equipped with NEOPRENE coupling

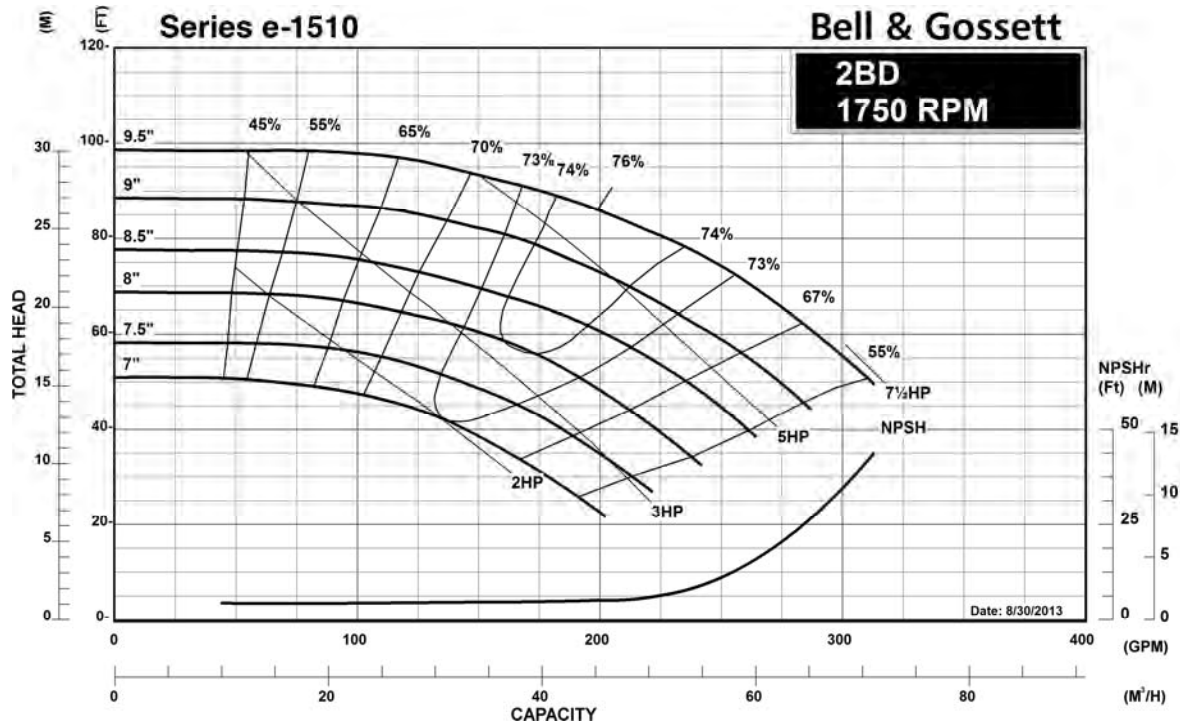

JOB:

REPRESENTATIVE:

UNIT TAG:

ORDER NO.

DATE:

ENGINEER:


SUBMITTED BY:

DATE:

CONTRACTOR:

APPROVED BY:

DATE:



2BD Series e-1510 Centrifugal Pumps - Base Mounted

SPECIFICATIONS

FLOW _____ HEAD _____

HP _____ RPM _____

VOLTS _____

CYCLE _____ PHASE _____

ENCLOSURE _____

APPROX. WEIGHT _____

SPECIALS _____

MATERIALS OF CONSTRUCTION

☒ Stainless Steel Fitted

FEATURES

- ☐ i-ALERT™ Condition Monitor
- ☒ ANSI/OSHA Coupling Guard
- ☒ Center Drop Out Spacer Coupling
- ☒ Fabricated Heavy Duty Baseplate


MAXIMUM WORKING PRESSURE

- ☐ 175 psi (12 bar) W.P.
w/ 125# ANSI flange drilling

TYPE OF SEAL


- ☐ Standard Seal
(Buna-Carbon/Ceramic)
- ☐ -F Standard Seal w/ Flush Line
(Buna-Carbon/Ceramic)
- ☐ -S Stuffing Box Construction w/ Flushed
Mechanical Single Seal
(EPR-Tungsten Carbide/Carbon)
- ☐ -PF Stuffing Box Construction w/ Packing
(Graphite Impregnated Teflon)

Note: Equipped with NEOPRENE coupling

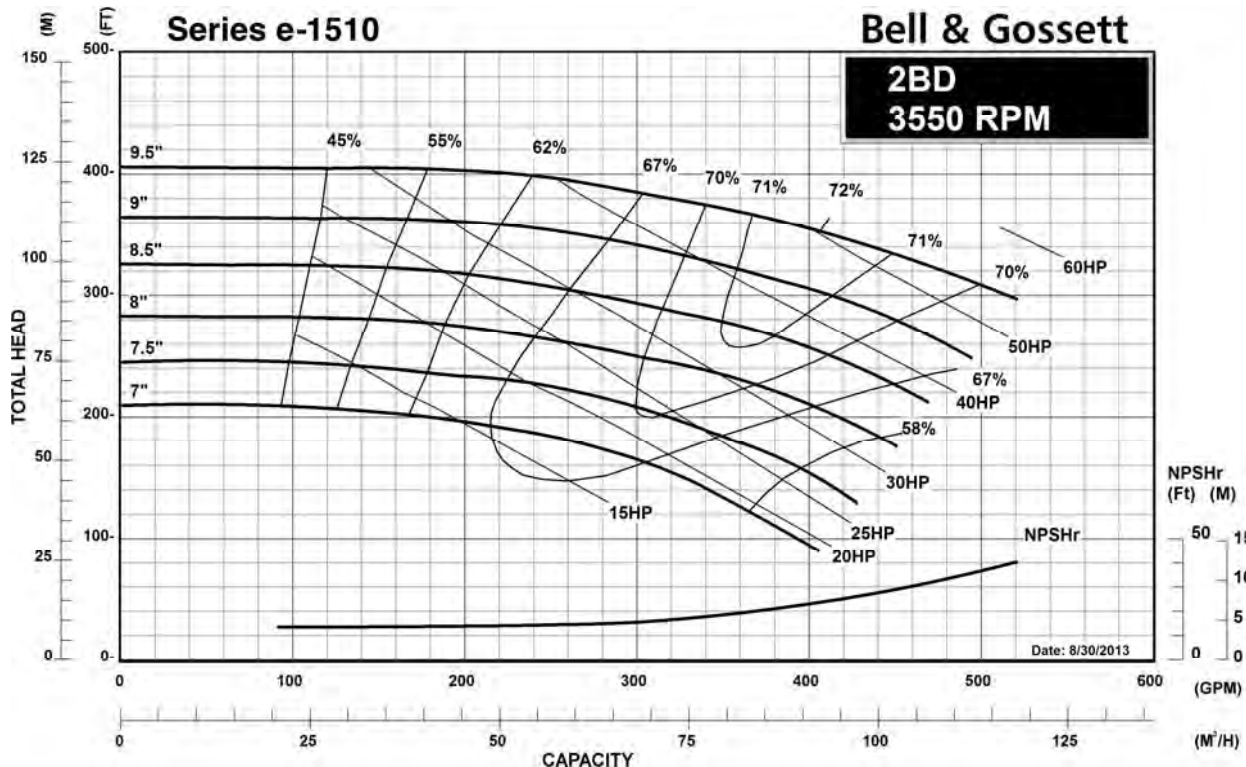

Series e-1510 2BD Centrifugal Pump Submittal

B-880.18A

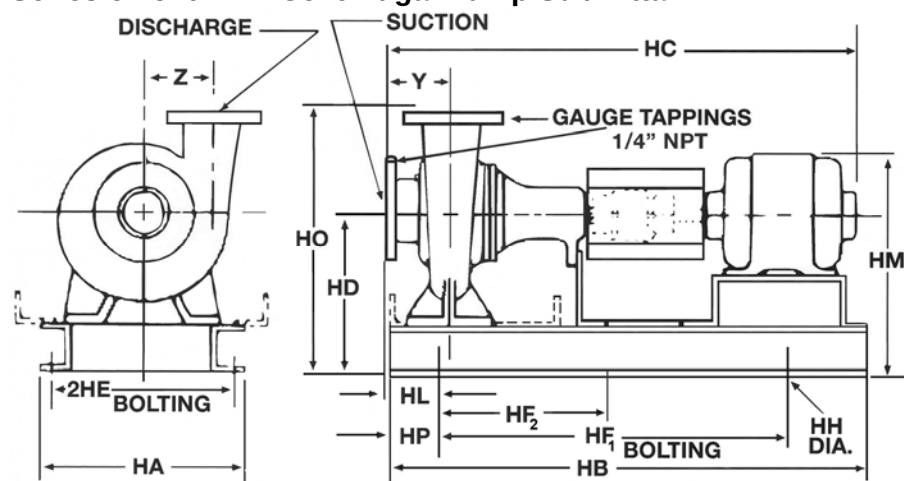

FLANGE DIMENSIONS IN INCHES (MM)			
	SIZE	THICKNESS	O.D.
Discharge	2"	7/8" (22)	6-1/4" (159)
Suction	2-1/2"	1" (25)	7-3/8" (187)

FLANGES ARE 125# ANSI - STANDARD

DIMENSIONS – Inches (mm)

STANDARD SEAL

MOTOR FRAME	HA	HB	HC MAX	HD	2HE	HF ₁	HF ₂	HH	HL	HM MAX	HO	HP	Y	Z
"S" FRAME														
143T	14-5/8 (371)	31 (787)	29-1/2 (749)	10-3/4 (273)	12-7/8 (327)	25 (635)	-	3/4 (19)	2-11/16 (68)	14-1/2 (368)	17-3/4 (451)	3 (76)	4 (102)	5-7/8 (149)
145T	14-5/8 (371)	31 (787)	30-1/2 (775)	10-3/4 (273)	12-7/8 (327)	25 (635)	-	3/4 (19)	2-11/16 (68)	14-1/2 (368)	17-3/4 (451)	3 (76)	4 (102)	5-7/8 (149)
182T	14-5/8 (371)	31 (787)	33-1/8 (841)	10-3/4 (273)	12-7/8 (327)	25 (635)	-	3/4 (19)	2-11/16 (68)	16 (406)	17-3/4 (451)	3 (76)	4 (102)	5-7/8 (149)
184T	14-5/8 (371)	31 (787)	33-7/8 (860)	10-3/4 (273)	12-7/8 (327)	25 (635)	-	3/4 (19)	2-11/16 (68)	16 (406)	17-3/4 (451)	3 (76)	4 (102)	5-7/8 (149)
213T	14-5/8 (371)	34-5/8 (879)	36-1/2 (927)	10-3/4 (273)	12-7/8 (327)	28-5/8 (727)	-	3/4 (19)	2-11/16 (68)	16-5/8 (422)	17-3/4 (451)	3 (76)	4 (102)	5-7/8 (149)
"L" FRAME														
215T	14-5/8 (371)	39-3/8 (1000)	42-3/8 (1076)	10-3/4 (273)	12-7/8 (327)	33-3/8 (848)	-	3/4 (19)	2-11/16 (68)	16-5/8 (422)	17-3/4 (451)	3 (76)	4 (102)	5-7/8 (149)
254T	16 (406)	46-1/2 (1181)	46-1/8 (1172)	12 (305)	14 (356)	36-1/2 (927)	18-1/4 (464)	7/8 (22)	3-13/16 (97)	18-7/8 (479)	19 (483)	5 (127)	4 (102)	5-7/8 (149)
256T	16 (406)	46-1/2 (1181)	47-7/8 (1216)	12 (305)	14 (356)	36-1/2 (927)	18-1/4 (464)	7/8 (22)	3-13/16 (97)	18-7/8 (479)	19 (483)	5 (127)	4 (102)	5-7/8 (149)
284TS	16 (406)	46-1/2 (1181)	47-1/8 (1197)	13 (330)	14 (356)	36-1/2 (927)	18-1/4 (464)	7/8 (22)	3-13/16 (97)	21 (533)	20 (508)	5 (127)	4 (102)	5-7/8 (149)
286TS	16 (406)	46-1/2 (1181)	48-5/8 (1235)	13 (330)	14 (356)	36-1/2 (927)	18-1/4 (464)	7/8 (22)	3-13/16 (97)	21 (533)	20 (508)	5 (127)	4 (102)	5-7/8 (149)
324TS	16 (406)	46-1/2 (1181)	50-5/8 (1286)	12 (305)	14 (356)	36-1/2 (927)	18-1/4 (464)	7/8 (22)	3-13/16 (97)	21-1/8 (537)	19 (483)	5 (127)	4 (102)	5-7/8 (149)
326TS	16 (406)	46-1/2 (1181)	52-1/8 (1324)	12 (305)	14 (356)	36-1/2 (927)	18-1/4 (464)	7/8 (22)	3-13/16 (97)	21-1/8 (537)	19 (483)	5 (127)	4 (102)	5-7/8 (149)

STUFFING BOX

MOTOR FRAME	HA	HB	HC MAX	HD	2HE	HF ₁	HF ₂	HH	HL	HM MAX	HO	HP	Y	Z
"S" FRAME														
143T	14-5/8 (371)	34-5/8 (879)	33 (838)	10-3/4 (273)	12-7/8 (327)	28-5/8 (727)	-	3/4 (19)	2-11/16 (68)	14-1/2 (368)	17-3/4 (451)	3 (76)	4 (102)	5-7/8 (149)
145T	14-5/8 (371)	34-5/8 (879)	34 (864)	10-3/4 (273)	12-7/8 (327)	28-5/8 (727)	-	3/4 (19)	2-11/16 (68)	14-1/2 (368)	17-3/4 (451)	3 (76)	4 (102)	5-7/8 (149)
182T	14-5/8 (371)	34-5/8 (879)	36-3/4 (933)	10-3/4 (273)	12-7/8 (327)	28-5/8 (727)	-	3/4 (19)	2-11/16 (68)	16 (406)	17-3/4 (451)	3 (76)	4 (102)	5-7/8 (149)
184T	14-5/8 (371)	34-5/8 (879)	37-1/2 (953)	10-3/4 (273)	12-7/8 (327)	28-5/8 (727)	-	3/4 (19)	2-11/16 (68)	16 (406)	17-3/4 (451)	3 (76)	4 (102)	5-7/8 (149)
213T	14-5/8 (371)	39-3/8 (1000)	40 (1016)	10-3/4 (273)	12-7/8 (327)	33-3/8 (848)	-	3/4 (19)	2-11/16 (68)	16-5/8 (422)	17-3/4 (451)	3 (76)	4 (102)	5-7/8 (149)
"L" FRAME														
215T	16 (406)	46-1/2 (1181)	44-3/4 (1137)	12 (305)	14 (356)	36-1/2 (927)	18-1/4 (464)	7/8 (22)	3-13/16 (97)	17-7/8 (454)	19 (483)	5 (127)	4 (102)	5-7/8 (149)
254T	16 (406)	51-3/4 (1314)	48-1/2 (1232)	12 (305)	14 (356)	41-3/4 (1060)	20-7/8 (530)	7/8 (22)	3-13/16 (97)	18-7/8 (479)	19 (483)	5 (127)	4 (102)	5-7/8 (149)
256T	16 (406)	51-3/4 (1314)	50-1/4 (1276)	12 (305)	14 (356)	41-3/4 (1060)	20-7/8 (530)	7/8 (22)	3-13/16 (97)	18-7/8 (479)	19 (483)	5 (127)	4 (102)	5-7/8 (149)
284TS	16 (406)	51-3/4 (1314)	49-5/8 (1260)	13 (330)	14 (356)	41-3/4 (1060)	20-7/8 (530)	7/8 (22)	3-13/16 (97)	21 (533)	20 (508)	5 (127)	4 (102)	5-7/8 (149)
286TS	16 (406)	51-3/4 (1314)	51-1/8 (1299)	13 (330)	14 (356)	41-3/4 (1060)	20-7/8 (530)	7/8 (22)	3-13/16 (97)	21 (533)	20 (508)	5 (127)	4 (102)	5-7/8 (149)
324TS	16 (406)	51-3/4 (1314)	53 (1346)	12 (305)	14 (356)	41-3/4 (1060)	20-7/8 (530)	7/8 (22)	3-13/16 (97)	21-1/8 (537)	19 (483)	5 (127)	4 (102)	5-7/8 (149)
326TS	16 (406)	51-3/4 (1314)	54-1/2 (1384)	12 (305)	14 (356)	41-3/4 (1060)	20-7/8 (530)	7/8 (22)	3-13/16 (97)	21-1/8 (537)	19 (483)	5 (127)	4 (102)	5-7/8 (149)

Dimensions are subject to change. Not to be used for construction purposes unless certified.

Xylem Inc.
8200 N. Austin Avenue
Morton Grove, IL 60053
Phone: (847)966-3700
Fax: (847)965-8379
www.bellgossett.com

xylem
Let's Solve Water

Bell & Gossett is a trademark of Xylem Inc. or one of its subsidiaries.
© 2013 Xylem Inc.

JOB:

REPRESENTATIVE:

UNIT TAG:

ORDER NO.

DATE:

ENGINEER:


SUBMITTED BY:

DATE:

CONTRACTOR:

APPROVED BY:

DATE:



2EB Series e-1510 Centrifugal Pumps - Base Mounted

SPECIFICATIONS

FLOW _____ HEAD _____

HP _____ RPM _____

VOLTS _____

CYCLE _____ PHASE _____

ENCLOSURE _____

APPROX. WEIGHT _____

SPECIALS _____

Note: Equipped with NEOPRENE coupling

MATERIALS OF CONSTRUCTION

☒ STAINLESS STEEL FITTED

FEATURES


- ☐ i-ALERT™ Condition Monitor
- ☒ ANSI/OSHA Coupling Guard
- ☒ Center Drop Out Spacer Coupling
- ☒ Fabricated Heavy Duty Baseplate

MAXIMUM WORKING PRESSURE

- ☐ 175 psi (12 bar) W.P.
w/125# ANSI flange drilling
- ☐ 250 psi (17 bar) W.P.
w/250# ANSI flange drilling
(requires 1510-S)

TYPE OF SEAL

- ☐ Standard Seal
(Buna-Carbon/Ceramic)
- ☐ -F Standard Seal w/ Flush Line
(Buna-Carbon/Ceramic)
- ☐ -S Stuffing Box Construction w/ Flushed
Mechanical Single Seal
(EPR-Tungsten Carbide/Carbon)
- ☐ -PF Stuffing Box Construction w/ Packing
(Graphite Impregnated Teflon)

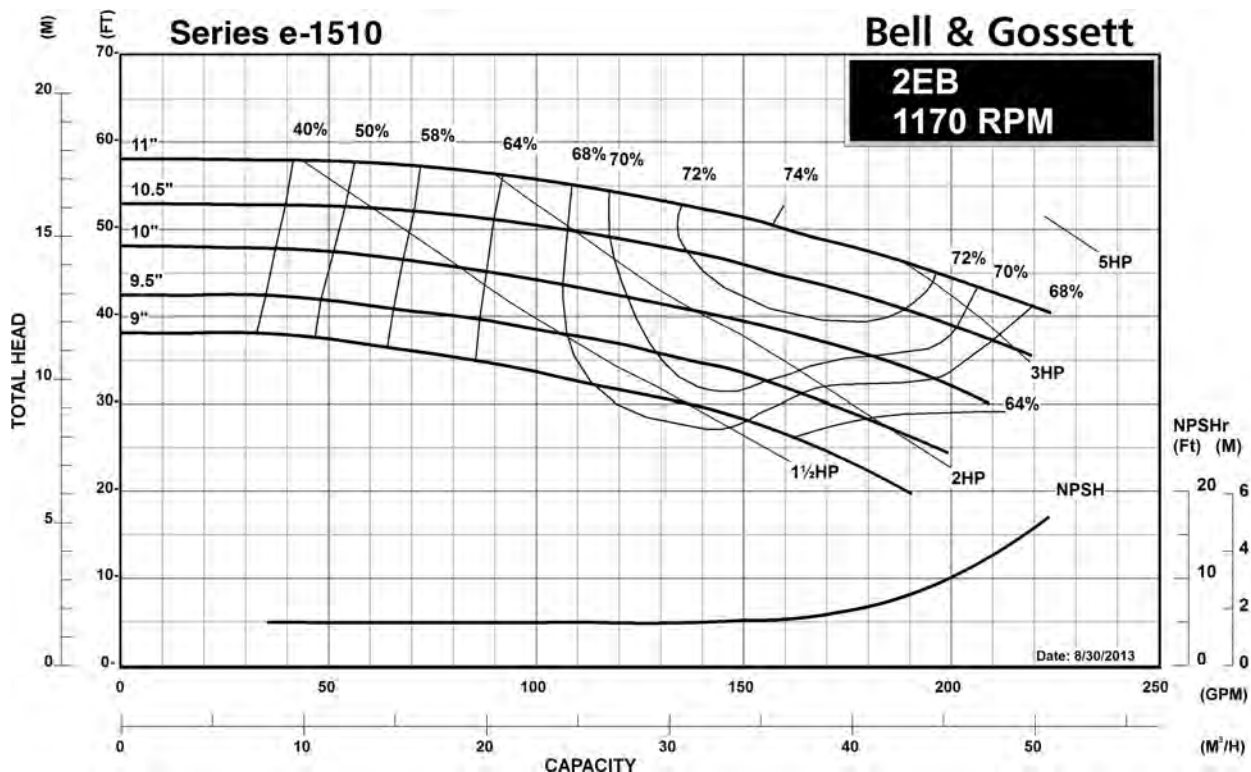

JOB:

REPRESENTATIVE:

UNIT TAG:

ORDER NO.

DATE:

ENGINEER:


SUBMITTED BY:

DATE:

CONTRACTOR:

APPROVED BY:

DATE:



2EB Series e-1510 Centrifugal Pumps - Base Mounted

SPECIFICATIONS

FLOW _____ HEAD _____

HP _____ RPM _____

VOLTS _____

CYCLE _____ PHASE _____

ENCLOSURE _____

APPROX. WEIGHT _____

SPECIALS _____

Note: Equipped with NEOPRENE coupling

MATERIALS OF CONSTRUCTION

☒ STAINLESS STEEL FITTED

FEATURES


- ☐ i-ALERT™ Condition Monitor
- ☒ ANSI/OSHA Coupling Guard
- ☒ Center Drop Out Spacer Coupling
- ☒ Fabricated Heavy Duty Baseplate

MAXIMUM WORKING PRESSURE


- ☐ 175 psi (12 bar) W.P.
w/125# ANSI flange drilling
- ☐ 250 psi (17 bar) W.P.
w/250# ANSI flange drilling
(requires 1510-S)

TYPE OF SEAL

- ☐ Standard Seal
(Buna-Carbon/Ceramic)
- ☐ -F Standard Seal w/ Flush Line
(Buna-Carbon/Ceramic)
- ☐ -S Stuffing Box Construction w/ Flushed
Mechanical Single Seal
(EPR-Tungsten Carbide/Carbon)
- ☐ -PF Stuffing Box Construction w/ Packing
(Graphite Impregnated Teflon)

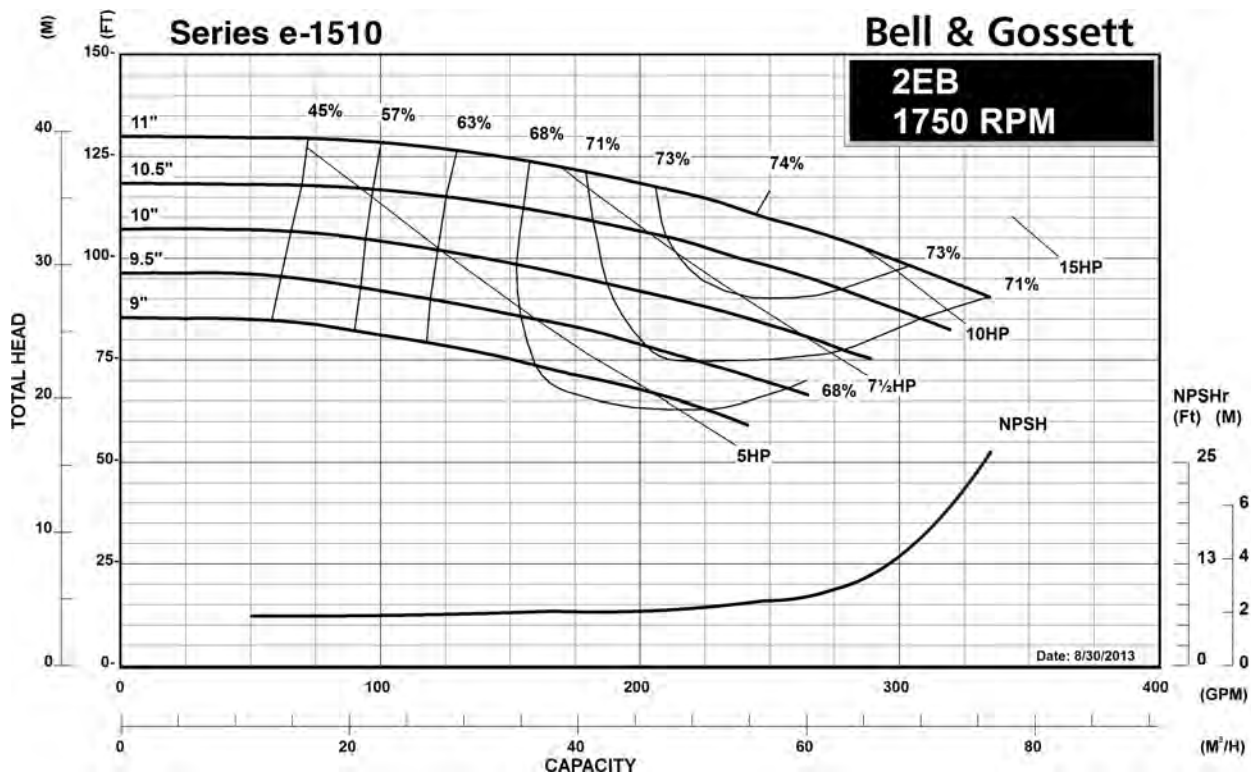

JOB: UNIT TAG: ENGINEER: CONTRACTOR:	REPRESENTATIVE: ORDER NO. SUBMITTED BY: APPROVED BY:	DATE: DATE: DATE:
---	---	--



2EB

Series e-1510

Centrifugal Pumps - Base Mounted

SPECIFICATIONS

FLOW _____ HEAD _____

HP _____ RPM _____

VOLTS _____

CYCLE _____ PHASE _____

ENCLOSURE _____

APPROX. WEIGHT _____

SPECIALS _____

Note: Equipped with NEOPRENE coupling

MATERIALS OF CONSTRUCTION

☒ STAINLESS STEEL FITTED

FEATURES


- ☐ i-ALERT™ Condition Monitor
- ☒ ANSI/OSHA Coupling Guard
- ☒ Center Drop Out Spacer Coupling
- ☒ Fabricated Heavy Duty Baseplate


MAXIMUM WORKING PRESSURE

- ☐ 175 psi (12 bar) W.P.
w/125# ANSI flange drilling
- ☐ 250 psi (17 bar) W.P.
w/250# ANSI flange drilling
(requires 1510-S)

TYPE OF SEAL

- ☐ Standard Seal
(Buna-Carbon/Ceramic)
- ☐ -F Standard Seal w/ Flush Line
(Buna-Carbon/Ceramic)
- ☐ -S Stuffing Box Construction w/ Flushed
Mechanical Single Seal
(EPR-Tungsten Carbide/Carbon)
- ☐ -PF Stuffing Box Construction w/ Packing
(Graphite Impregnated Teflon)

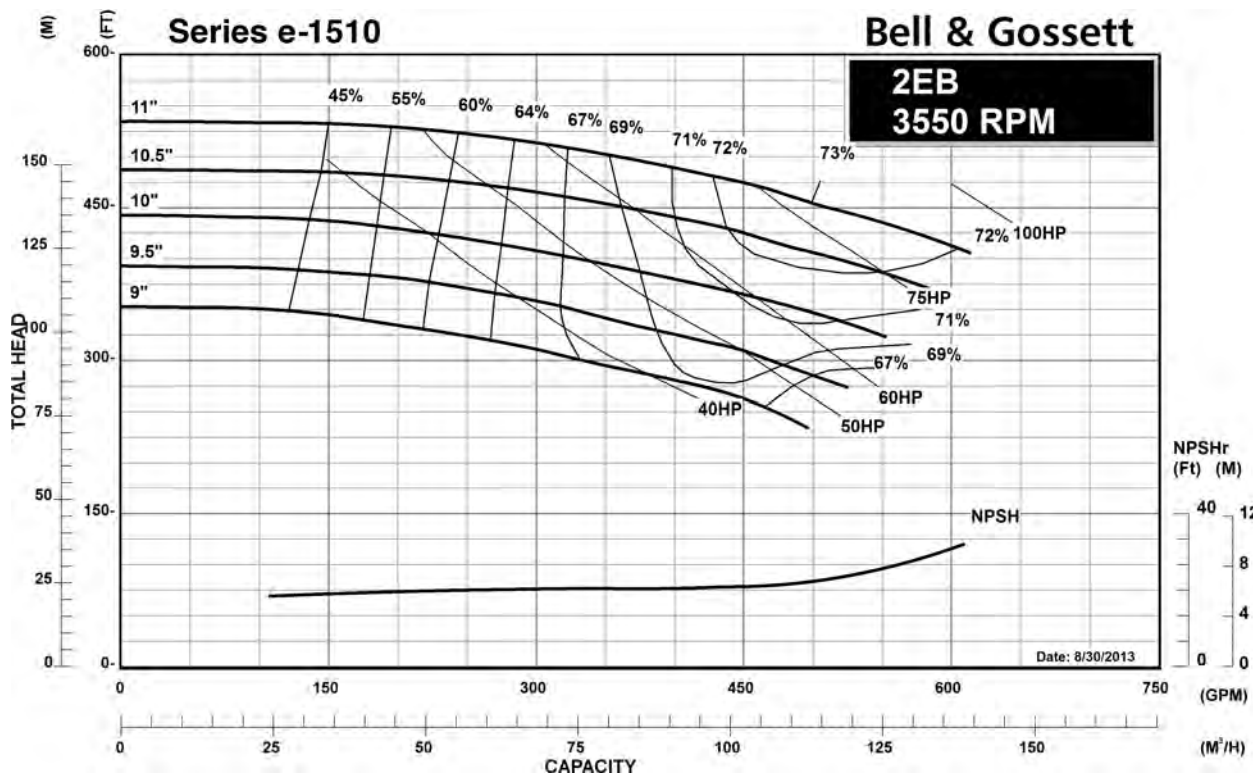

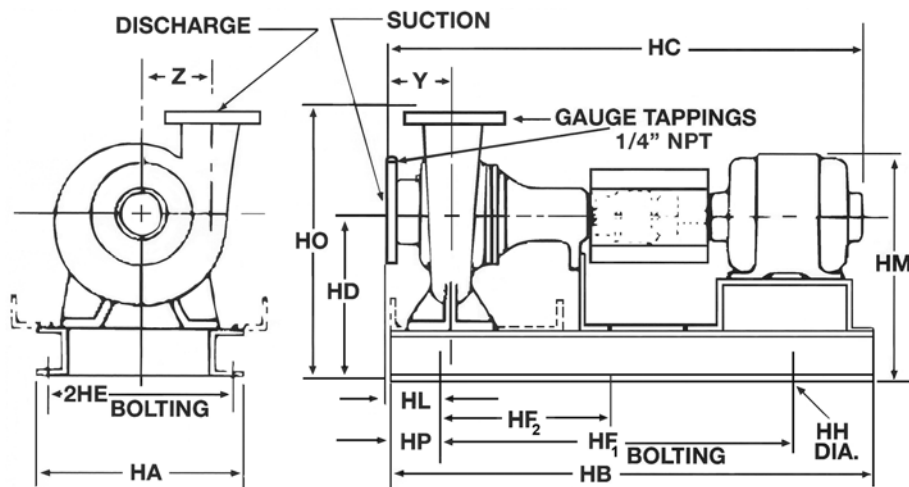

FLANGE DIMENSIONS IN INCHES (MM)			
	SIZE	THICKNESS	O.D.
Discharge	2"	7/8 (23)	6-1/4 (159)
Suction	3"	1-1/8 (29)	8 (203)

FLANGES ARE 125# ANSI - STANDARD
250# ANSI - AVAILABLE

DIMENSIONS - Inches (mm)

STANDARD SEAL

MOTOR FRAME	HA	HB	HC MAX	HD	2HE	HF ₁	HF ₂	HH	HL	HM MAX	HO	HP	Y	Z
"S" FRAME														
182T	16 (406)	42-1/4 (1073)	34 (864)	14 (356)	14 (356)	32-1/4 (819)	16-1/8 (410)	7/8 (22)	6-1/2 (165)	19-1/4 (489)	22 (559)	5 (127)	5-1/2 (140)	6-1/2 (165)
184T	16 (406)	42-1/4 (1073)	34-3/4 (883)	14 (356)	14 (356)	32-1/4 (819)	16-1/8 (410)	7/8 (22)	6-1/2 (165)	19-1/4 (489)	22 (559)	5 (127)	5-1/2 (140)	6-1/2 (165)
213T	16 (406)	42-1/4 (1073)	37-1/4 (946)	14 (356)	14 (356)	32-1/4 (819)	16-1/8 (410)	7/8 (22)	6-1/2 (165)	19-7/8 (505)	22 (559)	5 (127)	5-1/2 (140)	6-1/2 (165)
215T	16 (406)	42-1/4 (1073)	38-3/4 (984)	14 (356)	14 (356)	32-1/4 (819)	16-1/8 (410)	7/8 (22)	6-1/2 (165)	19-7/8 (505)	22 (559)	5 (127)	5-1/2 (140)	6-1/2 (165)
254T	16 (406)	42-1/4 (1073)	42-1/2 (1080)	14 (356)	14 (356)	32-1/4 (819)	16-1/8 (410)	7/8 (22)	6-1/2 (165)	20-7/8 (530)	22 (559)	5 (127)	5-1/2 (140)	6-1/2 (165)
"L" FRAME														
286TS	16 (406)	46-1/2 (1181)	49 (1245)	14 (356)	14 (356)	36-1/2 (927)	18-1/4 (464)	7/8 (22)	4-1/8 (105)	22 (559)	22 (559)	5 (127)	5-1/2 (140)	6-1/2 (165)
324TS	16 (406)	51-3/4 (1314)	50-7/8 (1292)	14 (356)	14 (356)	41-3/4 (1060)	20-7/8 (530)	7/8 (22)	4-1/8 (105)	23-1/8 (587)	22 (559)	5 (127)	5-1/2 (140)	6-1/2 (165)
326TS	16 (406)	51-3/4 (1314)	52-3/8 (1330)	14 (356)	14 (356)	41-3/4 (1060)	20-7/8 (530)	7/8 (22)	4-1/8 (105)	23-1/8 (587)	22 (559)	5 (127)	5-1/2 (140)	6-1/2 (165)
364TS	24 (610)	56 (1422)	54-1/4 (1378)	16-1/2 (419)	21-1/2 (546)	44 (1118)	22 (559)	1 (25)	4-3/4 (121)	26-3/4 (679)	24-1/2 (622)	6 (152)	5-1/2 (140)	6-1/2 (165)
365TS	24 (610)	56 (1422)	54-7/8 (1394)	16-1/2 (419)	21-1/2 (546)	44 (1118)	22 (559)	1 (25)	4-3/4 (121)	26-3/4 (679)	24-1/2 (622)	6 (152)	5-1/2 (140)	6-1/2 (165)

STUFFING BOX


MOTOR FRAME	HA	HB	HC MAX	HD	2HE	HF ₁	HF ₂	HH	HL	HM MAX	HO	HP	Y	Z
"S" FRAME														
182T	16 (406)	42-1/4 (1073)	37-5/8 (956)	14 (356)	14 (356)	32-1/4 (819)	16-1/8 (409)	7/8 (22)	6-1/2 (165)	19-1/4 (489)	22 (559)	5 (127)	5-1/2 (140)	6-1/2 (165)
184T	16 (406)	42-1/4 (1073)	38-3/8 (975)	14 (356)	14 (356)	32-1/4 (819)	16-1/8 (409)	7/8 (22)	6-1/2 (165)	19-1/4 (489)	22 (559)	5 (127)	5-1/2 (140)	6-1/2 (165)
213T	16 (406)	42-1/4 (1073)	40-7/8 (1038)	14 (356)	14 (356)	32-1/4 (819)	16-1/8 (409)	7/8 (22)	6-1/2 (165)	19-7/8 (505)	22 (559)	5 (127)	5-1/2 (140)	6-1/2 (165)
215T	16 (406)	42-1/4 (1073)	42-3/8 (1076)	14 (356)	14 (356)	32-1/4 (819)	16-1/8 (409)	7/8 (22)	6-1/2 (165)	19-7/8 (505)	22 (559)	5 (127)	5-1/2 (140)	6-1/2 (165)
254T	16 (406)	42-1/4 (1073)	46-1/8 (1171)	14 (356)	14 (356)	32-1/4 (819)	16-1/8 (409)	7/8 (22)	6-1/2 (165)	20-7/8 (530)	22 (559)	5 (127)	5-1/2 (140)	6-1/2 (165)
"L" FRAME														
286TS	16 (406)	51-3/4 (1314)	51-3/8 (1305)	14 (356)	14 (356)	41-3/4 (1060)	20-7/8 (530)	7/8 (22)	4-1/8 (105)	22 (559)	22 (559)	5 (127)	5-1/2 (140)	6-1/2 (165)
324TS	16 (406)	51-3/4 (1314)	53-3/8 (1356)	14 (356)	14 (356)	41-3/4 (1060)	20-7/8 (530)	7/8 (22)	4-1/8 (105)	23-1/8 (587)	22 (559)	5 (127)	5-1/2 (140)	6-1/2 (165)
326TS	16 (406)	51-3/4 (1314)	54-7/8 (1394)	14 (356)	14 (356)	41-3/4 (1060)	20-7/8 (530)	7/8 (22)	4-1/8 (105)	23-1/8 (587)	22 (559)	5 (127)	5-1/2 (140)	6-1/2 (165)
364TS	24 (610)	56 (1422)	56-5/8 (1438)	16-1/2 (419)	21-1/2 (546)	44 (1118)	22 (559)	1 (25)	4-3/4 (121)	26-3/4 (679)	24-1/2 (622)	6 (152)	5-1/2 (140)	6-1/2 (165)
365TS	24 (610)	56 (1422)	57-3/8 (1457)	16-1/2 (419)	21-1/2 (546)	44 (1118)	22 (559)	1 (25)	4-3/4 (121)	26-3/4 (679)	24-1/2 (622)	6 (152)	5-1/2 (140)	6-1/2 (165)

Dimensions are subject to change. Not to be used for construction purposes unless certified.

Xylem Inc.
8200 N. Austin Avenue
Morton Grove, IL 60053
Phone: (847)966-3700
Fax: (847)965-8379
www.xylem.com/brands/bellgossett

xylem
Let's Solve Water

JOB: UNIT TAG: ENGINEER: CONTRACTOR:	REPRESENTATIVE: ORDER NO. SUBMITTED BY: APPROVED BY:	DATE: DATE: DATE:
---	---	--



2GB

Series e-1510

Centrifugal Pumps - Base Mounted

SPECIFICATIONS

FLOW _____ HEAD _____
 HP _____ RPM _____
 VOLTS _____
 CYCLE _____ PHASE _____
 ENCLOSURE _____
 APPROX. WEIGHT _____
 SPECIALS _____

Note: Equipped with NEOPRENE coupling

MATERIALS OF CONSTRUCTION

☒ Stainless Steel Fitted

FEATURES


- ☐ i-ALERT™ Condition Monitor
- ☒ ANSI/OSHA Coupling Guard
- ☒ Center Drop Out Spacer Coupling
- ☒ Fabricated Heavy Duty Baseplate

MAXIMUM WORKING PRESSURE


- ☐ 175 psi (12 bar) W.P.
w/ 125# ANSI flange drilling
- ☐ 250 psi (17 bar) W.P.
w/ 250# ANSI flange drilling
(requires 1510-S)

TYPE OF SEAL

- ☐ Standard Seal
(Buna-Carbon/Ceramic)
- ☐ -F Standard Seal w/ Flush Line
(Buna-Carbon/Ceramic)
- ☐ -S Stuffing Box Construction w/ Flushed
Mechanical Single Seal
(EPR-Tungsten Carbide/Carbon)
- ☐ -PF Stuffing Box Construction w/ Packing
(Graphite Impregnated Teflon)

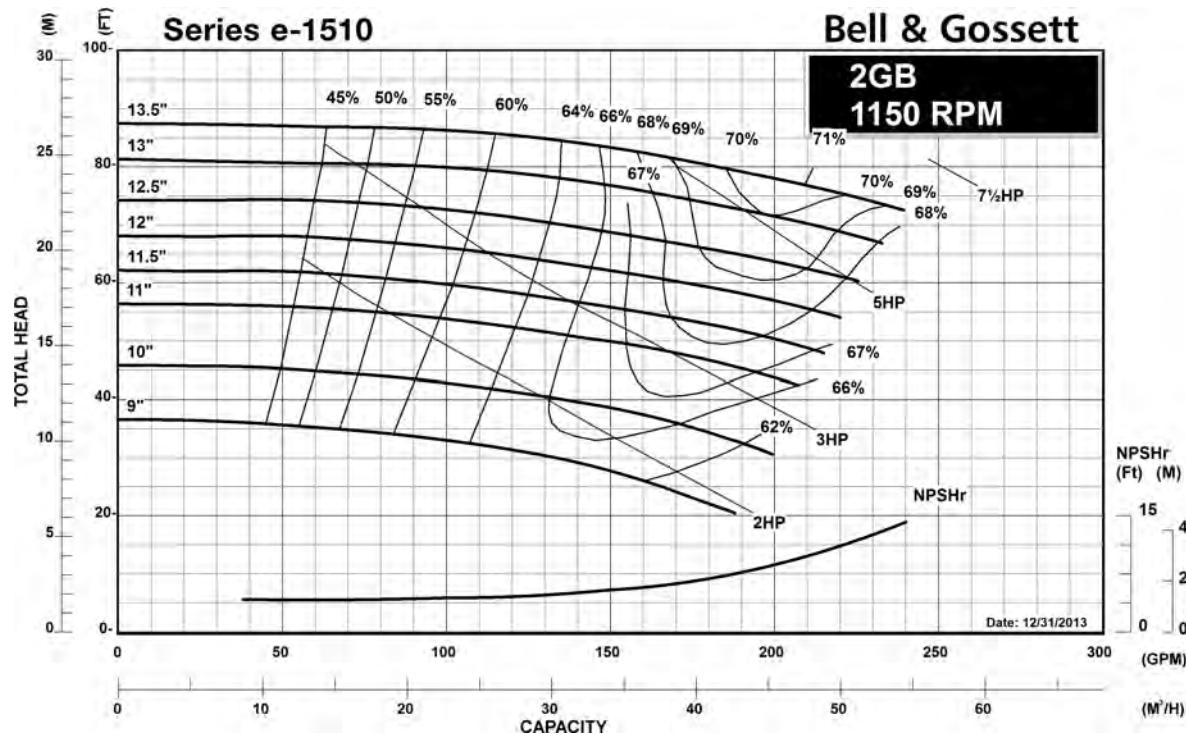

JOB: UNIT TAG: ENGINEER: CONTRACTOR:	REPRESENTATIVE: ORDER NO. SUBMITTED BY: APPROVED BY:	DATE: DATE: DATE:
---	---	--



2GB

Series e-1510

Centrifugal Pumps - Base Mounted

SPECIFICATIONS

FLOW _____ HEAD _____
 HP _____ RPM _____
 VOLTS _____
 CYCLE _____ PHASE _____
 ENCLOSURE _____
 APPROX. WEIGHT _____
 SPECIALS _____

Note: Equipped with NEOPRENE coupling

MATERIALS OF CONSTRUCTION

☒ Stainless Steel Fitted

FEATURES


- ☐ i-ALERT™ Condition Monitor
- ☒ ANSI/OSHA Coupling Guard
- ☒ Center Drop Out Spacer Coupling
- ☒ Fabricated Heavy Duty Baseplate


MAXIMUM WORKING PRESSURE

- ☐ 175 psi (12 bar) W.P.
w/ 125# ANSI flange drilling
- ☐ 250 psi (17 bar) W.P.
w/ 250# ANSI flange drilling
(requires 1510-S)

TYPE OF SEAL

- ☐ Standard Seal
(Buna-Carbon/Ceramic)
- ☐ -F Standard Seal w/ Flush Line
(Buna-Carbon/Ceramic)
- ☐ -S Stuffing Box Construction w/ Flushed
Mechanical Single Seal
(EPR-Tungsten Carbide/Carbon)
- ☐ -PF Stuffing Box Construction w/ Packing
(Graphite Impregnated Teflon)

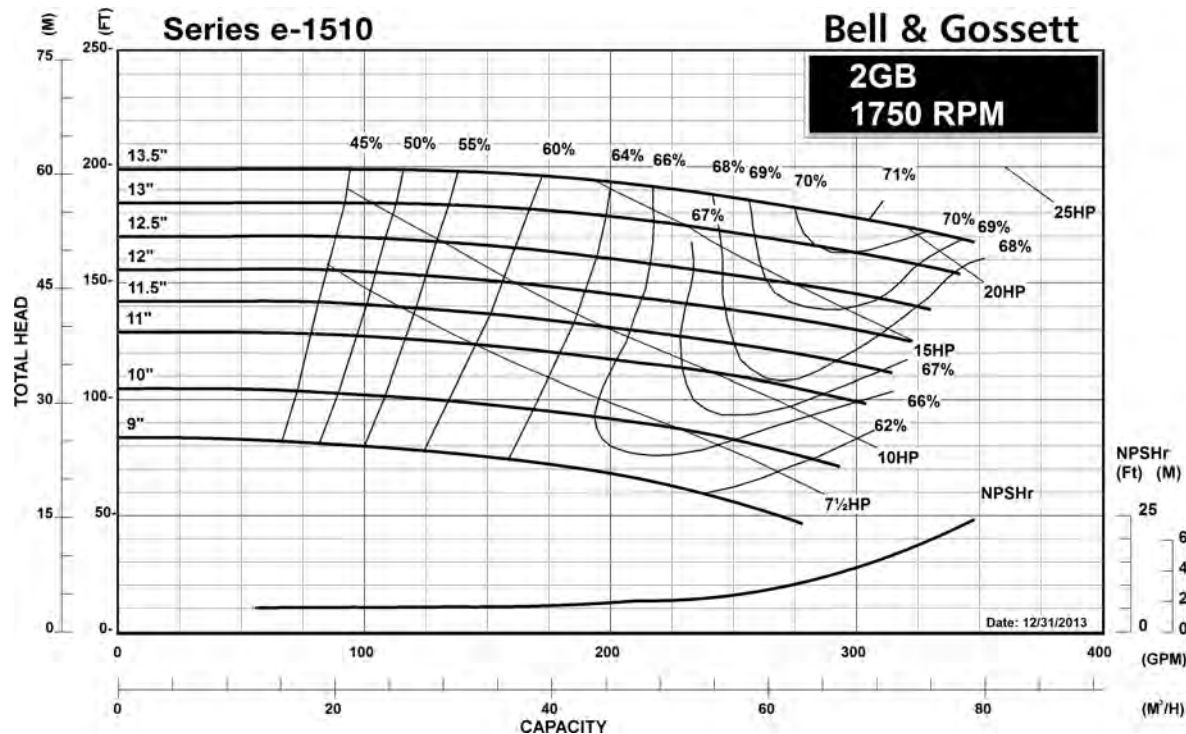

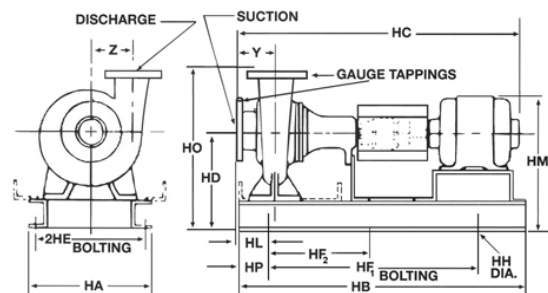

FLANGE DIMENSIONS IN INCHES (MM)			
	SIZE	THICKNESS	O.D.
Discharge	2"	7/8" (22)	6-1/4" (159)
Suction	3"	1-1/8" (29)	8" (203)

FLANGES ARE 125# ANSI - STANDARD
250# ANSI - AVAILABLE

DIMENSIONS – Inches (mm)**STANDARD SEAL**

MOTOR FRAME	HA	HB	HC MAX	HD	2HE	HF ₁	HF ₂	HH	HL	HM MAX	HO	HP	Y	Z
"L" FRAME														
213T	16 (406)	46-1/2 (1181)	41-3/8 (1051)	14 (356)	14 (356)	36-1/2 (927)	18-1/4 (464)	7/8 (22)	3-7/8 (98)	19-7/8 (505)	23 (584)	5 (127)	5-1/2 (140)	7-1/4 (184)
215T	16 (406)	46-1/2 (1181)	42-7/8 (1089)	14 (356)	14 (356)	36-1/2 (927)	18-1/4 (464)	7/8 (22)	3-7/8 (98)	19-7/8 (505)	23 (584)	5 (127)	5-1/2 (140)	7-1/4 (184)
254T	16 (406)	46-1/2 (1181)	46-5/8 (1184)	14 (356)	14 (356)	36-1/2 (927)	18-1/4 (464)	7/8 (22)	3-7/8 (98)	20-7/8 (530)	23 (584)	5 (127)	5-1/2 (140)	7-1/4 (184)
256T	16 (406)	46-1/2 (1181)	48-3/8 (1229)	14 (356)	14 (356)	36-1/2 (927)	18-1/4 (464)	7/8 (22)	3-7/8 (98)	20-7/8 (530)	23 (584)	5 (127)	5-1/2 (140)	7-1/4 (184)
284T	16 (406)	51-3/4 (1314)	48-5/8 (1235)	14 (356)	14 (356)	41-3/4 (1060)	20-7/8 (530)	7/8 (22)	3-7/8 (98)	22 (559)	23 (584)	5 (127)	5-1/2 (140)	7-1/4 (184)

STUFFING BOX

MOTOR FRAME	HA	HB	HC MAX	HD	2HE	HF ₁	HF ₂	HH	HL	HM MAX	HO	HP	Y	Z
"L" FRAME														
213T	16 (406)	46-1/2 (1181)	43-3/4 (1111)	14 (356)	14 (356)	36-1/2 (927)	18-1/4 (464)	7/8 (22)	3-7/8 (98)	19-7/8 (505)	23 (584)	5 (127)	5-1/2 (140)	7-1/4 (184)
215T	16 (406)	46-1/2 (1181)	45-1/4 (1149)	14 (356)	14 (356)	36-1/2 (927)	18-1/4 (464)	7/8 (22)	3-7/8 (98)	19-7/8 (505)	23 (584)	5 (127)	5-1/2 (140)	7-1/4 (184)
254T	16 (406)	51-3/4 (1314)	49 (1245)	14 (356)	14 (356)	41-3/4 (1060)	20-7/8 (530)	7/8 (22)	3-7/8 (98)	20-7/8 (530)	23 (584)	5 (127)	5-1/2 (140)	7-1/4 (184)
256T	16 (406)	51-3/4 (1314)	50-3/4 (1289)	14 (356)	14 (356)	41-3/4 (1060)	20-7/8 (530)	7/8 (22)	3-7/8 (98)	20-7/8 (530)	23 (584)	5 (127)	5-1/2 (140)	7-1/4 (184)
284T	16 (406)	51-3/4 (1314)	51 (1295)	14 (356)	14 (356)	41-3/4 (1060)	20-7/8 (530)	7/8 (22)	3-7/8 (98)	22 (559)	23 (584)	5 (127)	5-1/2 (140)	7-1/4 (184)


Dimensions are subject to change. Not to be used for construction purposes unless certified.

Xylem Inc.
8200 N. Austin Avenue
Morton Grove, IL 60053
Phone: (847)966-3700
Fax: (847)965-8379
www.xyleminc.com/brands/bellgossett

xylem
Let's Solve Water

Bell & Gossett is a trademark of Xylem Inc. or one of its subsidiaries.
© 2012 Xylem Inc.

JOB: UNIT TAG: ENGINEER: CONTRACTOR:	REPRESENTATIVE: ORDER NO. SUBMITTED BY: APPROVED BY:	DATE: DATE: DATE:
---	---	--



3AD

Series e-1510

Centrifugal Pumps - Base Mounted

SPECIFICATIONS

FLOW _____ HEAD _____
 HP _____ RPM _____
 VOLTS _____
 CYCLE _____ PHASE _____
 ENCLOSURE _____
 APPROX. WEIGHT _____
 SPECIALS _____

MATERIALS OF CONSTRUCTION

☒ Stainless Steel Fitted

FEATURES

- ☐ i-ALERT™ Condition Monitor
- ☒ ANSI/OSHA Coupling Guard
- ☒ Center Drop Out Spacer Coupling
- ☒ Fabricated Heavy Duty Baseplate


MAXIMUM WORKING PRESSURE

- ☐ 175 psi (12 bar) W.P.
w/ 125# ANSI flange drilling


TYPE OF SEAL

- ☐ Standard Seal
(Buna-Carbon/Ceramic)
- ☐ -F Standard Seal w/ Flush Line
(Buna-Carbon/Ceramic)
- ☐ -S Stuffing Box Construction w/ Flushed
Mechanical Single Seal
(EPR-Tungsten Carbide/Carbon)
- ☐ -PF Stuffing Box Construction w/ Packing
(Graphite Impregnated Teflon)

Note: Equipped with NEOPRENE coupling

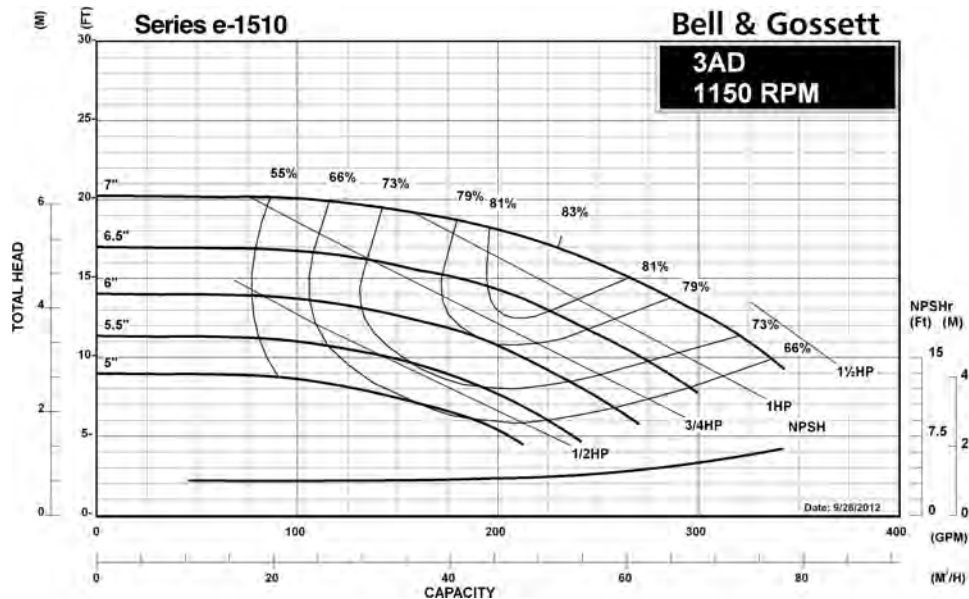

JOB: UNIT TAG: ENGINEER: CONTRACTOR:	REPRESENTATIVE: ORDER NO. SUBMITTED BY: APPROVED BY:	DATE: DATE: DATE:
---	---	--



3AD

Series e-1510

Centrifugal Pumps - Base Mounted

SPECIFICATIONS

FLOW _____ HEAD _____
 HP _____ RPM _____
 VOLTS _____
 CYCLE _____ PHASE _____
 ENCLOSURE _____
 APPROX. WEIGHT _____
 SPECIALS _____

MATERIALS OF CONSTRUCTION

☒ Stainless Steel Fitted

FEATURES

- ☐ i-ALERT™ Condition Monitor
- ☒ ANSI/OSHA Coupling Guard
- ☒ Center Drop Out Spacer Coupling
- ☒ Fabricated Heavy Duty Baseplate


MAXIMUM WORKING PRESSURE

- ☐ 175 psi (12 bar) W.P.
w/ 125# ANSI flange drilling


TYPE OF SEAL

- ☐ Standard Seal
(Buna-Carbon/Ceramic)
- ☐ -F Standard Seal w/ Flush Line
(Buna-Carbon/Ceramic)
- ☐ -S Stuffing Box Construction w/ Flushed
Mechanical Single Seal
(EPR-Tungsten Carbide/Carbon)
- ☐ -PF Stuffing Box Construction w/ Packing
(Graphite Impregnated Teflon)

Note: Equipped with NEOPRENE coupling

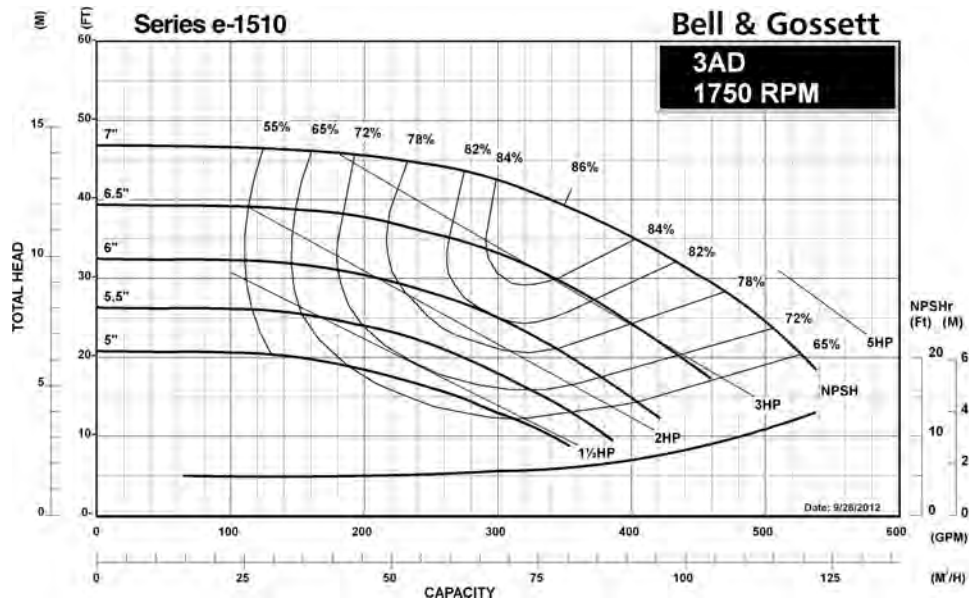

JOB: _____ UNIT TAG: _____ ENGINEER: _____ CONTRACTOR: _____	REPRESENTATIVE: _____ ORDER NO. _____ SUBMITTED BY: _____ APPROVED BY: _____ DATE: _____ DATE: _____ DATE: _____
---	--



3AD

Series e-1510

Centrifugal Pumps - Base Mounted

SPECIFICATIONS

FLOW _____ HEAD _____
 HP _____ RPM _____
 VOLTS _____
 CYCLE _____ PHASE _____
 ENCLOSURE _____
 APPROX. WEIGHT _____
 SPECIALS _____

MATERIALS OF CONSTRUCTION

☒ Stainless Steel Fitted

FEATURES

- ☐ i-ALERT™ Condition Monitor
- ☒ ANSI/OSHA Coupling Guard
- ☒ Center Drop Out Spacer Coupling
- ☒ Fabricated Heavy Duty Baseplate


MAXIMUM WORKING PRESSURE


- ☐ 175 psi (12 bar) W.P.
w/ 125# ANSI flange drilling

TYPE OF SEAL

- ☐ Standard Seal
(Buna-Carbon/Ceramic)
- ☐ -F Standard Seal w/ Flush Line
(Buna-Carbon/Ceramic)
- ☐ -S Stuffing Box Construction w/ Flushed
Mechanical Single Seal
(EPR-Tungsten Carbide/Carbon)
- ☐ -PF Stuffing Box Construction w/ Packing
(Graphite Impregnated Teflon)

Note: Equipped with NEOPRENE coupling

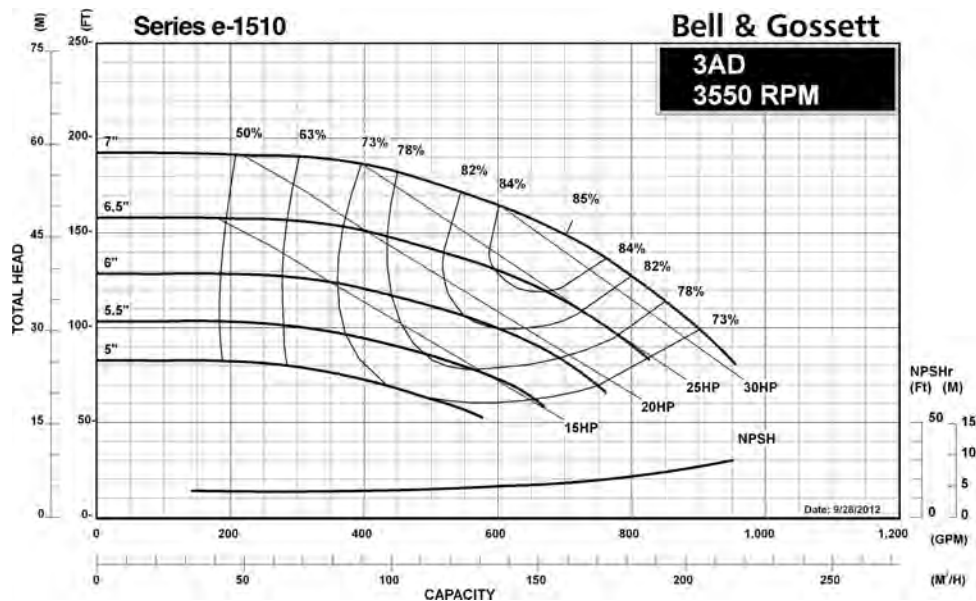

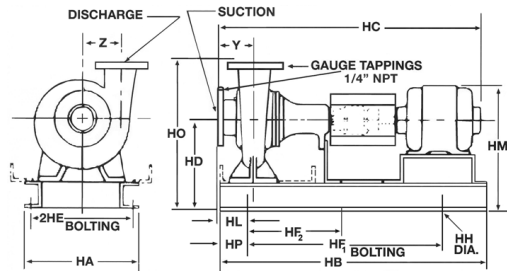

FLANGE DIMENSIONS IN INCHES (MM)			
	SIZE	THICKNESS	O.D.
Discharge	3"	3/4" (19)	7-1/2" (191)
Suction	4"	15/16" (24)	9" (229)

FLANGES ARE 125# ANSI - STANDARD

DIMENSIONS – Inches (mm)

STANDARD SEAL

MOTOR FRAME	HA	HB	HC MAX	HD	2HE	HF ₁	HF ₂	HH	HL	HM MAX	HO	HP	Y	Z
"S" FRAME														
56	12 (305)	28-3/4 (730)	29-1/2 (749)	9-3/4 (248)	10-1/4 (260)	22-1/2 (572)	-	3/4 (19)	4-5/16 (110)	13-3/8 (340)	15-3/4 (400)	3 (76)	4-1/8 (105)	5 (127)
143T	12 (305)	28-3/4 (730)	29-5/8 (752)	9-3/4 (248)	10-1/4 (260)	22-1/2 (572)	-	3/4 (19)	4-5/16 (110)	13-1/2 (343)	15-3/4 (400)	3 (76)	4-1/8 (105)	5 (127)
145T	12 (305)	28-3/4 (730)	30-5/8 (778)	9-3/4 (248)	10-1/4 (260)	22-1/2 (572)	-	3/4 (19)	4-5/16 (110)	13-1/2 (343)	15-3/4 (400)	3 (76)	4-1/8 (105)	5 (127)
182T	14-5/8 (371)	31 (787)	33-3/8 (848)	9-3/4 (248)	12-7/8 (327)	25 (635)	-	3/4 (19)	4-5/16 (110)	15 (381)	15-3/4 (400)	3 (76)	4-1/8 (105)	5 (127)
184T	14-5/8 (371)	31 (787)	34-1/8 (867)	9-3/4 (248)	12-7/8 (327)	25 (635)	-	3/4 (19)	2-15/16 (75)	15 (381)	15-3/4 (400)	3 (76)	4-1/8 (105)	5 (127)
"L" FRAME														
215T	14-5/8 (371)	39-3/8 (1000)	42-5/8 (1083)	9-3/4 (248)	12-7/8 (327)	33-5/8 (848)	-	3/4 (19)	2-15/16 (75)	15-3/8 (397)	15-3/4 (400)	3 (76)	4-1/8 (105)	5 (127)
254T	16 (406)	46-1/2 (1181)	46-3/8 (1178)	12 (305)	14 (356)	36-1/2 (927)	18-1/4 (464)	7/8 (22)	4-1/16 (103)	18-7/8 (479)	18 (457)	5 (127)	4-1/8 (105)	5 (127)
256T	16 (406)	46-1/2 (1181)	48-1/8 (1222)	12 (305)	14 (356)	36-1/2 (927)	18-1/4 (464)	7/8 (22)	4-1/16 (103)	18-7/8 (479)	18 (457)	5 (127)	4-1/8 (105)	5 (127)
284TS	16 (406)	46-1/2 (1181)	47-3/8 (1203)	13 (330)	14 (356)	36-1/2 (927)	18-1/4 (464)	7/8 (22)	4-1/16 (103)	21 (533)	19 (483)	5 (127)	4-1/8 (105)	5 (127)
286TS	16 (406)	46-1/2 (1181)	48-7/8 (1203)	13 (330)	14 (356)	36-1/2 (927)	18-1/4 (464)	7/8 (22)	4-1/16 (103)	21 (533)	19 (483)	5 (127)	4-1/8 (105)	5 (127)
324TS	16 (406)	46-1/2 (1181)	50-7/8 (1292)	12 (305)	14 (356)	36-1/2 (927)	18-1/4 (464)	7/8 (22)	4-1/16 (103)	21 (533)	18 (457)	5 (127)	4-1/8 (105)	5 (127)

STUFFING BOX


MOTOR FRAME	HA	HB	HC MAX	HD	2HE	HF ₁	HF ₂	HH	HL	HM MAX	HO	HP	Y	Z
"S" FRAME														
56	14-5/8 (371)	34-5/8 (879)	33-1/8 (841)	9-3/4 (248)	12-7/8 (327)	28-5/8 (727)	-	3/4 (19)	2-15/16 (75)	13-3/8 (340)	15-3/4 (400)	3 (76)	4-1/8 (105)	5 (127)
143T	14-5/8 (371)	34-5/8 (879)	33-1/4 (845)	9-3/4 (248)	12-7/8 (327)	28-5/8 (727)	-	3/4 (19)	2-15/16 (75)	13-1/2 (343)	15-3/4 (400)	3 (76)	4-1/8 (105)	5 (127)
145T	14-5/8 (371)	34-5/8 (879)	34-1/4 (870)	9-3/4 (248)	12-7/8 (327)	28-5/8 (727)	-	3/4 (19)	2-15/16 (75)	13-1/2 (343)	15-3/4 (400)	3 (76)	4-1/8 (105)	5 (127)
182T	14-5/8 (371)	34-5/8 (879)	37 (940)	9-3/4 (248)	12-7/8 (327)	28-5/8 (727)	-	3/4 (19)	2-15/16 (75)	15 (381)	15-3/4 (400)	3 (76)	4-1/8 (105)	5 (127)
184T	14-5/8 (371)	34-5/8 (879)	37-3/4 (959)	9-3/4 (248)	12-7/8 (327)	28-5/8 (727)	-	3/4 (19)	2-15/16 (75)	15 (381)	15-3/4 (400)	3 (76)	4-1/8 (105)	5 (127)
"L" FRAME														
215T	16 (406)	46-1/2 (1181)	45 (1143)	11 (279)	14 (356)	36-1/2 (927)	18-1/4 (464)	7/8 (22)	4-1/16 (103)	16-7/8 (429)	17 (432)	5 (127)	4-1/8 (105)	5 (127)
254T	16 (406)	51-3/4 (1314)	48-3/4 (1238)	12 (305)	14 (356)	41-3/4 (1060)	20-7/8 (530)	7/8 (22)	4-1/16 (103)	18-7/8 (479)	18 (457)	5 (127)	4-1/8 (105)	5 (127)
256T	16 (406)	51-3/4 (1314)	50-1/2 (1283)	12 (305)	14 (356)	41-3/4 (1060)	20-7/8 (530)	7/8 (22)	4-1/16 (103)	18-7/8 (479)	18 (457)	5 (127)	4-1/8 (105)	5 (127)
284TS	16 (406)	51-3/4 (1314)	49-3/4 (1264)	13 (330)	14 (356)	41-3/4 (1060)	20-7/8 (530)	7/8 (22)	4-1/16 (103)	21 (533)	19 (483)	5 (127)	4-1/8 (105)	5 (127)
286TS	16 (406)	51-3/4 (1314)	51-1/4 (1302)	13 (330)	14 (356)	41-3/4 (1060)	20-7/8 (530)	7/8 (22)	4-1/16 (103)	21 (533)	19 (483)	5 (127)	4-1/8 (105)	5 (127)

Dimensions are subject to change. Not to be used for construction purposes unless certified.

Xylem Inc.
8200 N. Austin Avenue
Morton Grove, IL 60053
Phone: (847)966-3700
Fax: (847)965-8379
www.bellgossett.com

xylem
Let's Solve Water

JOB: UNIT TAG: ENGINEER: CONTRACTOR:	REPRESENTATIVE: ORDER NO. SUBMITTED BY: APPROVED BY:	DATE: DATE: DATE:
---	---	--



3BD

Series e-1510

Centrifugal Pumps - Base Mounted

SPECIFICATIONS

FLOW _____ HEAD _____
 HP _____ RPM _____
 VOLTS _____
 CYCLE _____ PHASE _____
 ENCLOSURE _____
 APPROX. WEIGHT _____
 SPECIALS _____

MATERIALS OF CONSTRUCTION

☒ Stainless Steel Fitted

FEATURES

- ☐ i-ALERT™ Condition Monitor
- ☒ ANSI/OSHA Coupling Guard
- ☒ Center Drop Out Spacer Coupling
- ☒ Fabricated Heavy Duty Baseplate


MAXIMUM WORKING PRESSURE

- ☐ 175 psi (12 bar) W.P.
w/ 125# ANSI flange drilling


TYPE OF SEAL

- ☐ Standard Seal
(Buna-Carbon/Ceramic)
- ☐ -F Standard Seal w/ Flush Line
(Buna-Carbon/Ceramic)
- ☐ -S Stuffing Box Construction w/ Flushed
Mechanical Single Seal
(EPR-Tungsten Carbide/Carbon)
- ☐ -PF Stuffing Box Construction w/ Packing
(Graphite Impregnated Teflon)

Note: Equipped with NEOPRENE coupling

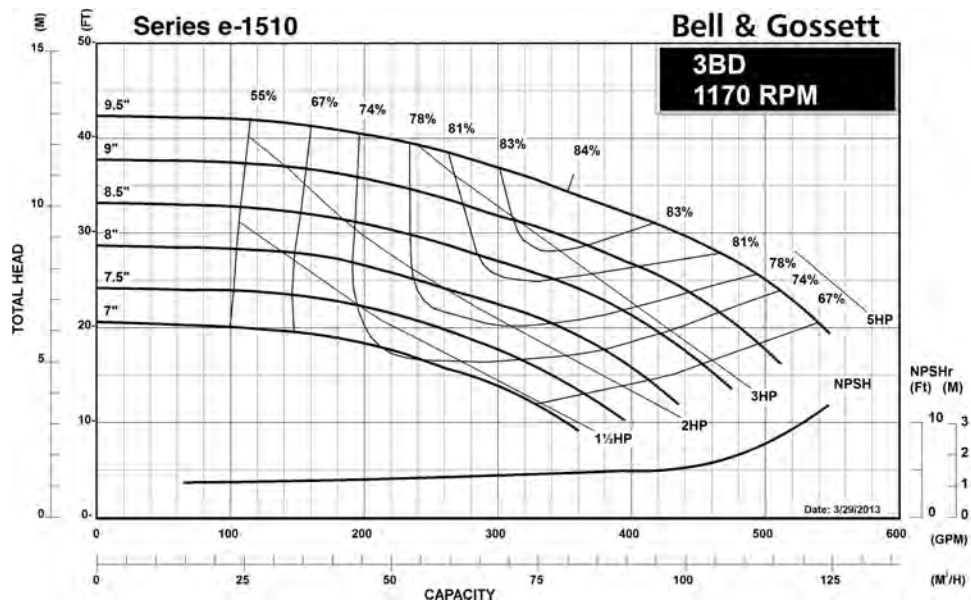

JOB: UNIT TAG: ENGINEER: CONTRACTOR:	REPRESENTATIVE: ORDER NO. SUBMITTED BY: APPROVED BY:	DATE: DATE: DATE:
---	---	--



3BD

Series e-1510

Centrifugal Pumps - Base Mounted

SPECIFICATIONS

FLOW _____ HEAD _____
 HP _____ RPM _____
 VOLTS _____
 CYCLE _____ PHASE _____
 ENCLOSURE _____
 APPROX. WEIGHT _____
 SPECIALS _____

MATERIALS OF CONSTRUCTION

☒ Stainless Steel Fitted

FEATURES

- ☐ i-ALERT™ Condition Monitor
- ☒ ANSI/OSHA Coupling Guard
- ☒ Center Drop Out Spacer Coupling
- ☒ Fabricated Heavy Duty Baseplate


MAXIMUM WORKING PRESSURE

- ☐ 175 psi (12 bar) W.P.
w/ 125# ANSI flange drilling


TYPE OF SEAL

- ☐ Standard Seal
(Buna-Carbon/Ceramic)
- ☐ -F Standard Seal w/ Flush Line
(Buna-Carbon/Ceramic)
- ☐ -S Stuffing Box Construction w/ Flushed
Mechanical Single Seal
(EPR-Tungsten Carbide/Carbon)
- ☐ -PF Stuffing Box Construction w/ Packing
(Graphite Impregnated Teflon)

Note: Equipped with NEOPRENE coupling

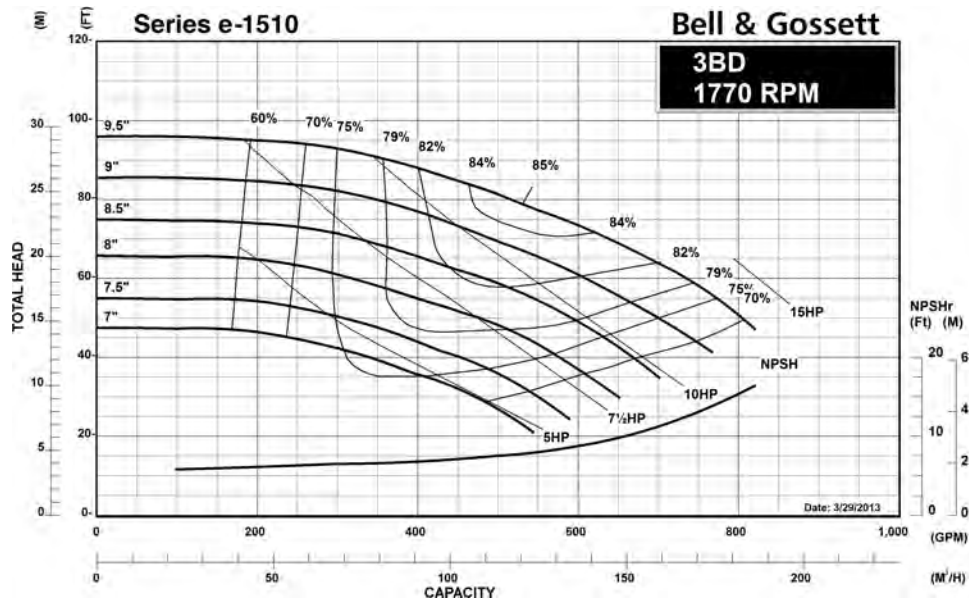

JOB: UNIT TAG: ENGINEER: CONTRACTOR:	REPRESENTATIVE: ORDER NO. SUBMITTED BY: APPROVED BY:	DATE: DATE: DATE:
---	---	--



3BD

Series e-1510

Centrifugal Pumps - Base Mounted

SPECIFICATIONS

FLOW _____ HEAD _____
 HP _____ RPM _____
 VOLTS _____
 CYCLE _____ PHASE _____
 ENCLOSURE _____
 APPROX. WEIGHT _____
 SPECIALS _____

MATERIALS OF CONSTRUCTION

☒ Stainless Steel Fitted

FEATURES

- ☐ i-ALERT™ Condition Monitor
- ☒ ANSI/OSHA Coupling Guard
- ☒ Center Drop Out Spacer Coupling
- ☒ Fabricated Heavy Duty Baseplate


MAXIMUM WORKING PRESSURE

- ☐ 175 psi (12 bar) W.P.
w/ 125# ANSI flange drilling

TYPE OF SEAL


- ☐ Standard Seal
(Buna-Carbon/Ceramic)
- ☐ -F Standard Seal w/ Flush Line
(Buna-Carbon/Ceramic)
- ☐ -S Stuffing Box Construction w/ Flushed
Mechanical Single Seal
(EPR-Tungsten Carbide/Carbon)
- ☐ -PF Stuffing Box Construction w/ Packing
(Graphite Impregnated Teflon)

Note: Equipped with NEOPRENE coupling

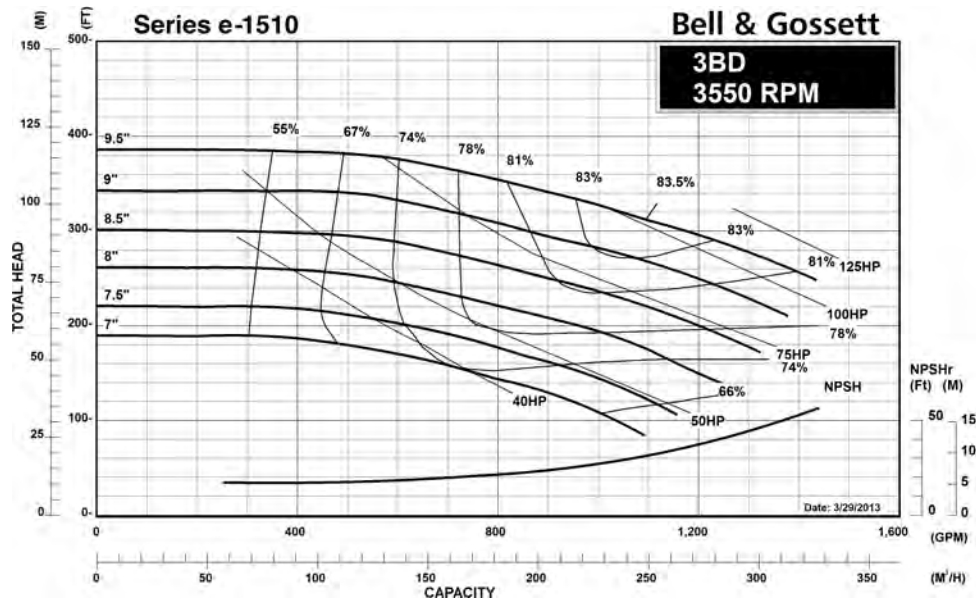

Series e-1510 3BD Centrifugal Pump Submittal

B-880.22B

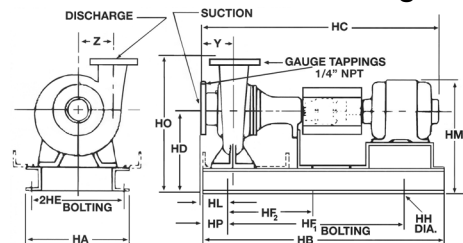

FLANGE DIMENSIONS IN INCHES (MM)			
	SIZE	THICKNESS	O.D.
Discharge	3"	3/4" (25)	7-1/2" (191)
Suction	4"	15/16" (24)	9" (229)

FLANGES ARE 125# ANSI - STANDARD

DIMENSIONS – Inches (mm)

STANDARD SEAL

MOTOR FRAME	HA	HB	HC MAX	HD	2HE	HF ₁	HF ₂	HH	HL	HM MAX	HO	HP	Y	Z
"S" FRAME														
182T	14-5/8 (371)	31 (787)	34-7/8 (886)	10-3/4 (273)	12-7/8 (327)	25 (635)	-	3/4 (19)	3-11/16 (94)	16 (406)	18-1/4 (464)	3 (76)	4-3/4 (121)	6-1/8 (156)
184T	14-5/8 (371)	31 (787)	34-7/8 (886)	10-3/4 (273)	12-7/8 (327)	25 (635)	-	3/4 (19)	3-11/16 (94)	16 (406)	18-1/4 (464)	3 (76)	4-3/4 (121)	6-1/8 (156)
213T	14-5/8 (371)	34-5/8 (879)	37-1/2 (953)	10-3/4 (273)	12-7/8 (327)	28-5/8 (727)	-	3/4 (19)	3-11/16 (94)	16-5/8 (422)	18-1/4 (464)	3 (76)	4-3/4 (121)	6-1/8 (156)
215T	14-5/8 (371)	34-5/8 (879)	39 (991)	10-3/4 (273)	12-7/8 (327)	28-5/8 (727)	-	3/4 (19)	3-11/16 (94)	16-5/8 (422)	18-1/4 (464)	3 (76)	4-3/4 (121)	6-1/8 (156)
254T	14-5/8 (371)	39-3/8 (1000)	42-3/4 (1086)	10-3/4 (273)	12-7/8 (327)	33-3/8 (848)	-	3/4 (19)	3-11/16 (94)	17-5/8 (448)	18-1/4 (464)	3 (76)	4-3/4 (121)	6-1/8 (156)

"L" FRAME

284TS	16 (406)	46-1/2 (1181)	48-1/8 (1222)	13 (330)	14 (356)	36-1/2 (927)	18-1/4 (464)	7/8 (22)	4-13/16 (122)	21 (533)	20-1/2 (521)	5 (127)	4-3/4 (121)	6-1/8 (156)
286TS	16 (406)	46-1/2 (1181)	49-5/8 (1260)	13 (330)	14 (356)	36-1/2 (927)	18-1/4 (464)	7/8 (22)	4-13/16 (122)	21 (533)	20-1/2 (521)	5 (127)	4-3/4 (121)	6-1/8 (156)
324TS	16 (406)	46-1/2 (1181)	51-1/2 (1308)	12 (305)	14 (356)	36-1/2 (927)	18-1/4 (464)	7/8 (22)	4-13/16 (122)	21 (533)	19-1/2 (495)	5 (127)	4-3/4 (121)	6-1/8 (156)
326TS	16 (406)	46-1/2 (1181)	53 (1346)	12 (305)	14 (356)	36-1/2 (927)	18-1/4 (464)	7/8 (22)	4-13/16 (122)	21 (533)	19-1/2 (495)	5 (127)	4-3/4 (121)	6-1/8 (156)
364TS	16 (406)	51-3/4 (1314)	53-1/2 (1359)	13-1/4 (337)	14 (356)	41-3/4 (1060)	20-7/8 (530)	7/8 (22)	4-13/16 (122)	22-1/2 (572)	20-3/4 (527)	5 (127)	4-3/4 (121)	6-1/8 (156)
365TS	16 (406)	51-3/4 (1314)	55 (1397)	13-1/4 (337)	14 (356)	41-3/4 (1060)	20-7/8 (530)	7/8 (22)	4-13/16 (122)	22-1/2 (572)	20-3/4 (527)	5 (127)	4-3/4 (121)	6-1/8 (156)

STUFFING BOX

MOTOR FRAME	HA	HB	HC MAX	HD	2HE	HF ₁	HF ₂	HH	HL	HM MAX	HO	HP	Y	Z
"S" FRAME														
182T	14-5/8 (371)	34-5/8 (879)	34-3/4 (959)	10-3/4 (273)	12-7/8 (327)	28-5/8 (727)	-	3/4 (19)	3-11/16 (93)	16 (406)	18-1/4 (464)	3 (76)	4-3/4 (121)	6-1/8 (156)
184T	14-5/8 (371)	34-5/8 (879)	38-1/2 (978)	10-3/4 (273)	12-7/8 (327)	28-5/8 (727)	-	3/4 (19)	3-11/16 (93)	16 (406)	18-1/4 (464)	3 (76)	4-3/4 (121)	6-1/8 (156)
213T	14-5/8 (371)	39-3/8 (1000)	41 (1041)	10-3/4 (273)	12-7/8 (327)	33-3/8 (848)	-	3/4 (19)	3-11/16 (93)	16-5/8 (422)	18-1/4 (464)	3 (76)	4-3/4 (121)	6-1/8 (156)
215T	14-5/8 (371)	39-3/8 (1000)	42-1/2 (1080)	10-3/4 (273)	12-7/8 (327)	33-3/8 (848)	-	3/4 (19)	3-11/16 (93)	16-5/8 (422)	18-1/4 (464)	3 (76)	4-3/4 (121)	6-1/8 (156)
254T	16 (406)	46-1/2 (1181)	46-1/4 (1175)	12 (305)	14 (356)	36-1/2 (927)	18-1/4 (464)	7/8 (22)	4-13/16 (122)	18-7/8 (479)	19-1/2 (495)	5 (127)	4-3/4 (121)	6-1/8 (156)

"L" FRAME

284TS	16 (406)	51-3/4 (1314)	50-1/2 (1283)	13 (330)	14 (356)	41-3/4 (1060)	20-7/8 (530)	7/8 (22)	4-13/16 (122)	21 (533)	20-1/2 (521)	5 (127)	4-3/4 (121)	6-1/8 (156)
286TS	16 (406)	51-3/4 (1314)	52 (1321)	13 (330)	14 (356)	41-3/4 (1060)	20-7/8 (530)	7/8 (22)	4-13/16 (122)	21 (533)	20-1/2 (521)	5 (127)	4-3/4 (121)	6-1/8 (156)
324TS	16 (406)	51-3/4 (1314)	54 (1372)	12 (305)	14 (356)	41-3/4 (1060)	20-7/8 (530)	7/8 (22)	4-13/16 (122)	21 (533)	19-1/2 (495)	5 (127)	4-3/4 (121)	6-1/8 (156)
326TS	16 (406)	51-3/4 (1314)	55-1/2 (1410)	12 (305)	14 (356)	41-3/4 (1060)	20-7/8 (530)	7/8 (22)	4-13/16 (122)	21 (533)	19-1/2 (495)	5 (127)	4-3/4 (121)	6-1/8 (156)


Dimensions are subject to change. Not to be used for construction purposes unless certified.

Xylem Inc.
8200 N. Austin Avenue
Morton Grove, IL 60053
Phone: (847)966-3700
Fax: (847)965-8379
www.bellgossett.com

xylem
Let's Solve Water

Bell & Gossett is a trademark of Xylem Inc. or one of its subsidiaries.
© 2013 Xylem Inc.

JOB: UNIT TAG: ENGINEER: CONTRACTOR:	REPRESENTATIVE: ORDER NO. SUBMITTED BY: APPROVED BY:	DATE: DATE: DATE:
---	---	--



3EB

Series e-1510

Centrifugal Pumps - Base Mounted

SPECIFICATIONS

FLOW _____ HEAD _____
 HP _____ RPM _____
 VOLTS _____
 CYCLE _____ PHASE _____
 ENCLOSURE _____
 APPROX. WEIGHT _____
 SPECIALS _____

Note: Equipped with NEOPRENE coupling

MATERIALS OF CONSTRUCTION

☒ Stainless Steel Fitted

FEATURES


- ☐ i-ALERT™ Condition Monitor
- ☒ ANSI/OSHA Coupling Guard
- ☒ Center Drop Out Spacer Coupling
- ☒ Fabricated Heavy Duty Baseplate

MAXIMUM WORKING PRESSURE

- ☐ 175 psi (12 bar) W.P.
w/ 125# ANSI flange drilling
- ☐ 250 psi (17 bar) W.P.
w/250# ANSI flange drilling
(requires 1510-S)

TYPE OF SEAL

- ☐ Standard Seal
(Buna-Carbon/Ceramic)
- ☐ -F Standard Seal w/ Flush Line
(Buna-Carbon/Ceramic)
- ☐ -S Stuffing Box Construction w/ Flushed
Mechanical Single Seal
(EPR-Tungsten Carbide/Carbon)
- ☐ -PF Stuffing Box Construction w/ Packing
(Graphite Impregnated Teflon)

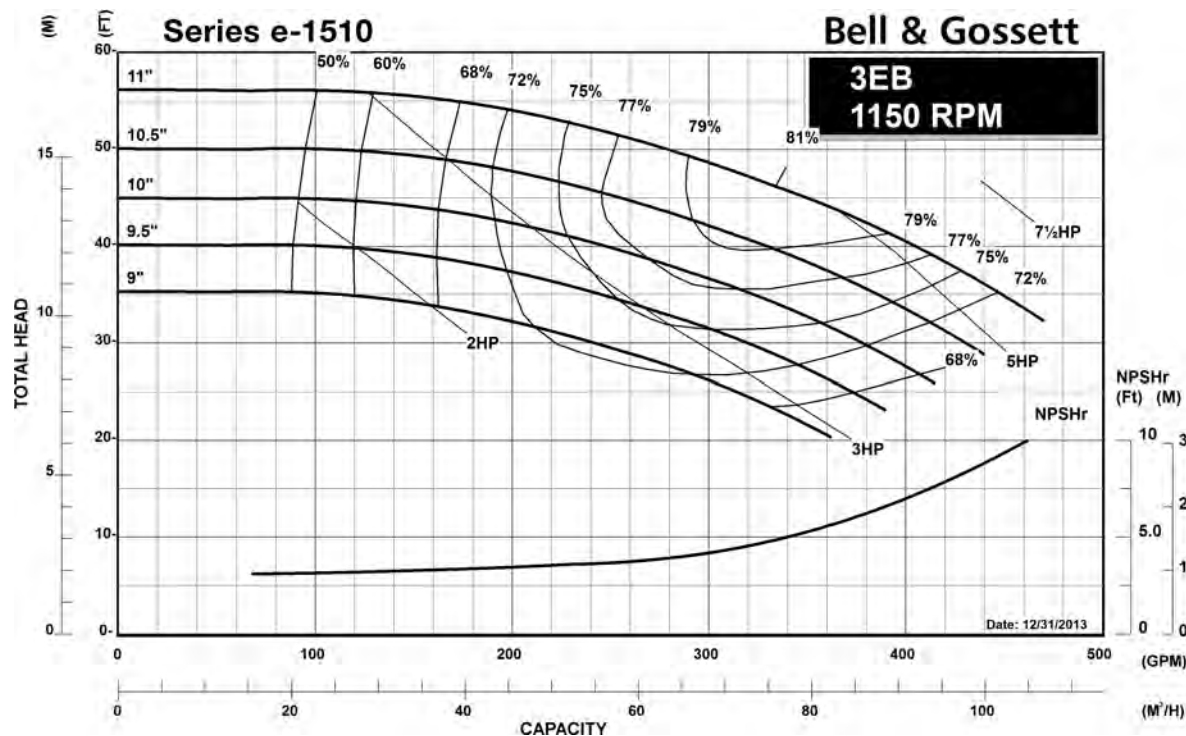

JOB:

REPRESENTATIVE:

UNIT TAG:

ORDER NO.

DATE:

ENGINEER:


SUBMITTED BY:

DATE:

CONTRACTOR:

APPROVED BY:

DATE:



3EB Series e-1510 Centrifugal Pumps - Base Mounted

SPECIFICATIONS

FLOW _____ HEAD _____

HP _____ RPM _____

VOLTS _____

CYCLE _____ PHASE _____

ENCLOSURE _____

APPROX. WEIGHT _____

SPECIALS _____

Note: Equipped with NEOPRENE coupling

MATERIALS OF CONSTRUCTION

☒ Stainless Steel Fitted

FEATURES


- ☐ i-ALERT™ Condition Monitor
- ☒ ANSI/OSHA Coupling Guard
- ☒ Center Drop Out Spacer Coupling
- ☒ Fabricated Heavy Duty Baseplate

MAXIMUM WORKING PRESSURE


- ☐ 175 psi (12 bar) W.P.
w/ 125# ANSI flange drilling
- ☐ 250 psi (17 bar) W.P.
w/ 250# ANSI flange drilling
(requires 1510-S)

TYPE OF SEAL

- ☐ Standard Seal
(Buna-Carbon/Ceramic)
- ☐ -F Standard Seal w/ Flush Line
(Buna-Carbon/Ceramic)
- ☐ -S Stuffing Box Construction w/ Flushed
Mechanical Single Seal
(EPR-Tungsten Carbide/Carbon)
- ☐ -PF Stuffing Box Construction w/ Packing
(Graphite Impregnated Teflon)

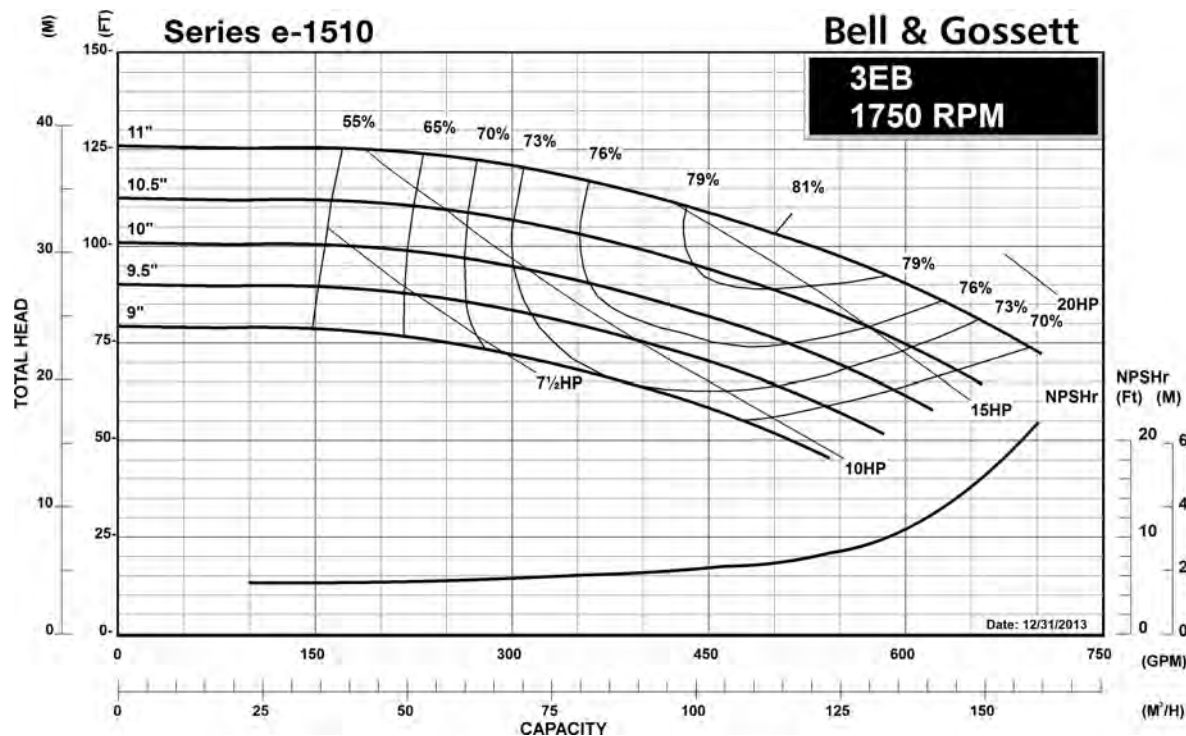

JOB: UNIT TAG: ENGINEER: CONTRACTOR:	REPRESENTATIVE: ORDER NO. SUBMITTED BY: APPROVED BY:	DATE: DATE: DATE:
---	---	--



3EB

Series e-1510

Centrifugal Pumps - Base Mounted

SPECIFICATIONS

FLOW _____ HEAD _____
 HP _____ RPM _____
 VOLTS _____
 CYCLE _____ PHASE _____
 ENCLOSURE _____
 APPROX. WEIGHT _____
 SPECIALS _____

Note: Equipped with NEOPRENE coupling

MATERIALS OF CONSTRUCTION

☒ Stainless Steel Fitted

FEATURES


- ☐ i-ALERT™ Condition Monitor
- ☒ ANSI/OSHA Coupling Guard
- ☒ Center Drop Out Spacer Coupling
- ☒ Fabricated Heavy Duty Baseplate


MAXIMUM WORKING PRESSURE

- ☐ 175 psi (12 bar) W.P.
w/ 125# ANSI flange drilling
- ☐ 250 psi (17 bar) W.P.
w/ 250# ANSI flange drilling
(requires 1510-S)

TYPE OF SEAL

- ☐ Standard Seal
(Buna-Carbon/Ceramic)
- ☐ -F Standard Seal w/ Flush Line
(Buna-Carbon/Ceramic)
- ☐ -S Stuffing Box Construction w/ Flushed
Mechanical Single Seal
(EPR-Tungsten Carbide/Carbon)
- ☐ -PF Stuffing Box Construction w/ Packing
(Graphite Impregnated Teflon)

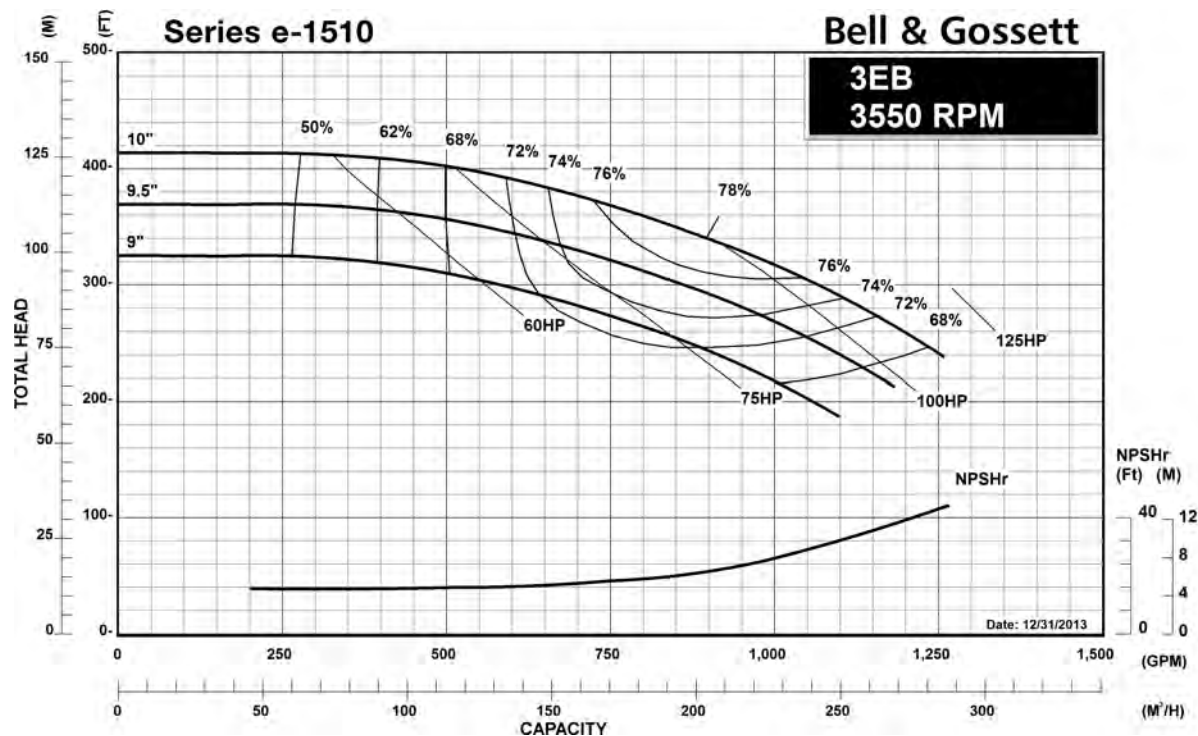

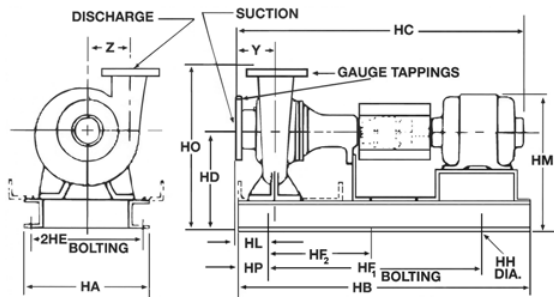

FLANGE DIMENSIONS IN INCHES (MM)			
	SIZE	THICKNESS	O.D.
Discharge	3"	1-1/8 (29)	8 (203)
Suction	4"	1-1/4 (32)	9-1/2 (241)

FLANGES ARE 125# ANSI - STANDARD
250# ANSI - AVAILABLE

DIMENSIONS - Inches (mm)

STANDARD SEAL

MOTOR FRAME	HA	HB	HC MAX	HD	2HE	HF ₁	HF ₂	HH	HL	HM MAX	HO	HP	Y	Z
"S" FRAME														
184T	16 (406)	42-1/4 (1073)	34-7/8 (886)	14 (356)	14 (356)	32-1/4 (819)	16-1/8 (410)	7/8 (22)	6-11/16 (170)	19-1/4 (489)	23-1/2 (597)	5 (127)	5-1/2 (140)	7-3/8 (187)
213T	16 (406)	42-1/4 (1073)	37-3/8 (949)	14 (356)	14 (356)	32-1/4 (819)	16-1/8 (410)	7/8 (22)	6-11/16 (170)	19-7/8 (505)	23-1/2 (597)	5 (127)	5-1/2 (140)	7-3/8 (187)
215T	16 (406)	42-1/4 (1073)	38-7/8 (987)	14 (356)	14 (356)	32-1/4 (819)	16-1/8 (410)	7/8 (22)	6-11/16 (170)	19-7/8 (505)	23-1/2 (597)	5 (127)	5-1/2 (140)	7-3/8 (187)
254T	16 (406)	42-1/4 (1073)	42-5/8 (1083)	14 (356)	14 (356)	32-1/4 (819)	16-1/8 (410)	7/8 (22)	6-11/16 (170)	20-7/8 (530)	23-1/2 (597)	5 (127)	5-1/2 (140)	7-3/8 (187)
"L" FRAME														
256T	16 (406)	46-1/2 (1181)	48-1/4 (1226)	14 (356)	14 (356)	36-1/2 (927)	18-1/4 (464)	7/8 (22)	4-5/16 (110)	20-7/8 (530)	23-1/2 (597)	5 (127)	5-1/2 (140)	7-3/8 (187)
324TS	16 (406)	51-3/4 (1314)	51 (1295)	14 (356)	14 (356)	41-3/4 (1060)	20-7/8 (530)	7/8 (22)	4-5/16 (110)	23-1/8 (587)	23-1/2 (597)	5 (127)	5-1/2 (140)	7-3/8 (187)
326TS	16 (406)	51-3/4 (1314)	52-1/2 (1334)	14 (356)	14 (356)	41-3/4 (1060)	20-7/8 (530)	7/8 (22)	4-5/16 (110)	23-1/8 (587)	23-1/2 (597)	5 (127)	5-1/2 (140)	7-3/8 (187)
364TS	24 (610)	56 (1422)	54-3/8 (1381)	16-1/2 (419)	21-1/2 (546)	44 (1118)	22 (559)	1 (25)	4-15/16 (125)	26-3/4 (679)	26 (660)	6 (152)	5-1/2 (140)	7-3/8 (187)
365TS	24 (610)	56 (1422)	55 (1397)	16-1/2 (419)	21-1/2 (546)	44 (1118)	22 (559)	1 (25)	4-15/16 (125)	26-3/4 (679)	26 (660)	6 (152)	5-1/2 (140)	7-3/8 (187)
404TS	24 (610)	56 (1422)	57-1/4 (1454)	16-1/2 (419)	21-1/2 (546)	44 (1118)	22 (559)	1 (25)	4-15/16 (125)	28-3/8 (721)	26 (660)	6 (152)	5-1/2 (140)	7-3/8 (187)

STUFFING BOX

MOTOR FRAME	HA	HB	HC MAX	HD	2HE	HF ₁	HF ₂	HH	HL	HM MAX	HO	HP	Y	Z
"S" FRAME														
184T	16 (406)	42-1/4 (1073)	38-1/2 (978)	14 (356)	14 (356)	32-1/4 (819)	16-1/8 (409)	7/8 (22)	6-11/16 (170)	19-1/4 (489)	23-1/2 (597)	5 (127)	5-1/2 (140)	7-3/8 (187)
213T	16 (406)	42-1/4 (1073)	41 (1041)	14 (356)	14 (356)	32-1/4 (819)	16-1/8 (409)	7/8 (22)	6-11/16 (170)	19-7/8 (505)	23-1/2 (597)	5 (127)	5-1/2 (140)	7-3/8 (187)
215T	16 (406)	42-1/4 (1073)	42-1/2 (1080)	14 (356)	14 (356)	32-1/4 (819)	16-1/8 (409)	7/8 (22)	6-11/16 (170)	19-7/8 (505)	23-1/2 (597)	5 (127)	5-1/2 (140)	7-3/8 (187)
254T	16 (406)	42-1/4 (1073)	46-1/4 (1175)	14 (356)	14 (356)	32-1/4 (819)	16-1/8 (409)	7/8 (22)	6-11/16 (170)	20-7/8 (530)	23-1/2 (597)	5 (127)	5-1/2 (140)	7-3/8 (187)
"L" FRAME														
256T	16 (406)	51-3/4 (1314)	50-3/4 (1289)	14 (356)	14 (356)	41-3/4 (1060)	20-7/8 (530)	7/8 (22)	4-5/16 (109)	20-7/8 (530)	23-1/2 (597)	5 (127)	5-1/2 (140)	7-3/8 (187)
324TS	16 (406)	51-3/4 (1314)	53-3/8 (1356)	14 (356)	14 (356)	41-3/4 (1060)	20-7/8 (530)	7/8 (22)	4-5/16 (109)	23-1/8 (587)	23-1/2 (597)	5 (127)	5-1/2 (140)	7-3/8 (187)
326TS	16 (406)	51-3/4 (1314)	55 (1397)	14 (356)	14 (356)	41-3/4 (1060)	20-7/8 (530)	7/8 (22)	4-5/16 (109)	23-1/8 (587)	23-1/2 (597)	5 (127)	5-1/2 (140)	7-3/8 (187)
364TS	24 (610)	56 (1422)	56-3/4 (1441)	16-1/2 (419)	21-1/2 (546)	44 (1118)	22 (559)	1 (25)	4-15/16 (125)	26-3/4 (679)	26 (660)	6 (152)	5-1/2 (140)	7-3/8 (187)
365TS	24 (610)	56 (1422)	57-1/2 (1460)	16-1/2 (419)	21-1/2 (546)	44 (1118)	22 (559)	1 (25)	4-15/16 (125)	26-3/4 (679)	26 (660)	6 (152)	5-1/2 (140)	7-3/8 (187)
404TS	24 (610)	56 (1422)	59-3/4 (1518)	16-1/2 (419)	21-1/2 (546)	44 (1118)	22 (559)	1 (25)	4-15/16 (125)	28-3/8 (721)	26 (660)	6 (152)	5-1/2 (140)	7-3/8 (187)

Dimensions are subject to change. Not to be used for construction purposes unless certified.

Xylem Inc.
8200 N. Austin Avenue
Morton Grove, IL 60053
Phone: (847)966-3700
Fax: (847)965-8379
www.xyleminc.com/brands/bellgossett

xylem
Let's Solve Water

JOB:

REPRESENTATIVE:

UNIT TAG:

ORDER NO.

DATE:

ENGINEER:


SUBMITTED BY:

DATE:

CONTRACTOR:

APPROVED BY:

DATE:



3GB Series e-1510 Centrifugal Pumps - Base Mounted

SPECIFICATIONS

FLOW _____ HEAD _____

HP _____ RPM _____

VOLTS _____

CYCLE _____ PHASE _____

ENCLOSURE _____

APPROX. WEIGHT _____

SPECIALS _____

Note: Equipped with NEOPRENE coupling

MATERIALS OF CONSTRUCTION

☒ Stainless Steel Fitted

FEATURES


- ☐ i-ALERT™ Condition Monitor
- ☒ ANSI/OSHA Coupling Guard
- ☒ Center Drop Out Spacer Coupling
- ☒ Fabricated Heavy Duty Baseplate

MAXIMUM WORKING PRESSURE


- ☐ 175 psi (12 bar) W.P.
w/ 125# ANSI flange drilling
- ☐ 250 psi (17 bar) W.P.
w/ 250# ANSI flange drilling
(requires 1510-S)

TYPE OF SEAL

- ☐ Standard Seal
(Buna-Carbon/Ceramic)
- ☐ -F Standard Seal w/ Flush Line
(Buna-Carbon/Ceramic)
- ☐ -S Stuffing Box Construction w/ Flushed
Mechanical Single Seal
(EPR-Tungsten Carbide/Carbon)
- ☐ -PF Stuffing Box Construction w/ Packing
(Graphite Impregnated Teflon)

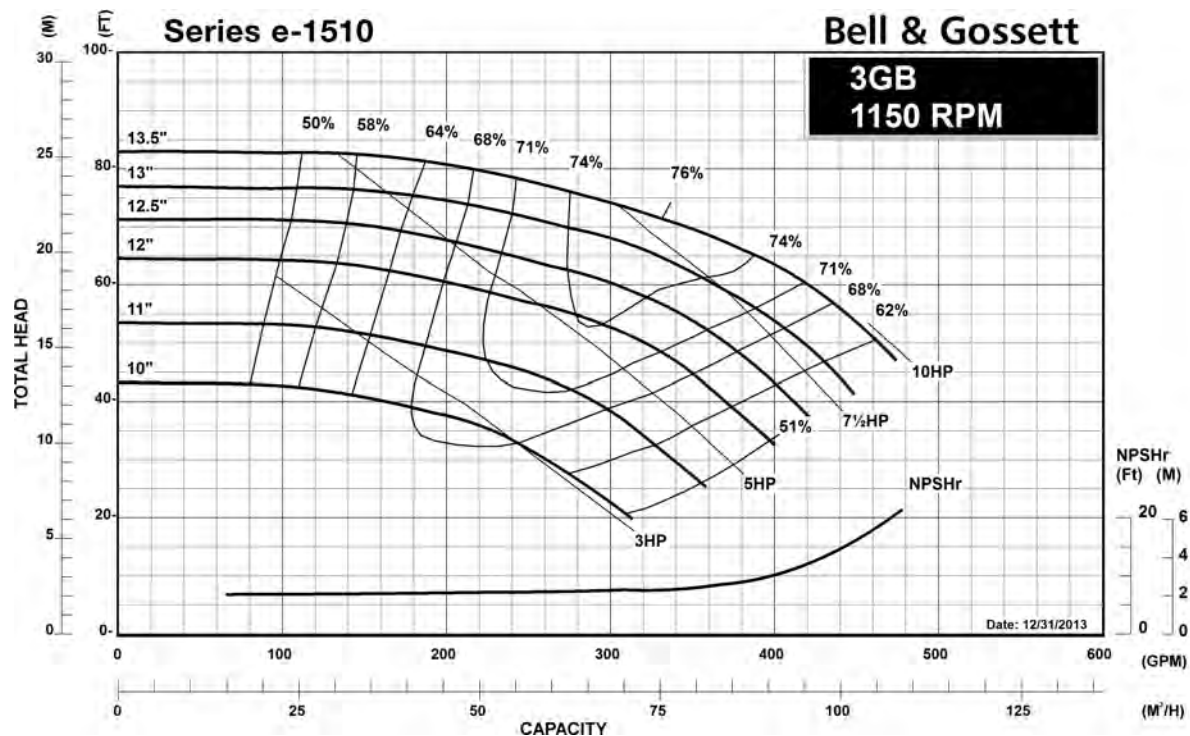

JOB: UNIT TAG: ENGINEER: CONTRACTOR:	REPRESENTATIVE: ORDER NO. SUBMITTED BY: APPROVED BY:	DATE: DATE: DATE:
---	---	--



3GB

Series e-1510

Centrifugal Pumps - Base Mounted

SPECIFICATIONS

FLOW _____ HEAD _____

HP _____ RPM _____

VOLTS _____

CYCLE _____ PHASE _____

ENCLOSURE _____

APPROX. WEIGHT _____

SPECIALS _____

MATERIALS OF CONSTRUCTION

☒ Stainless Steel Fitted

FEATURES

- ☐ i-ALERT™ Condition Monitor
- ☒ ANSI/OSHA Coupling Guard
- ☒ Center Drop Out Spacer Coupling
- ☒ Fabricated Heavy Duty Baseplate


MAXIMUM WORKING PRESSURE


- ☐ 175 psi (12 bar) W.P.
w/ 125# ANSI flange drilling
- ☐ 250 psi (17 bar) W.P.
w/ 250# ANSI flange drilling
(requires 1510-S)

TYPE OF SEAL

- ☐ Standard Seal
(Buna-Carbon/Ceramic)
- ☐ -F Standard Seal w/ Flush Line
(Buna-Carbon/Ceramic)
- ☐ -S Stuffing Box Construction w/ Flushed
Mechanical Single Seal
(EPR-Tungsten Carbide/Carbon)
- ☐ -PF Stuffing Box Construction w/ Packing
(Graphite Impregnated Teflon)

Note: Equipped with NEOPRENE coupling

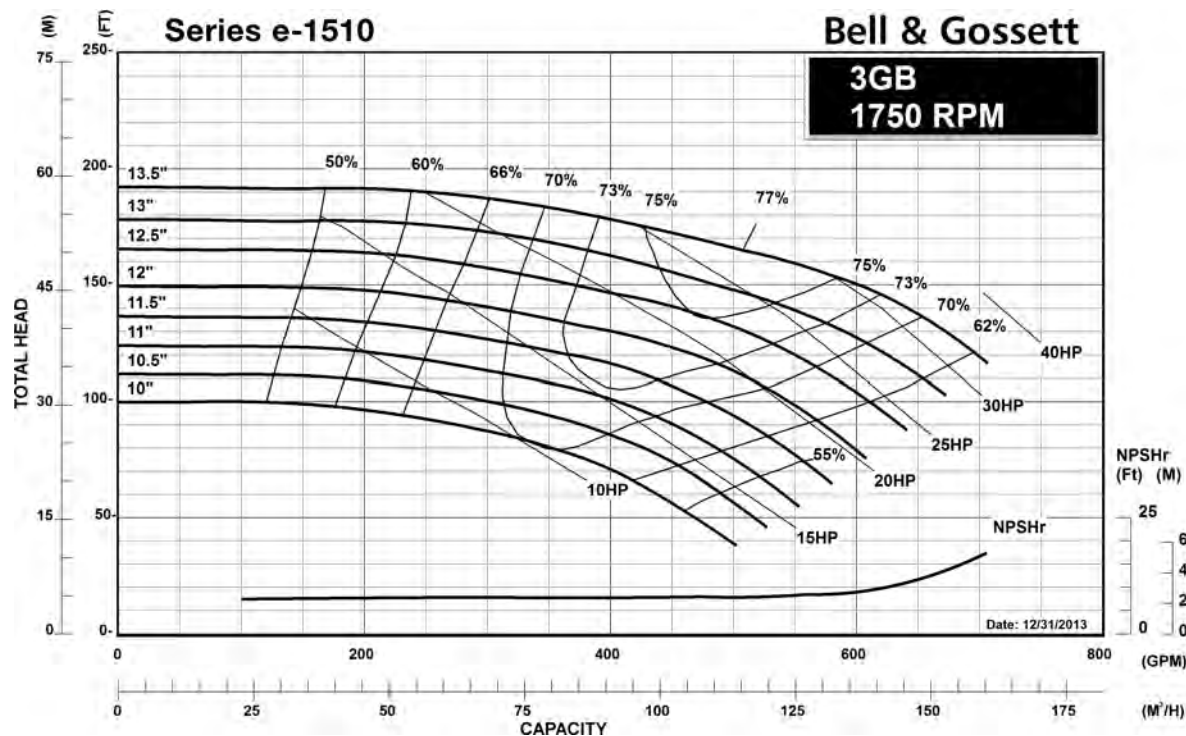

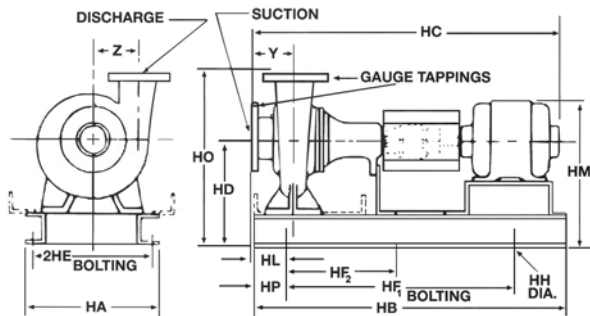

FLANGE DIMENSIONS IN INCHES (MM)			
	SIZE	THICKNESS	O.D.
Discharge	3" (76)	1-1/8 (29)	8 (203)
Suction	4"(102)	1-1/4 (32)	10 (254)

FLANGES ARE 125# ANSI - STANDARD
250# ANSI - AVAILABLE

DIMENSIONS - Inches (mm)

STANDARD SEAL

MOTOR FRAME	HA	HB	HC MAX	HD	2HE	HF ₁	HF ₂	HH	HL	HM MAX	HO	HP	Y	Z
	"L" FRAME													
213T	16 (406)	46-1/2 (1181)	41-1/8 (1045)	14 (356)	14 (356)	36-1/2 (927)	18-1/4 (464)	7/8 (22)	4-1/8 (105)	19-7/8 (505)	23-1/2 (597)	5 (127)	5-5/8 (143)	8 (203)
215T	16 (406)	46-1/2 (1181)	42-5/8 (1083)	14 (356)	14 (356)	36-1/2 (927)	18-1/4 (464)	7/8 (22)	4-1/8 (105)	19-7/8 (505)	23-1/2 (597)	5 (127)	5-5/8 (143)	8 (203)
254T	16 (406)	46-1/2 (1181)	46-3/8 (1178)	14 (356)	14 (356)	36-1/2 (927)	18-1/4 (464)	7/8 (22)	4-1/8 (105)	20-7/8 (530)	23-1/2 (597)	5 (127)	5-5/8 (143)	8 (203)
256T	16 (406)	46-1/2 (1181)	48-1/8 (1222)	14 (356)	14 (356)	36-1/2 (927)	18-1/4 (464)	7/8 (22)	4-1/8 (105)	20-7/8 (530)	23-1/2 (597)	5 (127)	5-5/8 (143)	8 (203)
284T	16 (406)	51-3/4 (1314)	48-7/8 (1241)	14 (356)	14 (356)	41-3/4 (1060)	20-7/8 (530)	7/8 (22)	4-1/8 (105)	22 (559)	23-1/2 (597)	5 (127)	5-5/8 (143)	8 (203)
286T	16 (406)	51-3/4 (1314)	50-5/8 (1286)	14 (356)	14 (356)	41-3/4 (1060)	20-7/8 (530)	7/8 (22)	4-1/8 (105)	22 (559)	23-1/2 (597)	5 (127)	5-5/8 (143)	8 (203)
324T	16 (406)	51-3/4 (1314)	52-5/8 (1337)	14 (356)	14 (356)	41-3/4 (1060)	20-7/8 (530)	7/8 (22)	4-1/8 (105)	23-1/8 (587)	23-1/2 (597)	5 (127)	5-5/8 (143)	8 (203)

STUFFING BOX

MOTOR FRAME	HA	HB	HC MAX	HD	2HE	HF ₁	HF ₂	HH	HL	HM MAX	HO	HP	Y	Z
	"L" FRAME													
213T	16 (406)	46-1/2 (1181)	43-1/2 (1105)	14 (356)	14 (356)	36-1/2 (927)	18-1/4 (464)	7/8 (22)	4-1/8 (105)	19-7/8 (505)	23-1/2 (597)	5 (127)	5-5/8 (143)	8 (203)
215T	16 (406)	46-1/2 (1181)	45 (1143)	14 (356)	14 (356)	36-1/2 (927)	18-1/4 (464)	7/8 (22)	4-1/8 (105)	19-7/8 (505)	23-1/2 (597)	5 (127)	5-5/8 (143)	8 (203)
254T	16 (406)	51-3/4 (1314)	48-3/4 (1238)	14 (356)	14 (356)	41-3/4 (1060)	20-7/8 (530)	7/8 (22)	4-1/8 (105)	20-7/8 (530)	23-1/2 (597)	5 (127)	5-5/8 (143)	8 (203)
256T	16 (406)	51-3/4 (1314)	50-1/2 (1283)	14 (356)	14 (356)	41-3/4 (1060)	20-7/8 (530)	7/8 (22)	4-1/8 (105)	20-7/8 (530)	23-1/2 (597)	5 (127)	5-5/8 (143)	8 (203)
284T	16 (406)	51-3/4 (1314)	51-1/4 (1302)	14 (356)	14 (356)	41-3/4 (1060)	20-7/8 (530)	7/8 (22)	4-1/8 (105)	22 (559)	23-1/2 (597)	5 (127)	5-5/8 (143)	8 (203)
286T	16 (406)	51-3/4 (1314)	53 (1346)	14 (356)	14 (356)	41-3/4 (1060)	20-7/8 (530)	7/8 (22)	4-1/8 (105)	22 (559)	23-1/2 (597)	5 (127)	5-5/8 (143)	8 (203)
324T	16 (406)	51-3/4 (1314)	55 (1397)	14 (356)	14 (356)	41-3/4 (1060)	20-7/8 (530)	7/8 (22)	4-1/8 (105)	23-1/8 (587)	23-1/2 (597)	5 (127)	5-5/8 (143)	8 (203)


Dimensions are subject to change. Not to be used for construction purposes unless certified.

Xylem Inc.
8200 N. Austin Avenue
Morton Grove, IL 60053
Phone: (847)966-3700
Fax: (847)965-8379
www.bellgossett.com

xylem
Let's Solve Water

Bell & Gossett is a trademark of Xylem Inc. or one of its subsidiaries.
© 2013 Xylem Inc.

JOB: UNIT TAG: ENGINEER: CONTRACTOR:	REPRESENTATIVE: ORDER NO. SUBMITTED BY: APPROVED BY:	DATE: DATE: DATE:
---	---	--



4AD

Series e-1510

Centrifugal Pumps - Base Mounted

SPECIFICATIONS

FLOW _____ HEAD _____
 HP _____ RPM _____
 VOLTS _____
 CYCLE _____ PHASE _____
 ENCLOSURE _____
 APPROX. WEIGHT _____
 SPECIALS _____

Note: Equipped with NEOPRENE coupling

MATERIALS OF CONSTRUCTION

☒ STAINLESS STEEL FITTED

FEATURES


- ☐ i-ALERT™ Condition Monitor
- ☒ ANSI/OSHA Coupling Guard
- ☒ Center Drop Out Spacer Coupling
- ☒ Fabricated Heavy Duty Baseplate

MAXIMUM WORKING PRESSURE


- ☐ 175 psi (12 bar) W.P.
w/125# ANSI flange drilling
- ☐ 250 psi (17 bar) W.P.
w/250# ANSI flange drilling
(requires 1510-S)

TYPE OF SEAL

- ☐ Standard Seal
(Buna-Carbon/Ceramic)
- ☐ -F Standard Seal w/ Flush Line
(Buna-Carbon/Ceramic)
- ☐ -S Stuffing Box Construction w/ Flushed
Mechanical Single Seal
(EPR-Tungsten Carbide/Carbon)
- ☐ -PF Stuffing Box Construction w/ Packing
(Graphite Impregnated Teflon)

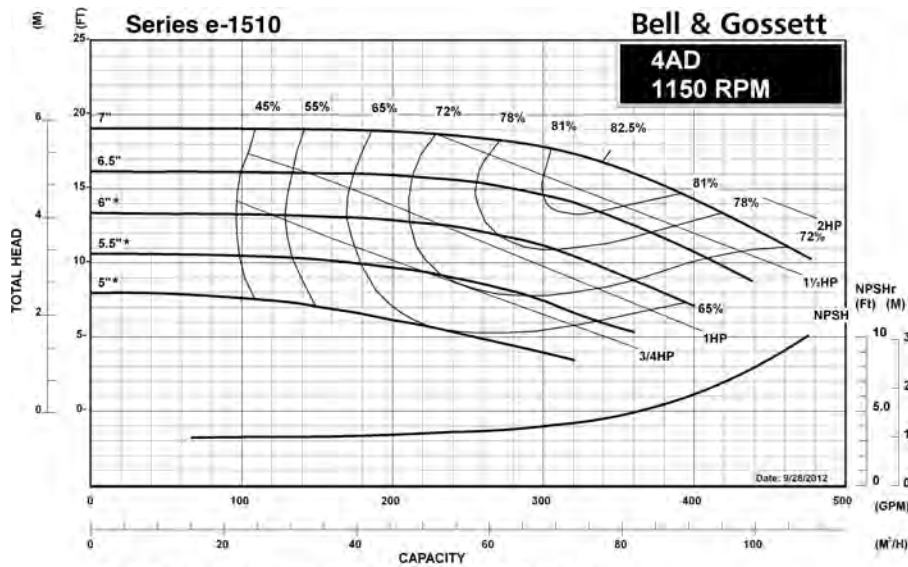

JOB: UNIT TAG: ENGINEER: CONTRACTOR:	REPRESENTATIVE: ORDER NO. SUBMITTED BY: APPROVED BY:	DATE: DATE: DATE:
---	---	--



4AD

Series e-1510

Centrifugal Pumps - Base Mounted

SPECIFICATIONS

FLOW _____ HEAD _____
 HP _____ RPM _____
 VOLTS _____
 CYCLE _____ PHASE _____
 ENCLOSURE _____
 APPROX. WEIGHT _____
 SPECIALS _____

Note: Equipped with NEOPRENE coupling

MATERIALS OF CONSTRUCTION

☒ STAINLESS STEEL FITTED

FEATURES


- ☐ i-ALERT™ Condition Monitor
- ☒ ANSI/OSHA Coupling Guard
- ☒ Center Drop Out Spacer Coupling
- ☒ Fabricated Heavy Duty Baseplate

MAXIMUM WORKING PRESSURE


- ☐ 175 psi (12 bar) W.P.
w/125# ANSI flange drilling
- ☐ 250 psi (17 bar) W.P.
w/250# ANSI flange drilling
(requires 1510-S)

TYPE OF SEAL

- ☐ Standard Seal
(Buna-Carbon/Ceramic)
- ☐ -F Standard Seal w/ Flush Line
(Buna-Carbon/Ceramic)
- ☐ -S Stuffing Box Construction w/ Flushed
Mechanical Single Seal
(EPR-Tungsten Carbide/Carbon)
- ☐ -PF Stuffing Box Construction w/ Packing
(Graphite Impregnated Teflon)

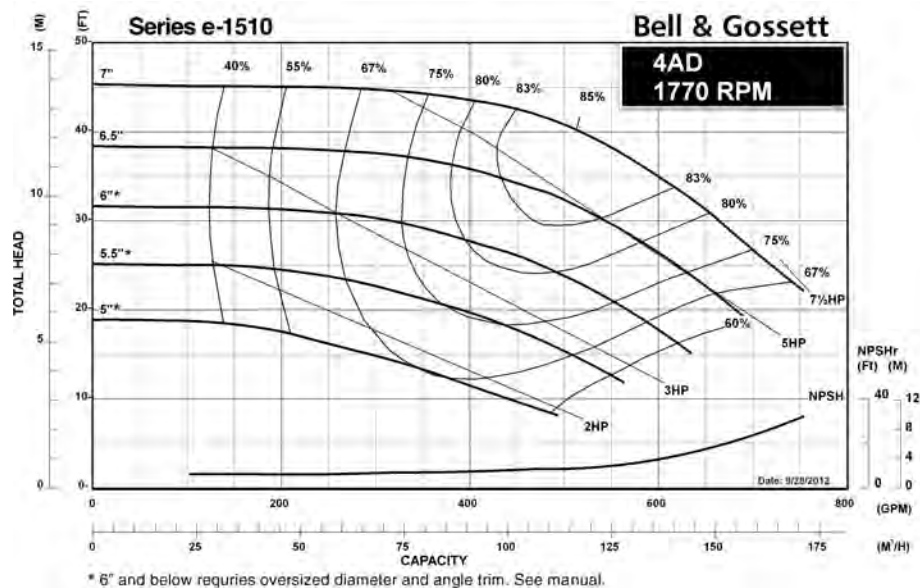

JOB: UNIT TAG: ENGINEER: CONTRACTOR:	REPRESENTATIVE: ORDER NO. SUBMITTED BY: APPROVED BY:	DATE: DATE: DATE:
---	---	--



4AD

Series e-1510

Centrifugal Pumps - Base Mounted

SPECIFICATIONS

FLOW _____ HEAD _____
 HP _____ RPM _____
 VOLTS _____
 CYCLE _____ PHASE _____
 ENCLOSURE _____
 APPROX. WEIGHT _____
 SPECIALS _____

Note: Equipped with NEOPRENE coupling

MATERIALS OF CONSTRUCTION

☒ STAINLESS STEEL FITTED

FEATURES


- ☐ i-ALERT™ Condition Monitor
- ☒ ANSI/OSHA Coupling Guard
- ☒ Center Drop Out Spacer Coupling
- ☒ Fabricated Heavy Duty Baseplate

MAXIMUM WORKING PRESSURE

- ☐ 175 psi (12 bar) W.P.
w/125# ANSI flange drilling
- ☐ 250 psi (17 bar) W.P.
w/250# ANSI flange drilling
(requires 1510-S)


TYPE OF SEAL

- ☐ Standard Seal
(Buna-Carbon/Ceramic)
- ☐ -F Standard Seal w/ Flush Line
(Buna-Carbon/Ceramic)
- ☐ -S Stuffing Box Construction w/ Flushed
Mechanical Single Seal
(EPR-Tungsten Carbide/Carbon)
- ☐ -PF Stuffing Box Construction w/ Packing
(Graphite Impregnated Teflon)

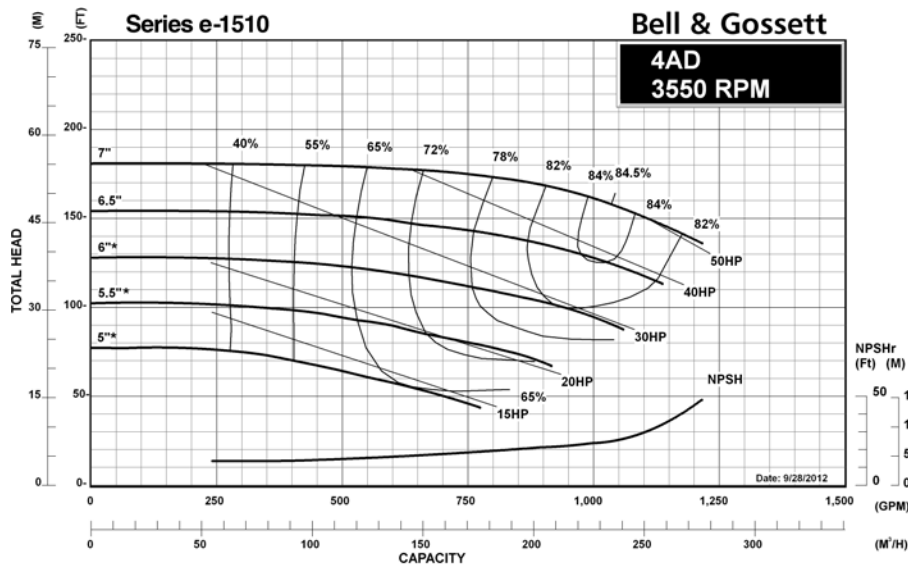

Series e-1510 4AD Centrifugal Pump Submittal

B-880.10C

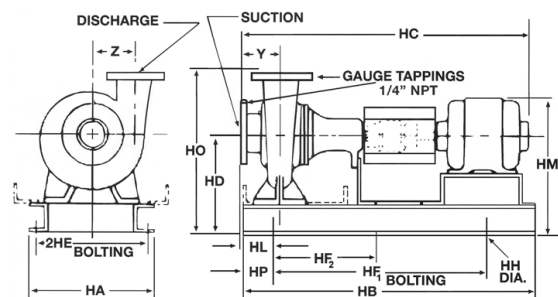

FLANGE DIMENSIONS IN INCHES (MM)			
	SIZE	THICKNESS	O.D.
Discharge	4" (102)	1-1/4 (32)	9-1/2 (273)
Suction	5" (127)	1-3/8" (35)	10-3/4" (273)

FLANGES ARE 125# ANSI - STANDARD
250# ANSI - AVAILABLE

DIMENSIONS - Inches (mm)

STANDARD SEAL

MOTOR FRAME	HA	HB	HC MAX	HD	2HE	HF ₁	HF ₂	HH	HL	HM MAX	HO	HP	Y	Z
"S" FRAME														
145T	14-5/8 (371)	31 (787)	32-1/8 (816)	10-3/4 (273)	12-7/8 (327)	25 (635)	-	3/4 (19)	4-5/16 (110)	14-1/2 (368)	18-1/4 (464)	3 (76)	4-15/16 (125)	5-3/4 (146)
182T	14-5/8 (371)	31 (787)	34-3/4 (883)	10-3/4 (273)	12-7/8 (327)	25 (635)	-	3/4 (19)	4-5/16 (110)	16 (406)	18-1/4 (464)	3 (76)	4-15/16 (125)	5-3/4 (146)
184T	14-5/8 (371)	31 (787)	35-1/2 (902)	10-3/4 (273)	12-7/8 (327)	25 (635)	-	3/4 (19)	4-5/16 (110)	16 (406)	18-1/4 (464)	3 (76)	4-15/16 (125)	5-3/4 (146)
213T	14-5/8 (371)	34-5/8 (879)	38-1/8 (968)	10-3/4 (273)	12-7/8 (327)	28-5/8 (727)	-	3/4 (19)	4-5/16 (110)	16-5/8 (422)	18-1/4 (464)	3 (76)	4-15/16 (125)	5-3/4 (146)
"L" FRAME														
215T	14-5/8 (371)	39-3/8 (1000)	44 (1118)	10-3/4 (273)	12-7/8 (327)	33-3/8 (848)	-	3/4 (19)	4-5/16 (110)	16-5/8 (422)	18-1/4 (464)	3 (76)	4-15/16 (125)	5-3/4 (146)
254T	16 (406)	46-1/2 (1181)	47-3/4 (1213)	12 (305)	14 (356)	36-1/2 (927)	18-1/4 (464)	7/8 (22)	5-7/16 (138)	18-7/8 (479)	19-1/2 (495)	5 (127)	4-15/16 (125)	5-3/4 (146)
256T	16 (406)	46-1/2 (1181)	49-1/2 (1257)	13 (330)	14 (356)	36-1/2 (927)	18-1/4 (464)	7/8 (22)	5-7/16 (138)	21 (533)	19-1/2 (495)	5 (127)	4-15/16 (125)	5-3/4 (146)
284TS	16 (406)	46-1/2 (1181)	48-3/4 (1238)	13 (330)	14 (356)	36-1/2 (927)	18-1/4 (464)	7/8 (22)	5-7/16 (138)	21 (533)	20-1/2 (521)	5 (127)	4-15/16 (125)	5-3/4 (146)
286TS	16 (406)	46-1/2 (1181)	50-1/4 (1276)	13 (330)	14 (356)	36-1/2 (927)	18-1/4 (464)	7/8 (22)	5-7/16 (138)	21 (533)	20-1/2 (521)	5 (127)	4-15/16 (125)	5-3/4 (146)
324TS	16 (406)	46-1/2 (1181)	52-1/4 (1327)	12 (305)	14 (356)	36-1/2 (927)	18-1/4 (464)	7/8 (22)	5-7/16 (138)	21 (533)	19-1/2 (495)	5 (127)	4-15/16 (125)	5-3/4 (146)
326TS	16 (406)	46-1/2 (1181)	54 (1372)	12 (305)	14 (356)	36-1/2 (927)	18-1/4 (464)	7/8 (22)	5-7/16 (138)	21 (533)	19-1/2 (495)	5 (127)	4-15/16 (125)	5-3/4 (146)
364TS	16 (406)	51-3/4 (1314)	55-5/8 (1413)	13 (330)	14 (356)	41-3/4 (1060)	20-7/8 (530)	7/8 (22)	5-7/16 (138)	23 (584)	20-1/2 (521)	5 (127)	4-15/16 (125)	5-3/4 (146)
365TS	16 (406)	51-3/4 (1314)	56-1/4 (1429)	13 (330)	14 (356)	41-3/4 (1060)	20-7/8 (530)	7/8 (22)	5-7/16 (138)	23 (584)	20-1/2 (521)	5 (127)	4-15/16 (125)	5-3/4 (146)

STUFFING BOX


MOTOR FRAME	HA	HB	HC MAX	HD	2HE	HF ₁	HF ₂	HH	HL	HM MAX	HO	HP	Y	Z
"S" FRAME														
145T	14-5/8 (371)	34-5/8 (879)	35-5/8 (905)	10-3/4 (273)	12-7/8 (327)	28-5/8 (727)	-	3/4 (19)	4-5/16 (109)	14-1/2 (368)	18-1/4 (464)	3 (76)	4-15/16 (125)	5-3/4 (146)
182T	14-5/8 (371)	34-5/8 (879)	38-3/8 (975)	10-3/4 (273)	12-7/8 (327)	28-5/8 (727)	-	3/4 (19)	4-5/16 (109)	16 (406)	18-1/4 (464)	3 (76)	4-15/16 (125)	5-3/4 (146)
184T	14-5/8 (371)	34-5/8 (879)	39-1/8 (994)	10-3/4 (273)	12-7/8 (327)	28-5/8 (727)	-	3/4 (19)	4-5/16 (109)	16 (406)	18-1/4 (464)	3 (76)	4-15/16 (125)	5-3/4 (146)
213T	14-5/8 (371)	39-3/8 (1000)	41-5/8 (1057)	10-3/4 (273)	12-7/8 (327)	33-3/8 (848)	-	3/4 (19)	4-5/16 (109)	16-5/8 (422)	18-1/4 (464)	3 (76)	4-15/16 (125)	5-3/4 (146)
"L" FRAME														
215T	16 (406)	46-1/2 (1181)	46-3/8 (1178)	12 (305)	14 (356)	36-1/2 (927)	18-1/4 (464)	7/8 (22)	5-7/16 (138)	17-7/8 (454)	19-1/2 (495)	5 (127)	4-15/16 (125)	5-3/4 (146)
254T	16 (406)	51-3/4 (1314)	50-1/8 (1273)	12 (305)	14 (356)	41-3/4 (1060)	20-7/8 (530)	7/8 (22)	5-7/16 (138)	18-7/8 (479)	19-1/2 (495)	5 (127)	4-15/16 (125)	5-3/4 (146)
256T	16 (406)	51-3/4 (1314)	51-7/8 (1317)	13 (330)	14 (356)	41-3/4 (1060)	20-7/8 (530)	7/8 (22)	5-7/16 (138)	21 (533)	19-1/2 (495)	5 (127)	4-15/16 (125)	5-3/4 (146)
284TS	16 (406)	51-3/4 (1314)	51-1/8 (1298)	13 (330)	14 (356)	41-3/4 (1060)	20-7/8 (530)	7/8 (22)	5-7/16 (138)	21 (533)	20-1/2 (521)	5 (127)	4-15/16 (125)	5-3/4 (146)
286TS	16 (406)	51-3/4 (1314)	52-5/8 (1337)	13 (330)	14 (356)	41-3/4 (1060)	20-7/8 (530)	7/8 (22)	5-7/16 (138)	21 (533)	20-1/2 (521)	5 (127)	4-15/16 (125)	5-3/4 (146)
324TS	16 (406)	51-3/4 (1314)	54-5/8 (1387)	12 (305)	14 (356)	41-3/4 (1060)	20-7/8 (530)	7/8 (22)	5-7/16 (138)	21 (533)	19-1/2 (495)	5 (127)	4-15/16 (125)	5-3/4 (146)
326TS	16 (406)	51-3/4 (1314)	56-3/8 (1432)	12 (305)	14 (356)	41-3/4 (1060)	20-7/8 (530)	7/8 (22)	5-7/16 (138)	21 (533)	19-1/2 (495)	5 (127)	4-15/16 (125)	5-3/4 (146)

Dimensions are subject to change. Not to be used for construction purposes unless certified.

Xylem Inc.
8200 N. Austin Avenue
Morton Grove, IL 60053
Phone: (847)966-3700
Fax: (847)965-8379
www.bellgossett.com

xylem
Let's Solve Water

JOB: UNIT TAG: ENGINEER: CONTRACTOR:	REPRESENTATIVE: ORDER NO. SUBMITTED BY: APPROVED BY:	DATE: DATE: DATE:
---	---	--



4BD

Series e-1510

Centrifugal Pumps - Base Mounted

SPECIFICATIONS

FLOW _____ HEAD _____
 HP _____ RPM _____
 VOLTS _____
 CYCLE _____ PHASE _____
 ENCLOSURE _____
 APPROX. WEIGHT _____
 SPECIALS _____

MATERIALS OF CONSTRUCTION

☒ Stainless Steel Fitted

FEATURES

- ☐ i-ALERT™ Condition Monitor
- ☒ ANSI/OSHA Coupling Guard
- ☒ Center Drop Out Spacer Coupling
- ☒ Fabricated Heavy Duty Baseplate


MAXIMUM WORKING PRESSURE

- ☐ 175 psi (12 bar) W.P.
w/ 125# ANSI flange drilling


TYPE OF SEAL

- ☐ Standard Seal
(Buna-Carbon/Ceramic)
- ☐ -F Standard Seal w/ Flush Line
(Buna-Carbon/Ceramic)
- ☐ -S Stuffing Box Construction w/ Flushed
Mechanical Single Seal
(EPR-Tungsten Carbide/Carbon)
- ☐ -PF Stuffing Box Construction w/ Packing
(Graphite Impregnated Teflon)

Note: Equipped with NEOPRENE coupling

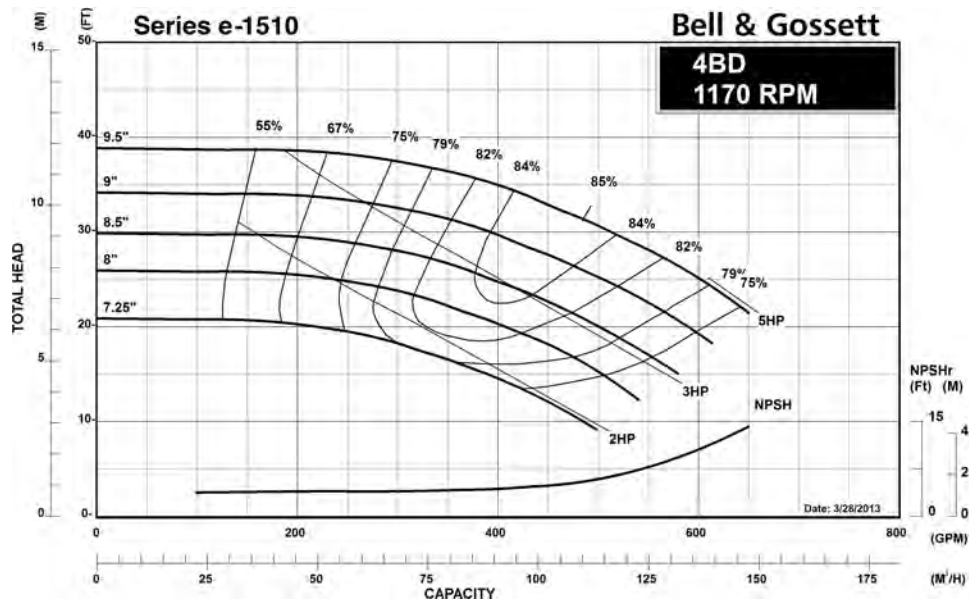

JOB: UNIT TAG: ENGINEER: CONTRACTOR:	REPRESENTATIVE: ORDER NO. SUBMITTED BY: APPROVED BY:	DATE: DATE: DATE:
---	---	--



4BD

Series e-1510

Centrifugal Pumps - Base Mounted

SPECIFICATIONS

FLOW _____ HEAD _____
 HP _____ RPM _____
 VOLTS _____
 CYCLE _____ PHASE _____
 ENCLOSURE _____
 APPROX. WEIGHT _____
 SPECIALS _____

MATERIALS OF CONSTRUCTION

☒ Stainless Steel Fitted

FEATURES

- ☐ i-ALERT™ Condition Monitor
- ☒ ANSI/OSHA Coupling Guard
- ☒ Center Drop Out Spacer Coupling
- ☒ Fabricated Heavy Duty Baseplate


MAXIMUM WORKING PRESSURE

- ☐ 175 psi (12 bar) W.P.
w/ 125# ANSI flange drilling


TYPE OF SEAL

- ☐ Standard Seal
(Buna-Carbon/Ceramic)
- ☐ -F Standard Seal w/ Flush Line
(Buna-Carbon/Ceramic)
- ☐ -S Stuffing Box Construction w/ Flushed
Mechanical Single Seal
(EPR-Tungsten Carbide/Carbon)
- ☐ -PF Stuffing Box Construction w/ Packing
(Graphite Impregnated Teflon)

Note: Equipped with NEOPRENE coupling

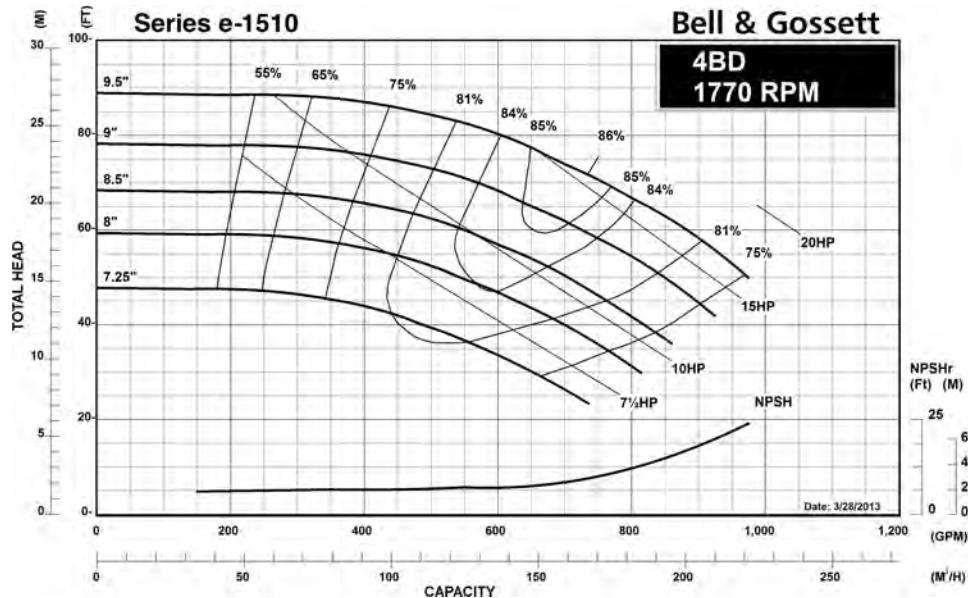

JOB: UNIT TAG: ENGINEER: CONTRACTOR:	REPRESENTATIVE: ORDER NO. SUBMITTED BY: APPROVED BY:	DATE: DATE: DATE:
---	---	--



4BD

Series e-1510

Centrifugal Pumps - Base Mounted

SPECIFICATIONS

FLOW _____ HEAD _____
 HP _____ RPM _____
 VOLTS _____
 CYCLE _____ PHASE _____
 ENCLOSURE _____
 APPROX. WEIGHT _____
 SPECIALS _____

MATERIALS OF CONSTRUCTION

☒ Stainless Steel Fitted

FEATURES

- ☐ i-ALERT™ Condition Monitor
- ☒ ANSI/OSHA Coupling Guard
- ☒ Center Drop Out Spacer Coupling
- ☒ Fabricated Heavy Duty Baseplate


MAXIMUM WORKING PRESSURE


- ☐ 175 psi (12 bar) W.P.
w/ 125# ANSI flange drilling

TYPE OF SEAL

- ☐ Standard Seal
(Buna-Carbon/Ceramic)
- ☐ -F Standard Seal w/ Flush Line
(Buna-Carbon/Ceramic)
- ☐ -S Stuffing Box Construction w/ Flushed
Mechanical Single Seal
(EPR-Tungsten Carbide/Carbon)
- ☐ -PF Stuffing Box Construction w/ Packing
(Graphite Impregnated Teflon)

Note: Equipped with NEOPRENE coupling

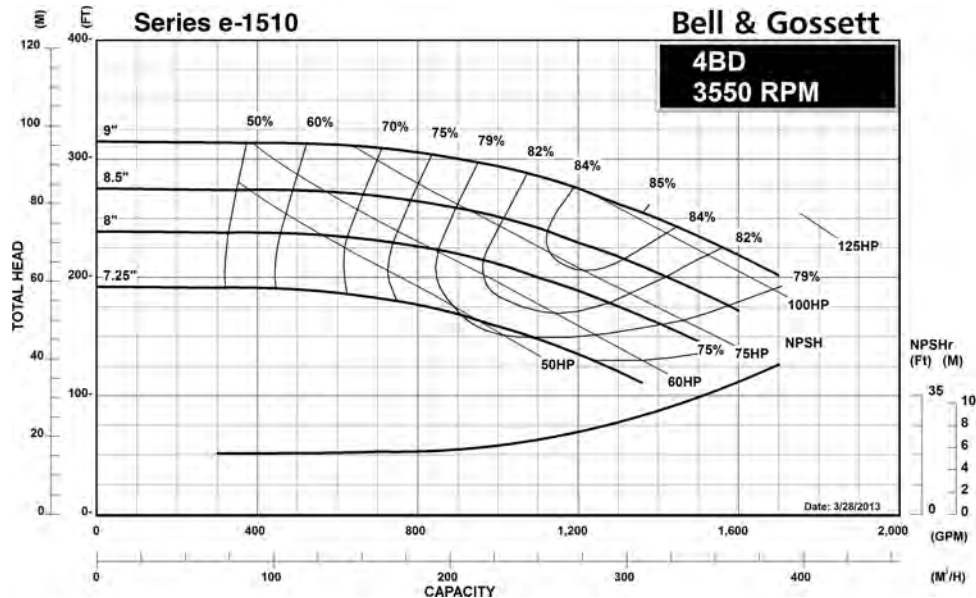

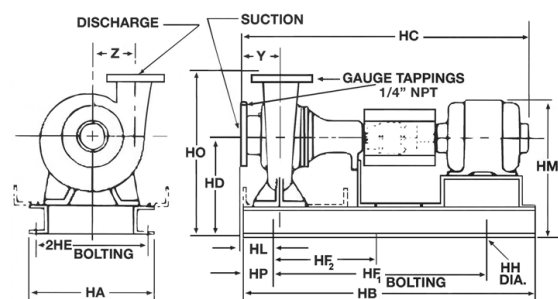

FLANGE DIMENSIONS IN INCHES (MM)			
	SIZE	THICKNESS	O.D.
Discharge	4" (102)	1-1/4" (32)	9-1/2" (241)
Suction	5" (127)	1-3/8" (35)	10-3/4" (273)

FLANGES ARE 125# ANSI - STANDARD

DIMENSIONS – Inches (mm)

STANDARD SEAL

MOTOR FRAME	HA	HB	HC MAX	HD	2HE	HF ₁	HF ₂	HH	HL	HM MAX	HO	HP	Y	Z
"S" FRAME														
213T	14-5/8 (371)	34-5/8 (879)	37-3/4 (959)	12-3/4 (324)	12-7/8 (327)	28-5/8 (727)	-	3/4 (19)	4 (102)	18-5/8 (473)	20-3/4 (527)	3 (76)	5 (127)	7 (178)
215T	14-5/8 (371)	34-5/8 (879)	39-1/4 (997)	12-3/4 (324)	12-7/8 (327)	28-5/8 (727)	-	3/4 (19)	4 (102)	18-5/8 (473)	20-3/4 (527)	3 (76)	5 (127)	7 (178)
254T	14-5/8 (371)	39-3/8 (1000)	43 (1092)	12-3/4 (324)	12-7/8 (327)	33-3/8 (848)	-	3/4 (19)	4 (102)	19-5/8 (498)	20-3/4 (527)	3 (76)	5 (127)	7 (178)
"L" FRAME														
256T	16 (406)	46-1/2 (1181)	49-1/8 (1248)	14 (356)	14 (356)	36-1/2 (927)	18-1/4 (464)	7/8 (22)	5-1/8 (130)	20-7/8 (530)	22 (559)	5 (127)	5 (127)	7 (178)
284TS	16 (406)	46-1/2 (1181)	48-1/2 (1232)	14 (356)	14 (356)	36-1/2 (927)	18-1/4 (464)	7/8 (22)	5-1/8 (130)	22 (559)	22 (559)	5 (127)	5 (127)	7 (178)
286TS	16 (406)	46-1/2 (1181)	50 (1270)	14 (356)	14 (356)	36-1/2 (927)	18-1/4 (464)	7/8 (22)	5-1/8 (130)	22 (559)	22 (559)	5 (127)	5 (127)	7 (178)
324TS	16 (406)	51-3/4 (1314)	51-7/8 (1318)	14 (356)	14 (356)	41-3/4 (1060)	20-7/8 (530)	7/8 (22)	5-1/8 (130)	23-1/8 (587)	22 (559)	5 (127)	5 (127)	7 (178)
326TS	16 (406)	51-3/4 (1314)	53-5/8 (1362)	14 (356)	14 (356)	41-3/4 (1060)	20-7/8 (530)	7/8 (22)	5-1/8 (130)	23-1/8 (587)	22 (559)	5 (127)	5 (127)	7 (178)
364TS	24 (610)	56 (1422)	55-1/4 (1403)	16-1/2 (419)	21-1/2 (546)	44 (1118)	22 (559)	1 (25)	5-3/4 (146)	26-3/4 (679)	24-1/2 (622)	6 (152)	5 (127)	7 (178)
365TS	24 (610)	56 (1422)	55-7/8 (1419)	16-1/2 (419)	21-1/2 (546)	44 (1118)	22 (559)	1 (25)	5-3/4 (146)	26-3/4 (679)	24-1/2 (622)	6 (152)	5 (127)	7 (178)
404TS	24 (610)	56 (1422)	58-1/8 (1476)	16-1/2 (419)	21-1/2 (546)	44 (1118)	22 (559)	1 (25)	5-3/4 (146)	28-3/8 (721)	24-1/2 (622)	6 (152)	5 (127)	7 (178)
405TS	24 (610)	56 (1422)	58-7/8 (1496)	16-1/2 (419)	21-1/2 (546)	44 (1118)	22 (559)	1 (25)	5-3/4 (146)	30 (762)	24-1/2 (622)	6 (152)	5 (127)	7 (178)

STUFFING BOX

MOTOR FRAME	HA	HB	HC MAX	HD	2HE	HF ₁	HF ₂	HH	HL	HM MAX	HO	HP	Y	Z
"L" FRAME														
213T	16 (406)	46-1/2 (1181)	44-1/2 (1130)	14 (356)	14 (356)	36-1/2 (927)	18-1/4 (464)	7/8 (22)	5-1/8 (130)	19-7/8 (505)	22 (559)	5 (127)	5 (127)	7 (178)
215T	16 (406)	46-1/2 (1181)	46 (1168)	14 (356)	14 (356)	36-1/2 (927)	18-1/4 (464)	7/8 (22)	5-1/8 (130)	19-7/8 (505)	22 (559)	5 (127)	5 (127)	7 (178)
254T	16 (406)	51-3/4 (1314)	49-3/4 (1264)	14 (356)	14 (356)	41-3/4 (1060)	20-7/8 (530)	7/8 (22)	5-1/8 (130)	20-7/8 (530)	22 (559)	5 (127)	5 (127)	7 (178)
256T	16 (406)	51-3/4 (1314)	51-1/2 (1308)	14 (356)	14 (356)	41-3/4 (1060)	20-7/8 (530)	7/8 (22)	5-1/8 (130)	20-7/8 (530)	22 (559)	5 (127)	5 (127)	7 (178)

Dimensions are subject to change. Not to be used for construction purposes unless certified.

Box type pumps should not be operated at 3500 RPM.

Xylem Inc.
8200 N. Austin Avenue
Morton Grove, IL 60053
Phone: (847)966-3700
Fax: (847)965-8379
www.bellgossett.com

xylem
Let's Solve Water

JOB:

REPRESENTATIVE:

UNIT TAG:

ORDER NO.

DATE:

ENGINEER:


SUBMITTED BY:

DATE:

CONTRACTOR:

APPROVED BY:

DATE:



4EB Series e-1510 Centrifugal Pumps - Base Mounted

SPECIFICATIONS

FLOW _____ HEAD _____

HP _____ RPM _____

VOLTS _____

CYCLE _____ PHASE _____

ENCLOSURE _____

APPROX. WEIGHT _____

SPECIALS _____

Note: Equipped with NEOPRENE coupling

MATERIALS OF CONSTRUCTION

☒ STAINLESS STEEL FITTED

FEATURES


- ☐ i-ALERT™ Condition Monitor
- ☒ ANSI/OSHA Coupling Guard
- ☒ Center Drop Out Spacer Coupling
- ☒ Fabricated Heavy Duty Baseplate

MAXIMUM WORKING PRESSURE

- ☐ 175 psi (12 bar) W.P.
w/125# ANSI flange drilling
- ☐ 250 psi (17 bar) W.P.
w/250# ANSI flange drilling
(requires 1510-S)

TYPE OF SEAL

- ☐ Standard Seal
(Buna-Carbon/Ceramic)
- ☐ -F Standard Seal w/ Flush Line
(Buna-Carbon/Ceramic)
- ☐ -S Stuffing Box Construction w/ Flushed
Mechanical Single Seal
(EPR-Tungsten Carbide/Carbon)
- ☐ -PF Stuffing Box Construction w/ Packing
(Graphite Impregnated Teflon)

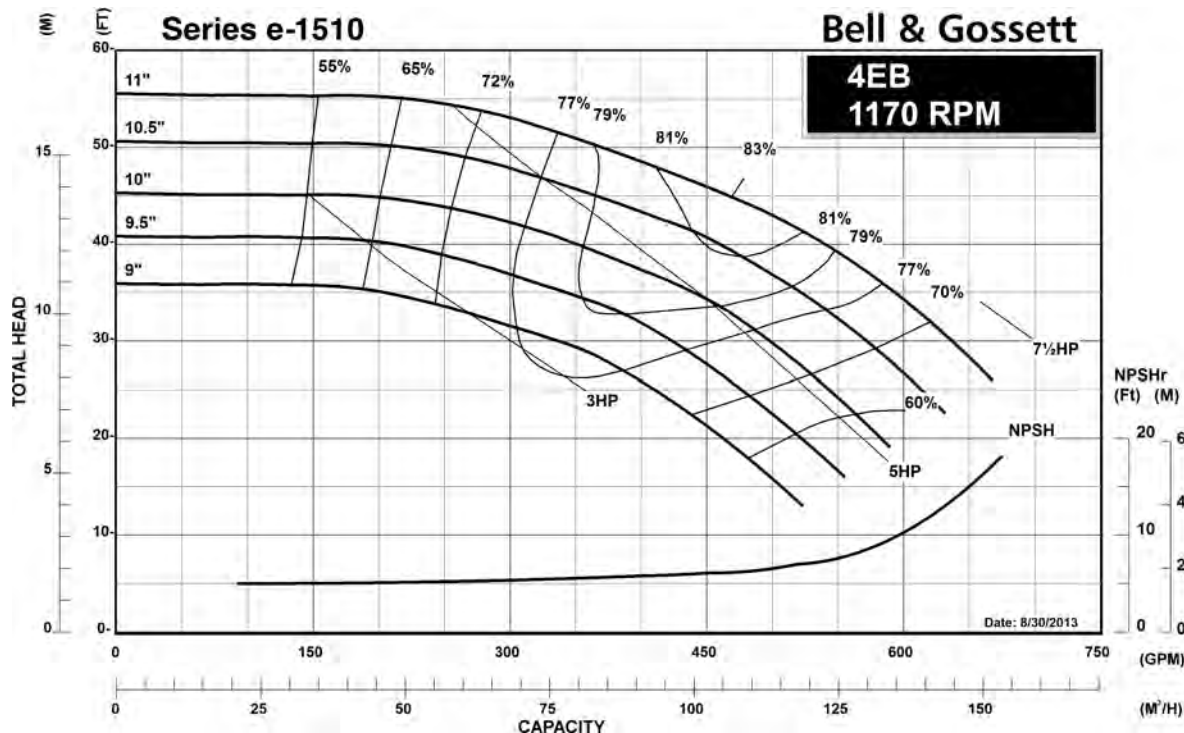

JOB:

REPRESENTATIVE:

UNIT TAG:

ORDER NO.

DATE:

ENGINEER:


SUBMITTED BY:

DATE:

CONTRACTOR:

APPROVED BY:

DATE:



4EB Series e-1510 Centrifugal Pumps - Base Mounted

SPECIFICATIONS

FLOW _____ HEAD _____

HP _____ RPM _____

VOLTS _____

CYCLE _____ PHASE _____

ENCLOSURE _____

APPROX. WEIGHT _____

SPECIALS _____

Note: Equipped with NEOPRENE coupling

MATERIALS OF CONSTRUCTION

☒ STAINLESS STEEL FITTED

FEATURES


- ☐ i-ALERT™ Condition Monitor
- ☒ ANSI/OSHA Coupling Guard
- ☒ Center Drop Out Spacer Coupling
- ☒ Fabricated Heavy Duty Baseplate

MAXIMUM WORKING PRESSURE


- ☐ 175 psi (12 bar) W.P.
w/125# ANSI flange drilling
- ☐ 250 psi (17 bar) W.P.
w/250# ANSI flange drilling
(requires 1510-S)

TYPE OF SEAL

- ☐ Standard Seal
(Buna-Carbon/Ceramic)
- ☐ -F Standard Seal w/ Flush Line
(Buna-Carbon/Ceramic)
- ☐ -S Stuffing Box Construction w/ Flushed
Mechanical Single Seal
(EPR-Tungsten Carbide/Carbon)
- ☐ -PF Stuffing Box Construction w/ Packing
(Graphite Impregnated Teflon)

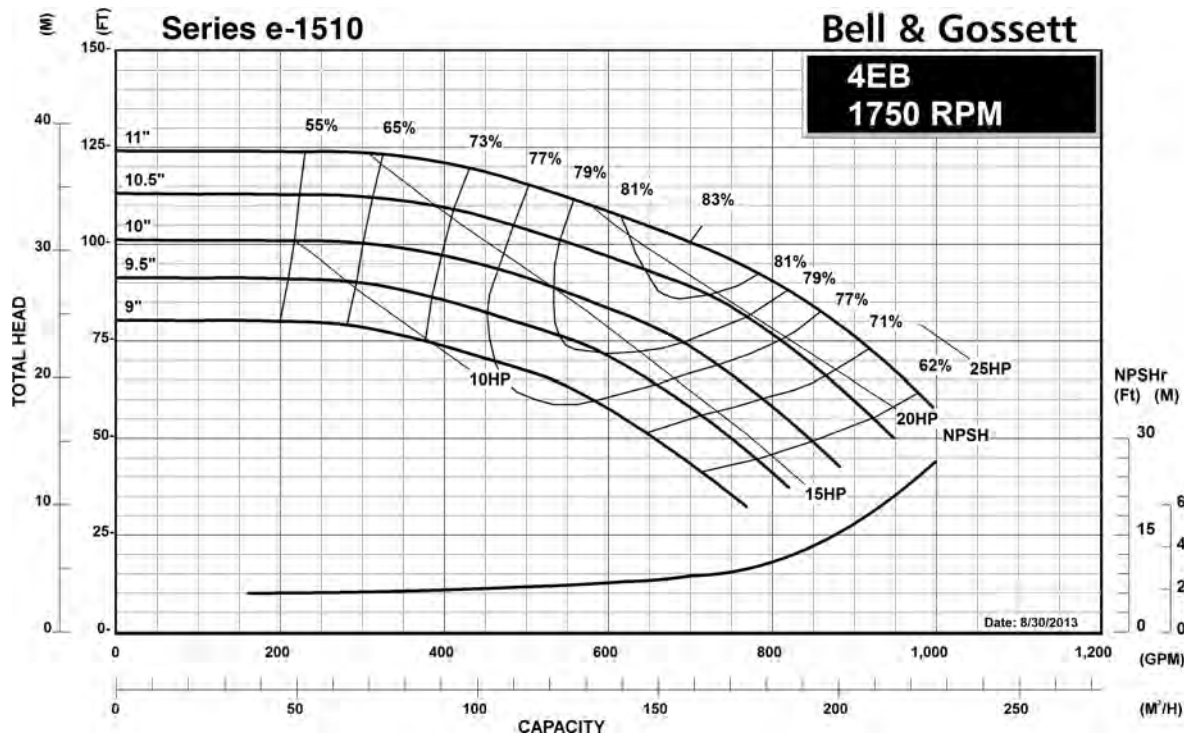

JOB: _____ UNIT TAG: _____ ENGINEER: _____ CONTRACTOR: _____	REPRESENTATIVE: _____ ORDER NO. _____ SUBMITTED BY: _____ APPROVED BY: _____ DATE: _____ DATE: _____ DATE: _____
---	--



4EB

Series e-1510

Centrifugal Pumps - Base Mounted

SPECIFICATIONS

FLOW _____ HEAD _____
 HP _____ RPM _____
 VOLTS _____
 CYCLE _____ PHASE _____
 ENCLOSURE _____
 APPROX. WEIGHT _____
 SPECIALS _____

Note: Equipped with NEOPRENE coupling

MATERIALS OF CONSTRUCTION

☒ STAINLESS STEEL FITTED

FEATURES


- ☐ i-ALERT™ Condition Monitor
- ☒ ANSI/OSHA Coupling Guard
- ☒ Center Drop Out Spacer Coupling
- ☒ Fabricated Heavy Duty Baseplate


MAXIMUM WORKING PRESSURE

- ☐ 175 psi (12 bar) W.P.
w/125# ANSI flange drilling
- ☐ 250 psi (17 bar) W.P.
w/250# ANSI flange drilling
(requires 1510-S)

TYPE OF SEAL

- ☐ Standard Seal
(Buna-Carbon/Ceramic)
- ☐ -F Standard Seal w/ Flush Line
(Buna-Carbon/Ceramic)
- ☐ -S Stuffing Box Construction w/ Flushed
Mechanical Single Seal
(EPR-Tungsten Carbide/Carbon)
- ☐ -PF Stuffing Box Construction w/ Packing
(Graphite Impregnated Teflon)

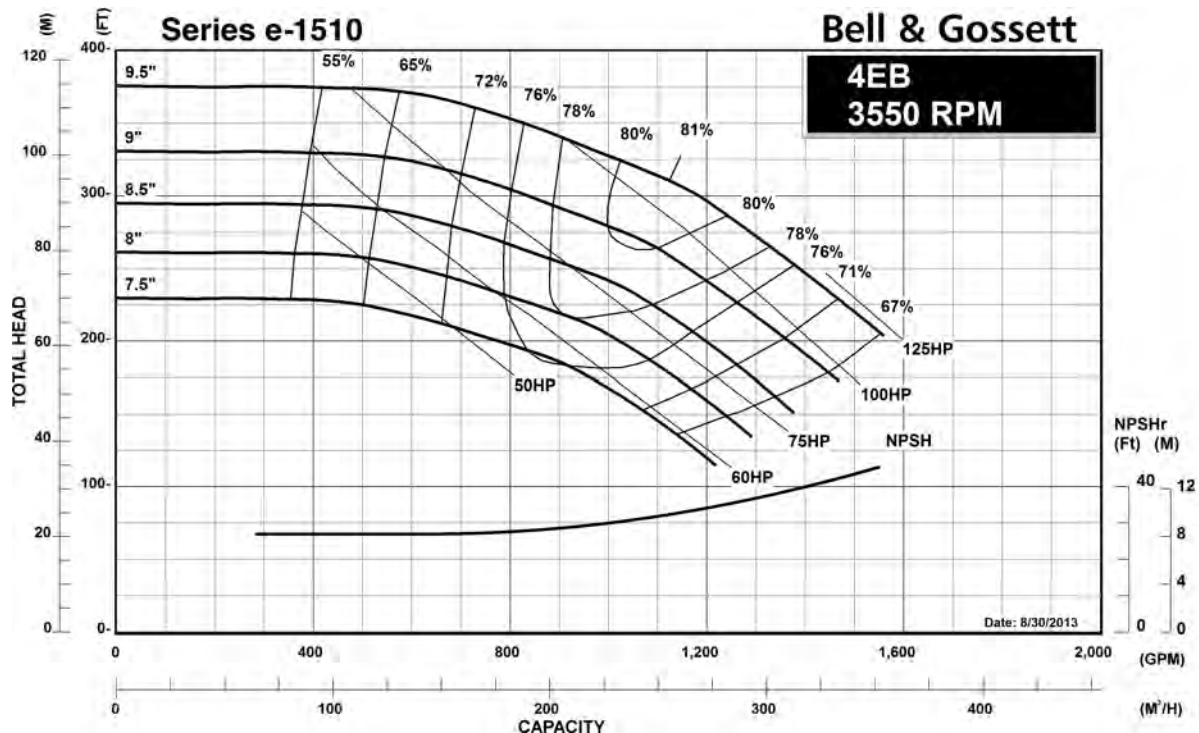

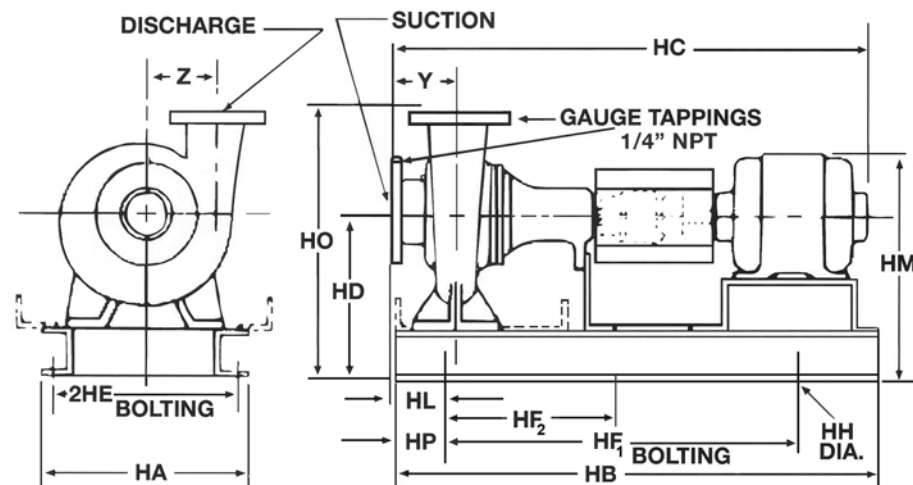

FLANGE DIMENSIONS IN INCHES (MM)			
	SIZE	THICKNESS	O.D.
Discharge	4" (102)	1-1/4" (32)	9-1/2" (241)
Suction	5" (127)	1-3/8" (35)	10-3/4" (273)

FLANGES
ARE 125# ANSI -
STANDARD
250# ANSI -
AVAILABLE

DIMENSIONS - Inches (mm)

STANDARD SEAL

MOTOR FRAME	HA	HB	HC MAX	HD	2HE	HF ₁	HF ₂	HH	HL	HM MAX	HO	HP	Y	Z
"S" FRAME														
213T	16 (406)	42-1/4 (1073)	37-1/2 (952)	14 (356)	14 (356)	32-1/4 (819)	16-1/8 (410)	7/8 (22)	6-11/16 (170)	19-7/8 (505)	23-3/4 (603)	5 (127)	5-9/16 (141)	7-1/4 (184)
215T	16 (406)	42-1/4 (1073)	39 (991)	14 (356)	14 (356)	32-1/4 (819)	16-1/8 (410)	7/8 (22)	6-11/16 (170)	19-7/8 (505)	23-3/4 (603)	5 (127)	5-9/16 (141)	7-1/4 (184)
254T	16 (406)	42-1/4 (1073)	42-3/4 (1086)	14 (356)	14 (356)	32-1/4 (819)	16-1/8 (410)	7/8 (22)	6-11/16 (170)	20-7/8 (530)	23-3/4 (603)	5 (127)	5-9/16 (141)	7-1/4 (184)
"L" FRAME														
256T	16 (406)	46-1/2 (1181)	48-3/8 (1229)	14 (356)	14 (356)	36-1/2 (927)	18-1/4 (464)	7/8 (22)	4-5/16 (110)	20-7/8 (530)	23-3/4 (603)	5 (127)	5-9/16 (141)	7-1/4 (184)
284T	16 (406)	51-3/4 (1314)	49-1/8 (1248)	14 (356)	14 (356)	41-3/4 (1060)	20-7/8 (530)	7/8 (22)	4-5/16 (110)	22 (559)	23-3/4 (603)	5 (127)	5-9/16 (141)	7-1/4 (184)
286TS	16 (406)	51-3/4 (1314)	50-5/8 (1286)	14 (356)	14 (356)	41-3/4 (1060)	20-7/8 (530)	7/8 (22)	4-5/16 (110)	22 (559)	23-3/4 (603)	5 (127)	5-9/16 (141)	7-1/4 (184)
324TS	16 (406)	51-3/4 (1314)	51-1/8 (1299)	14 (356)	14 (356)	41-3/4 (1060)	20-7/8 (530)	7/8 (22)	4-5/16 (110)	23-1/8 (587)	23-3/4 (603)	5 (127)	5-9/16 (141)	7-1/4 (184)
326TS	16 (406)	51-3/4 (1314)	52-5/8 (1337)	14 (356)	14 (356)	41-3/4 (1060)	20-7/8 (530)	7/8 (22)	4-5/16 (110)	23-1/8 (587)	23-3/4 (603)	5 (127)	5-9/16 (141)	7-1/4 (184)
364TS	24 (610)	56 (1422)	54-3/8 (1381)	16-1/2 (419)	21-1/2 (546)	44 (1118)	22 (559)	1 (25)	4-15/16 (125)	26-3/4 (679)	26-1/4 (667)	6 (152)	5-9/16 (141)	7-1/4 (184)
365TS	24 (610)	56 (1422)	55-1/8 (1400)	16-1/2 (419)	21-1/2 (546)	44 (1118)	22 (559)	1 (25)	4-15/16 (125)	26-3/4 (679)	26-1/4 (667)	6 (152)	5-9/16 (141)	7-1/4 (184)
404TS	24 (610)	56 (1422)	57-3/8 (1457)	16-1/2 (419)	21-1/2 (546)	44 (1118)	22 (559)	1 (25)	4-15/16 (125)	28-3/8 (721)	26-1/4 (667)	6 (152)	5-9/16 (141)	7-1/4 (184)

STUFFING BOX

MOTOR FRAME	HA	HB	HC MAX	HD	2HE	HF ₁	HF ₂	HH	HL	HM MAX	HO	HP	Y	Z
"S" FRAME														
213T	16 (406)	42-1/4 (1073)	41-1/8 (1044)	14 (356)	14 (356)	32-1/4 (819)	16-1/8 (409)	7/8 (22)	6-11/16 (170)	19-7/8 (505)	23-3/4 (603)	5 (127)	5-9/16 (141)	7-1/4 (184)
215T	16 (406)	42-1/4 (1073)	42-5/8 (1083)	14 (356)	14 (356)	32-1/4 (819)	16-1/8 (409)	7/8 (22)	6-11/16 (170)	19-7/8 (505)	23-3/4 (603)	5 (127)	5-9/16 (141)	7-1/4 (184)
254T	16 (406)	42-1/4 (1073)	46-3/8 (1178)	14 (356)	14 (356)	32-1/4 (819)	16-1/8 (409)	7/8 (22)	6-11/16 (170)	20-7/8 (530)	23-3/4 (603)	5 (127)	5-9/16 (141)	7-1/4 (184)
"L" FRAME														
256T	16 (406)	51-3/4 (1314)	50-7/8 (1292)	14 (356)	14 (356)	41-3/4 (1060)	20-7/8 (530)	7/8 (22)	4-5/16 (110)	20-7/8 (530)	23-3/4 (603)	5 (127)	5-9/16 (141)	7-1/4 (184)
284T	16 (406)	51-3/4 (1314)	51-1/2 (1308)	14 (356)	14 (356)	41-3/4 (1060)	20-7/8 (530)	7/8 (22)	4-5/16 (110)	22 (559)	23-3/4 (603)	5 (127)	5-9/16 (141)	7-1/4 (184)
286TS	16 (406)	51-3/4 (1314)	53 (1346)	14 (356)	14 (356)	41-3/4 (1060)	20-7/8 (530)	7/8 (22)	4-5/16 (110)	22 (559)	23-3/4 (603)	5 (127)	5-9/16 (141)	7-1/4 (184)
324TS	16 (406)	51-3/4 (1314)	53-1/2 (1359)	14 (356)	14 (356)	41-3/4 (1060)	20-7/8 (530)	7/8 (22)	4-5/16 (110)	23-1/8 (587)	23-3/4 (603)	5 (127)	5-9/16 (141)	7-1/4 (184)
326TS	16 (406)	51-3/4 (1314)	55-1/8 (1400)	14 (356)	14 (356)	41-3/4 (1060)	20-7/8 (530)	7/8 (22)	4-5/16 (110)	23-1/8 (587)	23-3/4 (603)	5 (127)	5-9/16 (141)	7-1/4 (184)
364TS	24 (610)	56 (1422)	56-7/8 (1444)	16-1/2 (419)	21-1/2 (546)	44 (1118)	22 (559)	1 (25)	4-15/16 (125)	26-3/4 (679)	26-1/4 (667)	6 (152)	5-9/16 (141)	7-1/4 (184)
365TS	24 (610)	56 (1422)	57-1/2 (1460)	16-1/2 (419)	21-1/2 (546)	44 (1118)	22 (559)	1 (25)	4-15/16 (125)	26-3/4 (679)	26-1/4 (667)	6 (152)	5-9/16 (141)	7-1/4 (184)
404TS	24 (610)	56 (1422)	59-3/4 (1518)	16-1/2 (419)	21-1/2 (546)	44 (1118)	22 (559)	1 (25)	4-15/16 (125)	28-3/8 (721)	26-1/4 (667)	6 (152)	5-9/16 (141)	7-1/4 (184)

Dimensions are subject to change. Not to be used for construction purposes unless certified.

Xylem Inc.
8200 N. Austin Avenue
Morton Grove, IL 60053
Phone: (847)966-3700
Fax: (847)965-8379
www.xyleminc.com/brands/bellgossett

xylem
Let's Solve Water

JOB:

REPRESENTATIVE:

UNIT TAG:

ORDER NO.

DATE:

ENGINEER:


SUBMITTED BY:

DATE:

CONTRACTOR:

APPROVED BY:

DATE:



4GC Series e-1510 Centrifugal Pumps - Base Mounted

SPECIFICATIONS

FLOW _____ HEAD _____

HP _____ RPM _____

VOLTS _____

CYCLE _____ PHASE _____

ENCLOSURE _____

APPROX. WEIGHT _____

SPECIALS _____

Note: Equipped with NEOPRENE coupling

MATERIALS OF CONSTRUCTION

☒ STAINLESS STEEL FITTED

FEATURES


- ☐ i-ALERT™ Condition Monitor
- ☒ ANSI/OSHA Coupling Guard
- ☒ Center Drop Out Spacer Coupling
- ☒ Fabricated Heavy Duty Baseplate

MAXIMUM WORKING PRESSURE

- ☐ 175 psi (12 bar) W.P.
w/125# ANSI flange drilling
- ☐ 250 psi (17 bar) W.P.
w/250# ANSI flange drilling
(requires 1510-S)

TYPE OF SEAL

- ☐ Standard Seal
(Buna-Carbon/Ceramic)
- ☐ -F Standard Seal w/ Flush Line
(Buna-Carbon/Ceramic)
- ☐ -S Stuffing Box Construction w/ Flushed
Mechanical Single Seal
(EPR-Tungsten Carbide/Carbon)
- ☐ -PF Stuffing Box Construction w/ Packing
(Graphite Impregnated Teflon)

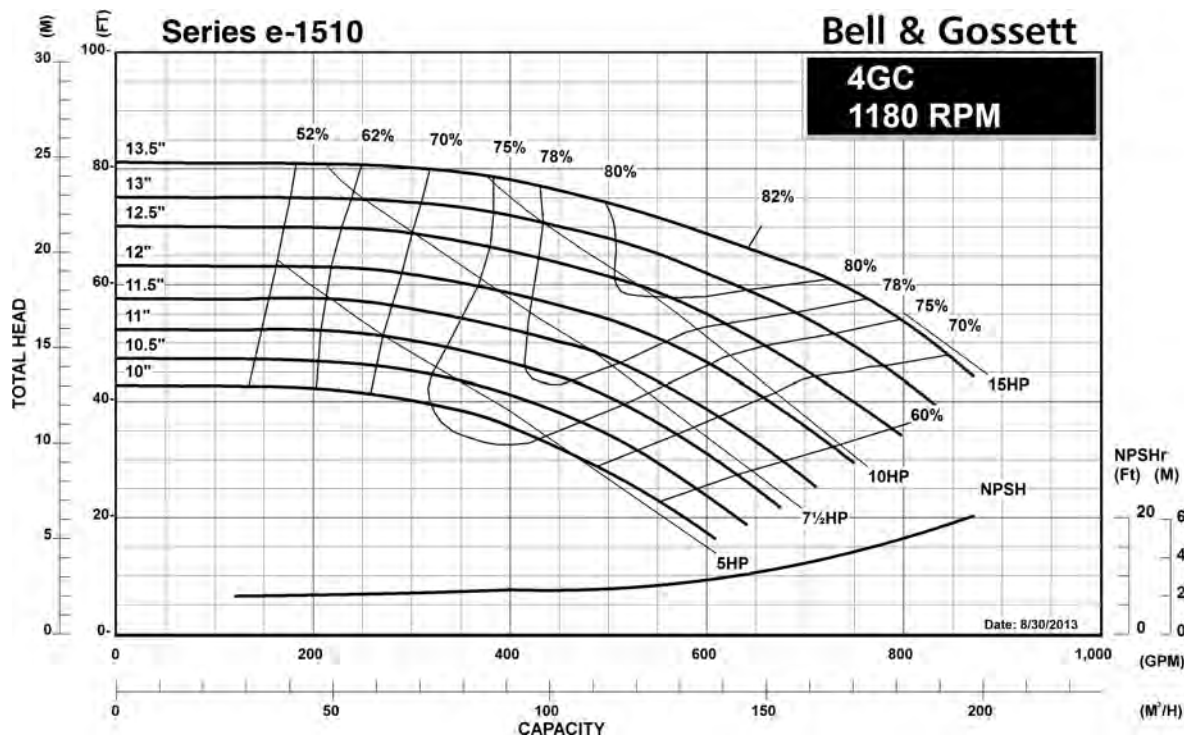

JOB:

REPRESENTATIVE:

UNIT TAG:

ORDER NO.

DATE:

ENGINEER:


SUBMITTED BY:

DATE:

CONTRACTOR:

APPROVED BY:

DATE:



4GC Series e-1510 Centrifugal Pumps - Base Mounted

SPECIFICATIONS

FLOW _____ HEAD _____

HP _____ RPM _____

VOLTS _____

CYCLE _____ PHASE _____

ENCLOSURE _____

APPROX. WEIGHT _____

SPECIALS _____

Note: Equipped with NEOPRENE coupling

MATERIALS OF CONSTRUCTION

☒ STAINLESS STEEL FITTED

FEATURES


- ☐ i-ALERT™ Condition Monitor
- ☒ ANSI/OSHA Coupling Guard
- ☒ Center Drop Out Spacer Coupling
- ☒ Fabricated Heavy Duty Baseplate


MAXIMUM WORKING PRESSURE

- ☐ 175 psi (12 bar) W.P.
w/125# ANSI flange drilling
- ☐ 250 psi (17 bar) W.P.
w/250# ANSI flange drilling
(requires 1510-S)

TYPE OF SEAL

- ☐ Standard Seal
(Buna-Carbon/Ceramic)
- ☐ -F Standard Seal w/ Flush Line
(Buna-Carbon/Ceramic)
- ☐ -S Stuffing Box Construction w/ Flushed
Mechanical Single Seal
(EPR-Tungsten Carbide/Carbon)
- ☐ -PF Stuffing Box Construction w/ Packing
(Graphite Impregnated Teflon)

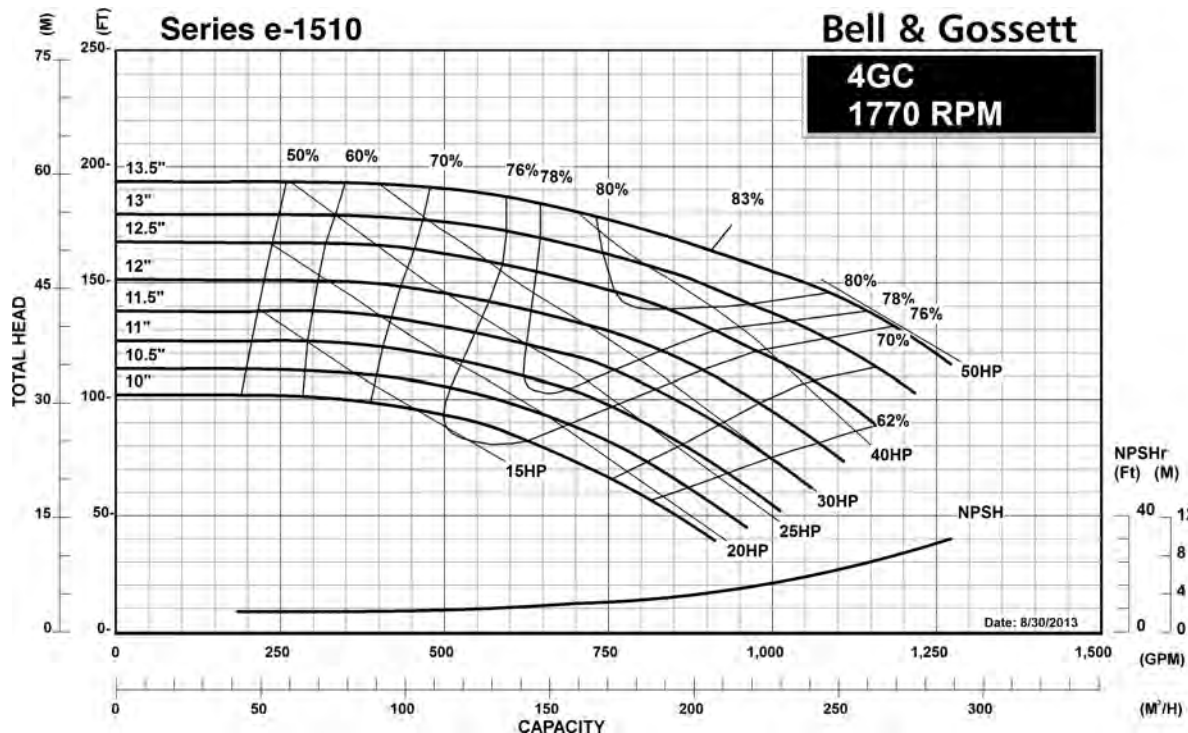

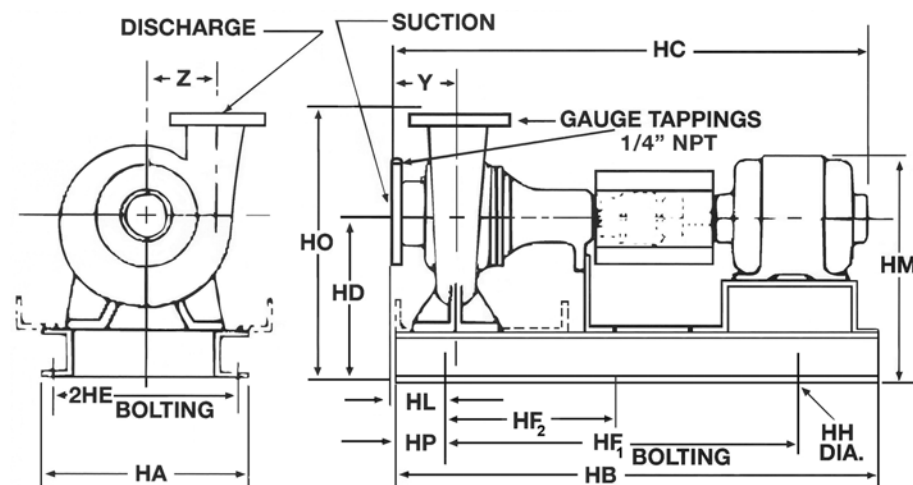

FLANGE DIMENSIONS IN INCHES (MM)			
	SIZE	THICKNESS	O.D.
Discharge	4" (102)	1-1/4 (32)	10 (254)
Suction	5" (127)	1-3/8 (35)	10-3/4 (273)

FLANGES ARE: 125# ANSI - STANDARD
250# ANSI - AVAILABLE

DIMENSIONS - Inches (mm)

STANDARD SEAL

MOTOR FRAME	HA	HB	HC MAX	HD	2HE	HF ₁	HF ₂	HH	HL	HM MAX	HO	HP	Y	Z
"L" FRAME														
213T	16 (406)	46-1/2 (1181)	41-5/8 (1057)	15 (381)	14 (356)	36-1/2 (927)	18-1/4 (464)	7/8 (22)	4-5/8 (117)	20-7/8 (530)	25 (635)	5 (127)	6 (152)	8-9/16 (217)
215T	16 (406)	46-1/2 (1181)	43-1/8 (1095)	15 (381)	14 (356)	36-1/2 (927)	18-1/4 (464)	7/8 (22)	4-5/8 (117)	20-7/8 (530)	25 (635)	5 (127)	6 (152)	8-9/16 (217)
254T	16 (406)	46-1/2 (1181)	46-7/8 (1191)	15 (381)	14 (356)	36-1/2 (927)	18-1/4 (464)	7/8 (22)	4-5/8 (117)	21-7/8 (556)	25 (635)	5 (127)	6 (152)	8-9/16 (217)
256T	16 (406)	46-1/2 (1181)	48-5/8 (1235)	15 (381)	14 (356)	36-1/2 (927)	18-1/4 (464)	7/8 (22)	4-5/8 (117)	21-7/8 (556)	25 (635)	5 (127)	6 (152)	8-9/16 (217)
284T	16 (406)	51-3/4 (1314)	49-3/8 (1254)	15 (381)	14 (356)	41-3/4 (1060)	20-7/8 (530)	7/8 (22)	4-5/8 (117)	23 (584)	25 (635)	5 (127)	6 (152)	8-9/16 (217)
286T	16 (406)	51-3/4 (1314)	50-7/8 (1292)	15 (381)	14 (356)	41-3/4 (1060)	20-7/8 (530)	7/8 (22)	4-5/8 (117)	23 (584)	25 (635)	5 (127)	6 (152)	8-9/16 (217)
324T	16 (406)	51-3/4 (1314)	53-1/8 (1349)	15 (381)	14 (356)	41-3/4 (1060)	20-7/8 (530)	7/8 (22)	4-5/8 (117)	24-1/8 (613)	25 (635)	5 (127)	6 (152)	8-9/16 (217)
326T	16 (406)	51-3/4 (1314)	54-5/8 (1387)	15 (381)	14 (356)	41-3/4 (1060)	20-7/8 (530)	7/8 (22)	4-5/8 (117)	24-1/8 (613)	25 (635)	5 (127)	6 (152)	8-9/16 (217)

STUFFING BOX


MOTOR FRAME	HA	HB	HC MAX	HD	2HE	HF ₁	HF ₂	HH	HL	HM MAX	HO	HP	Y	Z
"L" FRAME														
213T	16 (406)	46-1/2 (1181)	44 (1118)	15 (381)	14 (356)	36-1/2 (927)	18-1/4 (464)	7/8 (22)	4-5/8 (117)	20-7/8 (530)	25 (635)	5 (127)	6 (152)	8-9/16 (217)
215T	16 (406)	46-1/2 (1181)	45-1/2 (1156)	15 (381)	14 (356)	36-1/2 (927)	18-1/4 (464)	7/8 (22)	4-5/8 (117)	20-7/8 (530)	25 (635)	5 (127)	6 (152)	8-9/16 (217)
254T	16 (406)	51-3/4 (1314)	49-1/4 (1251)	15 (381)	14 (356)	41-3/4 (1060)	20-7/8 (530)	7/8 (22)	4-5/8 (117)	21-7/8 (556)	25 (635)	5 (127)	6 (152)	8-9/16 (217)
256T	16 (406)	51-3/4 (1314)	51 (1295)	15 (381)	14 (356)	41-3/4 (1060)	20-7/8 (530)	7/8 (22)	4-5/8 (117)	21-7/8 (556)	25 (635)	5 (127)	6 (152)	8-9/16 (217)
284T	16 (406)	51-3/4 (1314)	51-3/4 (1314)	15 (381)	14 (356)	41-3/4 (1060)	20-7/8 (530)	7/8 (22)	4-5/8 (117)	23 (584)	25 (635)	5 (127)	6 (152)	8-9/16 (217)
286T	16 (406)	51-3/4 (1314)	53-1/4 (1353)	15 (381)	14 (356)	41-3/4 (1060)	20-7/8 (530)	7/8 (22)	4-5/8 (117)	23 (584)	25 (635)	5 (127)	6 (152)	8-9/16 (217)
324T	16 (406)	51-3/4 (1314)	55-1/2 (1410)	15 (381)	14 (356)	41-3/4 (1060)	20-7/8 (530)	7/8 (22)	4-5/8 (117)	24-1/8 (613)	25 (635)	5 (127)	6 (152)	8-9/16 (217)
326T	16 (406)	51-3/4 (1314)	57 (1448)	15 (381)	14 (356)	41-3/4 (1060)	20-7/8 (530)	7/8 (22)	4-5/8 (117)	24-1/8 (613)	25 (635)	5 (127)	6 (152)	8-9/16 (217)

Dimensions are subject to change. Not to be used for construction purposes unless certified.

Xylem Inc.
8200 N. Austin Avenue
Morton Grove, IL 60053
Phone: (847)966-3700
Fax: (847)965-8379
www.bellgossett.com

xylem
Let's Solve Water

JOB: UNIT TAG: ENGINEER: CONTRACTOR:	REPRESENTATIVE: ORDER NO. SUBMITTED BY: APPROVED BY:	DATE: DATE: DATE:
---	---	--



5A

Series e-1510

Centrifugal Pumps - Base Mounted

SPECIFICATIONS

FLOW _____ HEAD _____

HP _____ RPM _____

VOLTS _____

CYCLE _____ PHASE _____

ENCLOSURE _____

APPROX. WEIGHT _____

SPECIALS _____

Note: Equipped with NEOPRENE coupling

MATERIALS OF CONSTRUCTION

☒ STAINLESS STEEL FITTED

FEATURES


- ☐ i-ALERT™ Condition Monitor
- ☒ ANSI/OSHA Coupling Guard
- ☒ Center Drop Out Spacer Coupling
- ☒ Fabricated Heavy Duty Baseplate

MAXIMUM WORKING PRESSURE


- ☐ 175 psi (12 bar) W.P.
w/125# ANSI flange drilling
- ☐ 250 psi (17 bar) W.P.
w/250# ANSI flange drilling
(requires 1510-S)

TYPE OF SEAL

- ☐ Standard Seal
(Buna-Carbon/Ceramic)
- ☐ -F Standard Seal w/ Flush Line
(Buna-Carbon/Ceramic)
- ☐ -S Stuffing Box Construction w/ Flushed
Mechanical Single Seal
(EPR-Tungsten Carbide/Carbon)
- ☐ -PF Stuffing Box Construction w/ Packing
(Graphite Impregnated Teflon)

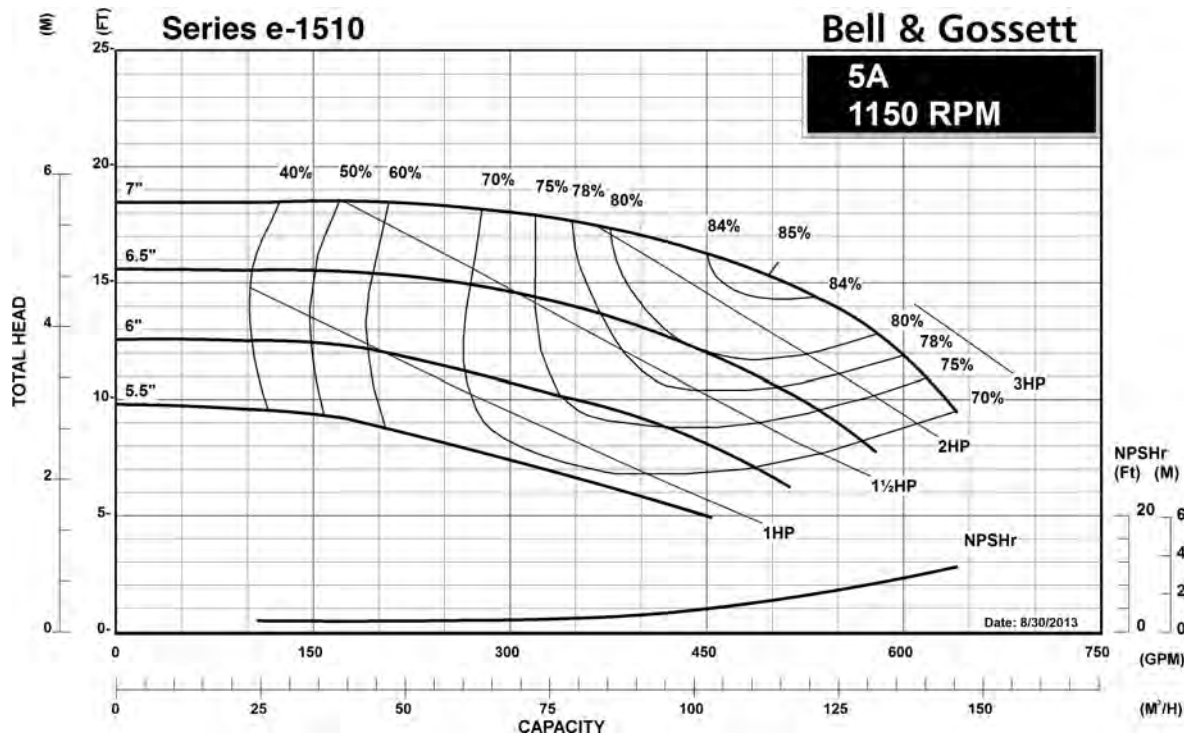

JOB: UNIT TAG: ENGINEER: CONTRACTOR:	REPRESENTATIVE: ORDER NO. SUBMITTED BY: APPROVED BY:	DATE: DATE: DATE:
---	---	--



5A

Series e-1510

Centrifugal Pumps - Base Mounted

SPECIFICATIONS

FLOW _____ HEAD _____
 HP _____ RPM _____
 VOLTS _____
 CYCLE _____ PHASE _____
 ENCLOSURE _____
 APPROX. WEIGHT _____
 SPECIALS _____

Note: Equipped with NEOPRENE coupling

MATERIALS OF CONSTRUCTION

☒ STAINLESS STEEL FITTED

FEATURES


- ☐ i-ALERT™ Condition Monitor
- ☒ ANSI/OSHA Coupling Guard
- ☒ Center Drop Out Spacer Coupling
- ☒ Fabricated Heavy Duty Baseplate

MAXIMUM WORKING PRESSURE

- ☐ 175 psi (12 bar) W.P.
w/125# ANSI flange drilling
- ☐ 250 psi (17 bar) W.P.
w/250# ANSI flange drilling
(requires 1510-S)

TYPE OF SEAL

- ☐ Standard Seal
(Buna-Carbon/Ceramic)
- ☐ -F Standard Seal w/ Flush Line
(Buna-Carbon/Ceramic)
- ☐ -S Stuffing Box Construction w/ Flushed
Mechanical Single Seal
(EPR-Tungsten Carbide/Carbon)
- ☐ -PF Stuffing Box Construction w/ Packing
(Graphite Impregnated Teflon)

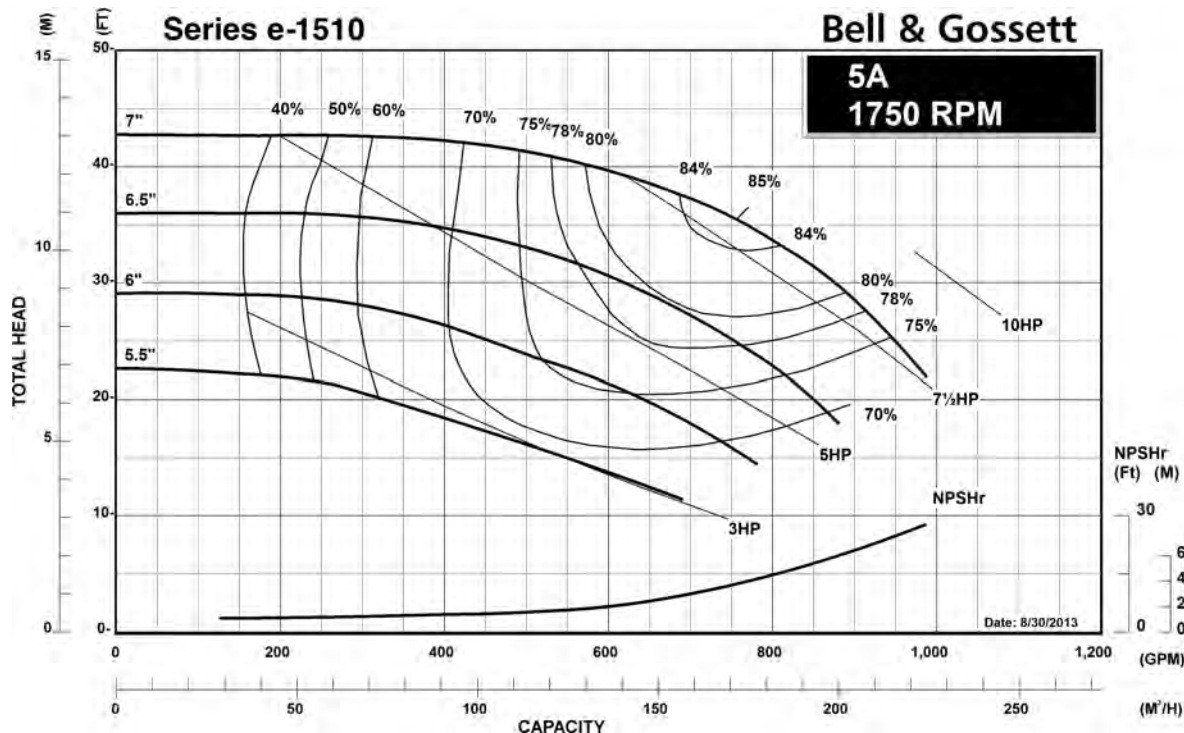

JOB:

REPRESENTATIVE:

UNIT TAG:

ORDER NO.

DATE:

ENGINEER:


SUBMITTED BY:

DATE:

CONTRACTOR:

APPROVED BY:

DATE:



5A Series e-1510 Centrifugal Pumps - Base Mounted

SPECIFICATIONS

FLOW _____ HEAD _____

HP _____ RPM _____

VOLTS _____

CYCLE _____ PHASE _____

ENCLOSURE _____

APPROX. WEIGHT _____

SPECIALS _____

Note: Equipped with NEOPRENE coupling

MATERIALS OF CONSTRUCTION

☒ STAINLESS STEEL FITTED

FEATURES


- ☐ i-ALERT™ Condition Monitor
- ☒ ANSI/OSHA Coupling Guard
- ☒ Center Drop Out Spacer Coupling
- ☒ Fabricated Heavy Duty Baseplate


MAXIMUM WORKING PRESSURE

- ☐ 175 psi (12 bar) W.P.
w/125# ANSI flange drilling
- ☐ 250 psi (17 bar) W.P.
w/250# ANSI flange drilling
(requires 1510-S)

TYPE OF SEAL

- ☐ Standard Seal
(Buna-Carbon/Ceramic)
- ☐ -F Standard Seal w/ Flush Line
(Buna-Carbon/Ceramic)
- ☐ -S Stuffing Box Construction w/ Flushed
Mechanical Single Seal
(EPR-Tungsten Carbide/Carbon)
- ☐ -PF Stuffing Box Construction w/ Packing
(Graphite Impregnated Teflon)

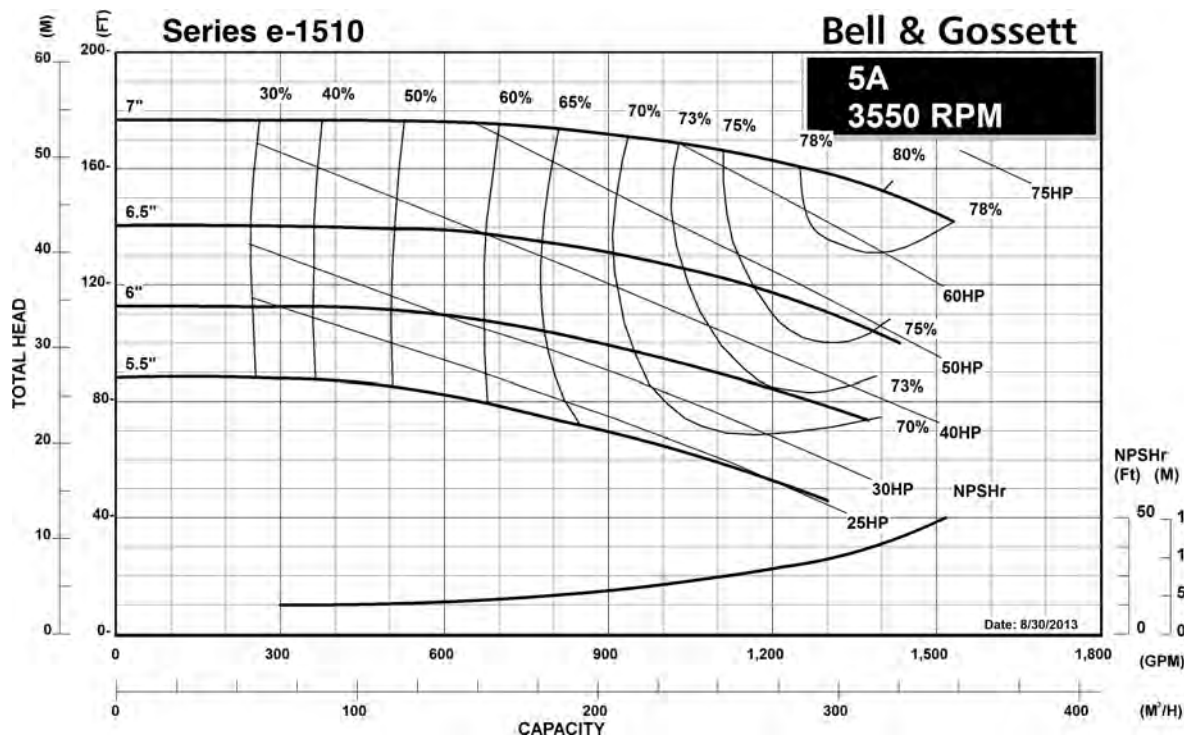

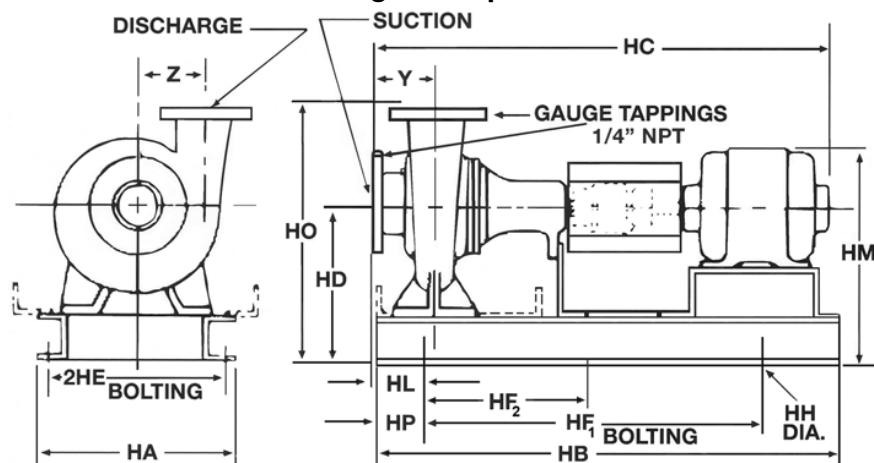

FLANGE DIMENSIONS IN INCHES (MM)			
	SIZE	THICKNESS	O.D.
Discharge	5" (35)	1-3/8 (35)	10-3/4 (273)
Suction	6" (152)	1-7/16 (37)	12-1/8 (308)

FLANGES ARE 125# ANSI - STANDARD
250# ANSI - AVAILABLE

DIMENSIONS - Inches (mm)

STANDARD SEAL

MOTOR FRAME	HA	HB	HC MAX	HD	2HE	HF ₁	HF ₂	HH	HL	HM MAX	HO	HP	Y	Z
"S" FRAME														
182T	14-5/8 (371)	31 (787)	36-1/4 (921)	12-3/4 (324)	12-7/8 (327)	25 (635)	-	3/4 (19)	5-3/4 (146)	18 (457)	21-1/4 (540)	3 (76)	5-13/16 (148)	6-1/4 (159)
184T	14-5/8 (371)	31 (787)	37 (940)	12-3/4 (324)	12-7/8 (327)	25 (635)	-	3/4 (19)	5-3/4 (146)	18 (457)	21-1/4 (540)	3 (76)	5-13/16 (148)	6-1/4 (159)
213T	14-5/8 (371)	34-5/8 (879)	39-1/2 (1003)	12-3/4 (324)	12-7/8 (327)	28-5/8 (727)	-	3/4 (19)	5-3/4 (146)	18-5/8 (473)	21-1/4 (540)	3 (76)	5-13/16 (148)	6-1/4 (159)
215T	14-5/8 (371)	34-5/8 (879)	41 (1041)	12-3/4 (324)	12-7/8 (327)	28-5/8 (727)	-	3/4 (19)	5-3/4 (146)	18-5/8 (473)	21-1/4 (540)	3 (76)	5-13/16 (148)	6-1/4 (159)
"L" FRAME														
254T	16 (406)	46-1/2 (1181)	49-1/8 (1248)	14 (356)	14 (356)	36-1/2 (927)	18-1/4 (464)	7/8 (22)	6-7/8 (175)	20-7/8 (530)	22-1/2 (572)	5 (127)	5-13/16 (148)	6-1/4 (159)
256T	16 (406)	46-1/2 (1181)	50-7/8 (1292)	14 (356)	14 (356)	36-1/2 (927)	18-1/4 (464)	7/8 (22)	6-7/8 (175)	20-7/8 (530)	22-1/2 (572)	5 (127)	5-13/16 (148)	6-1/4 (159)
284TS	16 (406)	46-1/2 (1181)	50-1/4 (1276)	14 (356)	14 (356)	36-1/2 (927)	18-1/4 (464)	7/8 (22)	6-7/8 (175)	22 (559)	22-1/2 (572)	5 (127)	5-13/16 (148)	6-1/4 (159)
286TS	16 (406)	46-1/2 (1181)	51-3/4 (1314)	14 (356)	14 (356)	36-1/2 (927)	18-1/4 (464)	7/8 (22)	6-7/8 (175)	22 (559)	22-1/2 (572)	5 (127)	5-13/16 (148)	6-1/4 (159)
324TS	16 (406)	51-3/4 (1314)	53-5/8 (1362)	14 (356)	14 (356)	41-3/4 (1060)	20-7/8 (530)	7/8 (22)	6-7/8 (175)	23-1/8 (587)	22-1/2 (572)	5 (127)	5-13/16 (148)	6-1/4 (159)
326TS	16 (406)	51-3/4 (1314)	55-3/8 (1407)	14 (356)	14 (356)	41-3/4 (1060)	20-7/8 (530)	7/8 (22)	6-7/8 (175)	23-1/8 (587)	22-1/2 (572)	5 (127)	5-13/16 (148)	6-1/4 (159)
364TS	16 (406)	51-3/4 (1314)	57 (1448)	14 (356)	14 (356)	41-3/4 (1060)	20-7/8 (530)	7/8 (22)	6-7/8 (175)	24-1/4 (616)	22-1/2 (572)	5 (127)	5-13/16 (148)	6-1/4 (159)

STUFFING BOX


MOTOR FRAME	HA	HB	HC MAX	HD	2HE	HF ₁	HF ₂	HH	HL	HM MAX	HO	HP	Y	Z
"S" FRAME														
182T	14-5/8 (371)	34-5/8 (879)	39-3/4 (1010)	12-3/4 (324)	12-7/8 (327)	28-5/8 (727)	-	3/4 (19)	5-3/4 (146)	18 (457)	21-1/4 (540)	3 (76)	5-13/16 (148)	6-1/4 (159)
184T	14-5/8 (371)	34-5/8 (879)	37 (940)	12-3/4 (324)	12-7/8 (327)	28-5/8 (727)	-	3/4 (19)	5-3/4 (146)	18 (457)	21-1/4 (540)	3 (76)	5-13/16 (148)	6-1/4 (159)
213T	14-5/8 (371)	39-3/8 (1000)	43-1/8 (1095)	12-3/4 (324)	12-7/8 (327)	33-3/8 (848)	-	3/4 (19)	5-3/4 (146)	18-5/8 (473)	21-1/4 (540)	3 (76)	5-13/16 (148)	6-1/4 (159)
215T	14-5/8 (371)	39-3/8 (1000)	44-5/8 (1133)	12-3/4 (324)	12-7/8 (327)	33-3/8 (848)	-	3/4 (19)	5-3/4 (146)	18-5/8 (473)	21-1/4 (540)	3 (76)	5-13/16 (148)	6-1/4 (159)
"L" FRAME														
254T	16 (406)	51-3/4 (1314)	51-1/2 (1308)	14 (356)	14 (356)	41-3/4 (1060)	20-7/8 (530)	7/8 (22)	6-7/8 (174)	20-7/8 (530)	22-1/2 (572)	5 (127)	5-13/16 (148)	6-1/4 (159)
256T	16 (406)	51-3/4 (1314)	53-1/4 (1353)	14 (356)	14 (356)	41-3/4 (1060)	20-7/8 (530)	7/8 (22)	6-7/8 (174)	20-7/8 (530)	22-1/2 (572)	5 (127)	5-13/16 (148)	6-1/4 (159)
284TS	16 (406)	51-3/4 (1314)	52-5/8 (1337)	14 (356)	14 (356)	41-3/4 (1060)	20-7/8 (530)	7/8 (22)	6-7/8 (174)	22 (559)	22-1/2 (572)	5 (127)	5-13/16 (148)	6-1/4 (159)
286TS	16 (406)	51-3/4 (1314)	54-1/8 (1375)	14 (356)	14 (356)	41-3/4 (1060)	20-7/8 (530)	7/8 (22)	6-7/8 (174)	22 (559)	22-1/2 (572)	5 (127)	5-13/16 (148)	6-1/4 (159)
324TS	16 (406)	51-3/4 (1314)	56 (1422)	14 (356)	14 (356)	41-3/4 (1060)	20-7/8 (530)	7/8 (22)	6-7/8 (174)	23-1/8 (587)	22-1/2 (572)	5 (127)	5-13/16 (148)	6-1/4 (159)
326TS	16 (406)	51-3/4 (1314)	57-3/4 (1467)	14 (356)	14 (356)	41-3/4 (1060)	20-7/8 (530)	7/8 (22)	6-7/8 (174)	23-1/8 (587)	22-1/2 (572)	5 (127)	5-13/16 (148)	6-1/4 (159)
364TS	16 (406)	51-3/4 (1314)	59-3/8 (1508)	14 (356)	14 (356)	41-3/4 (1060)	20-7/8 (530)	7/8 (22)	6-7/8 (174)	24-1/4 (616)	22-1/2 (572)	5 (127)	5-13/16 (148)	6-1/4 (159)

Dimensions are subject to change. Not to be used for construction purposes unless certified.

Xylem Inc.
8200 N. Austin Avenue
Morton Grove, IL 60053
Phone: (847)966-3700
Fax: (847)965-8379
www.bellgossett.com

xylem
Let's Solve Water

JOB: UNIT TAG: ENGINEER: CONTRACTOR:	REPRESENTATIVE: ORDER NO. SUBMITTED BY: APPROVED BY:	DATE: DATE: DATE:
---	---	--



5BD

Series e-1510

Centrifugal Pumps - Base Mounted

SPECIFICATIONS

FLOW _____ HEAD _____
 HP _____ RPM _____
 VOLTS _____
 CYCLE _____ PHASE _____
 ENCLOSURE _____
 APPROX. WEIGHT _____
 SPECIALS _____

Note: Equipped with NEOPRENE coupling

MATERIALS OF CONSTRUCTION

☒ STAINLESS STEEL FITTED

FEATURES


- ☐ i-ALERT™ Condition Monitor
- ☒ ANSI/OSHA Coupling Guard
- ☒ Center Drop Out Spacer Coupling
- ☒ Fabricated Heavy Duty Baseplate

MAXIMUM WORKING PRESSURE


- ☐ 175 psi (12 bar) W.P.
w/125# ANSI flange drilling
- ☐ 250 psi (17 bar) W.P.
w/250# ANSI flange drilling
(requires 1510-S)

TYPE OF SEAL

- ☐ Standard Seal
(Buna-Carbon/Ceramic)
- ☐ -F Standard Seal w/ Flush Line
(Buna-Carbon/Ceramic)
- ☐ -S Stuffing Box Construction w/ Flushed
Mechanical Single Seal
(EPR-Tungsten Carbide/Carbon)
- ☐ -PF Stuffing Box Construction w/ Packing
(Graphite Impregnated Teflon)

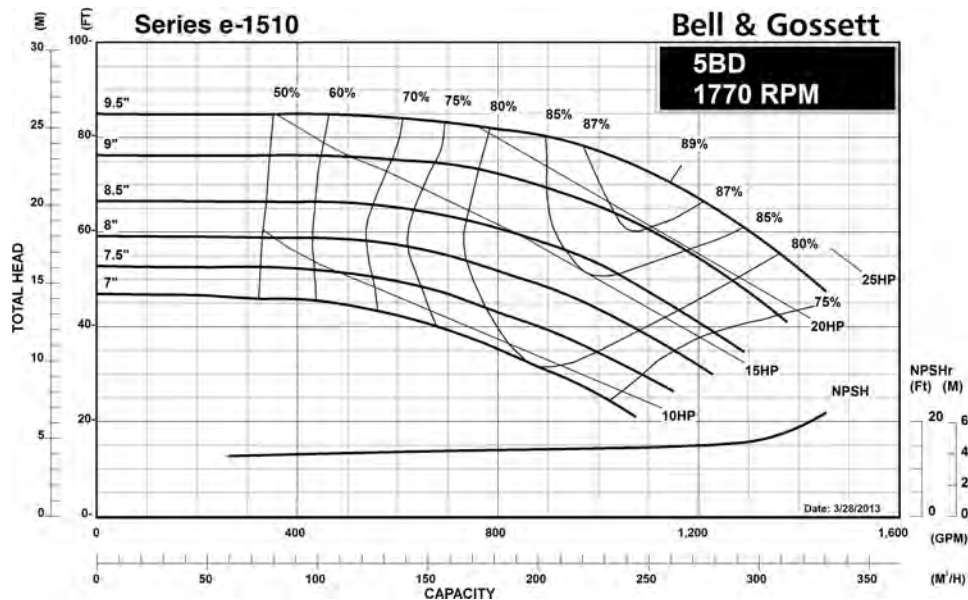

JOB: UNIT TAG: ENGINEER: CONTRACTOR:	REPRESENTATIVE: ORDER NO. SUBMITTED BY: APPROVED BY:	DATE: DATE: DATE:
---	---	--



5BD

Series e-1510

Centrifugal Pumps - Base Mounted

SPECIFICATIONS

FLOW _____ HEAD _____

HP _____ RPM _____

VOLTS _____

CYCLE _____ PHASE _____

ENCLOSURE _____

APPROX. WEIGHT _____

SPECIALS _____

Note: Equipped with NEOPRENE coupling

MATERIALS OF CONSTRUCTION

☒ STAINLESS STEEL FITTED

FEATURES


- ☐ i-ALERT™ Condition Monitor
- ☒ ANSI/OSHA Coupling Guard
- ☒ Center Drop Out Spacer Coupling
- ☒ Fabricated Heavy Duty Baseplate


MAXIMUM WORKING PRESSURE

- ☐ 175 psi (12 bar) W.P.
w/125# ANSI flange drilling
- ☐ 250 psi (17 bar) W.P.
w/250# ANSI flange drilling
(requires 1510-S)

TYPE OF SEAL

- ☐ Standard Seal
(Buna-Carbon/Ceramic)
- ☐ -F Standard Seal w/ Flush Line
(Buna-Carbon/Ceramic)
- ☐ -S Stuffing Box Construction w/ Flushed
Mechanical Single Seal
(EPR-Tungsten Carbide/Carbon)
- ☐ -PF Stuffing Box Construction w/ Packing
(Graphite Impregnated Teflon)

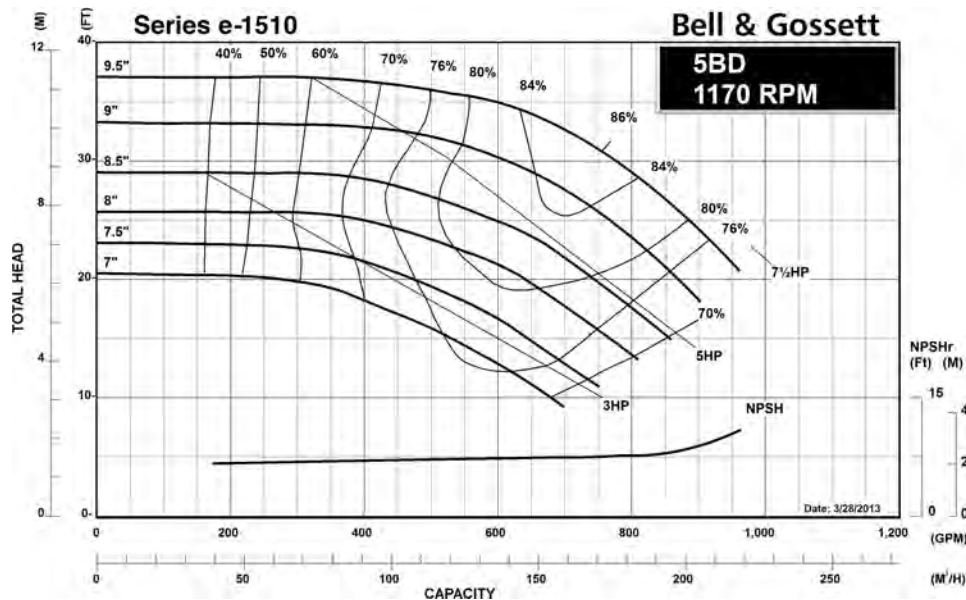

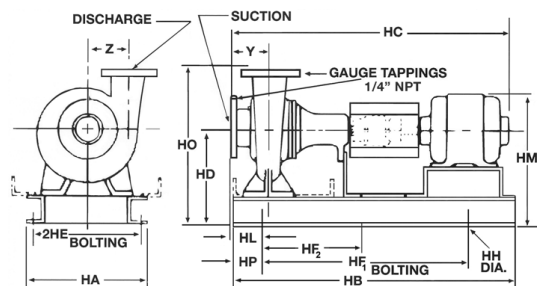

FLANGE DIMENSIONS IN INCHES (MM)			
	SIZE	THICKNESS	O.D.
Discharge	5" (127)	1-3/8" (35)	10-3/4" (273)
Suction	6" (152)	1-7/16" (37)	12-1/8" (308)

FLANGES ARE 125# ANSI - STANDARD

250# ANSI - AVAILABLE

DIMENSIONS - Inches (mm)

STANDARD SEAL

MOTOR FRAME	HA	HB	HC MAX	HD	2HE	HF ₁	HF ₂	HH	HL	HM MAX	HO	HP	Y	Z
"S" FRAME														
213T	16 (406)	46-1/2 (1181)	39-1/8 (994)	15 (381)	14 (356)	36-1/2 (927)	18-1/4 (464)	7/8 (22)	4-9/16 (116)	20-7/8 (530)	25 (635)	5 (127)	6 (152)	7-1/2 (190)
215T	16 (406)	46-1/2 (1181)	40-5/8 (1032)	15 (381)	14 (356)	36-1/2 (927)	18-1/4 (464)	7/8 (22)	4-9/16 (116)	20-7/8 (530)	25 (635)	5 (127)	6 (152)	7-1/2 (190)
254T	16 (406)	46-1/2 (1181)	44-3/8 (1127)	15 (381)	14 (356)	36-1/2 (927)	18-1/4 (464)	7/8 (22)	4-9/16 (116)	21-7/8 (556)	25 (635)	5 (127)	6 (152)	7-1/2 (190)
"L" FRAME														
256T	16 (406)	46-1/2 (1181)	50-1/2 (1283)	15 (381)	14 (356)	36-1/2 (927)	18-1/4 (464)	7/8 (22)	6-7/16 (164)	21-7/8 (556)	25 (635)	5 (127)	6 (152)	7-1/2 (190)
284T	16 (406)	51-3/4 (1314)	51-1/8 (1299)	15 (381)	14 (356)	41-3/4 (1060)	20-7/8 (530)	7/8 (22)	6-7/16 (164)	23 (584)	25 (635)	5 (127)	6 (152)	7-1/2 (190)

STUFFING BOX

MOTOR FRAME	HA	HB	HC MAX	HD	2HE	HF ₁	HF ₂	HH	HL	HM MAX	HO	HP	Y	Z
"L" FRAME														
213T	16 (406)	46-1/2 (1181)	45-7/8 (1165)	15 (381)	14 (356)	36-1/2 (927)	18-1/4 (464)	7/8 (22)	6-7/16 (163)	20-7/8 (530)	25 (635)	5 (127)	6 (152)	7-1/2 (190)
215T	16 (406)	46-1/2 (1181)	47-3/8 (1203)	15 (381)	14 (356)	36-1/2 (927)	18-1/4 (464)	7/8 (22)	6-7/16 (163)	20-7/8 (530)	25 (635)	5 (127)	6 (152)	7-1/2 (190)
254T	16 (406)	51-3/4 (1314)	51-1/8 (1298)	15 (381)	14 (356)	41-3/4 (1060)	20-7/8 (530)	7/8 (22)	6-7/16 (163)	21-7/8 (555)	25 (635)	5 (127)	6 (152)	7-1/2 (190)
256T	16 (406)	51-3/4 (1314)	52-7/8 (1343)	15 (381)	14 (356)	41-3/4 (1060)	20-7/8 (530)	7/8 (22)	6-7/16 (163)	21-7/8 (555)	25 (635)	5 (127)	6 (152)	7-1/2 (190)
284T	16 (406)	51-3/4 (1314)	53-5/8 (1362)	15 (381)	14 (356)	41-3/4 (1060)	20-7/8 (530)	7/8 (22)	6-7/16 (163)	23 (584)	25 (635)	5 (127)	6 (152)	7-1/2 (190)


Dimensions are subject to change. Not to be used for construction purposes unless certified.

Xylem Inc.
8200 N. Austin Avenue
Morton Grove, IL 60053
Phone: (847)966-3700
Fax: (847)965-8379
www.bellgossett.com

xylem
Let's Solve Water

Bell & Gossett is a trademark of Xylem Inc. or one of its subsidiaries.
© 2013 Xylem Inc.

JOB: UNIT TAG: ENGINEER: CONTRACTOR:	REPRESENTATIVE: ORDER NO. SUBMITTED BY: APPROVED BY:	DATE: DATE: DATE:
---	---	--



5EB

Series e-1510

Centrifugal Pumps - Base Mounted

SPECIFICATIONS

FLOW _____ HEAD _____

HP _____ RPM _____

VOLTS _____

CYCLE _____ PHASE _____

ENCLOSURE _____

APPROX. WEIGHT _____

SPECIALS _____

Note: Equipped with NEOPRENE coupling

MATERIALS OF CONSTRUCTION

☒ Stainless Steel Fitted

FEATURES


- ☐ i-ALERT™ Condition Monitor
- ☒ ANSI/OSHA Coupling Guard
- ☒ Center Drop Out Spacer Coupling
- ☒ Fabricated Heavy Duty Baseplate

MAXIMUM WORKING PRESSURE


- ☐ 175 psi (12 bar) W.P.
w/ 125# ANSI flange drilling
- ☐ 250 psi (17 bar) W.P.
w/250# ANSI flange drilling
(requires 1510-S)

TYPE OF SEAL

- ☐ Standard Seal
(Buna-Carbon/Ceramic)
- ☐ -F Standard Seal w/ Flush Line
(Buna-Carbon/Ceramic)
- ☐ -S Stuffing Box Construction w/ Flushed
Mechanical Single Seal
(EPR-Tungsten Carbide/Carbon)
- ☐ -PF Stuffing Box Construction w/ Packing
(Graphite Impregnated Teflon)

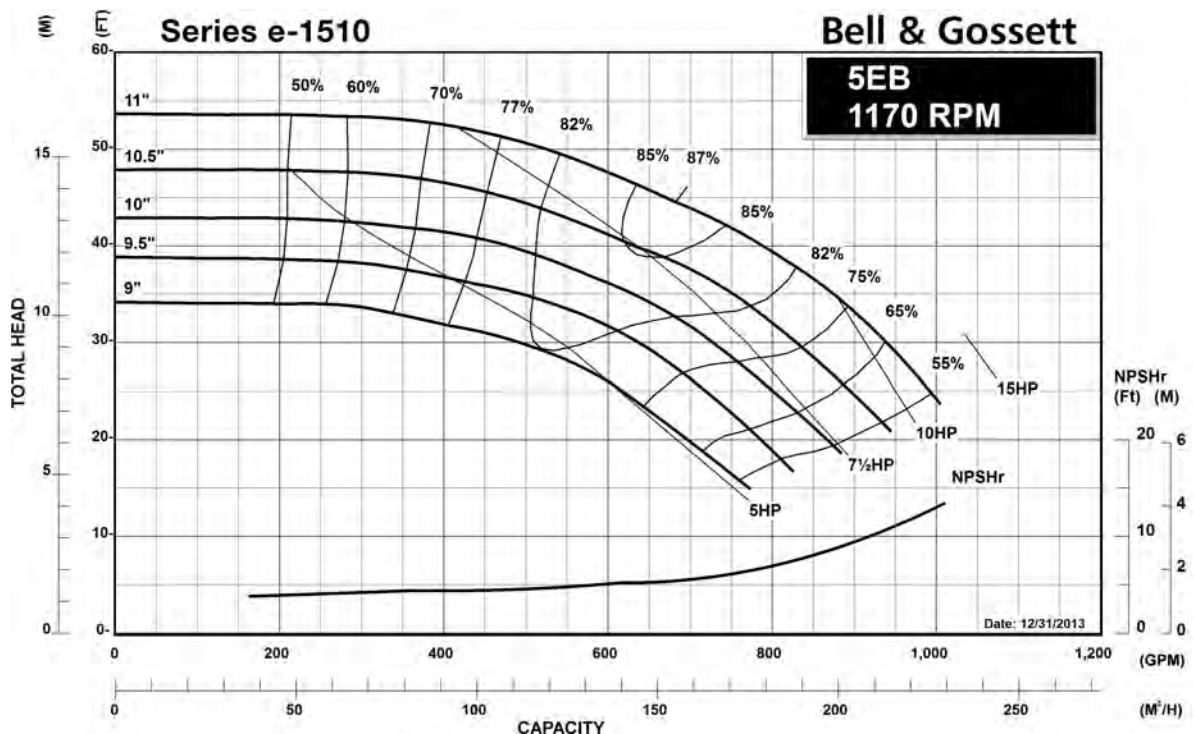

JOB: UNIT TAG: ENGINEER: CONTRACTOR:	REPRESENTATIVE: ORDER NO. SUBMITTED BY: APPROVED BY:	DATE: DATE: DATE:
---	---	--



5EB

Series e-1510

Centrifugal Pumps - Base Mounted

SPECIFICATIONS

FLOW _____ HEAD _____

HP _____ RPM _____

VOLTS _____

CYCLE _____ PHASE _____

ENCLOSURE _____

APPROX. WEIGHT _____

SPECIALS _____

Note: Equipped with NEOPRENE coupling

MATERIALS OF CONSTRUCTION

☒ Stainless Steel Fitted

FEATURES


- ☐ i-ALERT™ Condition Monitor
- ☒ ANSI/OSHA Coupling Guard
- ☒ Center Drop Out Spacer Coupling
- ☒ Fabricated Heavy Duty Baseplate


MAXIMUM WORKING PRESSURE

- ☐ 175 psi (12 bar) W.P.
w/ 125# ANSI flange drilling
- ☐ 250 psi (17 bar) W.P.
w/250# ANSI flange drilling
(requires 1510-S)

TYPE OF SEAL

- ☐ Standard Seal
(Buna-Carbon/Ceramic)
- ☐ -F Standard Seal w/ Flush Line
(Buna-Carbon/Ceramic)
- ☐ -S Stuffing Box Construction w/ Flushed
Mechanical Single Seal
(EPR-Tungsten Carbide/Carbon)
- ☐ -PF Stuffing Box Construction w/ Packing
(Graphite Impregnated Teflon)

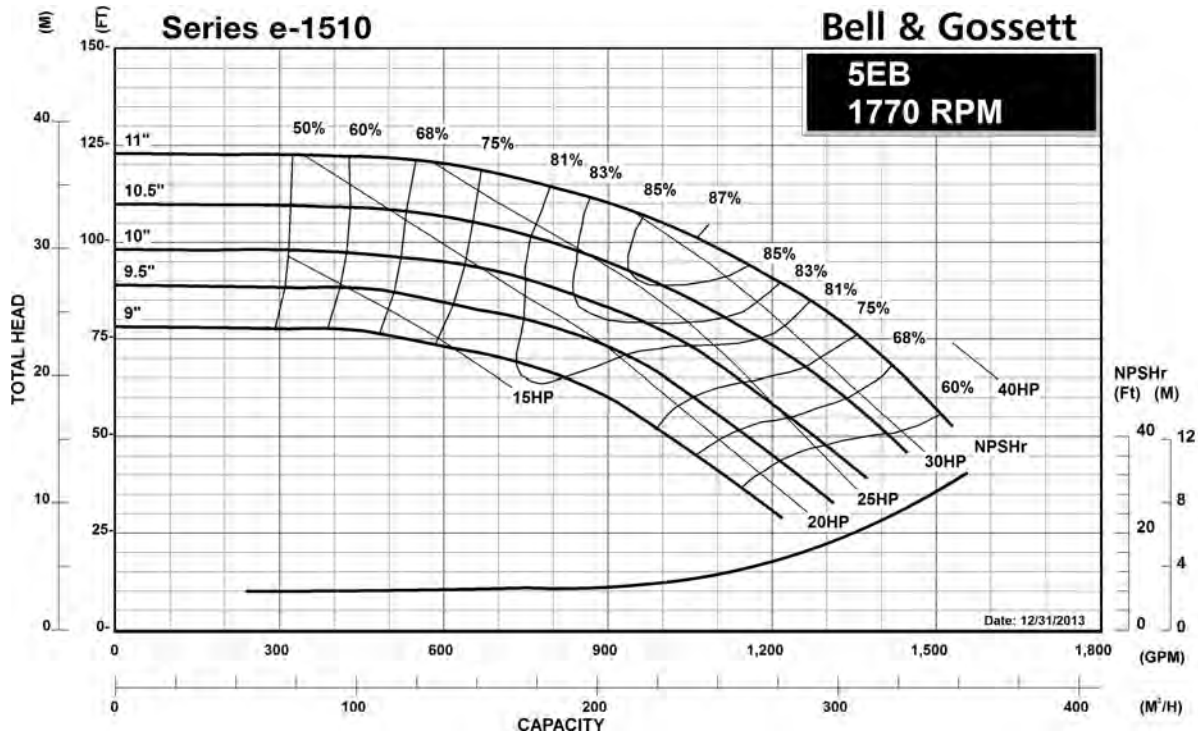

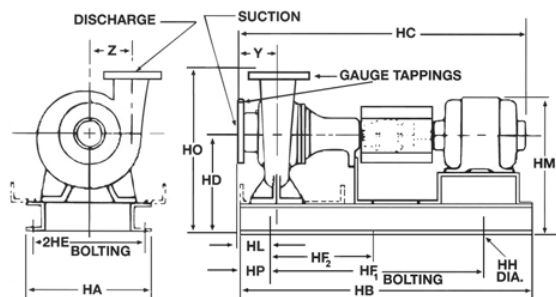

FLANGE DIMENSIONS IN INCHES (MM)			
	SIZE	THICKNESS	O.D.
Discharge	5" (127)	1-3/8" (35)	10-3/4" (273)
Suction	6" (152)	1-7/16" (37)	12-1/8" (308)

MAXIMUM WORKING PRESSURE 250 PSI

FLANGES ARE 125# ANSI - STANDARD

250# ANSI - AVAILABLE

DIMENSIONS - Inches (mm)

STANDARD SEAL

MOTOR FRAME	HA	HB	HC MAX	HD	2HE	HF ₁	HF ₂	HH	HL	HM MAX	HO	HP	Y	Z
	"L" FRAME													
254T	16 (406)	46-1/2 (1181)	46-3/4 (1187)	15 (381)	14 (356)	36-1/2 (927)	18-1/4 (464)	7/8 (22)	4-7/16 (113)	21-7/8 (556)	25-1/2 (648)	5 (127)	5-7/16 (138)	7-15/16 (202)
256T	16 (406)	46-1/2 (1181)	48-1/2 (1232)	15 (381)	14 (356)	36-1/2 (927)	18-1/4 (464)	7/8 (22)	4-7/16 (113)	21-7/8 (556)	25-1/2 (648)	5 (127)	5-7/16 (138)	7-15/16 (202)
284T	16 (406)	51-3/4 (1314)	49-1/4 (1251)	15 (381)	14 (356)	41-3/4 (1060)	20-7/8 (530)	7/8 (22)	4-7/16 (113)	23 (584)	25-1/2 (648)	5 (127)	5-7/16 (138)	7-15/16 (202)
286T	16 (406)	51-3/4 (1314)	50-3/4 (1289)	15 (381)	14 (356)	41-3/4 (1060)	20-7/8 (530)	7/8 (22)	4-7/16 (113)	23 (584)	25-1/2 (648)	5 (127)	5-7/16 (138)	7-15/16 (202)
324T	16 (406)	51-3/4 (1314)	53 (1346)	15 (381)	14 (356)	41-3/4 (1060)	20-7/8 (530)	7/8 (22)	4-7/16 (113)	24-1/8 (613)	25-1/2 (648)	5 (127)	5-7/16 (138)	7-15/16 (202)

STUFFING BOX

MOTOR FRAME	HA	HB	HC MAX	HD	2HE	HF ₁	HF ₂	HH	HL	HM MAX	HO	HP	Y	Z
	"L" FRAME													
254T	16 (406)	51-3/4 (1314)	49-1/8 (1248)	15 (381)	14 (356)	41-3/4 (1060)	20-7/8 (530)	7/8 (22)	4-7/16 (113)	21-7/8 (555)	25-1/2 (648)	5 (127)	5-7/16 (138)	7-15/16 (202)
256T	16 (406)	51-3/4 (1314)	50-7/8 (1292)	15 (381)	14 (356)	41-3/4 (1060)	20-7/8 (530)	7/8 (22)	4-7/16 (113)	21-7/8 (555)	25-1/2 (648)	5 (127)	5-7/16 (138)	7-15/16 (202)
284T	16 (406)	51-3/4 (1314)	51-5/8 (1311)	15 (381)	14 (356)	41-3/4 (1060)	20-7/8 (530)	7/8 (22)	4-7/16 (113)	23 (584)	25-1/2 (648)	5 (127)	5-7/16 (138)	7-15/16 (202)
286T	16 (406)	51-3/4 (1314)	53-1/8 (1349)	15 (381)	14 (356)	41-3/4 (1060)	20-7/8 (530)	7/8 (22)	4-7/16 (113)	23 (584)	25-1/2 (648)	5 (127)	5-7/16 (138)	7-15/16 (202)
324T	16 (406)	51-3/4 (1314)	55-3/8 (1407)	15 (381)	14 (356)	41-3/4 (1060)	20-7/8 (530)	7/8 (22)	4-7/16 (113)	24-1/8 (613)	25-1/2 (648)	5 (127)	5-7/16 (138)	7-15/16 (202)

Dimensions are subject to change. Not to be used for construction purposes unless certified.

Xylem Inc.
8200 N. Austin Avenue
Morton Grove, IL 60053
Phone: (847)966-3700
Fax: (847)965-8379
www.bellgossett.com

xylem
Let's Solve Water

Bell & Gossett is a trademark of Xylem Inc. or one of its subsidiaries.
© 2013 Xylem Inc.

JOB:

REPRESENTATIVE:

UNIT TAG:

ORDER NO.

DATE:

ENGINEER:


SUBMITTED BY:

DATE:

CONTRACTOR:

APPROVED BY:

DATE:



5GB Series e-1510 Centrifugal Pumps - Base Mounted

SPECIFICATIONS

FLOW _____ HEAD _____

HP _____ RPM _____

VOLTS _____

CYCLE _____ PHASE _____

ENCLOSURE _____

APPROX. WEIGHT _____

SPECIALS _____

Note: Equipped with NEOPRENE coupling

MATERIALS OF CONSTRUCTION

☒ STAINLESS STEEL FITTED

FEATURES


- ☐ i-ALERT™ Condition Monitor
- ☒ ANSI/OSHA Coupling Guard
- ☒ Center Drop Out Spacer Coupling
- ☒ Fabricated Heavy Duty Baseplate

MAXIMUM WORKING PRESSURE

- ☐ 175 psi (12 bar) W.P.
w/125# ANSI flange drilling
- ☐ 250 psi (17 bar) W.P.
w/250# ANSI flange drilling
(requires 1510-S)

TYPE OF SEAL

- ☐ Standard Seal
(Buna-Carbon/Ceramic)
- ☐ -F Standard Seal w/ Flush Line
(Buna-Carbon/Ceramic)
- ☐ -S Stuffing Box Construction w/ Flushed
Mechanical Single Seal
(EPR-Tungsten Carbide/Carbon)
- ☐ -PF Stuffing Box Construction w/ Packing
(Graphite Impregnated Teflon)

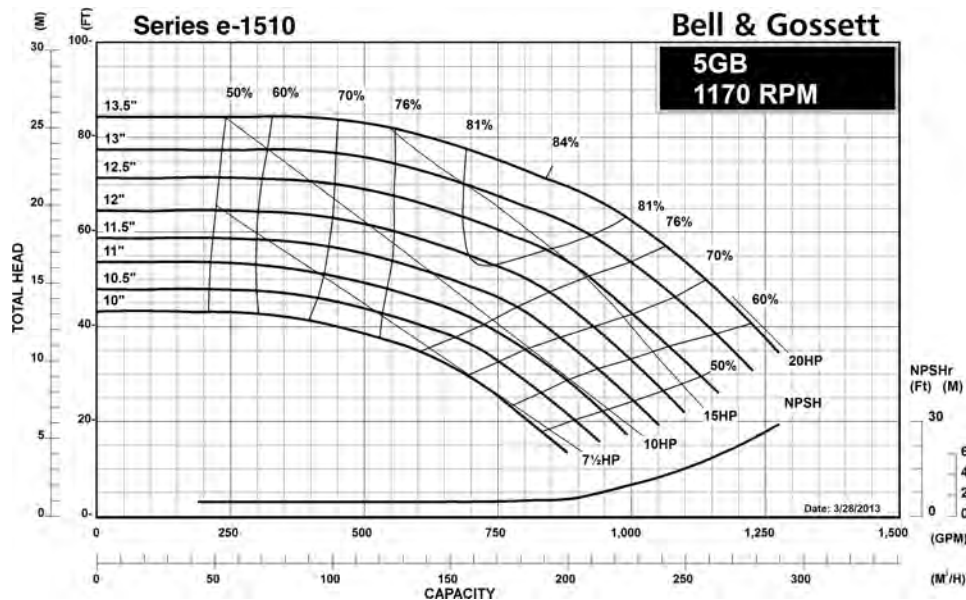

JOB:

REPRESENTATIVE:

UNIT TAG:

ORDER NO.

DATE:

ENGINEER:


SUBMITTED BY:

DATE:

CONTRACTOR:

APPROVED BY:

DATE:



5GB Series e-1510 Centrifugal Pumps - Base Mounted

SPECIFICATIONS

FLOW _____ HEAD _____

HP _____ RPM _____

VOLTS _____

CYCLE _____ PHASE _____

ENCLOSURE _____

APPROX. WEIGHT _____

SPECIALS _____

Note: Equipped with NEOPRENE coupling

MATERIALS OF CONSTRUCTION

☒ STAINLESS STEEL FITTED

FEATURES


- ☐ i-ALERT™ Condition Monitor
- ☒ ANSI/OSHA Coupling Guard
- ☒ Center Drop Out Spacer Coupling
- ☒ Fabricated Heavy Duty Baseplate


MAXIMUM WORKING PRESSURE

- ☐ 175 psi (12 bar) W.P.
w/125# ANSI flange drilling
- ☐ 250 psi (17 bar) W.P.
w/250# ANSI flange drilling
(requires 1510-S)

TYPE OF SEAL

- ☐ Standard Seal
(Buna-Carbon/Ceramic)
- ☐ -F Standard Seal w/ Flush Line
(Buna-Carbon/Ceramic)
- ☐ -S Stuffing Box Construction w/ Flushed
Mechanical Single Seal
(EPR-Tungsten Carbide/Carbon)
- ☐ -PF Stuffing Box Construction w/ Packing
(Graphite Impregnated Teflon)

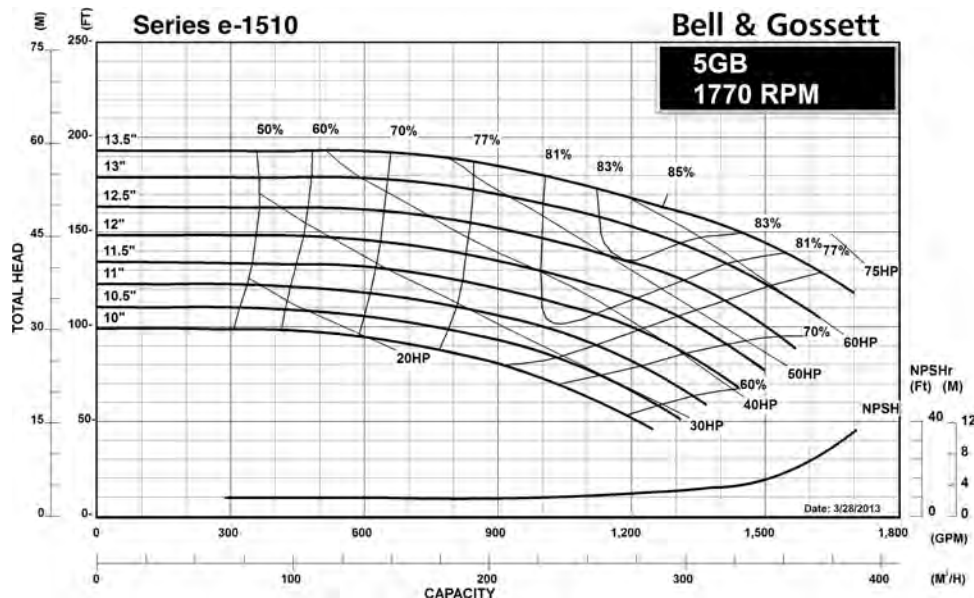

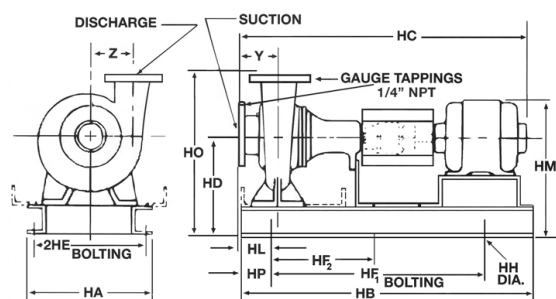

FLANGE DIMENSIONS IN INCHES (MM)			
	SIZE	THICKNESS	O.D.
Discharge	5" (127)	1-3/8 (35)	10-3/4 (273)
Suction	6" (152)	1-7/16 (37)	12-1/8 (308)

FLANGES ARE: 125# ANSI - STANDARD
250# ANSI - AVAILABLE

DIMENSIONS - Inches (mm)

STANDARD SEAL

MOTOR FRAME	HA	HB	HC MAX	HD	2HE	HF ₁	HF ₂	HH	HL	HM MAX	HO	HP	Y	Z
"L" FRAME														
254T	24 (610)	56 (1422)	47-1/8 (1197)	16-1/2 (419)	21-1/2 (546)	44 (1118)	22 (559)	1 (25)	5-7/16 (138)	23-3/8 (594)	29-1/2 (749)	6 (152)	6 (152)	9 (229)
256T	24 (610)	56 (1422)	48-7/8 (1241)	16-1/2 (419)	21-1/2 (546)	44 (1118)	22 (559)	1 (25)	5-7/16 (138)	23-3/8 (594)	29-1/2 (749)	6 (152)	6 (152)	9 (229)
284T	24 (610)	56 (1422)	49-7/8 (1267)	16-1/2 (419)	21-1/2 (546)	44 (1118)	22 (559)	1 (25)	5-7/16 (138)	24-1/2 (622)	29-1/2 (749)	6 (152)	6 (152)	9 (229)
286T	24 (610)	56 (1422)	51-3/8 (1305)	16-1/2 (419)	21-1/2 (546)	44 (1118)	22 (559)	1 (25)	5-7/16 (138)	24-1/2 (622)	29-1/2 (749)	6 (152)	6 (152)	9 (229)
324T	24 (610)	56 (1422)	53-3/8 (1356)	16-1/2 (419)	21-1/2 (546)	44 (1118)	22 (559)	1 (25)	5-7/16 (138)	25-5/8 (651)	29-1/2 (749)	6 (152)	6 (152)	9 (229)
326T	24 (610)	56 (1422)	54-7/8 (1394)	16-1/2 (419)	21-1/2 (546)	44 (1118)	22 (559)	1 (25)	5-7/16 (138)	25-5/8 (651)	29-1/2 (749)	6 (152)	6 (152)	9 (229)
364T	24 (610)	56 (1422)	57-1/8 (1451)	16-1/2 (419)	21-1/2 (546)	44 (1118)	22 (559)	1 (25)	5-7/16 (138)	26-3/4 (679)	29-1/2 (749)	6 (152)	6 (152)	9 (229)
365T	24 (610)	56 (1422)	58-1/8 (1476)	16-1/2 (419)	21-1/2 (546)	44 (1118)	22 (559)	1 (25)	5-7/16 (138)	26-3/4 (679)	29-1/2 (749)	6 (152)	6 (152)	9 (229)

STUFFING BOX

MOTOR FRAME	HA	HB	HC MAX	HD	2HE	HF ₁	HF ₂	HH	HL	HM MAX	HO	HP	Y	Z
"L" FRAME														
254T	24 (610)	56 (1422)	49-1/2 (1257)	16-1/2 (419)	21-1/2 (546)	44 (1118)	22 (559)	1 (25)	5-7/16 (138)	23-3/8 (594)	29-1/2 (749)	6 (152)	6 (152)	9 (229)
256T	24 (610)	56 (1422)	51-1/4 (1302)	16-1/2 (419)	21-1/2 (546)	44 (1118)	22 (559)	1 (25)	5-7/16 (138)	23-3/8 (594)	29-1/2 (749)	6 (152)	6 (152)	9 (229)
284T	24 (610)	56 (1422)	52-1/4 (1327)	16-1/2 (419)	21-1/2 (546)	44 (1118)	22 (559)	1 (25)	5-7/16 (138)	24-1/2 (622)	29-1/2 (749)	6 (152)	6 (152)	9 (229)
286T	24 (610)	56 (1422)	53-3/4 (1365)	16-1/2 (419)	21-1/2 (546)	44 (1118)	22 (559)	1 (25)	5-7/16 (138)	24-1/2 (622)	29-1/2 (749)	6 (152)	6 (152)	9 (229)
324T	24 (610)	56 (1422)	55-3/4 (1416)	16-1/2 (419)	21-1/2 (546)	44 (1118)	22 (559)	1 (25)	5-7/16 (138)	25-5/8 (651)	29-1/2 (749)	6 (152)	6 (152)	9 (229)
326T	24 (610)	56 (1422)	57-1/4 (1454)	16-1/2 (419)	21-1/2 (546)	44 (1118)	22 (559)	1 (25)	5-7/16 (138)	25-5/8 (651)	29-1/2 (749)	6 (152)	6 (152)	9 (229)
364T	24 (610)	56 (1422)	59-1/2 (1511)	16-1/2 (419)	21-1/2 (546)	44 (1118)	22 (559)	1 (25)	5-7/16 (138)	26-3/4 (679)	29-1/2 (749)	6 (152)	6 (152)	9 (229)
365T	24 (610)	56 (1422)	60-1/2 (1537)	16-1/2 (419)	21-1/2 (546)	44 (1118)	22 (559)	1 (25)	5-7/16 (138)	26-3/4 (679)	29-1/2 (749)	6 (152)	6 (152)	9 (229)

Dimensions are subject to change. Not to be used for construction purposes unless certified.

Xylem Inc.
8200 N. Austin Avenue
Morton Grove, IL 60053
Phone: (847)966-3700
Fax: (847)965-8379
www.bellgossett.com

xylem
Let's Solve Water

Bell & Gossett is a trademark of Xylem Inc. or one of its subsidiaries.
© 2013 Xylem Inc.

JOB:

REPRESENTATIVE:

UNIT TAG:

ORDER NO.

DATE:

ENGINEER:


SUBMITTED BY:

DATE:

CONTRACTOR:

APPROVED BY:

DATE:



6BD Series e-1510 Centrifugal Pumps - Base Mounted

SPECIFICATIONS

FLOW _____ HEAD _____

HP _____ RPM _____

VOLTS _____

CYCLE _____ PHASE _____

ENCLOSURE _____

APPROX. WEIGHT _____

SPECIALS _____

Note: Equipped with NEOPRENE coupling

MATERIALS OF CONSTRUCTION

☒ Stainless Steel Fitted

FEATURES


- ☐ i-ALERT™ Condition Monitor
- ☒ ANSI/OSHA Coupling Guard
- ☒ Center Drop Out Spacer Coupling
- ☒ Fabricated Heavy Duty Baseplate

MAXIMUM WORKING PRESSURE


- ☐ 175 psi (12 bar) W.P.
w/ 125# ANSI flange drilling
- ☐ 250 psi (17 bar) W.P.
w/ 250# ANSI flange drilling
(requires 1510-S)

TYPE OF SEAL

- ☐ Standard Seal
(Buna-Carbon/Ceramic)
- ☐ -F Standard Seal w/ Flush Line
(Buna-Carbon/Ceramic)
- ☐ -S Stuffing Box Construction w/ Flushed
Mechanical Single Seal
(EPR-Tungsten Carbide/Carbon)
- ☐ -PF Stuffing Box Construction w/ Packing
(Graphite Impregnated Teflon)

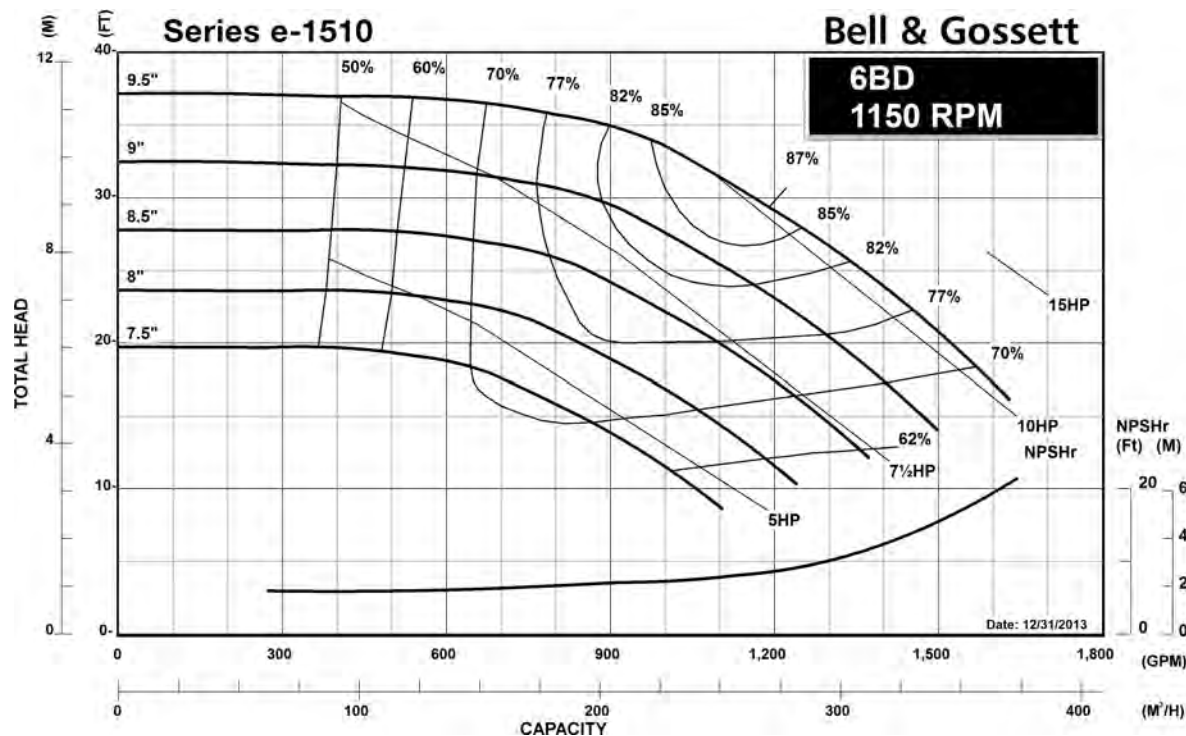

JOB: UNIT TAG: ENGINEER: CONTRACTOR:	REPRESENTATIVE: ORDER NO. SUBMITTED BY: APPROVED BY:	DATE: DATE: DATE:
---	---	--



6BD

Series e-1510

Centrifugal Pumps - Base Mounted

SPECIFICATIONS

FLOW _____ HEAD _____
 HP _____ RPM _____
 VOLTS _____
 CYCLE _____ PHASE _____
 ENCLOSURE _____
 APPROX. WEIGHT _____
 SPECIALS _____

Note: Equipped with NEOPRENE coupling

MATERIALS OF CONSTRUCTION

☒ Stainless Steel Fitted

FEATURES


- ☐ i-ALERT™ Condition Monitor
- ☒ ANSI/OSHA Coupling Guard
- ☒ Center Drop Out Spacer Coupling
- ☒ Fabricated Heavy Duty Baseplate


MAXIMUM WORKING PRESSURE

- ☐ 175 psi (12 bar) W.P.
w/ 125# ANSI flange drilling
- ☐ 250 psi (17 bar) W.P.
w/ 250# ANSI flange drilling
(requires 1510-S)

TYPE OF SEAL

- ☐ Standard Seal
(Buna-Carbon/Ceramic)
- ☐ -F Standard Seal w/ Flush Line
(Buna-Carbon/Ceramic)
- ☐ -S Stuffing Box Construction w/ Flushed
Mechanical Single Seal
(EPR-Tungsten Carbide/Carbon)
- ☐ -PF Stuffing Box Construction w/ Packing
(Graphite Impregnated Teflon)

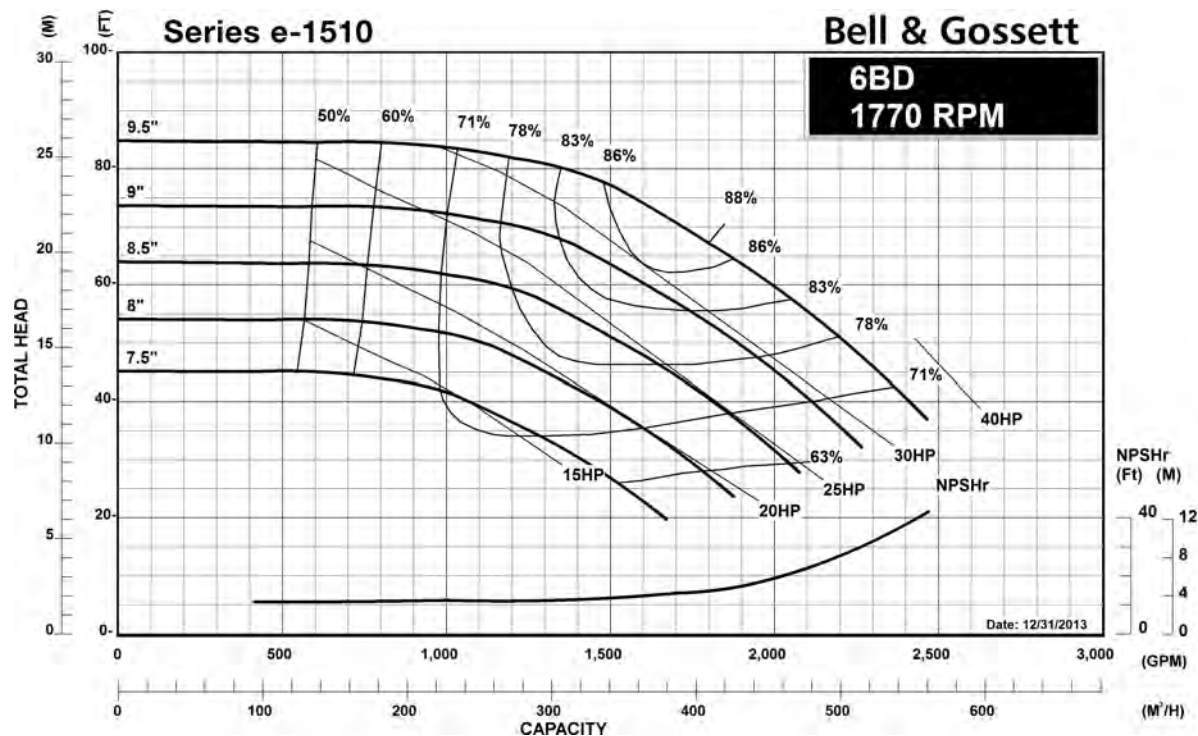

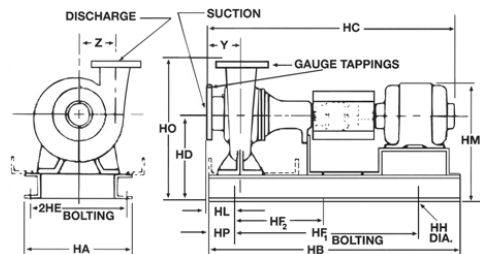

FLANGE DIMENSIONS IN INCHES (MM)			
	SIZE	THICKNESS	O.D.
Discharge	6" (152)	1-7/16" (37))	12-1/8" (308)
Suction	8" (203)	1-5/8" (41)	14-3/4" (375)

FLANGES ARE 125# ANSI - STANDARD
250# ANSI - AVAILABLE

DIMENSIONS - Inches (mm)

STANDARD SEAL

MOTOR FRAME	HA	HB	HC MAX	HD	2HE	HF ₁	HF ₂	HH	HL	HM MAX	HO	HP	Y	Z
	"L" FRAME													
254T	16 (406)	46-1/2 (1181)	50-5/8 (1286)	15 (381)	14 (356)	36-1/2 (927)	18-1/4 (464)	7/8 (22)	8-3/8 (213)	21-7/8 (556)	25-1/2 (648)	5 (127)	7 (178)	8-1/4 (210)
256T	16 (406)	46-1/2 (1181)	52-3/8 (1330)	15 (381)	14 (356)	36-1/2 (927)	18-1/4 (464)	7/8 (22)	8-3/8 (213)	21-7/8 (556)	25-1/2 (648)	5 (127)	7 (178)	8-1/4 (210)
284T	16 (406)	51-3/4 (1314)	53-1/8 (1349)	15 (381)	14 (356)	41-3/4 (1060)	20-7/8 (530)	7/8 (22)	8-3/8 (213)	23 (584)	25-1/2 (648)	5 (127)	7 (178)	8-1/4 (210)
286T	16 (406)	51-3/4 (1314)	54-5/8 (1387)	15 (381)	14 (356)	41-3/4 (1060)	20-7/8 (530)	7/8 (22)	8-3/8 (213)	23 (584)	25-1/2 (648)	5 (127)	7 (178)	8-1/4 (210)
324T	16 (406)	51-3/4 (1314)	56-7/8 (1445)	15 (381)	14 (356)	41-3/4 (1060)	20-7/8 (530)	7/8 (22)	8-3/8 (213)	24-1/8 (613)	25-1/2 (648)	5 (127)	7 (178)	8-1/4 (210)
326T	16 (406)	51-3/4 (1314)	58-3/8 (1483)	15 (381)	14 (356)	41-3/4 (1060)	20-7/8 (530)	7/8 (22)	8-3/8 (213)	24-1/8 (613)	25-1/2 (648)	5 (127)	7 (178)	8-1/4 (210)

STUFFING BOX

MOTOR FRAME	HA	HB	HC MAX	HD	2HE	HF ₁	HF ₂	HH	HL	HM MAX	HO	HP	Y	Z
	"L" FRAME													
254T	16 (406)	51-3/4 (1314)	53 (1346)	15 (381)	14 (356)	41-3/4 (1060)	20-7/8 (530)	7/8 (22)	8-3/8 (213)	21-7/8 (555)	25-1/2 (648)	5 (127)	7 (178)	8-1/4 (210)
256T	16 (406)	51-3/4 (1314)	54-3/4 (1391)	15 (381)	14 (356)	41-3/4 (1060)	20-7/8 (530)	7/8 (22)	8-3/8 (213)	21-7/8 (555)	25-1/2 (648)	5 (127)	7 (178)	8-1/4 (210)
284T	16 (406)	51-3/4 (1314)	55-1/2 (1410)	15 (381)	14 (356)	41-3/4 (1060)	20-7/8 (530)	7/8 (22)	8-3/8 (213)	23 (584)	25-1/2 (648)	5 (127)	7 (178)	8-1/4 (210)
286T	16 (406)	51-3/4 (1314)	57 (1448)	15 (381)	14 (356)	41-3/4 (1060)	20-7/8 (530)	7/8 (22)	8-3/8 (213)	23 (584)	25-1/2 (648)	5 (127)	7 (178)	8-1/4 (210)
324T	16 (406)	51-3/4 (1314)	59-1/4 (1505)	15 (381)	14 (356)	41-3/4 (1060)	20-7/8 (530)	7/8 (22)	8-3/8 (213)	24-1/8 (613)	25-1/2 (648)	5 (127)	7 (178)	8-1/4 (210)
326T	16 (406)	51-3/4 (1314)	60-3/4 (1543)	15 (381)	14 (356)	41-3/4 (1060)	20-7/8 (530)	7/8 (22)	8-3/8 (213)	24-1/8 (613)	25-1/2 (648)	5 (127)	7 (178)	8-1/4 (210)

Dimensions are subject to change. Not to be used for construction purposes unless certified.

Xylem Inc.
8200 N. Austin Avenue
Morton Grove, IL 60053
Phone: (847)966-3700
Fax: (847)965-8379
www.xyleminc.com/brands/bellgossett

xylem
Let's Solve Water

Bell & Gossett is a trademark of Xylem Inc. or one of its subsidiaries.
© 2012 Xylem Inc.

JOB:

REPRESENTATIVE:

UNIT TAG:

ORDER NO.

DATE:

ENGINEER:


SUBMITTED BY:

DATE:

CONTRACTOR:

APPROVED BY:

DATE:



6E Series e-1510 Centrifugal Pumps - Base Mounted

SPECIFICATIONS

FLOW _____ HEAD _____

HP _____ RPM _____

VOLTS _____

CYCLE _____ PHASE _____

ENCLOSURE _____

APPROX. WEIGHT _____

SPECIALS _____

Note: Equipped with NEOPRENE coupling

MATERIALS OF CONSTRUCTION

☒ Stainless Steel Fitted

FEATURES


- ☐ i-ALERT™ Condition Monitor
- ☒ ANSI/OSHA Coupling Guard
- ☒ Center Drop Out Spacer Coupling
- ☒ Fabricated Heavy Duty Baseplate

MAXIMUM WORKING PRESSURE

- ☐ 175 psi (12 bar) W.P.
w/ 125# ANSI flange drilling
- ☐ 250 psi (17 bar) W.P.
w/250# ANSI flange drilling
(requires 1510-S)

TYPE OF SEAL

- ☐ Standard Seal
(Buna-Carbon/Ceramic)
- ☐ -F Standard Seal w/ Flush Line
(Buna-Carbon/Ceramic)
- ☐ -S Stuffing Box Construction w/ Flushed
Mechanical Single Seal
(EPR-Tungsten Carbide/Carbon)
- ☐ -PF Stuffing Box Construction w/ Packing
(Graphite Impregnated Teflon)

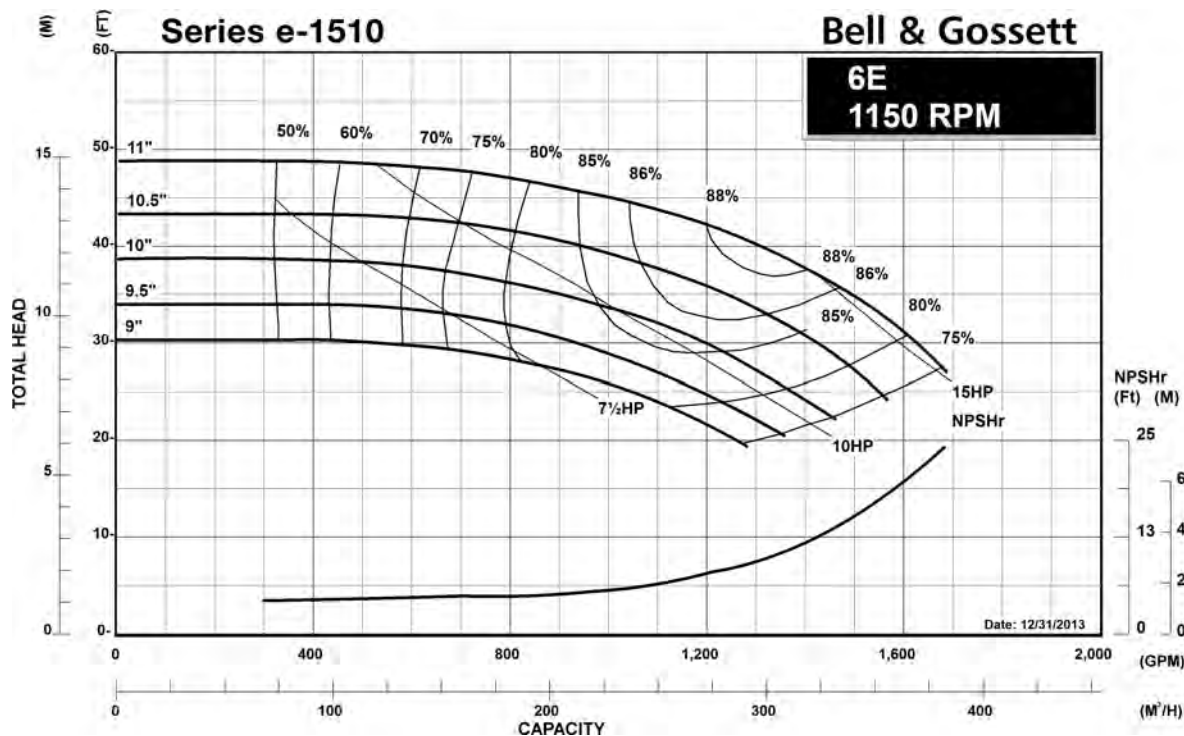

JOB:

REPRESENTATIVE:

UNIT TAG:

ORDER NO.

DATE:

ENGINEER:


SUBMITTED BY:

DATE:

CONTRACTOR:

APPROVED BY:

DATE:



6E Series e-1510 Centrifugal Pumps - Base Mounted

SPECIFICATIONS

FLOW _____ HEAD _____

HP _____ RPM _____

VOLTS _____

CYCLE _____ PHASE _____

ENCLOSURE _____

APPROX. WEIGHT _____

SPECIALS _____

Note: Equipped with NEOPRENE coupling

MATERIALS OF CONSTRUCTION

☒ Stainless Steel Fitted

FEATURES


- ☐ i-ALERT™ Condition Monitor
- ☒ ANSI/OSHA Coupling Guard
- ☒ Center Drop Out Spacer Coupling
- ☒ Fabricated Heavy Duty Baseplate


MAXIMUM WORKING PRESSURE

- ☐ 175 psi (12 bar) W.P.
w/ 125# ANSI flange drilling
- ☐ 250 psi (17 bar) W.P.
w/250# ANSI flange drilling
(requires 1510-S)

TYPE OF SEAL

- ☐ Standard Seal
(Buna-Carbon/Ceramic)
- ☐ -F Standard Seal w/ Flush Line
(Buna-Carbon/Ceramic)
- ☐ -S Stuffing Box Construction w/ Flushed
Mechanical Single Seal
(EPR-Tungsten Carbide/Carbon)
- ☐ -PF Stuffing Box Construction w/ Packing
(Graphite Impregnated Teflon)

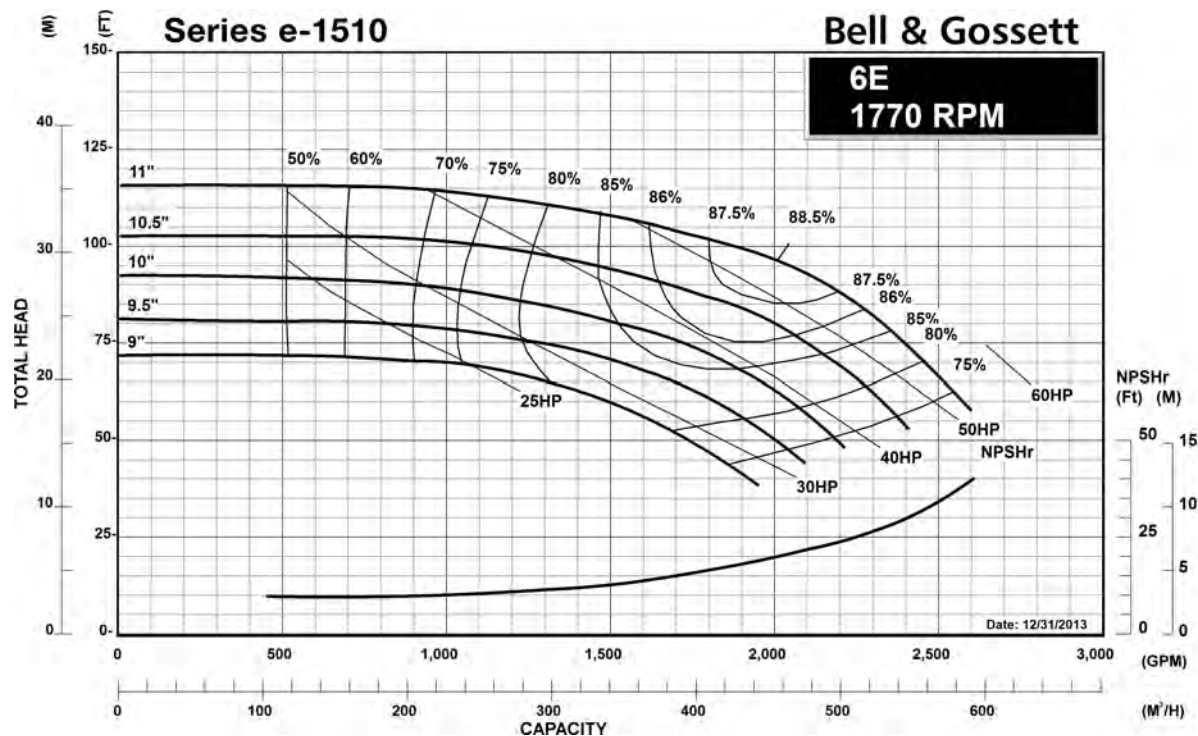

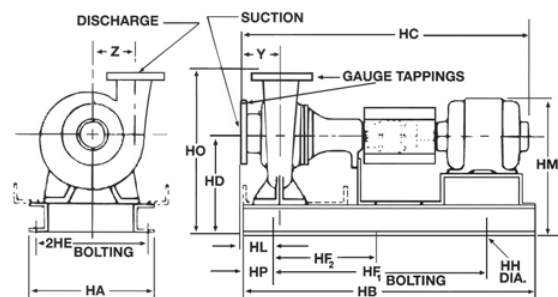

FLANGE DIMENSIONS IN INCHES (MM)			
	SIZE	THICKNESS	O.D.
Discharge	6" (152)	1-7/16" (37)	12-1/8" (308)
Suction	8" (203)	1-5/8" (41)	14-3/4" (375)

FLANGES ARE 125# ANSI - STANDARD

250# ANSI - AVAILABLE

DIMENSIONS - Inches (mm)

STANDARD SEAL

MOTOR FRAME	HA	HB	HC MAX	HD	2HE	HF ₁	HF ₂	HH	HL	HM MAX	HO	HP	Y	Z
"L" FRAME														
254T	24 (610)	56 (1422)	47-5/8 (1210)	16-1/2 (419)	21-1/2 (546)	44 (1118)	22 (559)	1 (25)	6 (152)	23-3/8 (594)	27-1/2 (698)	6 (152)	6-1/8 (156)	8-15/32 (215)
256T	24 (610)	56 (1422)	49-3/8 (1254)	16-1/2 (419)	21-1/2 (546)	44 (1118)	22 (559)	1 (25)	6 (152)	23-3/8 (594)	27-1/2 (698)	6 (152)	6-1/8 (156)	8-15/32 (215)
284T	24 (610)	56 (1422)	50-5/16 (1278)	16-1/2 (419)	21-1/2 (546)	44 (1118)	22 (559)	1 (25)	6 (152)	24-1/2 (622)	27-1/2 (698)	6 (152)	6-1/8 (156)	8-15/32 (215)
286T	24 (610)	56 (1422)	51-13/16 (1316)	16-1/2 (419)	21-1/2 (546)	44 (1118)	22 (559)	1 (25)	6 (152)	24-1/2 (622)	27-1/2 (698)	6 (152)	6-1/8 (156)	8-15/32 (215)
324T	24 (610)	56 (1422)	53-7/8 (1368)	16-1/2 (419)	21-1/2 (546)	44 (1118)	22 (559)	1 (25)	6 (152)	25-5/8 (651)	27-1/2 (698)	6 (152)	6-1/8 (156)	8-15/32 (215)
326T	24 (610)	56 (1422)	55-3/8 (1407)	16-1/2 (419)	21-1/2 (546)	44 (1118)	22 (559)	1 (25)	6 (152)	25-5/8 (651)	27-1/2 (698)	6 (152)	6-1/8 (156)	8-15/32 (215)
364T	24 (610)	56 (1422)	57-9/16 (1462)	16-1/2 (419)	21-1/2 (546)	44 (1118)	22 (559)	1 (25)	6 (152)	26-3/4 (679)	27-1/2 (698)	6 (152)	6-1/8 (156)	8-15/32 (215)

STUFFING BOX

MOTOR FRAME	HA	HB	HC MAX	HD	2HE	HF ₁	HF ₂	HH	HL	HM MAX	HO	HP	Y	Z
"L" FRAME														
254T	24 (610)	56 (1422)	50 (1270)	16-1/2 (419)	21-1/2 (546)	44 (1118)	22 (559)	1 (25)	6 (152)	23-3/8 (594)	27-1/2 (698)	6 (152)	6-1/8 (155)	8-15/32 (215)
256T	24 (610)	56 (1422)	51-3/4 (1314)	16-1/2 (419)	21-1/2 (546)	44 (1118)	22 (559)	1 (25)	6 (152)	23-3/8 (594)	27-1/2 (698)	6 (152)	6-1/8 (155)	8-15/32 (215)
284T	24 (610)	56 (1422)	52-11/16 (1338)	16-1/2 (419)	21-1/2 (546)	44 (1118)	22 (559)	1 (25)	6 (152)	24-1/2 (622)	27-1/2 (698)	6 (152)	6-1/8 (155)	8-15/32 (215)
286T	24 (610)	56 (1422)	54-3/16 (1376)	16-1/2 (419)	21-1/2 (546)	44 (1118)	22 (559)	1 (25)	6 (152)	24-1/2 (622)	27-1/2 (698)	6 (152)	6-1/8 (155)	8-15/32 (215)
324T	24 (610)	56 (1422)	56-1/4 (1429)	16-1/2 (419)	21-1/2 (546)	44 (1118)	22 (559)	1 (25)	6 (152)	25-5/8 (651)	27-1/2 (698)	6 (152)	6-1/8 (155)	8-15/32 (215)
326T	24 (610)	56 (1422)	57-3/4 (1467)	16-1/2 (419)	21-1/2 (546)	44 (1118)	22 (559)	1 (25)	6 (152)	25-5/8 (651)	27-1/2 (698)	6 (152)	6-1/8 (155)	8-15/32 (215)
364T	24 (610)	56 (1422)	59-15/16 (1522)	16-1/2 (419)	21-1/2 (546)	44 (1118)	22 (559)	1 (25)	6 (152)	26-3/4 (679)	27-1/2 (698)	6 (152)	6-1/8 (155)	8-15/32 (215)


Dimensions are subject to change. Not to be used for construction purposes unless certified.

Xylem Inc.
8200 N. Austin Avenue
Morton Grove, IL 60053
Phone: (847)966-3700
Fax: (847)965-8379
www.bellgossett.com

xylem
Let's Solve Water

Bell & Gossett is a trademark of Xylem Inc. or one of its subsidiaries.
© 2013 Xylem Inc.

JOB: UNIT TAG: ENGINEER: CONTRACTOR:	REPRESENTATIVE: ORDER NO. SUBMITTED BY: APPROVED BY:	DATE: DATE: DATE:
---	---	--



6G

Series e-1510

Centrifugal Pumps - Base Mounted

SPECIFICATIONS

FLOW _____ HEAD _____
 HP _____ RPM _____
 VOLTS _____
 CYCLE _____ PHASE _____
 ENCLOSURE _____
 APPROX. WEIGHT _____
 SPECIALS _____

Note: Equipped with NEOPRENE coupling

MATERIALS OF CONSTRUCTION

☒ Stainless Steel Fitted

FEATURES


- ☐ i-ALERT™ Condition Monitor
- ☒ ANSI/OSHA Coupling Guard
- ☒ Center Drop Out Spacer Coupling
- ☒ Fabricated Heavy Duty Baseplate

MAXIMUM WORKING PRESSURE

- ☐ 175 psi (12 bar) W.P.
w/ 125# ANSI flange drilling
- ☐ 250 psi (17 bar) W.P.
w/ 250# ANSI flange drilling
(requires 1510-S)

TYPE OF SEAL

- ☐ Standard Seal
(Buna-Carbon/Ceramic)
- ☐ -F Standard Seal w/ Flush Line
(Buna-Carbon/Ceramic)
- ☐ -S Stuffing Box Construction w/ Flushed
Mechanical Single Seal
(EPR-Tungsten Carbide/Carbon)
- ☐ -PF Stuffing Box Construction w/ Packing
(Graphite Impregnated Teflon)

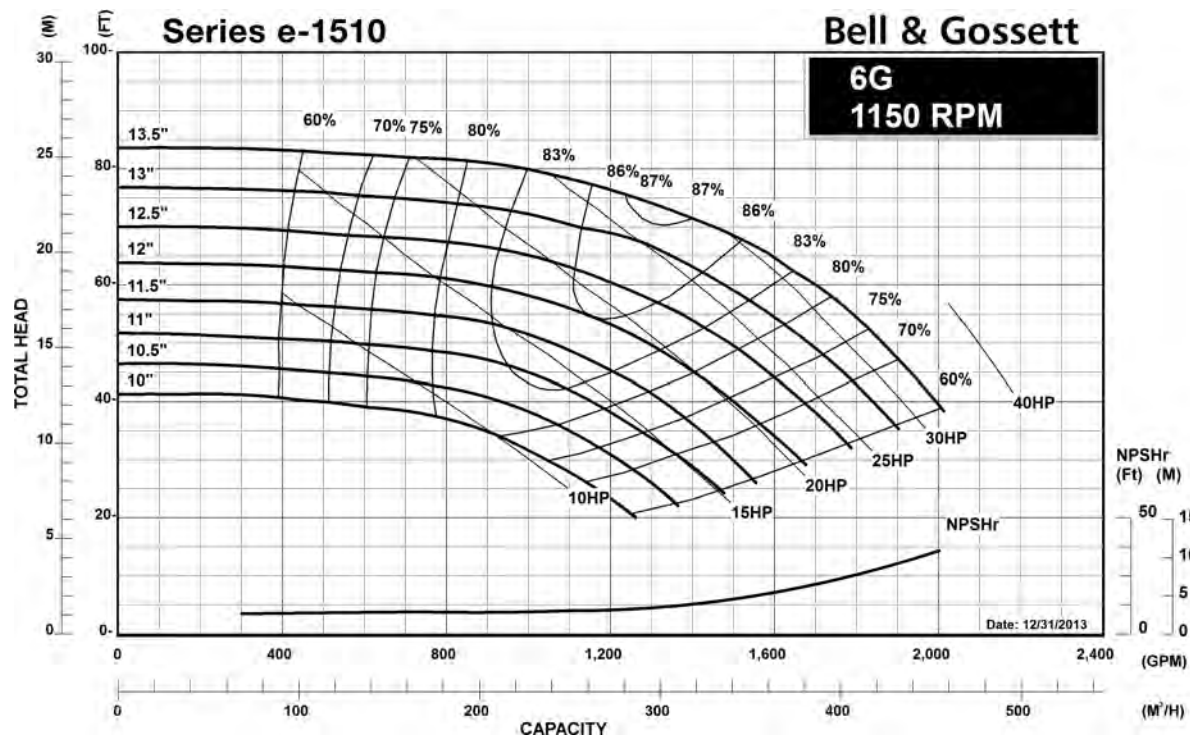

JOB:

REPRESENTATIVE:

UNIT TAG:

ORDER NO.

DATE:

ENGINEER:


SUBMITTED BY:

DATE:

CONTRACTOR:

APPROVED BY:

DATE:



6G Series e-1510 Centrifugal Pumps - Base Mounted

SPECIFICATIONS

FLOW _____ HEAD _____

HP _____ RPM _____

VOLTS _____

CYCLE _____ PHASE _____

ENCLOSURE _____

APPROX. WEIGHT _____

SPECIALS _____

Note: Equipped with NEOPRENE coupling

MATERIALS OF CONSTRUCTION

☒ Stainless Steel Fitted

FEATURES


- ☐ i-ALERT™ Condition Monitor
- ☒ ANSI/OSHA Coupling Guard
- ☒ Center Drop Out Spacer Coupling
- ☒ Fabricated Heavy Duty Baseplate

MAXIMUM WORKING PRESSURE

- ☐ 175 psi (12 bar) W.P.
w/ 125# ANSI flange drilling
- ☐ 250 psi (17 bar) W.P.
w/ 250# ANSI flange drilling
(requires 1510-S)


TYPE OF SEAL

- ☐ Standard Seal
(Buna-Carbon/Ceramic)
- ☐ -F Standard Seal w/ Flush Line
(Buna-Carbon/Ceramic)
- ☐ -S Stuffing Box Construction w/ Flushed
Mechanical Single Seal
(EPR-Tungsten Carbide/Carbon)
- ☐ -PF Stuffing Box Construction w/ Packing
(Graphite Impregnated Teflon)

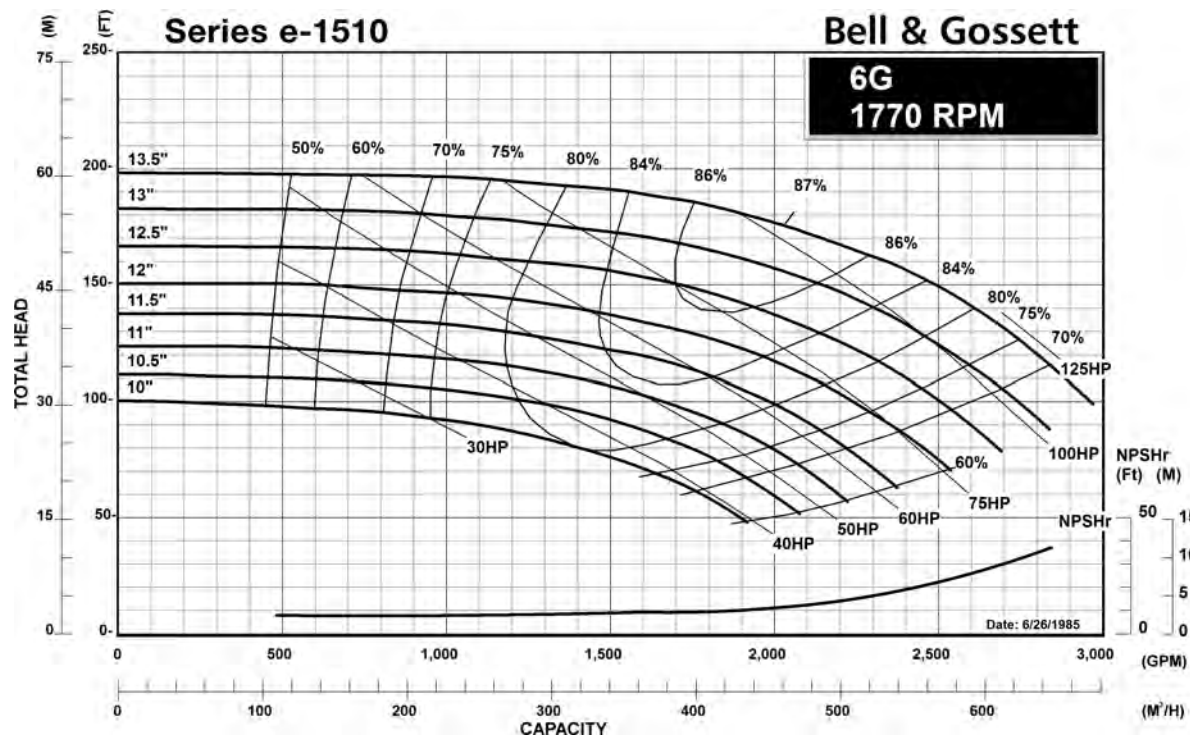

Series e-1510 6G Centrifugal Pump Submittal

B-880.48

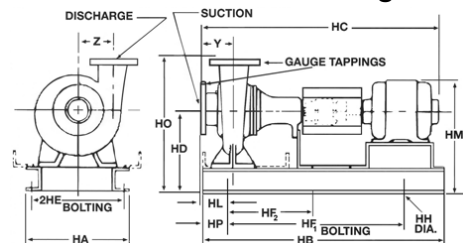

FLANGE DIMENSIONS IN INCHES (MM)			
	SIZE	THICKNESS	O.D.
Discharge	6" (152)	1-7/16 (37)	12-1/8 (308)
Suction	8" (203)	1-5/8 (41)	14-3/4 (375)

FLANGES ARE: 125# ANSI - STANDARD
250# ANSI - AVAILABLE

DIMENSIONS - Inches (mm)

STANDARD SEAL

MOTOR FRAME	HA	HB	HC MAX	HD	2HE	HF ₁	HF ₂	HH	HL	HM MAX	HO	HP	Y	Z
"L" FRAME														
256T	24 (610)	56 (1422)	49-5/8 (1260)	16-1/2 (419)	21-1/2 (546)	44 (1118)	22 (559)	1 (25)	6-1/4 (159)	23-3/8 (594)	30-1/2 (775)	6 (152)	6-1/2 (165)	9-5/16 (237)
284T	24 (610)	56 (1422)	50-5/8 (1286)	16-1/2 (419)	21-1/2 (546)	44 (1118)	22 (559)	1 (25)	6-1/4 (159)	24-1/2 (622)	30-1/2 (775)	6 (152)	6-1/2 (165)	9-5/16 (237)
286T	24 (610)	56 (1422)	52-1/8 (1324)	16-1/2 (419)	21-1/2 (546)	44 (1118)	22 (559)	1 (25)	6-1/4 (159)	24-1/2 (622)	30-1/2 (775)	6 (152)	6-1/2 (165)	9-5/16 (237)
324T	24 (610)	56 (1422)	54-1/8 (1375)	16-1/2 (419)	21-1/2 (546)	44 (1118)	22 (559)	1 (25)	6-1/4 (159)	25-5/8 (651)	30-1/2 (775)	6 (152)	6-1/2 (165)	9-5/16 (237)
326T	24 (610)	56 (1422)	55-5/8 (1413)	16-1/2 (419)	21-1/2 (546)	44 (1118)	22 (559)	1 (25)	6-1/4 (159)	25-5/8 (651)	30-1/2 (775)	6 (152)	6-1/2 (165)	9-5/16 (237)
364T	24 (610)	56 (1422)	57-7/8 (1470)	16-1/2 (419)	21-1/2 (546)	44 (1118)	22 (559)	1 (25)	6-1/4 (159)	26-3/4 (679)	30-1/2 (775)	6 (152)	6-1/2 (165)	9-5/16 (237)
365T	24 (610)	56 (1422)	58-1/2 (1486)	16-1/2 (419)	21-1/2 (546)	44 (1118)	22 (559)	1 (25)	6-1/4 (159)	26-3/4 (679)	30-1/2 (775)	6 (152)	6-1/2 (165)	9-5/16 (237)
404TS	24 (610)	56 (1422)	58-5/8 (1489)	16-1/2 (419)	21-1/2 (546)	44 (1118)	22 (559)	1 (25)	6-1/4 (159)	28-3/8 (721)	30-1/2 (775)	6 (152)	6-1/2 (165)	9-5/16 (237)
405TS	24 (610)	56 (1422)	59-3/8 (1508)	16-1/2 (419)	21-1/2 (546)	44 (1118)	22 (559)	1 (25)	6-1/4 (159)	30 (762)	30-1/2 (775)	6 (152)	6-1/2 (165)	9-5/16 (237)
"XL" FRAME														
324T	26 (660)	59-1/4 (1505)	58-7/8 (1495)	17 (432)	23-1/2 (597)	47-1/4 (1200)	23-5/8 (600)	1 (25)	6-1/2 (165)	25-1/4 (641)	31 (787)	6 (152)	6-1/2 (165)	9-5/16 (237)
326T	26 (660)	59-1/4 (1505)	60-5/16 (1532)	17 (432)	23-1/2 (597)	47-1/4 (1200)	23-5/8 (600)	1 (25)	6-1/2 (165)	25-1/4 (641)	31 (787)	6 (152)	6-1/2 (165)	9-5/16 (237)
364TS	26 (660)	59-1/4 (1505)	62-9/16 (1589)	17 (432)	23-1/2 (597)	47-1/4 (1200)	23-5/8 (600)	1 (25)	6-1/2 (165)	26-1/8 (663.5)	31 (787)	6 (152)	6-1/2 (165)	9-5/16 (237)
365TS	26 (660)	59-1/4 (1505)	62-1/2 (1588)	17 (432)	23-1/2 (597)	47-1/4 (1200)	23-5/8 (600)	1 (25)	6-1/2 (165)	27-1/4 (692)	31 (787)	6 (152)	6-1/2 (165)	9-5/16 (237)
404TS	26 (660)	59-1/4 (1505)	64-3/4 (1645)	17 (432)	23-1/2 (597)	47-1/4 (1200)	23-5/8 (600)	1 (25)	6-1/2 (165)	28-7/8 (733)	31 (787)	6 (152)	6-1/2 (165)	9-5/16 (237)
405TS	26 (660)	59-1/4 (1505)	66-1/4 (1683)	17 (432)	23-1/2 (597)	47-1/4 (1200)	23-5/8 (600)	1 (25)	6-1/2 (165)	28-7/8 (733)	31 (787)	6 (152)	6-1/2 (165)	9-5/16 (237)
444TS	26 (660)	59-1/4 (1505)	70-5/8 (1794)	18 (457)	23-1/2 (597)	47-1/4 (1200)	23-5/8 (600)	1 (25)	6-1/2 (165)	29-3/4 (756)	32 (813)	6 (152)	6-1/2 (165)	9-5/16 (237)

Dimensions are subject to change. Not to be used for construction purposes unless certified.

At 1800 RPM operation and impeller diameters greater than 12.5", "XL" bearing frame required.


Xylem Inc.
8200 N. Austin Avenue
Morton Grove, IL 60053
Phone: (847)966-3700
Fax: (847)965-8379
www.xyleminc.com/brands/bellgossett

xylem
Let's Solve Water

Bell & Gossett is a trademark of Xylem Inc. or one of its subsidiaries.
© 2012 Xylem Inc.

Series e-1510 6G Centrifugal Pump Submittal

B-880.48

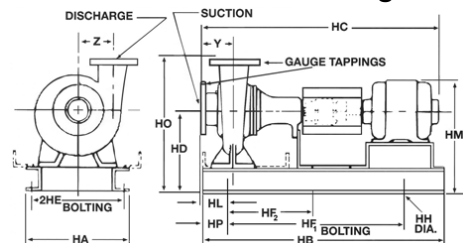

FLANGE DIMENSIONS IN INCHES (MM)			
	SIZE	THICKNESS	O.D.
Discharge	6" (152)	1-7/16 (37)	12-1/8 (308)
Suction	8" (203)	1-5/8 (41)	14-3/4 (375)

FLANGES ARE: 125# ANSI - STANDARD
250# ANSI - AVAILABLE

DIMENSIONS - Inches (mm)

STUFFING BOX

MOTOR FRAME	HA	HB	HC MAX	HD	2HE	HF ₁	HF ₂	HH	HL	HM MAX	HO	HP	Y	Z
"L" FRAME														
256T	24 (610)	56 (1422)	52 (1321)	16-1/2 (419)	21-1/2 (546)	44 (1118)	22 (559)	1 (25)	6-1/4 (159)	23-3/8 (594)	30-1/2 (775)	6 (152)	6-1/2 (165)	9-5/16 (237)
284T	24 (610)	56 (1422)	53 (1346)	16-1/2 (419)	21-1/2 (546)	44 (1118)	22 (559)	1 (25)	6-1/4 (159)	24-1/2 (622)	30-1/2 (775)	6 (152)	6-1/2 (165)	9-5/16 (237)
286T	24 (610)	56 (1422)	54-1/2 (1384)	16-1/2 (419)	21-1/2 (546)	44 (1118)	22 (559)	1 (25)	6-1/4 (159)	24-1/2 (622)	30-1/2 (775)	6 (152)	6-1/2 (165)	9-5/16 (237)
324T	24 (610)	56 (1422)	56-1/2 (1435)	16-1/2 (419)	21-1/2 (546)	44 (1118)	22 (559)	1 (25)	6-1/4 (159)	25-5/8 (651)	30-1/2 (775)	6 (152)	6-1/2 (165)	9-5/16 (237)
326T	24 (610)	56 (1422)	58 (1473)	16-1/2 (419)	21-1/2 (546)	44 (1118)	22 (559)	1 (25)	6-1/4 (159)	25-5/8 (651)	30-1/2 (775)	6 (152)	6-1/2 (165)	9-5/16 (237)
364T	24 (610)	56 (1422)	60-1/4 (1530)	16-1/2 (419)	21-1/2 (546)	44 (1118)	22 (559)	1 (25)	6-1/4 (159)	26-3/4 (679)	30-1/2 (775)	6 (152)	6-1/2 (165)	9-5/16 (237)
365T	24 (610)	56 (1422)	60-7/8 (1546)	16-1/2 (419)	21-1/2 (546)	44 (1118)	22 (559)	1 (25)	6-1/4 (159)	26-3/4 (679)	30-1/2 (775)	6 (152)	6-1/2 (165)	9-5/16 (237)
404TS	24 (610)	56 (1422)	61 (1549)	16-1/2 (419)	21-1/2 (546)	44 (1118)	22 (559)	1 (25)	6-1/4 (159)	28-3/8 (721)	30-1/2 (775)	6 (152)	6-1/2 (165)	9-5/16 (237)
405TS	24 (610)	56 (1422)	62 (1575)	16-1/2 (419)	21-1/2 (546)	44 (1118)	22 (559)	1 (25)	6-1/4 (159)	30 (762)	30-1/2 (775)	6 (152)	6-1/2 (165)	9-5/16 (237)
"XL" FRAME														
324T	26 (660)	59-1/4 (1505)	62-3/8 (1584)	17 (432)	23-1/2 (597)	47-1/4 (1200)	23-5/8 (600)	1 (25)	6-1/2 (165)	25-1/4 (641)	31 (787)	6 (152)	6-1/2 (165)	9-5/16 (237)
326T	26 (660)	59-1/4 (1505)	62-3/8 (1584)	17 (432)	23-1/2 (597)	47-1/4 (1200)	23-5/8 (600)	1 (25)	6-1/2 (165)	25-1/4 (641)	31 (787)	6 (152)	6-1/2 (165)	9-5/16 (237)
364TS	26 (660)	59-1/4 (1505)	62-3/4 (1594)	17 (432)	23-1/2 (597)	47-1/4 (1200)	23-5/8 (600)	1 (25)	6-1/2 (165)	26-1/8 (664)	31 (787)	6 (152)	6-1/2 (165)	9-5/16 (237)
365TS	26 (660)	59-1/4 (1505)	64-3/4 (1645)	17 (432)	23-1/2 (597)	47-1/4 (1200)	23-5/8 (600)	1 (25)	6-1/2 (165)	27-1/4 (692)	31 (787)	6 (152)	6-1/2 (165)	9-5/16 (237)
404TS	26 (660)	59-1/4 (1505)	67 (1702)	17 (432)	23-1/2 (597)	47-1/4 (1200)	23-5/8 (600)	1 (25)	6-1/2 (165)	28-7/8 (733)	31 (787)	6 (152)	6-1/2 (165)	9-5/16 (237)
405TS	26 (660)	59-1/4 (1505)	68-1/2 (1740)	17 (432)	23-1/2 (597)	47-1/4 (1200)	23-5/8 (600)	1 (25)	6-1/2 (165)	28-7/8 (733)	31 (787)	6 (152)	6-1/2 (165)	9-5/16 (237)
444TS	26 (660)	59-1/4 (1505)	72-3/4 (1848)	18 (457)	23-1/2 (597)	47-1/4 (1200)	23-5/8 (600)	1 (25)	6-1/2 (165)	29-3/4 (756)	32 (813)	6 (152)	6-1/2 (165)	9-5/16 (237)

Dimensions are subject to change. Not to be used for construction purposes unless certified.


At 1800 RPM operation and impeller diameters greater than 12.5", "XL" bearing frame required.

Xylem Inc.
8200 N. Austin Avenue
Morton Grove, IL 60053
Phone: (847)966-3700
Fax: (847)965-8379
www.xyleminc.com/brands/bellgossett

xylem
Let's Solve Water

Bell & Gossett is a trademark of Xylem Inc. or one of its subsidiaries.
© 2012 Xylem Inc.

JOB: UNIT TAG: ENGINEER: CONTRACTOR:	REPRESENTATIVE: ORDER NO. SUBMITTED BY: APPROVED BY:	DATE: DATE: DATE:
---	---	--



8GB

Series e-1510

Centrifugal Pumps - Base Mounted

SPECIFICATIONS

FLOW _____ HEAD _____

HP _____ RPM _____

VOLTS _____

CYCLE _____ PHASE _____

ENCLOSURE _____

APPROX. WEIGHT _____

SPECIALS _____

MATERIALS OF CONSTRUCTION

☒ Stainless Steel Fitted

FEATURES

- ☐ i-ALERT™ Condition Monitor
- ☒ ANSI/OSHA Coupling Guard
- ☒ Center Drop Out Spacer Coupling
- ☒ Fabricated Heavy Duty Baseplate


MAXIMUM WORKING PRESSURE

- ☐ 175 psi (12 bar) W.P.
w/ 125# ANSI flange drilling


TYPE OF SEAL

- ☐ Standard Seal
(Buna-Carbon/Ceramic)
- ☐ -F Standard Seal w/ Flush Line
(Buna-Carbon/Ceramic)
- ☐ -S Stuffing Box Construction w/ Flushed
Mechanical Single Seal
(EPR-Tungsten Carbide/Carbon)
- ☐ -PF Stuffing Box Construction w/ Packing
(Graphite Impregnated Teflon)

Note: Equipped with NEOPRENE coupling

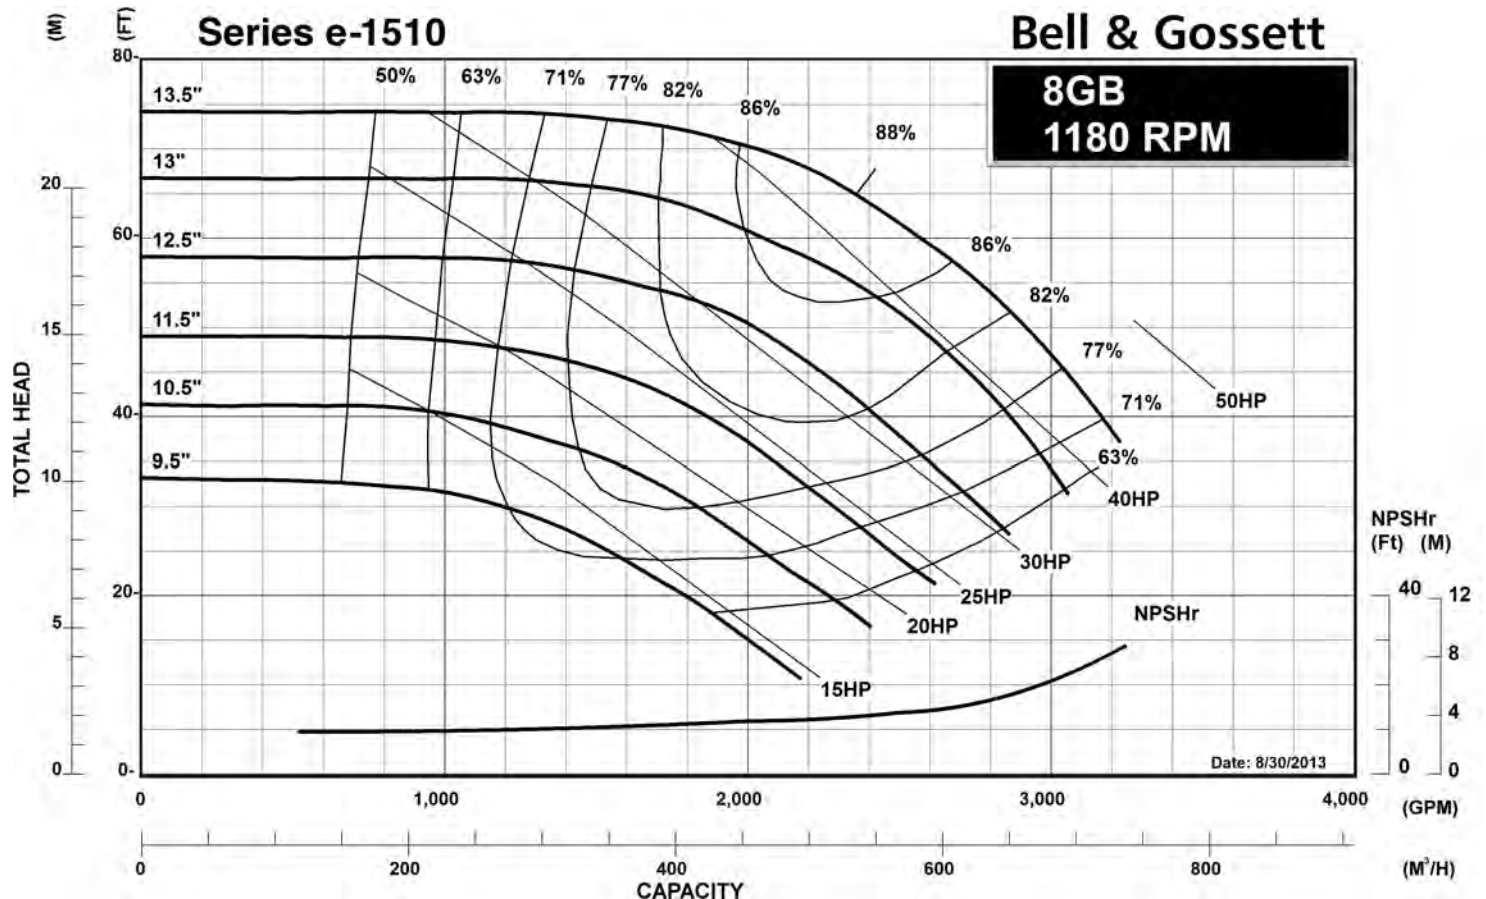

JOB: UNIT TAG: ENGINEER: CONTRACTOR:	REPRESENTATIVE: ORDER NO. SUBMITTED BY: APPROVED BY:	DATE: DATE: DATE:
---	---	--



8GB

Series e-1510

Centrifugal Pumps - Base Mounted

SPECIFICATIONS

FLOW _____ HEAD _____

HP _____ RPM _____

VOLTS _____

CYCLE _____ PHASE _____

ENCLOSURE _____

APPROX. WEIGHT _____

SPECIALS _____

MATERIALS OF CONSTRUCTION

☒ Stainless Steel Fitted

FEATURES

- ☐ i-ALERT™ Condition Monitor
- ☒ ANSI/OSHA Coupling Guard
- ☒ Center Drop Out Spacer Coupling
- ☒ Fabricated Heavy Duty Baseplate


MAXIMUM WORKING PRESSURE


- ☐ 175 psi (12 bar) W.P.
w/ 125# ANSI flange drilling

TYPE OF SEAL

- ☐ Standard Seal
(Buna-Carbon/Ceramic)
- ☐ -F Standard Seal w/ Flush Line
(Buna-Carbon/Ceramic)
- ☐ -S Stuffing Box Construction w/ Flushed
Mechanical Single Seal
(EPR-Tungsten Carbide/Carbon)
- ☐ -PF Stuffing Box Construction w/ Packing
(Graphite Impregnated Teflon)

Note: Equipped with NEOPRENE coupling

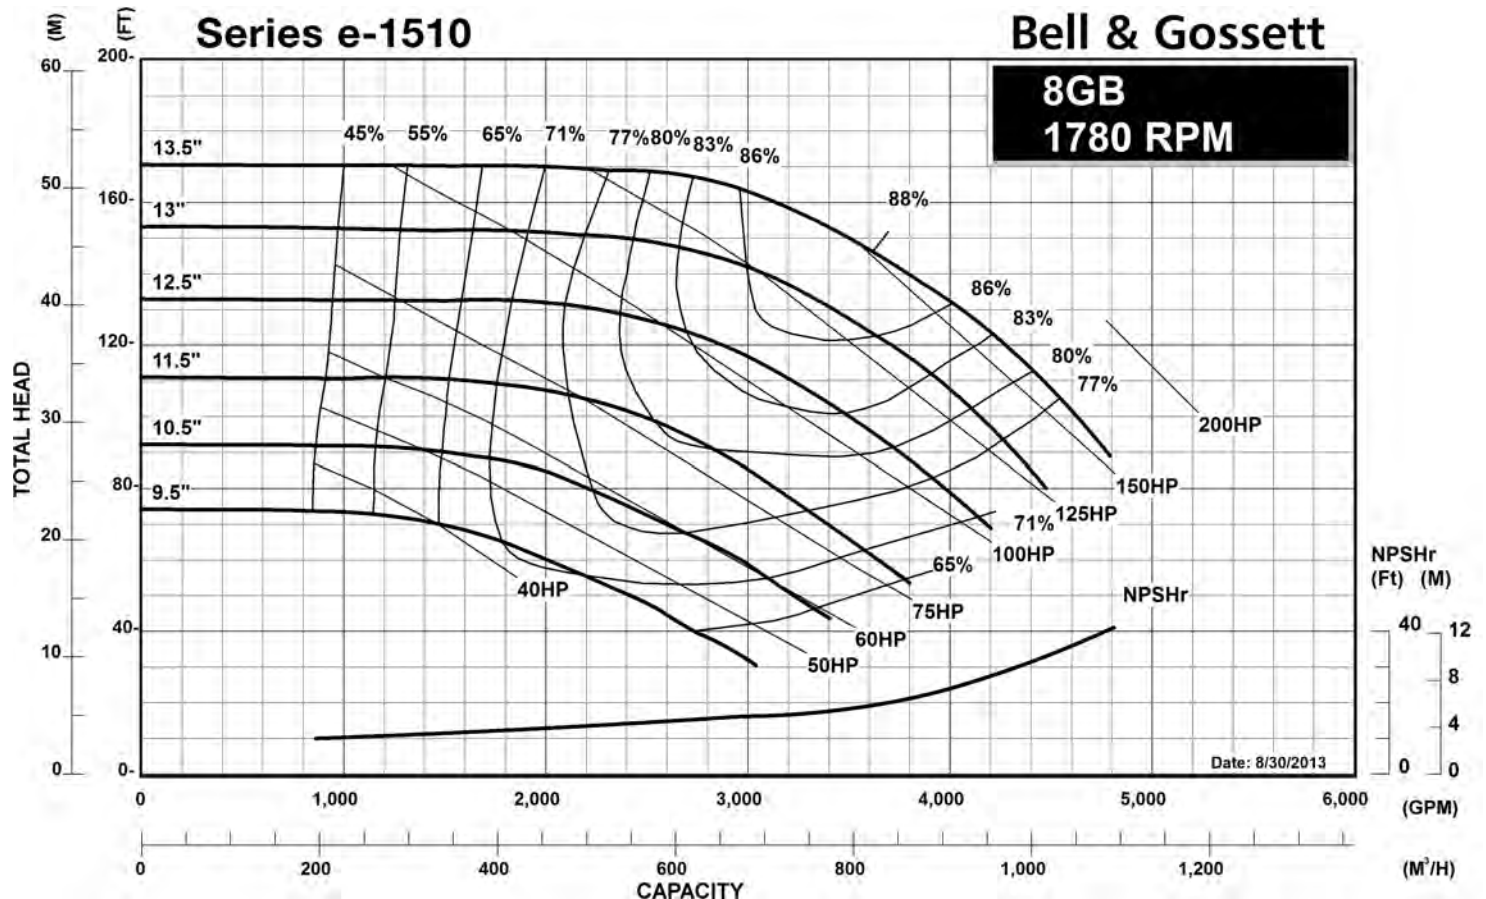

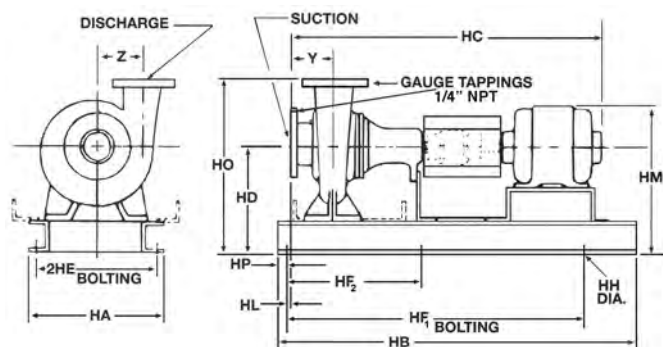

FLANGE DIMENSIONS IN INCHES (MM)			
..	SIZE	THICKNESS	O.D.
Discharge	8" (203)	1.69" (43)	15" (381)
Suction	10" (256)	1.95" (50)	17.5" (444)

FLANGES ARE: 125# ANSI - STANDARD

DIMENSIONS - Inches (mm)

STANDARD SEAL


MOTOR FRAME	HA	HB	HC MAX	HD	2HE	HF1	HF2	HH	HL	HM MAX	HO	HP	Y	Z
"L" FRAME														
256T	28.00 (711)	70.00 (1778)	50.34 (1279)	18.38 (467)	26.00 (660)	33.75 (857)	67.50 (1751)	1.00 (25)	0.44 (11)	25.25 (641)	33.07 (840)	1.25 (32)	7.01 (178)	11.25 (286)
284T	28.00 (711)	70.00 (1778)	51.34 (1304)	18.38 (467)	26.00 (660)	33.75 (857)	67.50 (1751)	1.00 (25)	0.44 (11)	26.38 (670)	33.07 (840)	1.25 (32)	7.01 (178)	11.25 (286)
286T	28.00 (711)	70.00 (1778)	52.84 (1342)	18.38 (467)	26.00 (660)	33.75 (857)	67.50 (1751)	1.00 (25)	0.44 (11)	26.38 (670)	33.07 (840)	1.25 (32)	7.01 (178)	11.25 (286)
324T	28.00 (711)	70.00 (1778)	54.84 (1393)	18.38 (467)	26.00 (660)	33.75 (857)	67.50 (1751)	1.00 (25)	0.44 (11)	27.50 (699)	33.07 (840)	1.25 (32)	7.01 (178)	11.25 (286)
326T	28.00 (711)	70.00 (1778)	56.34 (1431)	18.38 (467)	26.00 (660)	33.75 (857)	67.50 (1751)	1.00 (25)	0.44 (11)	27.50 (699)	33.07 (840)	1.25 (32)	7.01 (178)	11.25 (286)
364T	28.00 (711)	70.00 (1778)	58.54 (1487)	18.38 (467)	26.00 (660)	33.75 (857)	67.50 (1751)	1.00 (25)	0.44 (11)	28.63 (727)	33.07 (840)	1.25 (32)	7.01 (178)	11.25 (286)
365T	28.00 (711)	70.00 (1778)	59.21 (1504)	18.38 (467)	26.00 (660)	33.75 (857)	67.50 (1751)	1.00 (25)	0.44 (11)	28.63 (727)	33.07 (840)	1.25 (32)	7.01 (178)	11.25 (286)
404TS	28.00 (711)	70.00 (1778)	59.34 (1507)	18.38 (467)	26.00 (660)	33.75 (857)	67.50 (1751)	1.00 (25)	0.44 (11)	30.25 (768)	33.07 (840)	1.25 (32)	7.01 (178)	11.25 (286)
405TS	28.00 (711)	70.00 (1778)	60.09 (1526)	18.38 (467)	26.00 (660)	33.75 (857)	67.50 (1751)	1.00 (25)	0.44 (11)	31.88 (810)	33.07 (840)	1.25 (32)	7.01 (178)	11.25 (286)
"XL" FRAME														
324T	28.00 (711)	70.00 (1778)	59.59 (1514)	18.38 (467)	26.00 (660)	33.75 (857)	67.50 (1751)	1.00 (25)	0.44 (11)	26.63 (676)	33.07 (840)	1.25 (32)	7.01 (178)	11.25 (286)
326T	28.00 (711)	70.00 (1778)	61.02 (1550)	18.38 (467)	26.00 (660)	33.75 (857)	67.50 (1751)	1.00 (25)	0.44 (11)	26.63 (676)	33.07 (840)	1.25 (32)	7.01 (178)	11.25 (286)
364TS	28.00 (711)	70.00 (1778)	63.27 (1607)	18.38 (467)	26.00 (660)	33.75 (857)	67.50 (1751)	1.00 (25)	0.44 (11)	27.50 (699)	33.07 (840)	1.25 (32)	7.01 (178)	11.25 (286)
365TS	28.00 (711)	70.00 (1778)	63.21 (1606)	18.38 (467)	26.00 (660)	33.75 (857)	67.50 (1751)	1.00 (25)	0.44 (11)	28.63 (727)	33.07 (840)	1.25 (32)	7.01 (178)	11.25 (286)
404TS	28.00 (711)	70.00 (1778)	65.46 (1663)	18.38 (467)	26.00 (660)	33.75 (857)	67.50 (1751)	1.00 (25)	0.44 (11)	30.25 (768)	33.07 (840)	1.25 (32)	7.01 (178)	11.25 (286)
405TS	28.00 (711)	70.00 (1778)	66.96 (1701)	18.38 (467)	26.00 (660)	33.75 (857)	67.50 (1751)	1.00 (25)	0.44 (11)	30.25 (768)	33.07 (840)	1.25 (32)	7.01 (178)	11.25 (286)
444TS	28.00 (711)	70.00 (1778)	71.34 (1812)	18.38 (467)	26.00 (660)	33.75 (857)	67.50 (1751)	1.00 (25)	0.44 (11)	31.13 (791)	33.07 (840)	1.25 (32)	7.01 (178)	11.25 (286)

Dimensions are subject to change. Not to be used for construction purposes unless certified.

At 1800 RPM operation and impeller diameters greater than 12.5", "XL" bearing frame required.

Xylem Inc.
8200 N. Austin Avenue
Morton Grove, IL 60053
Phone: (847)966-3700
Fax: (847)965-8379
www.bellgossett.com

xylem
Let's Solve Water

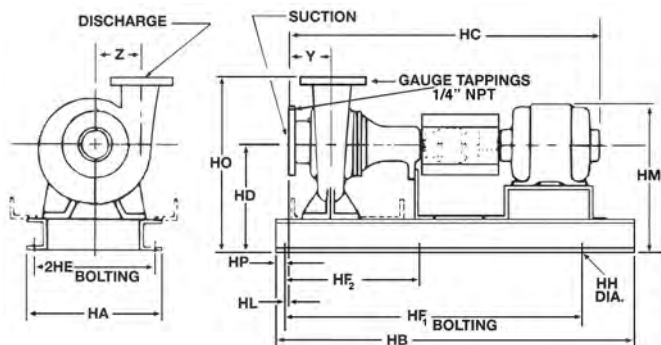

FLANGE DIMENSIONS IN INCHES (MM)			
..	SIZE	THICKNESS	O.D.
Discharge	8" (203)	1.69" (43)	15" (381)
Suction	10" (256)	1.95" (50)	17.5" (444)

FLANGES ARE: 125# ANSI - STANDARD

DIMENSIONS - Inches (mm)

STUFFING BOX

MOTOR FRAME	HA	HB	HC MAX	HD	2HE	HF1	HF2	HH	HL	HM MAX	HO	HP	Y	Z
"L" FRAME														
256T	28.00 (711)	70.00 (1778)	52.71 (1339)	18.38 (467)	26.00 (660)	33.75 (857)	67.50 (1751)	1.00 (25)	0.44 (11)	25.25 (641)	33.07 (840)	1.25 (32)	7.01 (178)	11.25 (286)
284T	28.00 (711)	70.00 (1778)	53.71 (1364)	18.38 (467)	26.00 (660)	33.75 (857)	67.50 (1751)	1.00 (25)	0.44 (11)	26.38 (670)	33.07 (840)	1.25 (32)	7.01 (178)	11.25 (286)
286T	28.00 (711)	70.00 (1778)	55.21 (1402)	18.38 (467)	26.00 (660)	33.75 (857)	67.50 (1751)	1.00 (25)	0.44 (11)	26.38 (670)	33.07 (840)	1.25 (32)	7.01 (178)	11.25 (286)
324T	28.00 (711)	70.00 (1778)	57.21 (1453)	18.38 (467)	26.00 (660)	33.75 (857)	67.50 (1751)	1.00 (25)	0.44 (11)	27.50 (699)	33.07 (840)	1.25 (32)	7.01 (178)	11.25 (286)
326T	28.00 (711)	70.00 (1778)	58.71 (1491)	18.38 (467)	26.00 (660)	33.75 (857)	67.50 (1751)	1.00 (25)	0.44 (11)	27.50 (699)	33.07 (840)	1.25 (32)	7.01 (178)	11.25 (286)
364T	28.00 (711)	70.00 (1778)	60.96 (1548)	18.38 (467)	26.00 (660)	33.75 (857)	67.50 (1751)	1.00 (25)	0.44 (11)	28.63 (727)	33.07 (840)	1.25 (32)	7.01 (178)	11.25 (286)
365T	28.00 (711)	70.00 (1778)	61.59 (1564)	18.38 (467)	26.00 (660)	33.75 (857)	67.50 (1751)	1.00 (25)	0.44 (11)	28.63 (727)	33.07 (840)	1.25 (32)	7.01 (178)	11.25 (286)
404TS	28.00 (711)	70.00 (1778)	61.71 (1567)	18.38 (467)	26.00 (660)	33.75 (857)	67.50 (1751)	1.00 (25)	0.44 (11)	30.25 (768)	33.07 (840)	1.25 (32)	7.01 (178)	11.25 (286)
405TS	28.00 (711)	70.00 (1778)	62.71 (1593)	18.38 (467)	26.00 (660)	33.75 (857)	67.50 (1751)	1.00 (25)	0.44 (11)	31.88 (810)	33.07 (840)	1.25 (32)	7.01 (178)	11.25 (286)
"XL" FRAME														
324T	28.00 (711)	70.00 (1778)	63.09 (1602)	18.38 (467)	26.00 (660)	33.75 (857)	67.50 (1751)	1.00 (25)	0.44 (11)	26.63 (676)	33.07 (840)	1.25 (32)	7.01 (178)	11.25 (286)
326T	28.00 (711)	70.00 (1778)	63.09 (1602)	18.38 (467)	26.00 (660)	33.75 (857)	67.50 (1751)	1.00 (25)	0.44 (11)	26.63 (676)	33.07 (840)	1.25 (32)	7.01 (178)	11.25 (286)
364TS	28.00 (711)	70.00 (1778)	63.46 (1612)	18.38 (467)	26.00 (660)	33.75 (857)	67.50 (1751)	1.00 (25)	0.44 (11)	27.50 (699)	33.07 (840)	1.25 (32)	7.01 (178)	11.25 (286)
365TS	28.00 (711)	70.00 (1778)	65.46 (1663)	18.38 (467)	26.00 (660)	33.75 (857)	67.50 (1751)	1.00 (25)	0.44 (11)	28.63 (727)	33.07 (840)	1.25 (32)	7.01 (178)	11.25 (286)
404TS	28.00 (711)	70.00 (1778)	67.71 (1720)	18.38 (467)	26.00 (660)	33.75 (857)	67.50 (1751)	1.00 (25)	0.44 (11)	30.25 (768)	33.07 (840)	1.25 (32)	7.01 (178)	11.25 (286)
405TS	28.00 (711)	70.00 (1778)	69.21 (1758)	18.38 (467)	26.00 (660)	33.75 (857)	67.50 (1751)	1.00 (25)	0.44 (11)	30.25 (768)	33.07 (840)	1.25 (32)	7.01 (178)	11.25 (286)
444TS	28.00 (711)	70.00 (1778)	73.46 (1866)	18.38 (467)	26.00 (660)	33.75 (857)	67.50 (1751)	1.00 (25)	0.44 (11)	31.13 (791)	33.07 (840)	1.25 (32)	7.01 (178)	11.25 (286)

Dimensions are subject to change. Not to be used for construction purposes unless certified.

At 1800 RPM operation and impeller diameters greater than 12.5", "XL" bearing frame required.

Xylem Inc.
8200 N. Austin Avenue
Morton Grove, IL 60053
Phone: (847)966-3700
Fax: (847)965-8379
www.bellgossett.com

xylem
Let's Solve Water

Bell & Gossett is a trademark of Xylem Inc. or one of its subsidiaries.

© 2013 Xylem Inc.