


JOB:	REPRESENTATIVE:	
UNIT TAG:	ORDER NO.:	DATE:
ENGINEER:	SUBMITTED BY:	DATE:
CONTRACTOR:	APPROVED BY:	DATE:



1.5x1.5x7C

Series e-80

In-Line Mounted Centrifugal Pumps

SPECIFICATIONS

FLOW _____ HEAD _____

HP _____ RPM _____

VOLTS _____

CYCLE _____ INPUT PHASE _____

ENCLOSURE _____

APPROX. WEIGHT _____

SPECIALS _____

MATERIALS OF CONSTRUCTION

Stainless Steel Fitted

MAXIMUM WORKING PRESSURE

- 175 psi (12 bar) with 125# ANSI flange drilling
- 250 psi (17 bar) with 250# ANSI flange drilling (requires 80-S)
- 300 psi (21 bar) W.P. with 250# ANSI flange drilling (Requires -S and EPR-Silicon Carbide-Silicon Carbide Seal)

MOUNTING


- In-Line Piping
- Flange Supports

PUMP VARIABLE SPEED CONTROL


- Integrated Technologic® Sensorless Control (ITSC)
- Integrated Technologic® (IT)
 - External input by others
 - Pressure Sensor(s)
 - Differential Pressure Sensor(s)
 - Flow Sensor(s)
- By Others

TYPE OF SEAL

- F Standard Seal w/ Flush Line (Buna-Carbon/Ceramic)
- S Stuffing Box construction w/ Flushed Mechanical Single Seal (EPR-Tungsten Carbide/Carbon)
- PF Stuffing Box Construction w/ Flushed Packing (Graphite Impregnated PTFE)

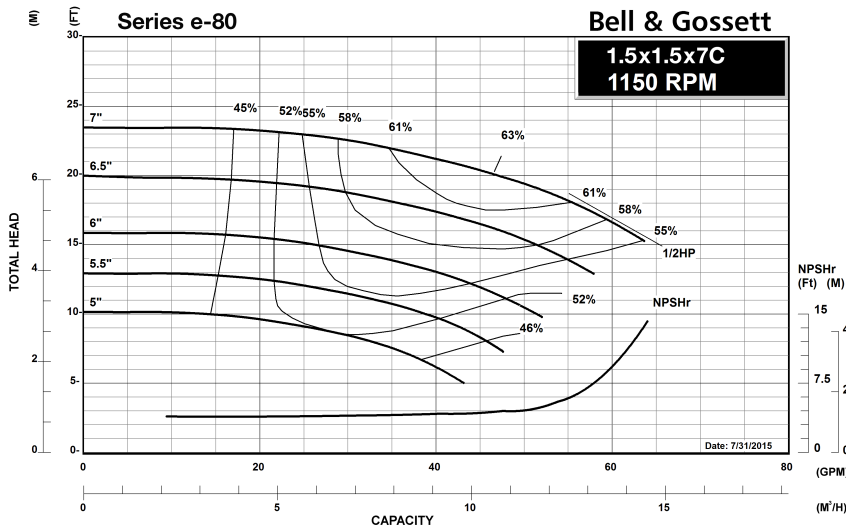

JOB:	REPRESENTATIVE:	
UNIT TAG:	ORDER NO.:	DATE:
ENGINEER:	SUBMITTED BY:	DATE:
CONTRACTOR:	APPROVED BY:	DATE:



1.5x1.5x7C

Series e-80

In-Line Mounted Centrifugal Pumps

SPECIFICATIONS

FLOW _____ HEAD _____

HP _____ RPM _____

VOLTS _____

CYCLE _____ INPUT PHASE _____

ENCLOSURE _____

APPROX. WEIGHT _____

SPECIALS _____

MATERIALS OF CONSTRUCTION

Stainless Steel Fitted

MAXIMUM WORKING PRESSURE

- 175 psi (12 bar) with 125# ANSI flange drilling
- 250 psi (17 bar) with 250# ANSI flange drilling (requires 80-S)
- 300 psi (21 bar) W.P. with 250# ANSI flange drilling (Requires -S and EPR-Silicon Carbide-Silicon Carbide Seal)

MOUNTING


- In-Line Piping
- Flange Supports

PUMP VARIABLE SPEED CONTROL


- Integrated Technologic® Sensorless Control (ITSC)
- Integrated Technologic® (IT)
 - External input by others
 - Pressure Sensor(s)
 - Differential Pressure Sensor(s)
 - Flow Sensor(s)
- By Others

TYPE OF SEAL

- F Standard Seal w/ Flush Line (Buna-Carbon/Ceramic)
- S Stuffing Box construction w/ Flushed Mechanical Single Seal (EPR-Tungsten Carbide/Carbon)
- PF Stuffing Box Construction w/ Flushed Packing (Graphite Impregnated PTFE)

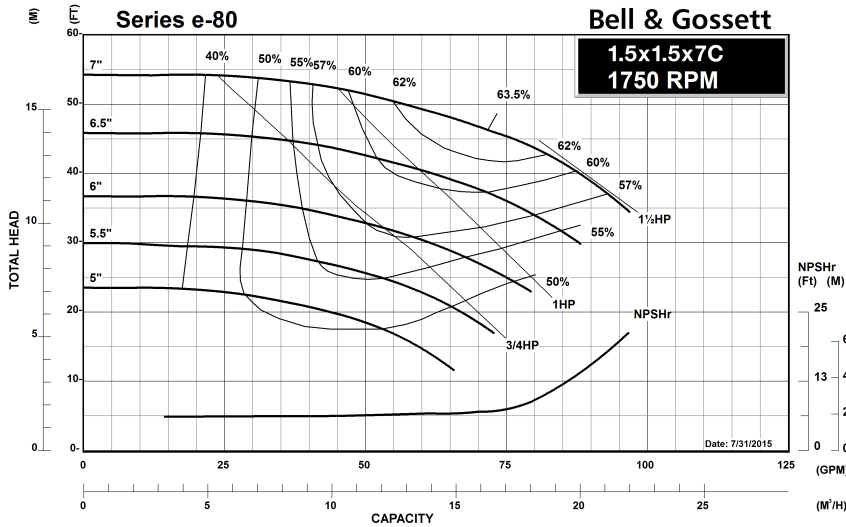

JOB:	REPRESENTATIVE:	
UNIT TAG:	ORDER NO.:	DATE:
ENGINEER:	SUBMITTED BY:	DATE:
CONTRACTOR:	APPROVED BY:	DATE:



1.5x1.5x7C

Series e-80

In-Line Mounted Centrifugal Pumps

SPECIFICATIONS

FLOW _____ HEAD _____

HP _____ RPM _____

VOLTS _____

CYCLE _____ INPUT PHASE _____

ENCLOSURE _____

APPROX. WEIGHT _____

SPECIALS _____

MATERIALS OF CONSTRUCTION

Stainless Steel Fitted

MAXIMUM WORKING PRESSURE

- 175 psi (12 bar) with 125# ANSI flange drilling
- 250 psi (17 bar) with 250# ANSI flange drilling (requires 80-S)
- 300 psi (21 bar) W.P. with 250# ANSI flange drilling (Requires -S and EPR-Silicon Carbide-Silicon Carbide Seal)

MOUNTING


- In-Line Piping
- Flange Supports


PUMP VARIABLE SPEED CONTROL

- Integrated Technologic® Sensorless Control (ITSC)
- Integrated Technologic® (IT)
 - External input by others
 - Pressure Sensor(s)
 - Differential Pressure Sensor(s)
 - Flow Sensor(s)
- By Others

TYPE OF SEAL

- F Standard Seal w/ Flush Line (Buna-Carbon/Ceramic)
- S Stuffing Box construction w/ Flushed Mechanical Single Seal (EPR-Tungsten Carbide/Carbon)
- PF Stuffing Box Construction w/ Flushed Packing (Graphite Impregnated PTFE)

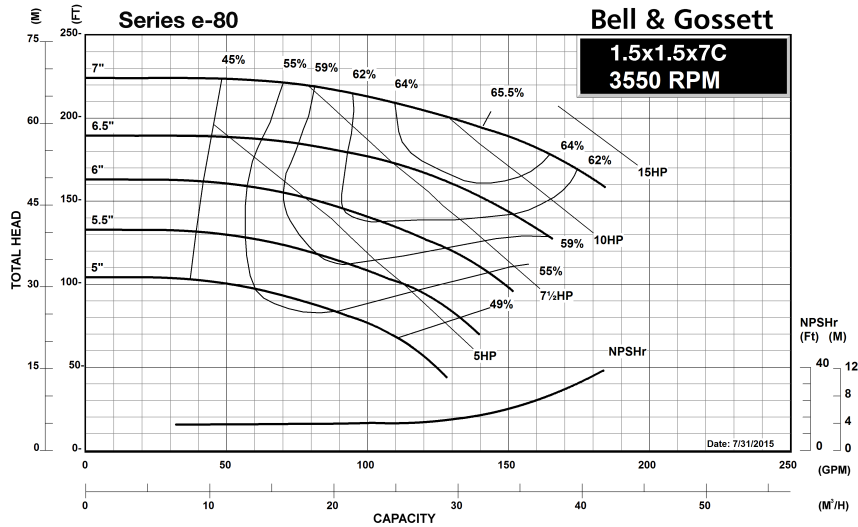

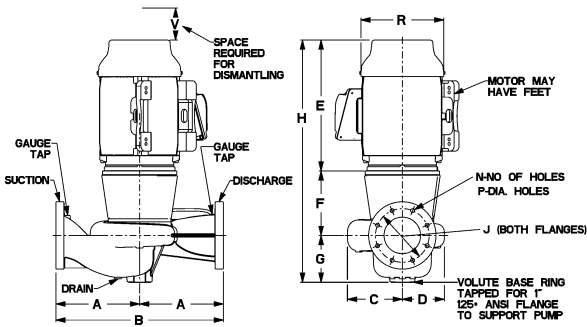

1.5x1.5x7C Series e-80 Centrifugal Pump Submittal - In-Line Piping

DIMENSIONS - Inches (mm)

STANDARD SEAL

MOTOR FRAME	A	B	C	D	E (max)	F	G	H (max)	125# ANSI			250# ANSI			R	S (Max)*	V (min)	Suct/Disch Gauge Taps (NPT)	Drain Tap (NPT)
									J	N	P	J	N	P					
									143JM	8.00 (203)	16.00 (406)	4.57 (116)	4.61 (117)	11.63 (295)					
145JM	8.00 (203)	16.00 (406)	4.57 (116)	4.61 (117)	12.63 (321)	4.63 (117)	4.58 (116)	21.83 (554)	3.88 (98)	4	0.63 (16)	4.50 (114)	4	0.88 (22)	9.75 (248)	1.50 (38)	4.00 (102)	0.25	0.25
182JM	8.00 (203)	16.00 (406)	4.57 (116)	4.61 (117)	15.31 (389)	4.63 (117)	4.58 (116)	24.52 (623)	3.88 (98)	4	0.63 (16)	4.50 (114)	4	0.88 (22)	11.75 (298)	1.00 (25)	4.00 (102)	0.25	0.25
184JM	8.00 (203)	16.00 (406)	4.57 (116)	4.61 (117)	15.31 (389)	4.63 (117)	4.58 (116)	24.52 (623)	3.88 (98)	4	0.63 (16)	4.50 (114)	4	0.88 (22)	11.75 (298)	1.00 (25)	4.00 (102)	0.25	0.25
213JM	8.00 (203)	16.00 (406)	4.57 (116)	4.61 (117)	19.25 (489)	4.63 (117)	4.58 (116)	28.45 (723)	3.88 (98)	4	0.63 (16)	4.50 (114)	4	0.88 (22)	14.00 (356)	-	4.00 (102)	0.25	0.25
215JM	8.00 (203)	16.00 (406)	4.57 (116)	4.61 (117)	19.25 (489)	4.63 (117)	4.58 (116)	28.45 (723)	3.88 (98)	4	0.63 (16)	4.50 (114)	4	0.88 (22)	14.00 (356)	-	4.00 (102)	0.25	0.25

STUFFING BOX

MOTOR FRAME	A	B	C	D	E (max)	F	G	H (max)	125# ANSI			250# ANSI			R	S (Max)*	V (min)	Suct/Disch Gauge Taps (NPT)	Drain Tap (NPT)
									J	N	P	J	N	P					
									143JP	8.00 (203)	16.00 (406)	4.57 (116)	4.61 (117)	11.63 (295)					
145JP	8.00 (203)	16.00 (406)	4.57 (116)	4.61 (117)	12.63 (321)	7.75 (197)	4.58 (116)	24.95 (634)	3.88 (98)	4	0.63 (16)	4.50 (114)	4	0.88 (22)	9.75 (248)	1.50 (38)	4.00 (102)	0.25	0.25
182JP	8.00 (203)	16.00 (406)	4.57 (116)	4.61 (117)	15.31 (389)	7.75 (197)	4.58 (116)	27.64 (702)	3.88 (98)	4	0.63 (16)	4.50 (114)	4	0.88 (22)	11.75 (298)	1.00 (25)	4.00 (102)	0.25	0.25
184JP	8.00 (203)	16.00 (406)	4.57 (116)	4.61 (117)	15.31 (389)	7.75 (197)	4.58 (116)	27.64 (702)	3.88 (98)	4	0.63 (16)	4.50 (114)	4	0.88 (22)	11.75 (298)	1.00 (25)	4.00 (102)	0.25	0.25


Dimensions are subject to change. Not to be used for construction purposes unless certified.

NOTE: For Single phase Motors add 1" to dimensions E & H.

*Dimensions are for ODP Motors. For TEFC add S dimension to dimensions E & H.

Xylem Inc.
8200 N. Austin Avenue, Morton Grove, IL 60053
Phone: (847)966-3700 Fax: (847)965-8379
www.bellgossett.com
Bell & Gossett is a trademark of Xylem Inc. or one of its subsidiaries.
© 2015 Xylem Inc.

xylem
Let's Solve Water

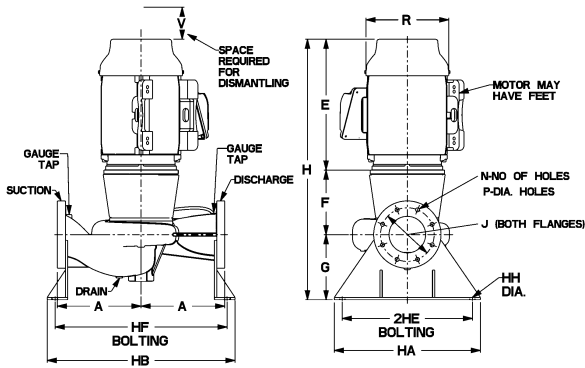

1.5x1.5x7C Series e-80 Centrifugal Pump Submittal - Flange Support Mounting

DIMENSIONS - Inches (mm)

STANDARD SEAL

MOTOR FRAME	A	HF BOLTING	HB	2HE BOLTING	HA	HH DIA	E (max)	F	G	H (max)	125# ANSI			250# ANSI			R	S (Max)*	V (min)	Suct/Disch Gauge Taps (NPT)	Drain Tap (NPT)
											J	N	P	J	N	P					
143JM	8.00 (203)	18.70 (475)	22.20 (564)	16.50 (419)	20.00 (508)	0.88 (22)	11.63 (295)	4.63 (117)	4.58 (116)	20.83 (529)	3.88 (98)	4 (16)	0.63 (16)	4.50 (114)	4 (22)	0.88 (22)	9.75 (248)	1.50 (38)	4.00 (102)	0.25	0.25
145JM	8.00 (203)	18.70 (475)	22.20 (564)	16.50 (419)	20.00 (508)	0.88 (22)	12.63 (321)	4.63 (117)	4.58 (116)	21.83 (554)	3.88 (98)	4 (16)	0.63 (16)	4.50 (114)	4 (22)	0.88 (22)	9.75 (248)	1.50 (38)	4.00 (102)	0.25	0.25
182JM	8.00 (203)	18.70 (475)	22.20 (564)	16.50 (419)	20.00 (508)	0.88 (22)	15.31 (389)	4.63 (117)	4.58 (116)	24.58 (624)	3.88 (98)	4 (16)	0.63 (16)	4.50 (114)	4 (22)	0.88 (22)	11.75 (298)	1.00 (25)	4.00 (102)	0.25	0.25
184JM	8.00 (203)	18.70 (475)	22.20 (564)	16.50 (419)	20.00 (508)	0.88 (22)	15.31 (389)	4.63 (117)	4.58 (116)	24.52 (623)	3.88 (98)	4 (16)	0.63 (16)	4.50 (114)	4 (22)	0.88 (22)	11.75 (298)	1.00 (25)	4.00 (102)	0.25	0.25
213JM	8.00 (203)	18.70 (475)	22.20 (564)	16.50 (419)	20.00 (508)	0.88 (22)	19.25 (489)	4.63 (117)	4.58 (116)	28.45 (723)	3.88 (98)	4 (16)	0.63 (16)	4.50 (114)	4 (22)	0.88 (22)	14.00 (356)	-	4.00 (102)	0.25	0.25
215JM	8.00 (203)	18.70 (475)	22.20 (564)	16.50 (419)	20.00 (508)	0.88 (22)	19.25 (489)	4.63 (117)	4.58 (116)	28.45 (723)	3.88 (98)	4 (16)	0.63 (16)	4.50 (114)	4 (22)	0.88 (22)	14.00 (356)	-	4.00 (102)	0.25	0.25

STUFFING BOX

MOTOR FRAME	A	HF BOLTING	HB	2HE BOLTING	HA	HH DIA	E (max)	F	G	H (max)	125# ANSI			250# ANSI			R	S (Max)*	V (min)	Suct/Disch Gauge Taps (NPT)	Drain Tap (NPT)
											J	N	P	J	N	P					
143JP	8.00 (203)	18.70 (475)	22.20 (564)	16.50 (419)	20.00 (508)	0.88 (22)	11.63 (295)	7.75 (197)	4.58 (116)	23.95 (608)	-	4 (16)	0.63 (16)	4.50 (114)	4 (22)	0.88 (22)	9.75 (248)	1.50 (38)	4.00 (102)	0.25	0.25
145JP	8.00 (203)	18.70 (475)	22.20 (564)	16.50 (419)	20.00 (508)	0.88 (22)	12.63 (321)	7.75 (197)	4.58 (116)	24.95 (634)	3.88 (98)	4 (16)	0.63 (16)	4.50 (114)	4 (22)	0.88 (22)	9.75 (248)	1.50 (38)	4.00 (102)	0.25	0.25
182JP	8.00 (203)	18.70 (475)	22.20 (564)	16.50 (419)	20.00 (508)	0.88 (22)	15.31 (389)	7.75 (197)	4.58 (116)	27.64 (702)	3.88 (98)	4 (16)	0.63 (16)	4.50 (114)	4 (22)	0.88 (22)	11.75 (298)	1.00 (25)	4.00 (102)	0.25	0.25
184JP	8.00 (203)	18.70 (475)	22.20 (564)	16.50 (419)	20.00 (508)	0.88 (22)	15.31 (389)	7.75 (197)	4.58 (116)	27.64 (702)	3.88 (98)	4 (16)	0.63 (16)	4.50 (114)	4 (22)	0.88 (22)	11.75 (298)	1.00 (25)	4.00 (102)	0.25	0.25


Dimensions are subject to change. Not to be used for construction purposes unless certified.

NOTE: For Single phase Motors add 1" to dimensions E & H.

*Dimensions are for ODP Motors. For TEFC add S dimension to dimensions E & H.

Xylem Inc.
8200 N. Austin Avenue, Morton Grove, IL 60053
Phone: (847)966-3700 Fax: (847)965-8379
www.bellgossett.com
Bell & Gossett is a trademark of Xylem Inc. or one of its subsidiaries.
© 2015 Xylem Inc.







1.5x1.5x7C Series e-80

In-Line Mounted Centrifugal Pumps With Integrated Technologic® Control

TECHNOLOGIC STANDARD FEATURES	
CONTROL METHOD WITH INTEGRATED TECHNOLOGIC® SENSORLESS CONTROL (ITSC)	Factory configured for sensorless operation.
CONTROL METHOD WITH INTEGRATED TECHNOLOGIC® (IT)	Field configurable for sensor by others, building management system input, or optional sensor(s) provided.
ENCLOSURE	NEMA 12 (same as IP55 & UL type 12)
POWER DISCONNECT SWITCH	Included standard. Fused Disconnect Switch optional with three phase input voltage.
HARMONIC SUPPRESSION	Integrated non-saturating dual DC link reactors provide better harmonic performance than a 5% AC line reactor.
COOLING	Fan-cooled through temperature controlled and easy replacement.
AMBIENT TEMPERATURE RATING	14°F to 113°F (-10°C to 45°C)
COMMUNICATION PROTOCOLS	BACnet, Modbus RTU, N2 Metasys, FLN Apogee
ANALOG INPUTS	2 configurable for either voltage (0 to 10VDC) or current(0/4 to 20mA)
ANALOG OUTPUTS	1 (0/4 to 20mA) up to 500 ohm load accurate to 1% of full scale
DIGITAL INPUTS	4 (0 to 24VDC), NPN or PNP, 0 to 24VDC, on 5 msec scan interval, Up to 2 can be configured as pulse inputs.
DIGITAL OUTPUTS	2 (0 to 24VDC), 40mA max current, configurable as pulse outputs.
RELAY OUTPUTS	2 programmable, 240VAC or 400VAC up to 2 A
MINIMUM CONTROL HEAD	_____ ft (default set to 40% of design head if not unknown)

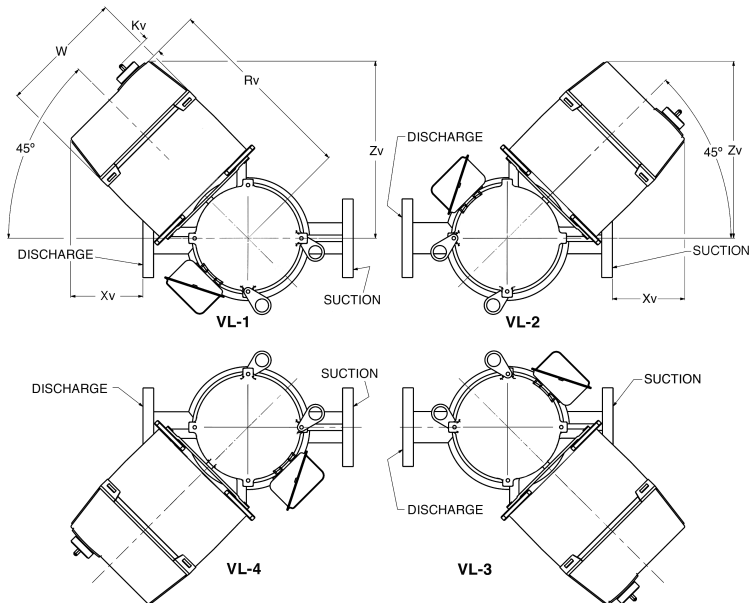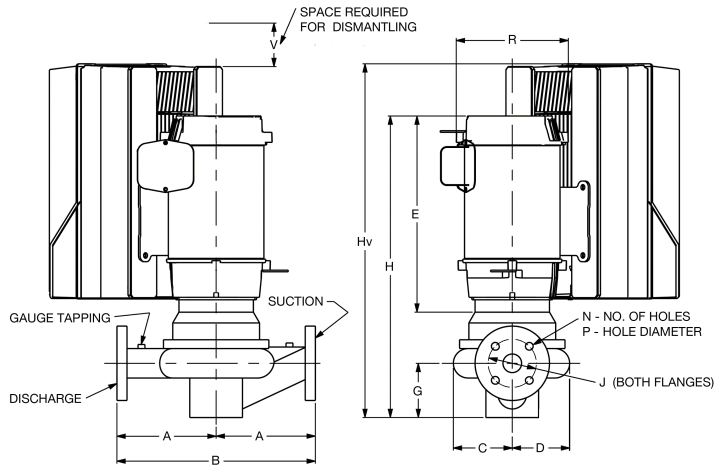

Xylem Inc.
8200 N. Austin Avenue
Morton Grove, IL 60053
Phone: (847)966-3700 Fax: (847)965-8379
www.bellgossett.com
Bell & Gossett is a trademark of Xylem Inc. or one of its subsidiaries.
© 2015 Xylem Inc.

xylem
Let's Solve Water

Series e-80 1.5x1.5x7C

B-139

In-Line Mounted Centrifugal Pumps

With Integrated Technologic® Control

DIMENSIONS - Inches (mm)

STANDARD SEAL

STUFFING BOX

MOTOR FRAME	VFD	Rv	Zv	W	Hv	Xv
143JM	A5	11.78 (299)	11.33 (288)	9.50 (241)	27.27 (693)	3.33 (85)
145JM	A5	11.78 (299)	11.33 (288)	9.50 (241)	28.27 (718)	3.33 (85)
	B1	14.07 (357)	12.93 (328)	9.50 (241)	30.62 (778)	4.93 (125)
182JM	A5	12.78 (325)	12.03 (306)	9.50 (241)	27.53 (699)	4.03 (102)
	B1	15.07 (383)	13.63 (346)	9.50 (241)	28.53 (725)	5.63 (143)
184JM	A5	12.78 (325)	12.03 (306)	9.50 (241)	27.53 (699)	4.03 (102)
	B1	15.08 (383)	13.69 (348)	9.50 (241)	28.59 (726)	5.69 (144)
213JM	A5	13.53 (344)	12.56 (319)	9.50 (241)	30.84 (783)	4.56 (116)
	B1	15.84 (402)	14.22 (361)	9.50 (241)	32.44 (824)	6.22 (158)
	B2	15.84 (402)	14.22 (361)	9.50 (241)	38.18 (970)	6.22 (158)
215JM	A5	13.53 (344)	12.56 (319)	9.50 (241)	29.36 (746)	4.56 (116)
	B1	15.84 (402)	14.22 (361)	9.50 (241)	30.89 (785)	6.22 (158)
	B2	13.53 (344)	12.56 (319)	9.50 (241)	36.63 (930)	6.22 (158)
	C1	15.50 (394)	15.76 (400)	12.10 (307)	38.65 (982)	9.42 (239)

MOTOR FRAME	VFD	Rv	Zv	W	Hv	Xv
143JP	A5	11.78 (299)	11.33 (288)	9.50 (241)	30.39 (772)	3.33 (85)
145JP	A5	11.78 (299)	11.33 (288)	9.50 (241)	31.39 (797)	3.33 (85)
	B1	14.07 (357)	12.93 (328)	9.50 (241)	33.74 (857)	4.93 (125)
182JP	A5	12.78 (325)	12.03 (306)	9.50 (241)	30.66 (779)	4.03 (102)
	B1	15.07 (383)	13.63 (346)	9.50 (241)	31.66 (804)	5.63 (143)
184JP	A5	12.78 (325)	12.03 (306)	9.50 (241)	30.66 (779)	4.03 (102)
	B1	15.08 (383)	13.69 (348)	9.50 (241)	31.72 (806)	5.69 (144)

NOTE: Drives with single phase input have three phase output and include three phase motors.
Kv=2 (50)




Pressure Sensor/Transmitter For Pumps with TECHNOLOGIC® Drives

FEATURES

- 4-20mA output
- 10-28 VDC supply voltage
- Operating Temperature -40 to 85°C (-40 to 185°F)
- Storage Temperature -40 to 100°C (-40 to 212°F)
- Enclosure IP-66 (housing only)
- High Strength Stainless Steel Construction
- No Oil, Welds or Internal O-rings
- Wide Operating Temperature
- Low Static and Thermal Errors
- Compatible with Wide Variety of Liquids and Gases
- EMI/RFI Protection
- UL/cUL 508 Approved (with housing)
- 1lb. (0.45 kg) approximate weight

TECHNOLOGIC ANALOG SENSOR WIRING

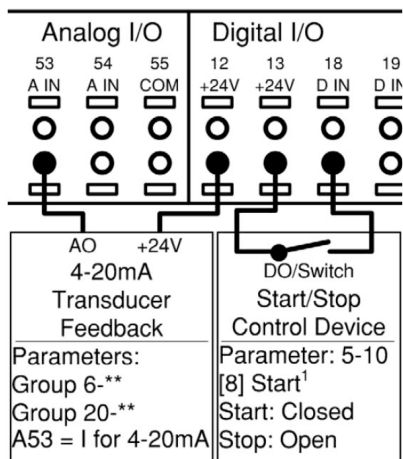

B&G PART NUMBERS

- S13203 Pressure range: 0-100 psi (0-689 kPa)
- S13204 Pressure range: 0-300 psi (0-2068 kPa)


Consult factory for other ranges.


INSTALLATION CONSIDERATIONS

- Standard 24 AWG (0.61 mm dia.) 2 wire shielded cable located in a conduit separate from high voltage wiring
- 24 vdc power supplied from Technologic Controller

DIMENSIONAL INFORMATION

Dimensions in Inches (Millimeters)

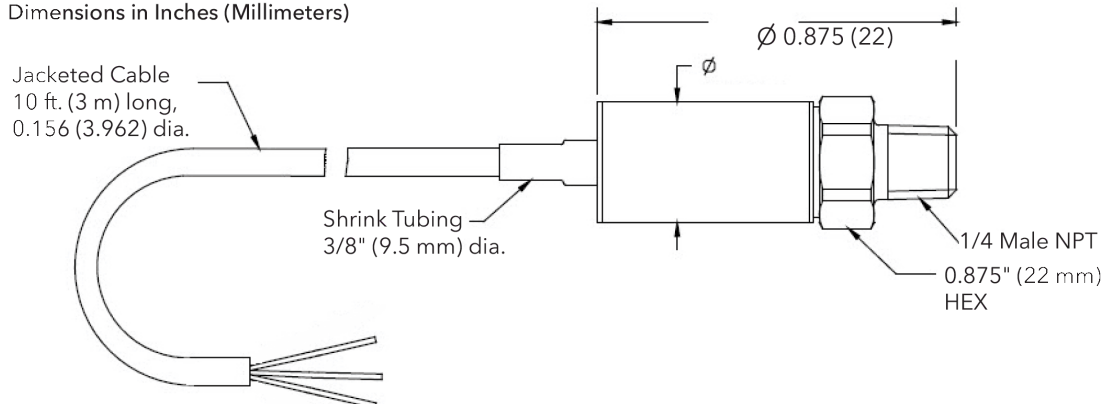

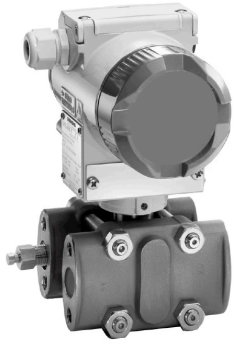


Differential Pressure Sensor/ Transmitter For Pumps with TECHNOLOGIC® Drives

FEATURES

- Relays reading to the Technologic controller up to 2000 ft. (610 m) away
- All wetted parts are 316 stainless steel
- Built-in RFI filter effective from 20 to 1000 MHz
- Withstands static pressures up to 2300 PSI (15858 kPa)
- 3 Valve bypass manifold (optional)
- 10 lbs. (4.5 kg) approximate weight

TECHNOLOGIC ANALOG SENSOR WIRING

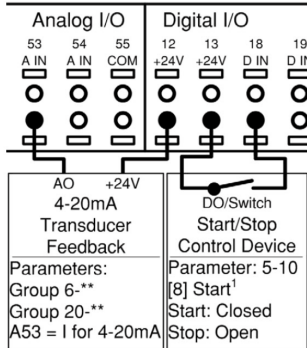

B&G PART NUMBERS

- S100089 Pressure range: 0 - 40 psi (0 - 276 kPa)
- S100091 Pressure range: 0 - 70 psi (0 - 483 kPa)
- S100092 Pressure range: 0 - 100 psi (0 - 689 kPa)


Consult factory for other ranges.

INSTALLATION CONSIDERATIONS

- Standard 18 AWG (1.194 mm dia.) 2 wire shielded cable located in a conduit separate from high voltage wiring
- 24 vdc power supplied from Technologic Controller for distance <2000 ft (610 m)

DIMENSIONAL INFORMATION

Dimensions in Inches (Millimeters)

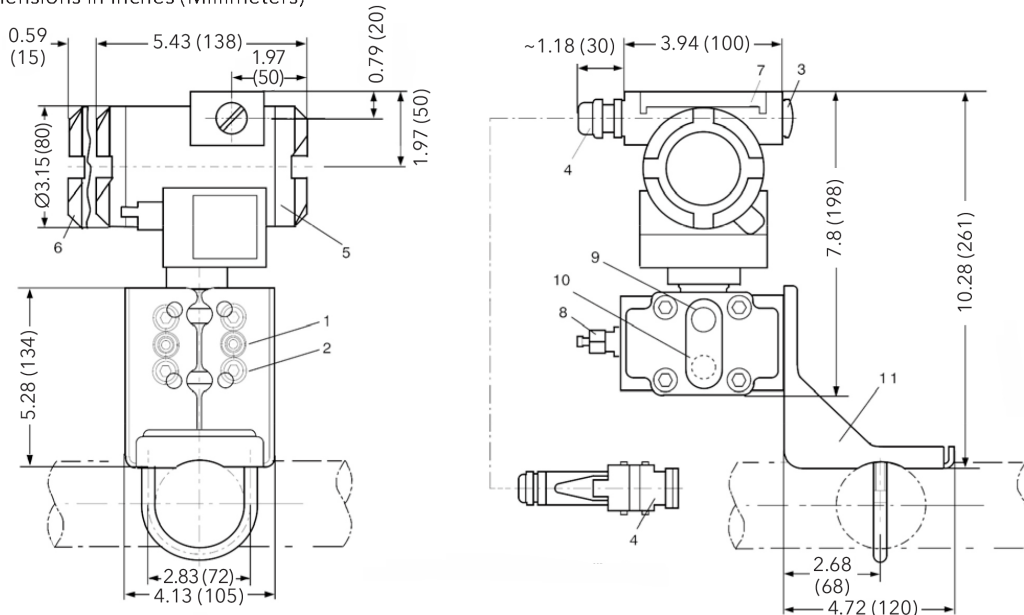

- 1 Process connection 1/4-18NPT for absolute pressure (+) side
- 2 Mounting thread 7/16-20 UNF to EN 61518
- 3 Dummy plug
- 4 Electrical connection: Screwed gland 1/2-14 NPT
- 5 Connection side

- 6 Electronic side, no digital display
- 7 Access cover over magnetic pushbuttons
- 8 Sealing screw with vent shown (optional)
- 9 Side vent for measuring liquid
- 10 Side vent for measuring gas (supplement H02)
- 11 Mounting bracket (2 shackles, 4 nuts, 4 U-plates, 1 angle) made of steel



Flow Sensor/Transmitter For Pumps with TECHNOLOGIC® Drives


The rugged Bell & Gossett Flow Sensor/Transmitter precisely measures system flow and transmits a proportional 4 to 20 mA DC signal to the Technologic Controller for display or program calculations.

FEATURES



- Suitable for mounting in vertical pipe
- Suitable for mounting in horizontal pipe within 45° of top dead center
- Non-magnetically sensed, non-fouling paddle wheel
- NEMA 4X Transmitter Enclosure
- Maximum Pressure Ratings:
 - 1000 psi @ 100°F, 900 psi @ 200°F,
 - 750 psi @ 300°F (6895 kPa @ 38°C, 6205 kPa @ 93°C, 5171 kPa @ 149°C)
- Maximum Temperature Ratings:
 - Fluid - 300°F (149°C) continuous service
 - Electronics - 150°F (66°C)
- Optional software and cable available for field programming
- 9.9 lbs (4.5 kg) approximate weight

DIMENSIONAL INFORMATION

Dimensions in Inches (Millimeters)

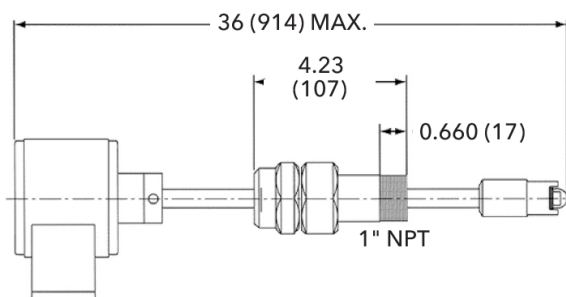

TECHNOLOGIC ANALOG SENSOR WIRING

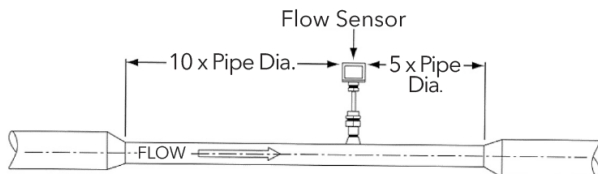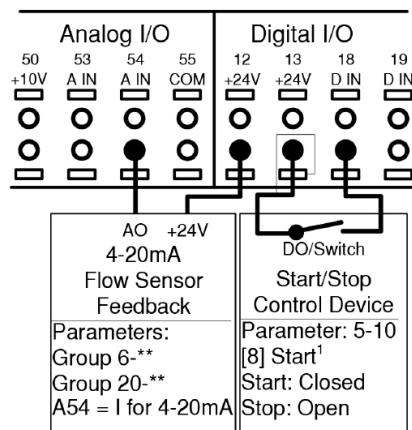


INSTALLATION CONSIDERATIONS

- Standard 18 AWG (1.194 mm dia.) gauge 3 wire shielded cable located in conduit separate from high voltage wiring
- 24 vdc power supplied from Technologic Controller
- Takes accurate readings and relays them to the Technologic Controller up to 2,000 ft. (610 m) away, when 10 pipe diameters upstream and 5 pipe diameters downstream of straight uninterrupted flow is present.

CALIBRATION CHART		
B&G Part No.	Pipe Size	Max. Flow
137411	3" Sch 40	250 gpm (16 l/sec)
137412	4" Sch 40	400 gpm (25 l/sec)
137413	6" Sch 40	850 gpm (54 l/sec)
137414	8" Sch 40	1750 gpm (110 l/sec)
137415	10" Sch 40	3150 gpm (199 l/sec)
137416	12" Sch 40	5000 gpm (315 l/sec)
137417	14" Sch 40	6400 gpm (404 l/sec)
137418	16" Sch 40	9100 gpm (574 l/sec)
137419	18" Sch 40	12400 gpm (782 l/sec)
137420	20" Sch 40	16500 gpm (1041 l/sec)

Consult factory for custom flow range calibration.

JOB:	REPRESENTATIVE:	
UNIT TAG:	ORDER NO.:	DATE:
ENGINEER:	SUBMITTED BY:	DATE:
CONTRACTOR:	APPROVED BY:	DATE:



1.5x1.5x9.5B

Series e-80

In-Line Mounted Centrifugal Pumps

SPECIFICATIONS

FLOW _____ HEAD _____

HP _____ RPM _____

VOLTS _____

CYCLE _____ INPUT PHASE _____

ENCLOSURE _____

APPROX. WEIGHT _____

SPECIALS _____

MATERIALS OF CONSTRUCTION

Stainless Steel Fitted

MAXIMUM WORKING PRESSURE

- 175 psi (12 bar) with 125# ANSI flange drilling
- 250 psi (17 bar) with 250# ANSI flange drilling (requires 80-S)
- 300 psi (21 bar) W.P. with 250# ANSI flange drilling (Requires -S and EPR-Silicon Carbide-Silicon Carbide Seal)

MOUNTING


- In-Line Piping
- Flange Supports

PUMP VARIABLE SPEED CONTROL


- Integrated Technologic® Sensorless Control (ITSC)
- Integrated Technologic® (IT)
 - External input by others
 - Pressure Sensor(s)
 - Differential Pressure Sensor(s)
 - Flow Sensor(s)
- By Others

TYPE OF SEAL

- F Standard Seal w/ Flush Line (Buna-Carbon/Ceramic)
- S Stuffing Box construction w/ Flushed Mechanical Single Seal (EPR-Tungsten Carbide/Carbon)
- PF Stuffing Box Construction w/ Flushed Packing (Graphite Impregnated PTFE)

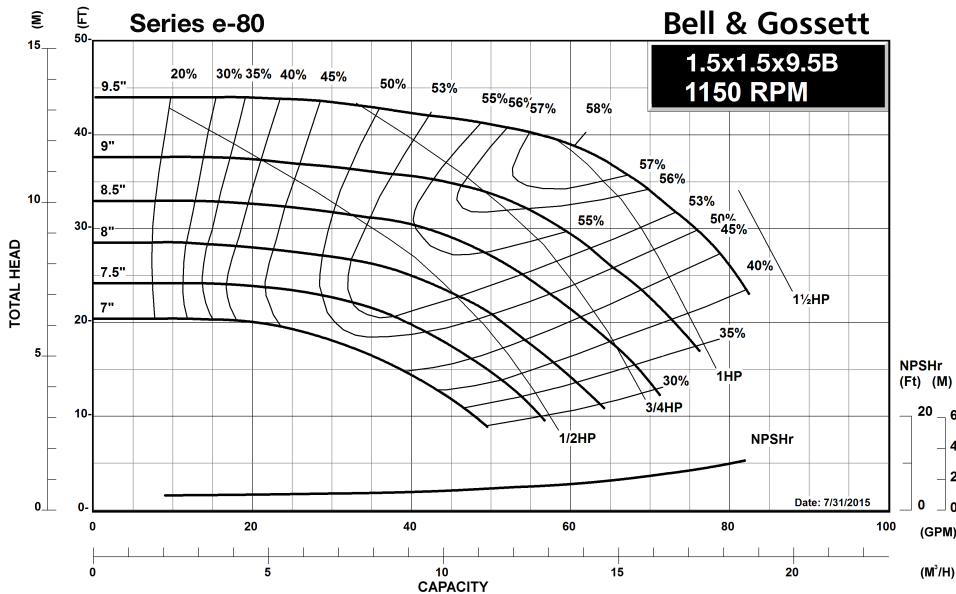

JOB:	REPRESENTATIVE:	
UNIT TAG:	ORDER NO.:	DATE:
ENGINEER:	SUBMITTED BY:	DATE:
CONTRACTOR:	APPROVED BY:	DATE:



1.5x1.5x9.5B

Series e-80

In-Line Mounted Centrifugal Pumps

SPECIFICATIONS

FLOW _____ HEAD _____

HP _____ RPM _____

VOLTS _____

CYCLE _____ INPUT PHASE _____

ENCLOSURE _____

APPROX. WEIGHT _____

SPECIALS _____

MATERIALS OF CONSTRUCTION

Stainless Steel Fitted

MAXIMUM WORKING PRESSURE

- 175 psi (12 bar) with 125# ANSI flange drilling
- 250 psi (17 bar) with 250# ANSI flange drilling (requires 80-S)
- 300 psi (21 bar) W.P. with 250# ANSI flange drilling (Requires -S and EPR-Silicon Carbide-Silicon Carbide Seal)

MOUNTING


- In-Line Piping
- Flange Supports

PUMP VARIABLE SPEED CONTROL


- Integrated Technologic® Sensorless Control (ITSC)
- Integrated Technologic® (IT)
 - External input by others
 - Pressure Sensor(s)
 - Differential Pressure Sensor(s)
 - Flow Sensor(s)
- By Others

TYPE OF SEAL

- F Standard Seal w/ Flush Line (Buna-Carbon/Ceramic)
- S Stuffing Box construction w/ Flushed Mechanical Single Seal (EPR-Tungsten Carbide/Carbon)
- PF Stuffing Box Construction w/ Flushed Packing (Graphite Impregnated PTFE)

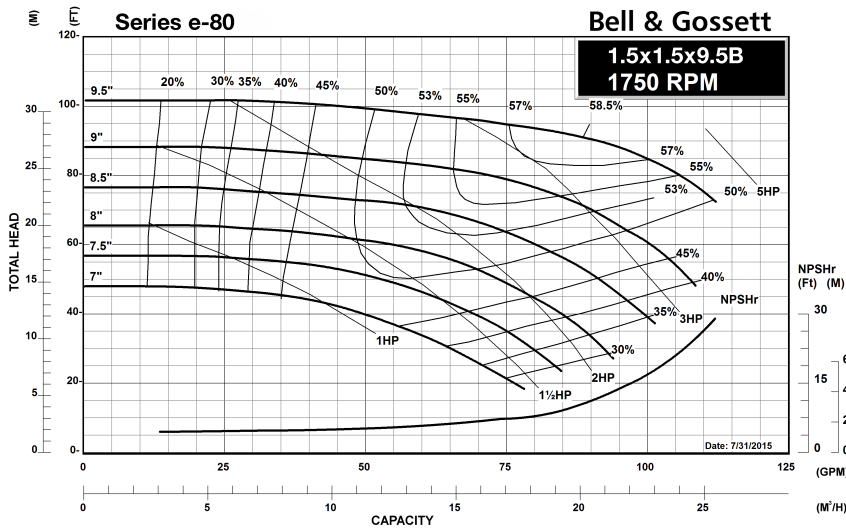

JOB:	REPRESENTATIVE:	
UNIT TAG:	ORDER NO.:	DATE:
ENGINEER:	SUBMITTED BY:	DATE:
CONTRACTOR:	APPROVED BY:	DATE:



1.5x1.5x9.5B

Series e-80

In-Line Mounted Centrifugal Pumps

SPECIFICATIONS

FLOW _____ HEAD _____

HP _____ RPM _____

VOLTS _____

CYCLE _____ INPUT PHASE _____

ENCLOSURE _____

APPROX. WEIGHT _____

SPECIALS _____

MATERIALS OF CONSTRUCTION

Stainless Steel Fitted

MAXIMUM WORKING PRESSURE

- 175 psi (12 bar) with 125# ANSI flange drilling
- 250 psi (17 bar) with 250# ANSI flange drilling (requires 80-S)
- 300 psi (21 bar) W.P. with 250# ANSI flange drilling (Requires -S and EPR-Silicon Carbide-Silicon Carbide Seal)

MOUNTING


- In-Line Piping
- Flange Supports


PUMP VARIABLE SPEED CONTROL

- Integrated Technologic® Sensorless Control (ITSC)
- Integrated Technologic® (IT)
 - External input by others
 - Pressure Sensor(s)
 - Differential Pressure Sensor(s)
 - Flow Sensor(s)
- By Others

TYPE OF SEAL

- F Standard Seal w/ Flush Line (Buna-Carbon/Ceramic)
- S Stuffing Box construction w/ Flushed Mechanical Single Seal (EPR-Tungsten Carbide/Carbon)
- PF Stuffing Box Construction w/ Flushed Packing (Graphite Impregnated PTFE)

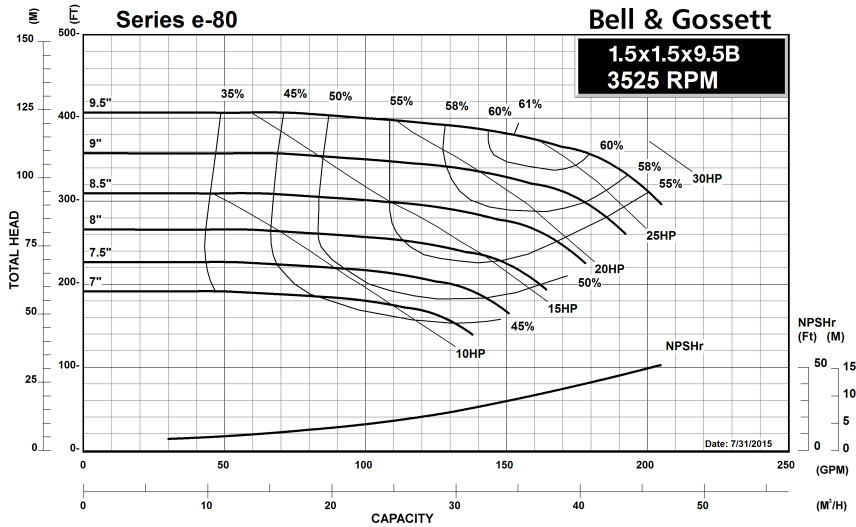

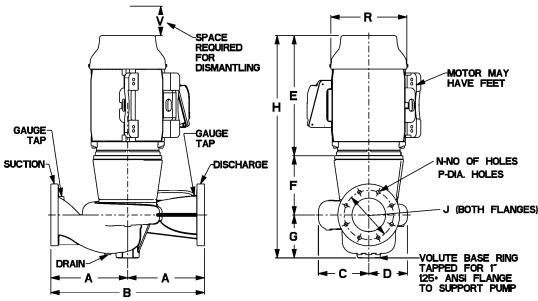

1.5x1.5x9.5B Series e-80 Centrifugal Pump Submittal - In-Line Piping

DIMENSIONS - Inches (mm)

STANDARD SEAL

MOTOR FRAME	A	B	C	D	E (max)	F	G	H (max)	125# ANSI			250# ANSI			R	S (Max)*	V (min)	Suct/Disch Gauge Taps (NPT)	Drain Tap (NPT)
									J	N	P	J	N	P					
143JM	9.50 (241)	19.00 (483)	5.86 (149)	6.16 (156)	11.63 (295)	4.69 (119)	4.50 (114)	20.81 (529)	3.88 (98)	4	0.63 (16)	4.50 (114)	4	0.88 (22)	9.75 (248)	1.50 (38)	4.00 (102)	0.25	0.25
145JM	9.50 (241)	19.00 (483)	5.86 (149)	6.16 (156)	12.63 (321)	4.69 (119)	4.50 (114)	21.81 (554)	3.88 (98)	4	0.63 (16)	4.50 (114)	4	0.88 (22)	9.75 (248)	1.50 (38)	4.00 (102)	0.25	0.25
182JM	9.50 (241)	19.00 (483)	5.86 (149)	6.16 (156)	15.31 (389)	4.69 (119)	4.50 (114)	24.50 (622)	3.88 (98)	4	0.63 (16)	4.50 (114)	4	0.88 (22)	11.75 (298)	1.00 (25)	4.00 (102)	0.25	0.25
184JM	9.50 (241)	19.00 (483)	5.86 (149)	6.16 (156)	15.31 (389)	4.69 (119)	4.50 (114)	24.50 (622)	3.88 (98)	4	0.63 (16)	4.50 (114)	4	0.88 (22)	11.75 (298)	1.00 (25)	4.00 (102)	0.25	0.25
213JM	9.50 (241)	19.00 (483)	5.86 (149)	6.16 (156)	19.25 (489)	4.69 (119)	4.50 (114)	28.44 (722)	3.88 (98)	4	0.63 (16)	4.50 (114)	4	0.88 (22)	14.00 (356)	-	4.00 (102)	0.25	0.25
215JM	9.50 (241)	19.00 (483)	5.86 (149)	6.16 (156)	19.25 (489)	4.69 (119)	4.50 (114)	28.44 (722)	3.88 (98)	4	0.63 (16)	4.50 (114)	4	0.88 (22)	14.00 (356)	-	4.00 (102)	0.25	0.25
254JM	9.50 (241)	19.00 (483)	5.86 (149)	6.16 (156)	24.13 (613)	5.69 (144)	4.50 (114)	34.31 (872)	3.88 (98)	4	0.63 (16)	4.50 (114)	4	0.88 (22)	17.00 (432)	-	4.00 (102)	0.25	0.25
256JM	9.50 (241)	19.00 (483)	5.86 (149)	6.16 (156)	24.13 (613)	5.69 (144)	4.50 (114)	34.31 (872)	3.88 (98)	4	0.63 (16)	4.50 (114)	4	0.88 (22)	17.00 (432)	-	4.00 (102)	0.25	0.25
284JM	9.50 (241)	19.00 (483)	5.86 (149)	6.16 (156)	23.63 (600)	5.69 (144)	4.50 (114)	33.81 (859)	3.88 (98)	4	0.63 (16)	4.50 (114)	4	0.88 (22)	16.13 (410)	4.63 (117)	4.00 (102)	0.25	0.25
286JM	9.50 (241)	19.00 (483)	5.86 (149)	6.16 (156)	25.13 (638)	5.69 (144)	4.50 (114)	35.31 (897)	3.88 (98)	4	0.63 (16)	4.50 (114)	4	0.88 (22)	16.13 (410)	4.63 (117)	4.00 (102)	0.25	0.25

STUFFING BOX

MOTOR FRAME	A	B	C	D	E (max)	F	G	H (max)	125# ANSI			250# ANSI			R	S (Max)*	V (min)	Suct/Disch Gauge Taps (NPT)	Drain Tap (NPT)
									J	N	P	J	N	P					
143JP	9.50 (241)	19.00 (483)	5.86 (149)	6.16 (156)	11.63 (295)	7.81 (198)	4.50 (114)	23.94 (608)	3.88 (98)	4	0.63 (16)	4.50 (114)	4	0.88 (22)	9.75 (248)	1.50 (38)	4.00 (102)	0.25	0.25
145JP	9.50 (241)	19.00 (483)	5.86 (149)	6.16 (156)	12.63 (321)	7.69 (195)	4.50 (114)	24.81 (630)	3.88 (98)	4	0.63 (16)	4.50 (114)	4	0.88 (22)	9.75 (248)	1.50 (38)	4.00 (102)	0.25	0.25
182JP	9.50 (241)	19.00 (483)	5.86 (149)	6.16 (156)	15.31 (389)	7.81 (198)	4.50 (114)	27.63 (702)	3.88 (98)	4	0.63 (16)	4.50 (114)	4	0.88 (22)	11.75 (298)	1.00 (25)	4.00 (102)	0.25	0.25
184JP	9.50 (241)	19.00 (483)	5.86 (149)	6.16 (156)	15.31 (389)	7.81 (198)	4.50 (114)	27.63 (702)	3.88 (98)	4	0.63 (16)	4.50 (114)	4	0.88 (22)	11.75 (298)	1.00 (25)	4.00 (102)	0.25	0.25
213JP	9.50 (241)	19.00 (483)	5.86 (149)	6.16 (156)	19.25 (489)	8.56 (217)	4.50 (114)	32.31 (821)	3.88 (98)	4	0.63 (16)	4.50 (114)	4	0.88 (22)	14.00 (356)	-	4.00 (102)	0.25	0.25
215JP	9.50 (241)	19.00 (483)	5.86 (149)	6.16 (156)	19.25 (489)	8.56 (217)	4.50 (114)	32.31 (821)	3.88 (98)	4	0.63 (16)	4.50 (114)	4	0.88 (22)	14.00 (356)	-	4.00 (102)	0.25	0.25
254JP	9.50 (241)	19.00 (483)	5.86 (149)	6.16 (156)	24.13 (613)	8.56 (217)	4.50 (114)	37.19 (945)	3.88 (98)	4	0.63 (16)	4.50 (114)	4	0.88 (22)	17.00 (432)	-	4.00 (102)	0.25	0.25
256JP	9.50 (241)	19.00 (483)	5.86 (149)	6.16 (156)	24.13 (613)	8.56 (217)	4.50 (114)	37.19 (945)	3.88 (98)	4	0.63 (16)	4.50 (114)	4	0.88 (22)	17.00 (432)	-	4.00 (102)	0.25	0.25
284JP	9.50 (241)	19.00 (483)	5.86 (149)	6.16 (156)	23.63 (600)	8.56 (217)	4.50 (114)	36.69 (932)	3.88 (98)	4	0.63 (16)	4.50 (114)	4	0.88 (22)	16.13 (410)	4.63 (117)	4.00 (102)	0.25	0.25
286JP	9.50 (241)	19.00 (483)	5.86 (149)	6.16 (156)	25.13 (638)	8.56 (217)	4.50 (114)	38.19 (970)	3.88 (98)	4	0.63 (16)	4.50 (114)	4	0.88 (22)	16.13 (410)	4.63 (117)	4.00 (102)	0.25	0.25


Dimensions are subject to change. Not to be used for construction purposes unless certified.

NOTE: For Single phase Motors add 1" to dimensions E & H.

*Dimensions are for ODP Motors. For TEFC add S dimension to dimensions E & H.

Xylem Inc.
8200 N. Austin Avenue, Morton Grove, IL 60053
Phone: (847)966-3700 Fax: (847)965-8379
www.bellgossett.com
Bell & Gossett is a trademark of Xylem Inc. or one of its subsidiaries.
© 2015 Xylem Inc.



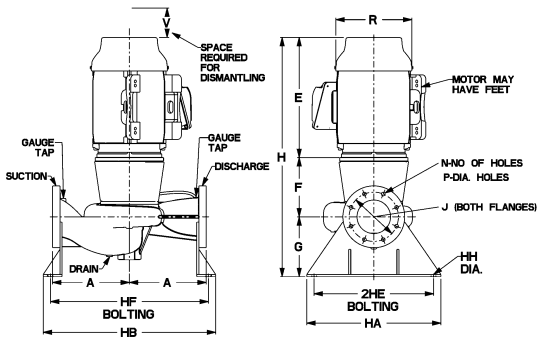

1.5x1.5x9.5B Series e-80 Centrifugal Pump Submittal - Flange Support Mounting

DIMENSIONS - Inches (mm)

STANDARD SEAL

MOTOR FRAME	A	HF BOLTING	HB	2HE BOLTING	HA	HH DIA	E (max)	F	G	H (max)	125# ANSI			250# ANSI			R	S (Max)*	V (min)	Suct/Disch Gauge Taps (NPT)	Drain Tap (NPT)
											J	N	P	J	N	P					
143JM	9.50 (241)	21.75 (552)	25.25 (641)	16.50 (419)	20.00 (508)	0.88 (22)	11.63 (295)	4.69 (119)	4.50 (114)	20.81 (529)	3.88 (98)	4 (16)	0.63 (16)	4.50 (114)	4 (22)	0.88 (248)	9.75 (248)	1.50 (38)	4.00 (102)	0.25	0.25
145JM	9.50 (241)	21.70 (551)	25.20 (640)	16.50 (419)	20.00 (508)	0.88 (22)	12.63 (321)	4.69 (119)	4.50 (114)	21.81 (554)	3.88 (98)	4 (16)	0.63 (16)	4.50 (114)	4 (22)	0.88 (248)	9.75 (248)	1.50 (38)	4.00 (102)	0.25	0.25
182JM	9.50 (241)	21.70 (551)	25.20 (640)	16.50 (419)	20.00 (508)	0.88 (22)	15.31 (389)	4.69 (119)	4.50 (114)	24.50 (622)	3.88 (98)	4 (16)	0.63 (16)	4.50 (114)	4 (22)	0.88 (298)	11.75 (298)	1.00 (25)	4.00 (102)	0.25	0.25
184JM	9.50 (241)	21.70 (551)	25.20 (640)	16.50 (419)	20.00 (508)	0.88 (22)	15.31 (389)	4.69 (119)	4.50 (114)	24.50 (622)	3.88 (98)	4 (16)	0.63 (16)	4.50 (114)	4 (22)	0.88 (298)	11.75 (298)	1.00 (25)	4.00 (102)	0.25	0.25
213JM	9.50 (241)	21.70 (551)	25.20 (640)	16.50 (419)	20.00 (508)	0.88 (22)	19.25 (489)	4.69 (119)	4.50 (114)	28.44 (722)	3.88 (98)	4 (16)	0.63 (16)	4.50 (114)	4 (22)	0.88 (356)	14.00 (356)	-	4.00 (102)	0.25	0.25
215JM	9.50 (241)	21.70 (551)	25.20 (640)	16.50 (419)	20.00 (508)	0.88 (22)	19.25 (489)	4.69 (119)	4.50 (114)	28.44 (722)	3.88 (98)	4 (16)	0.63 (16)	4.50 (114)	4 (22)	0.88 (356)	14.00 (356)	-	4.00 (102)	0.25	0.25
254JM	9.50 (241)	21.70 (551)	25.20 (640)	16.50 (419)	20.00 (508)	0.88 (22)	24.13 (613)	5.69 (144)	4.50 (114)	34.31 (872)	3.88 (98)	4 (16)	0.63 (16)	4.50 (114)	4 (22)	0.88 (432)	17.00 (432)	-	4.00 (102)	0.25	0.25
256JM	9.50 (241)	21.70 (551)	25.20 (640)	16.50 (419)	20.00 (508)	0.88 (22)	24.13 (613)	5.69 (144)	4.50 (114)	34.31 (872)	3.88 (98)	4 (16)	0.63 (16)	4.50 (114)	4 (22)	0.88 (432)	17.00 (432)	-	4.00 (102)	0.25	0.25
284JM	9.50 (241)	21.70 (551)	25.20 (640)	16.50 (419)	20.00 (508)	0.88 (22)	23.63 (600)	5.69 (144)	4.50 (114)	33.81 (859)	3.88 (98)	4 (16)	0.63 (16)	4.50 (114)	4 (22)	0.88 (410)	16.13 (410)	4.63 (117)	4.00 (102)	0.25	0.25
286JM	9.50 (241)	21.70 (551)	25.20 (640)	16.50 (419)	20.00 (508)	0.88 (22)	25.13 (638)	5.69 (144)	4.50 (114)	35.31 (897)	3.88 (98)	4 (16)	0.63 (16)	4.50 (114)	4 (22)	0.88 (410)	16.13 (410)	4.63 (117)	4.00 (102)	0.25	0.25

STUFFING BOX

MOTOR FRAME	A	HF BOLTING	HB	2HE BOLTING	HA	HH DIA	E (max)	F	G	H (max)	125# ANSI			250# ANSI			R	S (Max)*	V (min)	Suct/Disch Gauge Taps (NPT)	Drain Tap (NPT)
											J	N	P	J	N	P					
143JP	9.50 (241)	21.75 (552)	25.25 (641)	16.50 (419)	20.00 (508)	0.88 (22)	11.63 (295)	7.81 (198)	4.50 (114)	23.94 (608)	3.88 (98)	4 (16)	0.63 (16)	4.50 (114)	4 (22)	0.88 (248)	9.75 (248)	1.50 (38)	4.00 (102)	0.25	0.25
145JP	9.50 (241)	21.70 (551)	25.20 (640)	16.50 (419)	20.00 (508)	0.88 (22)	12.63 (321)	7.69 (195)	4.50 (114)	24.81 (630)	3.88 (98)	4 (16)	0.63 (16)	4.50 (114)	4 (22)	0.88 (248)	9.75 (248)	1.50 (38)	4.00 (102)	0.25	0.25
182JP	9.50 (241)	21.70 (551)	25.20 (640)	16.50 (419)	20.00 (508)	0.88 (22)	15.31 (389)	7.81 (198)	4.50 (114)	27.63 (702)	3.88 (98)	4 (16)	0.63 (16)	4.50 (114)	4 (22)	0.88 (298)	11.75 (298)	1.00 (25)	4.00 (102)	0.25	0.25
184JP	9.50 (241)	21.70 (551)	25.20 (640)	16.50 (419)	20.00 (508)	0.88 (22)	15.31 (389)	7.81 (198)	4.50 (114)	27.63 (702)	3.88 (98)	4 (16)	0.63 (16)	4.50 (114)	4 (22)	0.88 (298)	11.75 (298)	1.00 (25)	4.00 (102)	0.25	0.25
213JP	9.50 (241)	21.70 (551)	25.20 (640)	16.50 (419)	20.00 (508)	0.88 (22)	19.25 (489)	8.56 (217)	4.50 (114)	32.31 (821)	3.88 (98)	4 (16)	0.63 (16)	4.50 (114)	4 (22)	0.88 (356)	14.00 (356)	-	4.00 (102)	0.25	0.25
215JP	9.50 (241)	21.70 (551)	25.20 (640)	16.50 (419)	20.00 (508)	0.88 (22)	19.25 (489)	8.56 (217)	4.50 (114)	32.31 (821)	3.88 (98)	4 (16)	0.63 (16)	4.50 (114)	4 (22)	0.88 (356)	14.00 (356)	-	4.00 (102)	0.25	0.25
254JP	9.50 (241)	21.70 (551)	25.20 (640)	16.50 (419)	20.00 (508)	0.88 (22)	24.13 (613)	8.56 (217)	4.50 (114)	37.19 (945)	3.88 (98)	4 (16)	0.63 (16)	4.50 (114)	4 (22)	0.88 (432)	17.00 (432)	-	4.00 (102)	0.25	0.25
256JP	9.50 (241)	21.70 (551)	25.20 (640)	16.50 (419)	20.00 (508)	0.88 (22)	24.13 (613)	8.56 (217)	4.50 (114)	37.19 (945)	3.88 (98)	4 (16)	0.63 (16)	4.50 (114)	4 (22)	0.88 (432)	17.00 (432)	-	4.00 (102)	0.25	0.25
284JP	9.50 (241)	21.70 (551)	25.20 (640)	16.50 (419)	20.00 (508)	0.88 (22)	23.63 (600)	8.56 (217)	4.50 (114)	36.69 (932)	3.88 (98)	4 (16)	0.63 (16)	4.50 (114)	4 (22)	0.88 (410)	16.13 (410)	4.63 (117)	4.00 (102)	0.25	0.25
286JP	9.50 (241)	21.70 (551)	25.20 (640)	16.50 (419)	20.00 (508)	0.88 (22)	25.13 (638)	8.56 (217)	4.50 (114)	38.19 (970)	3.88 (98)	4 (16)	0.63 (16)	4.50 (114)	4 (22)	0.88 (410)	16.13 (410)	4.63 (117)	4.00 (102)	0.25	0.25


Dimensions are subject to change. Not to be used for construction purposes unless certified.

NOTE: For Single phase Motors add 1" to dimensions E & H.

*Dimensions are for ODP Motors. For TEFC add S dimension to dimensions E & H.


Xylem Inc.
8200 N. Austin Avenue, Morton Grove, IL 60053
Phone: (847)966-3700 Fax: (847)965-8379
www.bellgossett.com
Bell & Gossett is a trademark of Xylem Inc. or one of its subsidiaries.
© 2015 Xylem Inc.





1.5x1.5x9.5B Series e-80 In-Line Mounted Centrifugal Pumps With Integrated Technologic® Control

TECHNOLOGIC STANDARD FEATURES	
CONTROL METHOD WITH INTEGRATED TECHNOLOGIC® SENSORLESS CONTROL (ITSC)	Factory configured for sensorless operation.
CONTROL METHOD WITH INTEGRATED TECHNOLOGIC® (IT)	Field configurable for sensor by others, building management system input, or optional sensor(s) provided.
ENCLOSURE	NEMA 12 (same as IP55 & UL type 12)
POWER DISCONNECT SWITCH	Included standard. Fused Disconnect Switch optional with three phase input voltage.
HARMONIC SUPPRESSION	Integrated non-saturating dual DC link reactors provide better harmonic performance than a 5% AC line reactor.
COOLING	Fan-cooled through temperature controlled and easy replacement.
AMBIENT TEMPERATURE RATING	14°F to 113°F (-10°C to 45°C)
COMMUNICATION PROTOCOLS	BACnet, Modbus RTU, N2 Metasys, FLN Apogee
ANALOG INPUTS	2 configurable for either voltage (0 to 10VDC) or current(0/4 to 20mA)
ANALOG OUTPUTS	1 (0/4 to 20mA) up to 500 ohm load accurate to 1% of full scale
DIGITAL INPUTS	4 (0 to 24VDC), NPN or PNP, 0 to 24VDC, on 5 msec scan interval, Up to 2 can be configured as pulse inputs.
DIGITAL OUTPUTS	2 (0 to 24VDC), 40mA max current, configurable as pulse outputs.
RELAY OUTPUTS	2 programmable, 240VAC or 400VAC up to 2 A
MINIMUM CONTROL HEAD	_____ ft (default set to 40% of design head if not unknown)

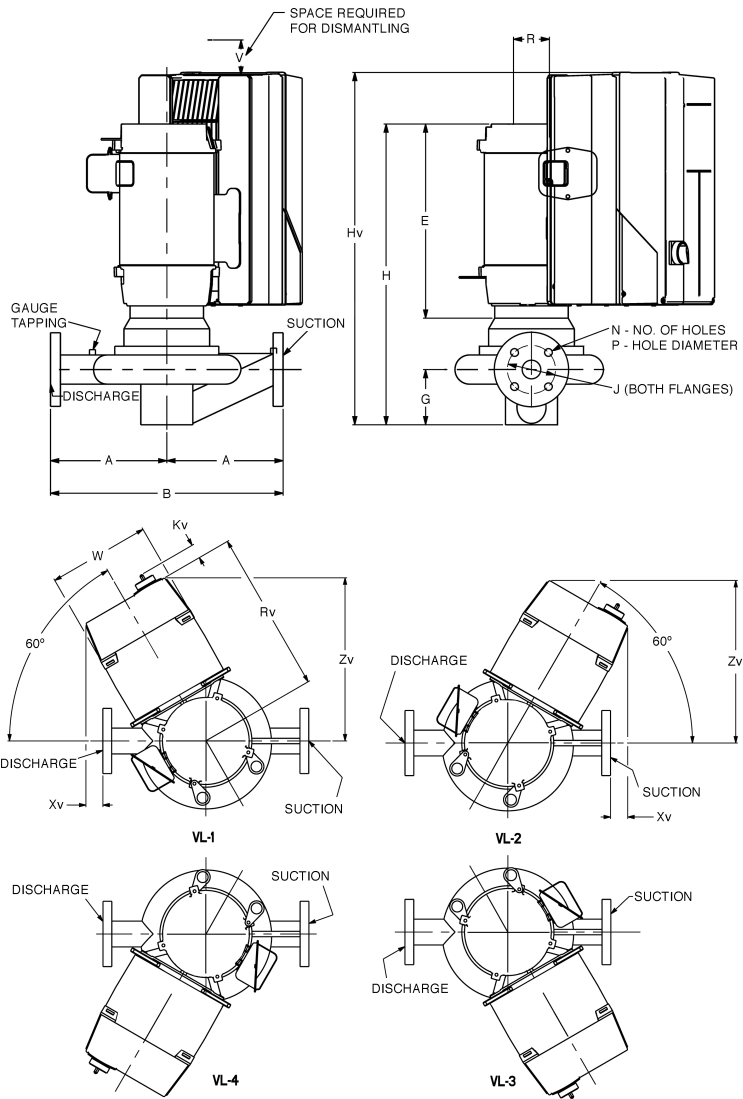

Series e-80 1.5x1.5x9.5B

B-139.2

In-Line Mounted Centrifugal Pumps
With Integrated Technologic® Control

DIMENSIONS - Inches (mm)		STANDARD SEAL					STUFFING BOX						
MOTOR FRAME	VFD	Rv	Zv	W	Hv	Xv	MOTOR FRAME	VFD	Rv	Zv	W	Hv	Xv
143JM	A5	11.78 (299)	12.31 (313)	9.50 (241)	27.53 (699)	0.06 (2)	143JP	A5	11.78 (299)	12.31 (313)	9.50 (241)	30.64 (778)	0.06 (2)
145JM	A5	11.78 (299)	12.31 (313)	9.50 (241)	28.52 (724)	0.06 (2)	145JP	A5	11.78 (299)	12.31 (313)	9.50 (241)	31.64 (804)	0.06 (2)
	B1	14.07 (357)	13.91 (353)	9.50 (241)	30.87 (784)	1.66 (42)		B1	14.07 (357)	13.91 (353)	9.50 (241)	33.99 (863)	1.66 (42)
182JM	A5	12.78 (325)	13.19 (335)	9.50 (241)	27.66 (702)	0.56 (14)	182JP	A5	12.78 (325)	13.19 (335)	9.50 (241)	30.78 (782)	0.56 (14)
	B1	15.07 (383)	14.79 (376)	9.50 (241)	28.66 (728)	2.16 (55)		B1	15.07 (383)	14.79 (376)	9.50 (241)	31.78 (807)	2.16 (55)
184JM	A5	12.78 (325)	13.19 (335)	9.50 (241)	27.66 (702)	0.56 (14)	184JP	A5	12.78 (325)	13.19 (335)	9.50 (241)	30.78 (782)	0.56 (14)
	B1	15.07 (383)	14.79 (376)	9.50 (241)	28.66 (728)	2.16 (55)		B1	15.07 (383)	14.79 (376)	9.50 (241)	31.78 (807)	2.16 (55)
213JM	A5	13.53 (344)	13.83 (351)	9.50 (241)	31.08 (789)	0.94 (24)	213JP	A5	13.53 (344)	13.83 (351)	9.50 (241)	34.95 (888)	0.94 (24)
	B1	15.84 (402)	15.84 (402)	9.50 (241)	32.67 (830)	2.13 (54)		B1	15.84 (402)	15.84 (402)	9.50 (241)	36.55 (928)	2.13 (54)
	B2	15.84 (402)	15.84 (402)	9.50 (241)	38.41 (976)	2.13 (54)		B2	15.84 (402)	15.84 (402)	9.50 (241)	42.29 (1074)	2.13 (54)
215JM	A5	13.55 (344)	14.24 (362)	9.50 (241)	29.89 (759)	0.52 (13)	215JP	A5	13.55 (344)	14.24 (362)	9.50 (241)	33.77 (858)	0.52 (13)
	B1	15.84 (402)	15.84 (402)	9.50 (241)	31.14 (791)	2.13 (54)		B1	15.84 (402)	15.84 (402)	9.50 (241)	35.02 (889)	2.13 (54)
	B2	15.84 (402)	15.84 (402)	9.50 (241)	36.88 (937)	2.13 (54)		B2	15.84 (402)	15.84 (402)	9.50 (241)	40.76 (1035)	2.13 (54)
	C1	17.81 (452)	19.04 (484)	12.10 (307)	38.90 (988)	5.33 (135)		C1	17.81 (452)	19.04 (484)	12.10 (307)	42.78 (1087)	5.33 (135)
254JM	B1	16.83 (427)	16.70 (424)	9.50 (241)	37.38 (949)	2.63 (67)	254JP	B1	16.83 (427)	16.70 (424)	9.50 (241)	40.25 (1022)	2.63 (67)
	B2	16.83 (427)	16.70 (424)	9.50 (241)	41.83 (1062)	2.63 (67)		B2	16.83 (427)	16.70 (424)	9.50 (241)	44.70 (1135)	2.63 (67)
	C1	18.80 (477)	19.90 (506)	12.10 (307)	43.09 (1094)	5.83 (148)		C1	18.80 (477)	19.90 (506)	12.10 (307)	46 (1167)	5.83 (148)
256JM	B1	16.83 (427)	16.70 (424)	9.50 (241)	36.75 (933)	2.63 (67)	256JP	B1	16.83 (427)	16.70 (424)	9.50 (241)	39.63 (1006)	2.63 (67)
	B2	16.83 (427)	16.70 (424)	9.50 (241)	41.20 (1047)	2.63 (67)		B2	16.83 (427)	16.70 (424)	9.50 (241)	44.08 (1120)	2.63 (67)
	C1	18.83 (478)	18.97 (482)	12.09 (307)	42.09 (1069)	4.53 (115)		C1	18.83 (478)	18.97 (482)	12.09 (307)	44.97 (1142)	4.53 (115)
	C2	19.61 (498)	21.27 (540)	14.59 (371)	46.75 (1069)	6.83 (174)		C2	19.61 (498)	21.27 (540)	14.59 (371)	49.63 (1261)	6.83 (174)
284JM	B1	17.58 (446)	17.36 (441)	9.50 (241)	36.13 (918)	3.00 (76)	284JP	B1	17.58 (446)	17.36 (441)	9.50 (241)	39.00 (991)	3.00 (76)
	B2	17.58 (446)	17.36 (441)	9.50 (241)	40.58 (1031)	3.00 (76)		B2	17.58 (446)	17.36 (441)	9.50 (241)	43.45 (1104)	3.00 (76)
	C1	19.58 (497)	19.63 (498)	12.09 (307)	42.98 (1092)	4.91 (125)		C1	19.58 (497)	19.63 (498)	12.09 (307)	45.86 (1165)	4.91 (125)
	C2	20.36 (517)	21.93 (557)	14.59 (371)	46.13 (1092)	7.21 (183)		C2	20.36 (517)	21.93 (557)	14.59 (371)	49.01 (1245)	7.21 (183)
286JM	B2	17.58 (446)	17.36 (441)	9.50 (241)	42.09 (1069)	3.00 (76)	286JP	B2	17.58 (446)	17.36 (441)	9.50 (241)	44.83 (1139)	3.00 (76)
	C1	19.58 (497)	19.63 (498)	12.09 (307)	44.48 (1130)	4.91 (125)		C1	19.58 (497)	19.63 (498)	12.09 (307)	47.23 (1200)	4.91 (125)
	C2	20.36 (517)	21.93 (557)	14.59 (371)	47.63 (1092)	7.21 (183)		C2	19.58 (497)	19.63 (498)	12.09 (307)	47.23 (1200)	4.91 (125)

NOTE: Drives with single phase input have three phase output and include three phase motors.

Kv=2 (50)

Xylem Inc.
8200 N. Austin Avenue, Morton Grove, IL 60053
Phone: (847)966-3700 Fax: (847)965-8379
www.bellgossett.com
Bell & Gossett is a trademark of Xylem Inc. or one of its subsidiaries.
© 2015 Xylem Inc.

xylem
Let's Solve Water




Pressure Sensor/Transmitter For Pumps with TECHNOLOGIC® Drives

FEATURES

- 4-20mA output
- 10-28 VDC supply voltage
- Operating Temperature -40 to 85°C (-40 to 185°F)
- Storage Temperature -40 to 100°C (-40 to 212°F)
- Enclosure IP-66 (housing only)
- High Strength Stainless Steel Construction
- No Oil, Welds or Internal O-rings
- Wide Operating Temperature
- Low Static and Thermal Errors
- Compatible with Wide Variety of Liquids and Gases
- EMI/RFI Protection
- UL/cUL 508 Approved (with housing)
- 1lb. (0.45 kg) approximate weight

TECHNOLOGIC ANALOG SENSOR WIRING

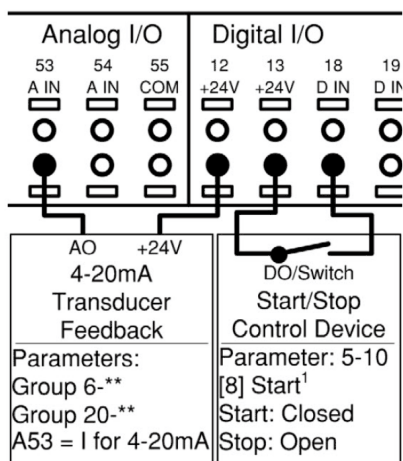

B&G PART NUMBERS

- S13203 Pressure range: 0-100 psi (0-689 kPa)
- S13204 Pressure range: 0-300 psi (0-2068 kPa)


Consult factory for other ranges.


INSTALLATION CONSIDERATIONS

- Standard 24 AWG (0.61 mm dia.) 2 wire shielded cable located in a conduit separate from high voltage wiring
- 24 vdc power supplied from Technologic Controller

DIMENSIONAL INFORMATION

Dimensions in Inches (Millimeters)

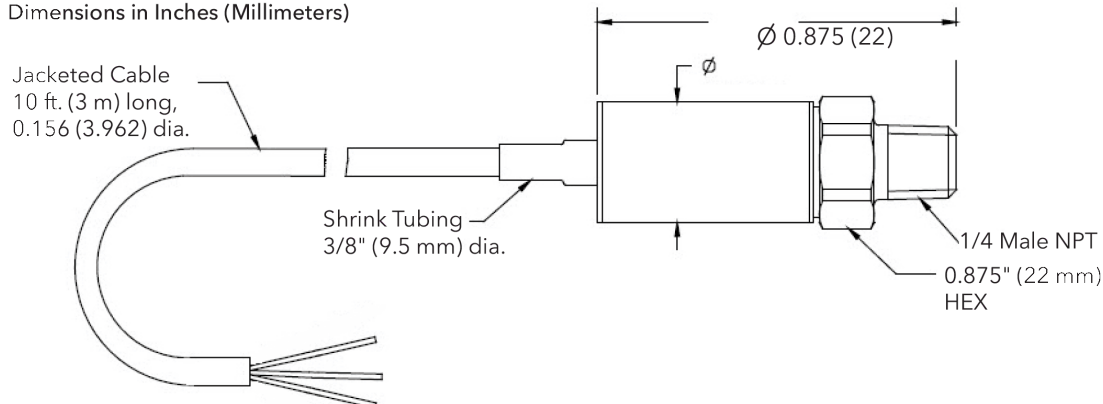

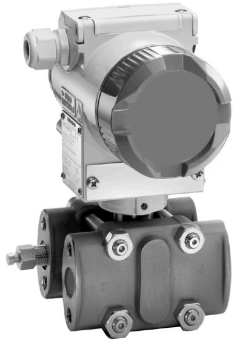


Differential Pressure Sensor/ Transmitter For Pumps with TECHNOLOGIC® Drives

FEATURES

- Relays reading to the Technologic controller up to 2000 ft. (610 m) away
- All wetted parts are 316 stainless steel
- Built-in RFI filter effective from 20 to 1000 MHz
- Withstands static pressures up to 2300 PSI (15858 kPa)
- 3 Valve bypass manifold (optional)
- 10 lbs. (4.5 kg) approximate weight

TECHNOLOGIC ANALOG SENSOR WIRING

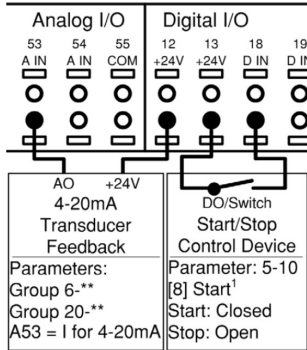

B&G PART NUMBERS

- S100089 Pressure range: 0 - 40 psi (0 - 276 kPa)
- S100091 Pressure range: 0 - 70 psi (0 - 483 kPa)
- S100092 Pressure range: 0 - 100 psi (0 - 689 kPa)


Consult factory for other ranges.

INSTALLATION CONSIDERATIONS

- Standard 18 AWG (1.194 mm dia.) 2 wire shielded cable located in a conduit separate from high voltage wiring
- 24 vdc power supplied from Technologic Controller for distance <2000 ft (610 m)

DIMENSIONAL INFORMATION

Dimensions in Inches (Millimeters)

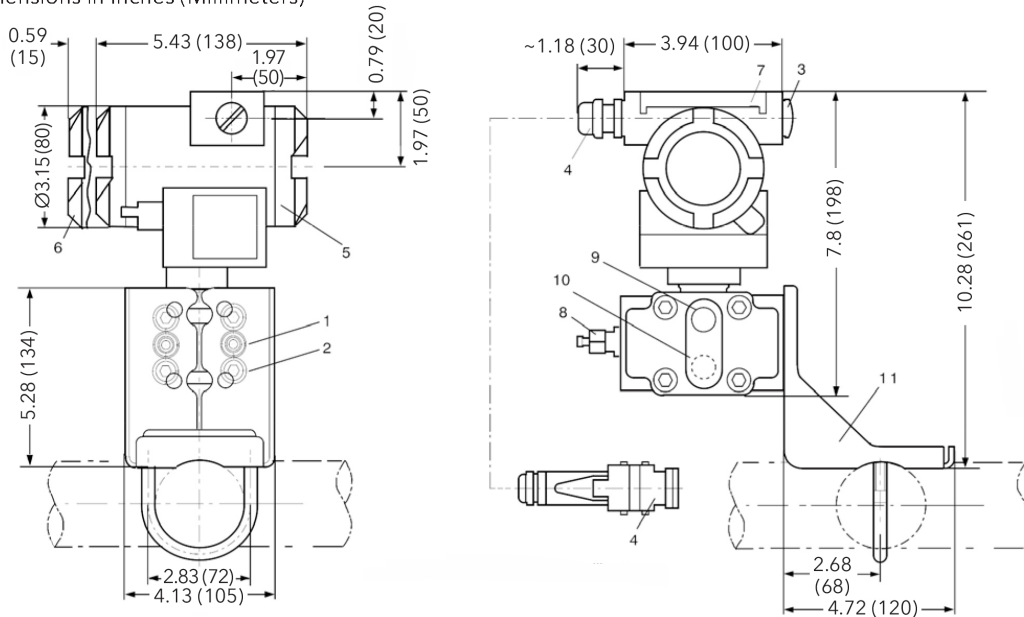

- 1 Process connection 1/4-18NPT for absolute pressure (+) side
- 2 Mounting thread 7/16-20 UNF to EN 61518
- 3 Dummy plug
- 4 Electrical connection: Screwed gland 1/2-14 NPT
- 5 Connection side

- 6 Electronic side, no digital display
- 7 Access cover over magnetic pushbuttons
- 8 Sealing screw with vent shown (optional)
- 9 Side vent for measuring liquid
- 10 Side vent for measuring gas (supplement H02)
- 11 Mounting bracket (2 shackles, 4 nuts, 4 U-plates, 1 angle) made of steel



Flow Sensor/Transmitter For Pumps with TECHNOLOGIC® Drives


The rugged Bell & Gossett Flow Sensor/Transmitter precisely measures system flow and transmits a proportional 4 to 20 mA DC signal to the Technologic Controller for display or program calculations.

FEATURES



- Suitable for mounting in vertical pipe
- Suitable for mounting in horizontal pipe within 45° of top dead center
- Non-magnetically sensed, non-fouling paddle wheel
- NEMA 4X Transmitter Enclosure
- Maximum Pressure Ratings:
 - 1000 psi @ 100°F, 900 psi @ 200°F,
 - 750 psi @ 300°F (6895 kPa @ 38°C, 6205 kPa @ 93°C, 5171 kPa @ 149°C)
- Maximum Temperature Ratings:
 - Fluid - 300°F (149°C) continuous service
 - Electronics - 150°F (66°C)
- Optional software and cable available for field programming
- 9.9 lbs (4.5 kg) approximate weight

DIMENSIONAL INFORMATION

Dimensions in Inches (Millimeters)

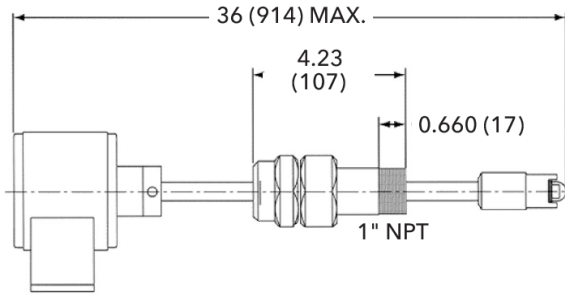

TECHNOLOGIC ANALOG SENSOR WIRING

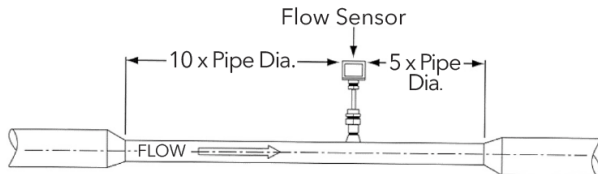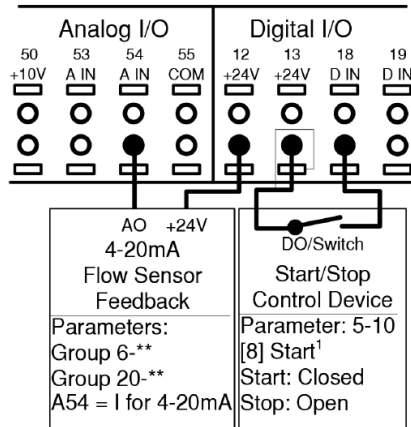


INSTALLATION CONSIDERATIONS

- Standard 18 AWG (1.194 mm dia.) gauge 3 wire shielded cable located in conduit separate from high voltage wiring
- 24 vdc power supplied from Technologic Controller
- Takes accurate readings and relays them to the Technologic Controller up to 2,000 ft. (610 m) away, when 10 pipe diameters upstream and 5 pipe diameters downstream of straight uninterrupted flow is present.

CALIBRATION CHART		
B&G Part No.	Pipe Size	Max. Flow
137411	3" Sch 40	250 gpm (16 l/sec)
137412	4" Sch 40	400 gpm (25 l/sec)
137413	6" Sch 40	850 gpm (54 l/sec)
137414	8" Sch 40	1750 gpm (110 l/sec)
137415	10" Sch 40	3150 gpm (199 l/sec)
137416	12" Sch 40	5000 gpm (315 l/sec)
137417	14" Sch 40	6400 gpm (404 l/sec)
137418	16" Sch 40	9100 gpm (574 l/sec)
137419	18" Sch 40	12400 gpm (782 l/sec)
137420	20" Sch 40	16500 gpm (1041 l/sec)

Consult factory for custom flow range calibration.

JOB: UNIT TAG: ENGINEER: CONTRACTOR:	REPRESENTATIVE: ORDER NO.: SUBMITTED BY: APPROVED BY:	DATE: DATE: DATE:
---	--	--



2.5x2.5x7B

Series e-80

In-Line Mounted Centrifugal Pumps

SPECIFICATIONS

FLOW _____ HEAD _____

HP _____ RPM _____

VOLTS _____

CYCLE _____ INPUT PHASE _____

ENCLOSURE _____

APPROX. WEIGHT _____

SPECIALS _____

MATERIALS OF CONSTRUCTION

Stainless Steel Fitted

MAXIMUM WORKING PRESSURE

- 175 psi (12 bar) with 125# ANSI flange drilling
- 250 psi (17 bar) with 250# ANSI flange drilling (requires 80-S)
- 300 psi (21 bar) W.P. with 250# ANSI flange drilling (Requires -S and EPR-Silicon Carbide-Silicon Carbide Seal)

MOUNTING


- In-Line Piping
- Flange Supports

PUMP VARIABLE SPEED CONTROL


- Integrated Technologic® Sensorless Control (ITSC)
- Integrated Technologic® (IT)
 - External input by others
 - Pressure Sensor(s)
 - Differential Pressure Sensor(s)
 - Flow Sensor(s)
- By Others

TYPE OF SEAL

- F Standard Seal w/ Flush Line (Buna-Carbon/Ceramic)
- S Stuffing Box construction w/ Flushed Mechanical Single Seal (EPR-Tungsten Carbide/Carbon)
- PF Stuffing Box Construction w/ Flushed Packing (Graphite Impregnated PTFE)

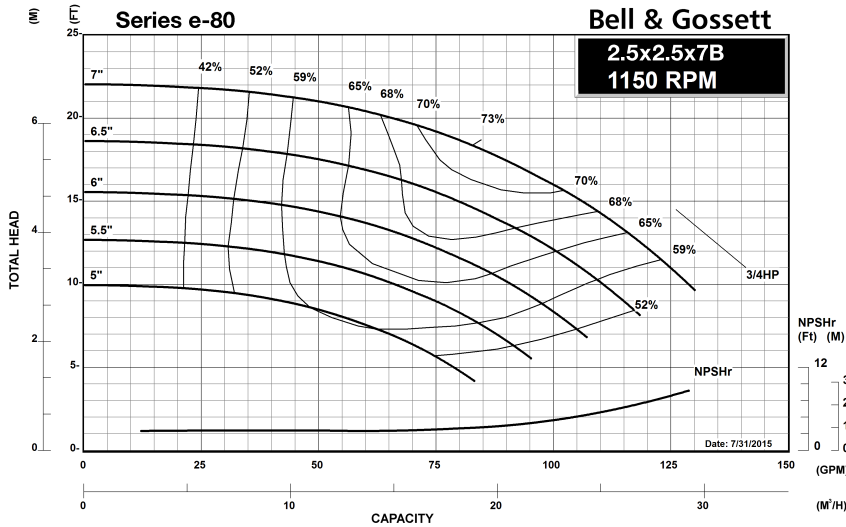

JOB:	REPRESENTATIVE:	
UNIT TAG:	ORDER NO.:	DATE:
ENGINEER:	SUBMITTED BY:	DATE:
CONTRACTOR:	APPROVED BY:	DATE:



2.5x2.5x7B

Series e-80

In-Line Mounted Centrifugal Pumps

SPECIFICATIONS

FLOW _____ HEAD _____

HP _____ RPM _____

VOLTS _____

CYCLE _____ INPUT PHASE _____

ENCLOSURE _____

APPROX. WEIGHT _____

SPECIALS _____

MATERIALS OF CONSTRUCTION

Stainless Steel Fitted

MAXIMUM WORKING PRESSURE

- 175 psi (12 bar) with 125# ANSI flange drilling
- 250 psi (17 bar) with 250# ANSI flange drilling (requires 80-S)
- 300 psi (21 bar) W.P. with 250# ANSI flange drilling (Requires -S and EPR-Silicon Carbide-Silicon Carbide Seal)

MOUNTING


- In-Line Piping
- Flange Supports

PUMP VARIABLE SPEED CONTROL


- Integrated Technologic® Sensorless Control (ITSC)
- Integrated Technologic® (IT)
 - External input by others
 - Pressure Sensor(s)
 - Differential Pressure Sensor(s)
 - Flow Sensor(s)
- By Others

TYPE OF SEAL

- F Standard Seal w/ Flush Line (Buna-Carbon/Ceramic)
- S Stuffing Box construction w/ Flushed Mechanical Single Seal (EPR-Tungsten Carbide/Carbon)
- PF Stuffing Box Construction w/ Flushed Packing (Graphite Impregnated PTFE)

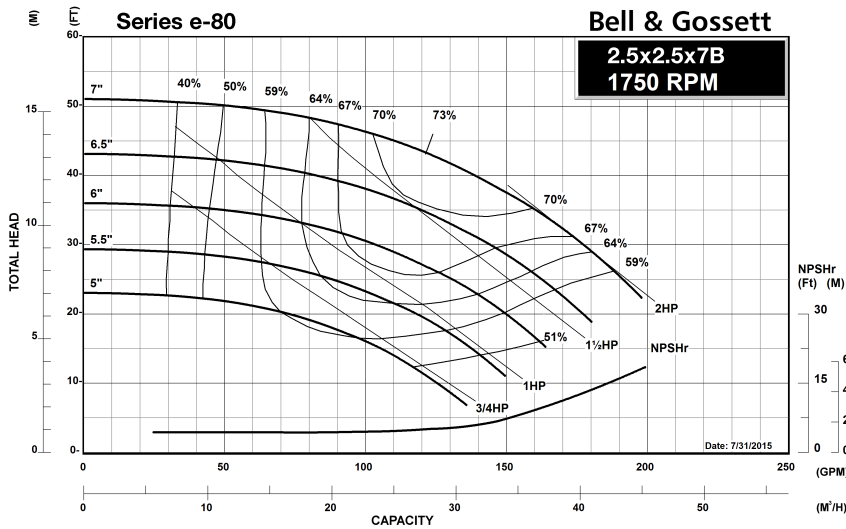

JOB:	REPRESENTATIVE:	
UNIT TAG:	ORDER NO.:	DATE:
ENGINEER:	SUBMITTED BY:	DATE:
CONTRACTOR:	APPROVED BY:	DATE:



2.5x2.5x7B Series e-80 In-Line Mounted Centrifugal Pumps

SPECIFICATIONS

FLOW _____ HEAD _____
 HP _____ RPM _____
 VOLTS _____
 CYCLE _____ INPUT PHASE _____
 ENCLOSURE _____
 APPROX. WEIGHT _____
 SPECIALS _____

MATERIALS OF CONSTRUCTION

Stainless Steel Fitted

MAXIMUM WORKING PRESSURE

- 175 psi (12 bar) with 125# ANSI flange drilling
- 250 psi (17 bar) with 250# ANSI flange drilling (requires 80-S)
- 300 psi (21 bar) W.P. with 250# ANSI flange drilling (Requires -S and EPR-Silicon Carbide-Silicon Carbide Seal)

MOUNTING


- In-Line Piping
- Flange Supports


PUMP VARIABLE SPEED CONTROL

- Integrated Technologic® Sensorless Control (ITSC)
- Integrated Technologic® (IT)
 - External input by others
 - Pressure Sensor(s)
 - Differential Pressure Sensor(s)
 - Flow Sensor(s)
- By Others

TYPE OF SEAL

- F Standard Seal w/ Flush Line (Buna-Carbon/Ceramic)
- S Stuffing Box construction w/ Flushed Mechanical Single Seal (EPR-Tungsten Carbide/Carbon)
- PF Stuffing Box Construction w/ Flushed Packing (Graphite Impregnated PTFE)

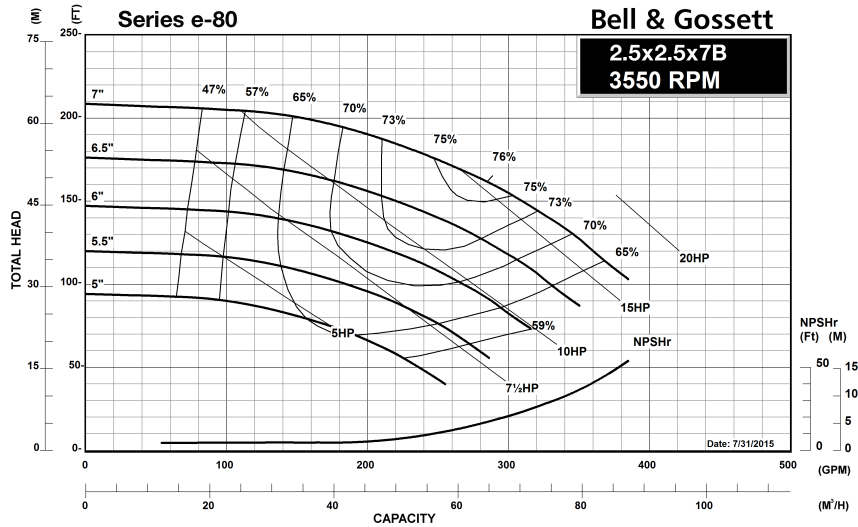

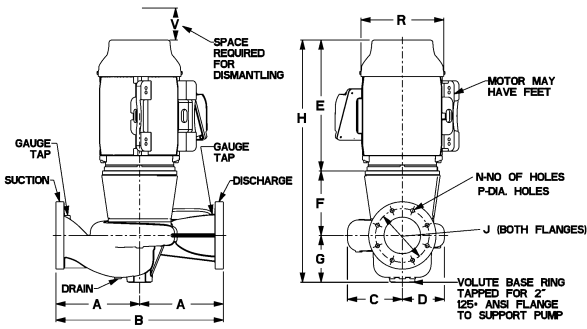

2.5x2.5x7B Series e-80 Centrifugal Pump Submittal - In-Line Piping

DIMENSIONS - Inches (mm)

STANDARD SEAL

MOTOR FRAME	A	B	C	D	E (max)	F	G	H (max)	125# ANSI			250# ANSI			R	S (Max)*	V (min)	Suct/Disch Gauge Taps (NPT)	Drain Tap (NPT)
									J	N	P	J	N	P					
									143JM	9.00 (229)	18.00 (457)	4.70 (119)	5.46 (139)	11.63 (295)					
145JM	9.00 (229)	18.00 (457)	4.70 (119)	5.46 (139)	12.63 (321)	4.88 (124)	5.40 (137)	22.90 (582)	5.50 (140)	4	0.75 (19)	5.88 (149)	8	0.88 (22)	9.75 (248)	1.50 (38)	4.50 (114)	0.25	0.25
182JM	9.00 (229)	18.00 (457)	4.70 (119)	5.46 (139)	15.31 (389)	4.88 (124)	5.40 (137)	25.59 (650)	5.50 (140)	4	0.75 (19)	5.88 (149)	8	0.88 (22)	11.75 (298)	1.00 (25)	4.50 (114)	0.25	0.25
184JM	9.00 (229)	18.00 (457)	4.70 (119)	5.46 (139)	15.31 (389)	4.88 (124)	5.40 (137)	25.59 (650)	5.50 (140)	4	0.75 (19)	5.88 (149)	8	0.88 (22)	11.75 (298)	1.00 (25)	4.50 (114)	0.25	0.25
213JM	9.00 (229)	18.00 (457)	4.70 (119)	5.46 (139)	19.25 (489)	4.88 (124)	5.40 (137)	29.53 (750)	5.50 (140)	4	0.75 (19)	5.88 (149)	8	0.88 (22)	14.00 (356)	-	4.50 (114)	0.25	0.25
215JM	9.00 (229)	18.00 (457)	4.70 (119)	5.46 (139)	19.25 (489)	4.88 (124)	5.40 (137)	29.53 (750)	5.50 (140)	4	0.75 (19)	5.88 (149)	8	0.88 (22)	14.00 (356)	-	4.50 (114)	0.25	0.25
254JM	9.00 (229)	18.00 (457)	4.70 (119)	5.46 (139)	24.13 (613)	5.88 (149)	5.40 (137)	35.40 (899)	5.50 (140)	4	0.75 (19)	5.88 (149)	8	0.88 (22)	17.00 (432)	-	4.50 (114)	0.25	0.25


STUFFING BOX

MOTOR FRAME	A	B	C	D	E (max)	F	G	H (max)	125# ANSI			250# ANSI			R	S (Max)*	V (min)	Suct/Disch Gauge Taps (NPT)	Drain Tap (NPT)
									J	N	P	J	N	P					
									143JP	9.00 (229)	18.00 (457)	4.70 (119)	5.46 (139)	11.63 (295)					
145JP	9.00 (229)	18.00 (457)	4.70 (119)	5.46 (139)	12.63 (321)	8.00 (203)	5.40 (137)	26.03 (661)	5.50 (140)	4	0.75 (19)	5.88 (149)	8	0.88 (22)	9.75 (248)	1.50 (38)	4.50 (114)	0.25	0.25
182JP	9.00 (229)	18.00 (457)	4.70 (119)	5.46 (139)	15.31 (389)	8.00 (203)	5.40 (137)	28.71 (729)	5.50 (140)	4	0.75 (19)	5.88 (149)	8	0.88 (22)	11.75 (298)	1.00 (25)	4.50 (114)	0.25	0.25
184JP	9.00 (229)	18.00 (457)	4.70 (119)	5.46 (139)	15.31 (389)	8.00 (203)	5.40 (137)	28.71 (729)	5.50 (140)	4	0.75 (19)	5.88 (149)	8	0.88 (22)	11.75 (298)	1.00 (25)	4.50 (114)	0.25	0.25
213JP	9.00 (229)	18.00 (457)	4.70 (119)	5.46 (139)	19.25 (489)	8.75 (222)	5.40 (137)	33.40 (848)	5.50 (140)	4	0.75 (19)	5.88 (149)	8	0.88 (22)	14.00 (356)	-	4.50 (114)	0.25	0.25
215JP	9.00 (229)	18.00 (457)	4.70 (119)	5.46 (139)	19.25 (489)	8.75 (222)	5.40 (137)	33.40 (848)	5.50 (140)	4	0.75 (19)	5.88 (149)	8	0.88 (22)	14.00 (356)	-	4.50 (114)	0.25	0.25
254JP	9.00 (229)	18.00 (457)	4.70 (119)	5.46 (139)	24.13 (613)	8.75 (222)	5.40 (137)	38.28 (972)	5.50 (140)	4	0.75 (19)	5.88 (149)	8	0.88 (22)	17.00 (432)	-	4.50 (114)	0.25	0.25

Dimensions are subject to change. Not to be used for construction purposes unless certified.

NOTE: For Single phase Motors add 1" to dimensions E & H.

*Dimensions are for ODP Motors. For TEFC add S dimension to dimensions E & H.

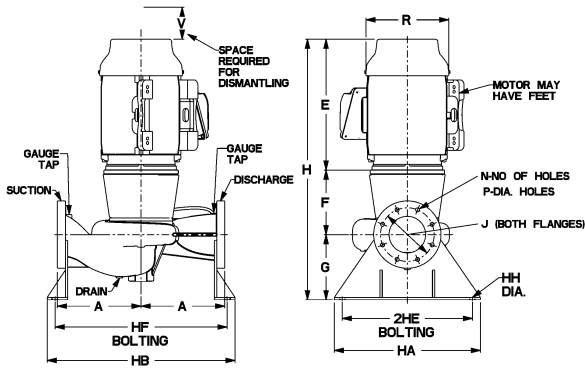

2.5x2.5x7B Series e-80 Centrifugal Pump Submittal - Flange Support Mounting

DIMENSIONS - Inches (mm)

STANDARD SEAL

MOTOR FRAME	A	HF BOLTING	HB	2HE BOLTING	HA	HH DIA.	E (max)	F	G	H (max)	125# ANSI			250# ANSI			R	S (Max)*	V (min)	Suct/Disch Gauge Taps (NPT)	Drain Tap (NPT)
											J	N	P	J	N	P					
143JM	9.00 (229)	20.20 (513)	23.70 (602)	21.50 (546)	25.00 (635)	0.88 (22)	11.63 (295)	4.88 (124)	5.40 (137)	21.90 (556)	5.50 (140)	4 (19)	0.75 (19)	5.88 (149)	8 (22)	0.88 (22)	9.75 (248)	1.50 (38)	4.50 (114)	0.25	0.25
145JM	9.00 (229)	20.20 (513)	23.70 (602)	21.50 (546)	25.00 (635)	0.88 (22)	12.63 (321)	4.88 (124)	5.40 (137)	22.90 (582)	5.50 (140)	4 (19)	0.75 (19)	5.88 (149)	8 (22)	0.88 (22)	9.75 (248)	1.50 (38)	4.50 (114)	0.25	0.25
182JM	9.00 (229)	20.20 (513)	23.70 (602)	21.50 (546)	25.00 (635)	0.88 (22)	15.31 (389)	4.88 (124)	5.40 (137)	25.59 (650)	5.50 (140)	4 (19)	0.75 (19)	5.88 (149)	8 (22)	0.88 (22)	11.75 (298)	1.00 (25)	4.50 (114)	0.25	0.25
184JM	9.00 (229)	20.20 (513)	23.70 (602)	21.50 (546)	25.00 (635)	0.88 (22)	15.31 (389)	4.88 (124)	5.40 (137)	25.59 (650)	5.50 (140)	4 (19)	0.75 (19)	5.88 (149)	8 (22)	0.88 (22)	11.75 (298)	1.00 (25)	4.50 (114)	0.25	0.25
213JM	9.00 (229)	20.20 (513)	23.70 (602)	21.50 (546)	25.00 (635)	0.88 (22)	19.25 (489)	4.88 (124)	5.40 (137)	29.53 (750)	5.50 (140)	4 (19)	0.75 (19)	5.88 (149)	8 (22)	0.88 (22)	14.00 (356)	-	4.50 (114)	0.25	0.25
215JM	9.00 (229)	20.20 (513)	23.70 (602)	21.50 (546)	25.00 (635)	0.88 (22)	19.25 (489)	4.88 (124)	5.40 (137)	29.53 (750)	5.50 (140)	4 (19)	0.75 (19)	5.88 (149)	8 (22)	0.88 (22)	14.00 (356)	-	4.50 (114)	0.25	0.25
254JM	9.00 (229)	20.20 (513)	23.70 (602)	21.50 (546)	25.00 (635)	0.88 (22)	24.13 (613)	5.88 (149)	5.40 (137)	35.40 (899)	5.50 (140)	4 (19)	0.75 (19)	5.88 (149)	8 (22)	0.88 (22)	17.00 (432)	-	4.50 (114)	0.25	0.25


STUFFING BOX

MOTOR FRAME	A	HF BOLTING	HB	2HE BOLTING	HA	HH DIA.	E (max)	F	G	H (max)	125# ANSI			250# ANSI			R	S (Max)*	V (min)	Suct/Disch Gauge Taps (NPT)	Drain Tap (NPT)
											J	N	P	J	N	P					
143JP	9.00 (229)	20.20 (513)	23.70 (602)	21.50 (546)	25.00 (635)	0.88 (22)	11.63 (295)	8.00 (203)	5.40 (137)	25.03 (636)	5.50 (140)	4 (19)	0.75 (19)	5.88 (149)	8 (22)	0.88 (22)	9.75 (248)	1.50 (38)	4.50 (114)	0.25	0.25
145JP	9.00 (229)	20.20 (513)	23.70 (602)	21.50 (546)	25.00 (635)	0.88 (22)	12.63 (321)	8.00 (203)	5.40 (137)	26.03 (661)	5.50 (140)	4 (19)	0.75 (19)	5.88 (149)	8 (22)	0.88 (22)	9.75 (248)	1.50 (38)	4.50 (114)	0.25	0.25
182JP	9.00 (229)	20.20 (513)	23.70 (602)	21.50 (546)	25.00 (635)	0.88 (22)	15.31 (389)	8.00 (203)	5.40 (137)	28.71 (729)	5.50 (140)	4 (19)	0.75 (19)	5.88 (149)	8 (22)	0.88 (22)	11.75 (298)	1.00 (25)	4.50 (114)	0.25	0.25
184JP	9.00 (229)	20.20 (513)	23.70 (602)	21.50 (546)	25.00 (635)	0.88 (22)	15.31 (389)	8.00 (203)	5.40 (137)	28.71 (729)	5.50 (140)	4 (19)	0.75 (19)	5.88 (149)	8 (22)	0.88 (22)	11.75 (298)	1.00 (25)	4.50 (114)	0.25	0.25
213JP	9.00 (229)	20.20 (513)	23.70 (602)	21.50 (546)	25.00 (635)	0.88 (22)	19.25 (489)	8.75 (222)	5.40 (137)	33.40 (848)	5.50 (140)	4 (19)	0.75 (19)	5.88 (149)	8 (22)	0.88 (22)	14.00 (356)	-	4.50 (114)	0.25	0.25
215JP	9.00 (229)	20.20 (513)	23.70 (602)	21.50 (546)	25.00 (635)	0.88 (22)	19.25 (489)	8.75 (222)	5.40 (137)	33.40 (848)	5.50 (140)	4 (19)	0.75 (19)	5.88 (149)	8 (22)	0.88 (22)	14.00 (356)	-	4.50 (114)	0.25	0.25
254JP	9.00 (229)	20.20 (513)	23.70 (602)	21.50 (546)	25.00 (635)	0.88 (22)	24.13 (613)	8.75 (222)	5.40 (137)	38.28 (972)	5.50 (140)	4 (19)	0.75 (19)	5.88 (149)	8 (22)	0.88 (22)	17.00 (432)	-	4.50 (114)	0.25	0.25

Dimensions are subject to change. Not to be used for construction purposes unless certified.

NOTE: For Single phase Motors add 1" to dimensions E & H.



*Dimensions are for ODP Motors. For TEFC add S dimension to dimensions E & H.



2.5x2.5x7B Series e-80

In-Line Mounted Centrifugal Pumps With Integrated Technologic® Control

TECHNOLOGIC STANDARD FEATURES	
CONTROL METHOD WITH INTEGRATED TECHNOLOGIC® SENSORLESS CONTROL (ITSC)	Factory configured for sensorless operation.
CONTROL METHOD WITH INTEGRATED TECHNOLOGIC® (IT)	Field configurable for sensor by others, building management system input, or optional sensor(s) provided.
ENCLOSURE	NEMA 12 (same as IP55 & UL type 12)
POWER DISCONNECT SWITCH	Included standard. Fused Disconnect Switch optional with three phase input voltage.
HARMONIC SUPPRESSION	Integrated non-saturating dual DC link reactors provide better harmonic performance than a 5% AC line reactor.
COOLING	Fan-cooled through temperature controlled and easy replacement.
AMBIENT TEMPERATURE RATING	14°F to 113°F (-10°C to 45°C)
COMMUNICATION PROTOCOLS	BACnet, Modbus RTU, N2 Metasys, FLN Apogee
ANALOG INPUTS	2 configurable for either voltage (0 to 10VDC) or current(0/4 to 20mA)
ANALOG OUTPUTS	1 (0/4 to 20mA) up to 500 ohm load accurate to 1% of full scale
DIGITAL INPUTS	4 (0 to 24VDC), NPN or PNP, 0 to 24VDC, on 5 msec scan interval, Up to 2 can be configured as pulse inputs.
DIGITAL OUTPUTS	2 (0 to 24VDC), 40mA max current, configurable as pulse outputs.
RELAY OUTPUTS	2 programmable, 240VAC or 400VAC up to 2 A
MINIMUM CONTROL HEAD	_____ ft (default set to 40% of design head if not unknown)

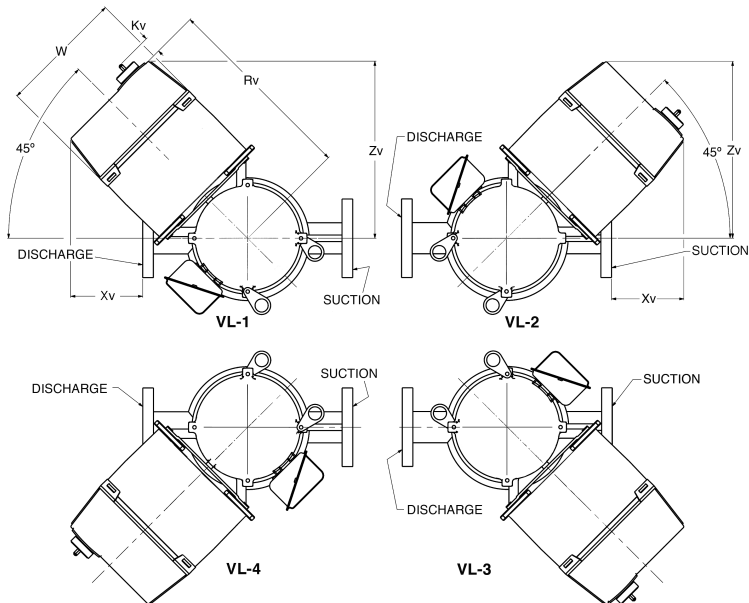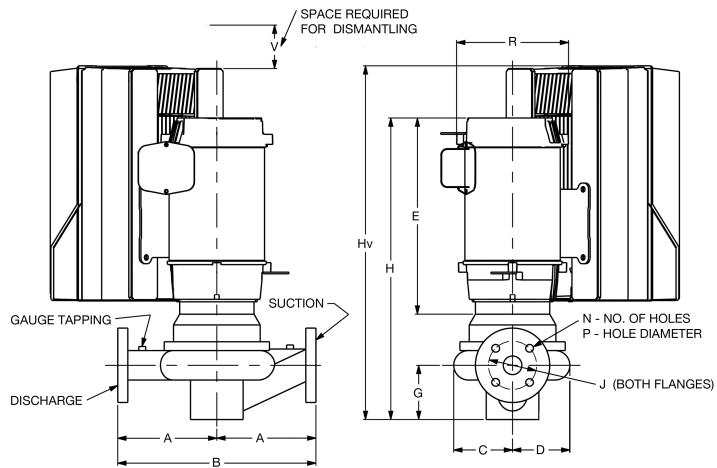

Series e-80 2.5x2.5x7B

B-139.8

In-Line Mounted Centrifugal Pumps

With Integrated Technologic® Control

DIMENSIONS - Inches (mm)							STANDARD SEAL						STUFFING BOX							
MOTOR FRAME	VFD	Rv	Zv	W	Hv	Xv	MOTOR FRAME	VFD	Rv	Zv	W	Hv	Xv	MOTOR FRAME	VFD	Rv	Zv	W	Hv	Xv
143JM	A5	11.78 (299)	11.33 (288)	9.50 (241)	28.39 (721)	2.33 (59)	143JP	A5	11.78 (299)	11.33 (288)	9.50 (241)	31.52 (800)	2.33 (59)	143JP	A5	11.78 (299)	11.33 (288)	9.50 (241)	32.52 (826)	2.33 (59)
145JM	A5	11.78 (299)	11.33 (288)	9.50 (241)	29.39 (747)	2.33 (59)	145JP	A5	11.78 (299)	11.33 (288)	9.50 (241)	32.52 (826)	2.33 (59)	145JP	B1	14.07 (357)	12.93 (328)	9.50 (241)	34.87 (886)	3.93 (100)
	B1	14.07 (357)	12.93 (328)	9.50 (241)	31.74 (806)	3.93 (100)		B1	14.07 (357)	12.93 (328)	9.50 (241)	34.87 (886)	3.93 (100)							
182JM	A5	12.78 (325)	12.03 (306)	9.50 (241)	28.66 (728)	3.03 (77)	182JP	A5	12.78 (325)	12.03 (306)	9.50 (241)	31.78 (807)	3.03 (77)	182JP	B1	15.07 (383)	13.63 (346)	9.50 (241)	32.78 (833)	4.63 (118)
	B1	15.07 (383)	13.63 (346)	9.50 (241)	29.66 (753)	4.63 (118)		B1	15.07 (383)	13.63 (346)	9.50 (241)	32.78 (833)	4.63 (118)							
184JM	A5	12.78 (325)	12.03 (306)	9.50 (241)	28.66 (728)	3.03 (77)	184JP	A5	12.78 (325)	12.03 (306)	9.50 (241)	31.78 (807)	3.03 (77)	184JP	B1	15.08 (383)	13.69 (348)	9.50 (241)	32.84 (834)	4.69 (119)
	B1	15.08 (383)	13.69 (348)	9.50 (241)	29.72 (755)	4.69 (119)		B1	15.08 (383)	13.69 (348)	9.50 (241)	32.84 (834)	4.69 (119)							
213JM	A5	13.53 (344)	12.56 (319)	9.50 (241)	31.95 (812)	3.56 (90)	213JP	A5	13.53 (344)	12.56 (319)	9.50 (241)	35.83 (910)	3.56 (90)	213JP	B1	15.84 (402)	14.22 (361)	9.50 (241)	37.42 (951)	5.22 (133)
	B1	15.84 (402)	14.22 (361)	9.50 (241)	33.55 (852)	5.22 (133)		B1	15.84 (402)	14.22 (361)	9.50 (241)	37.42 (951)	5.22 (133)							
	B2	15.84 (402)	14.22 (361)	9.50 (241)	39.29 (998)	5.22 (133)		B2	15.84 (402)	14.22 (361)	9.50 (241)	43.16 (1096)	5.22 (133)							
215JM	A5	13.53 (344)	12.56 (319)	9.50 (241)	30.48 (774)	3.56 (90)	215JP	A5	13.53 (344)	12.56 (319)	9.50 (241)	34.36 (873)	3.56 (90)	215JP	B1	15.84 (402)	14.22 (361)	9.50 (241)	35.89 (912)	5.22 (133)
	B1	15.84 (402)	14.22 (361)	9.50 (241)	32.02 (813)	5.22 (133)		B1	15.84 (402)	14.22 (361)	9.50 (241)	35.89 (912)	5.22 (133)							
	B2	15.84 (402)	14.22 (361)	9.50 (241)	37.76 (959)	5.22 (133)		B2	15.84 (402)	14.22 (361)	9.50 (241)	41.63 (1057)	5.22 (133)							
	C1	17.81 (452)	17.42 (442)	12.10 (307)	39.78 (1010)	8.42 (214)		C1	17.81 (452)	17.42 (442)	12.10 (307)	43.65 (1109)	8.42 (214)							
254JM	B1	16.83 (427)	14.92 (379)	9.50 (241)	38.25 (972)	5.92 (150)	254JP	B1	16.83 (427)	14.92 (379)	9.50 (241)	41.13 (1045)	5.92 (150)	254JP	B2	16.83 (427)	14.92 (379)	9.50 (241)	45.58 (1158)	5.92 (150)
	B2	16.83 (427)	14.92 (379)	9.50 (241)	42.70 (1085)	5.92 (150)		B2	16.83 (427)	14.92 (379)	9.50 (241)	45.58 (1158)	5.92 (150)							
	C1	18.80 (477)	18.12 (460)	12.10 (307)	43.96 (1117)	9.12 (232)		C1	18.80 (477)	18.12 (460)	12.10 (307)	46.84 (1190)	9.12 (232)							

NOTE: Drives with single phase input have three phase output and include three phase motors.
Kv=2 (50)

Xylem Inc.
8200 N. Austin Avenue, Morton Grove, IL 60053
Phone: (847)966-3700 Fax: (847)965-8379
www.bellgossett.com
Bell & Gossett is a trademark of Xylem Inc. or one of its subsidiaries.
© 2015 Xylem Inc.

xylem
Let's Solve Water




Pressure Sensor/Transmitter For Pumps with TECHNOLOGIC® Drives

FEATURES

- 4-20mA output
- 10-28 VDC supply voltage
- Operating Temperature -40 to 85°C (-40 to 185°F)
- Storage Temperature -40 to 100°C (-40 to 212°F)
- Enclosure IP-66 (housing only)
- High Strength Stainless Steel Construction
- No Oil, Welds or Internal O-rings
- Wide Operating Temperature
- Low Static and Thermal Errors
- Compatible with Wide Variety of Liquids and Gases
- EMI/RFI Protection
- UL/cUL 508 Approved (with housing)
- 1lb. (0.45 kg) approximate weight

TECHNOLOGIC ANALOG SENSOR WIRING

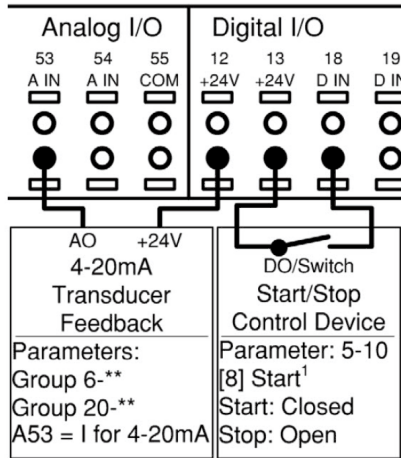

B&G PART NUMBERS

- S13203 Pressure range: 0-100 psi (0-689 kPa)
- S13204 Pressure range: 0-300 psi (0-2068 kPa)


Consult factory for other ranges.


INSTALLATION CONSIDERATIONS

- Standard 24 AWG (0.61 mm dia.) 2 wire shielded cable located in a conduit separate from high voltage wiring
- 24 vdc power supplied from Technologic Controller

DIMENSIONAL INFORMATION

Dimensions in Inches (Millimeters)

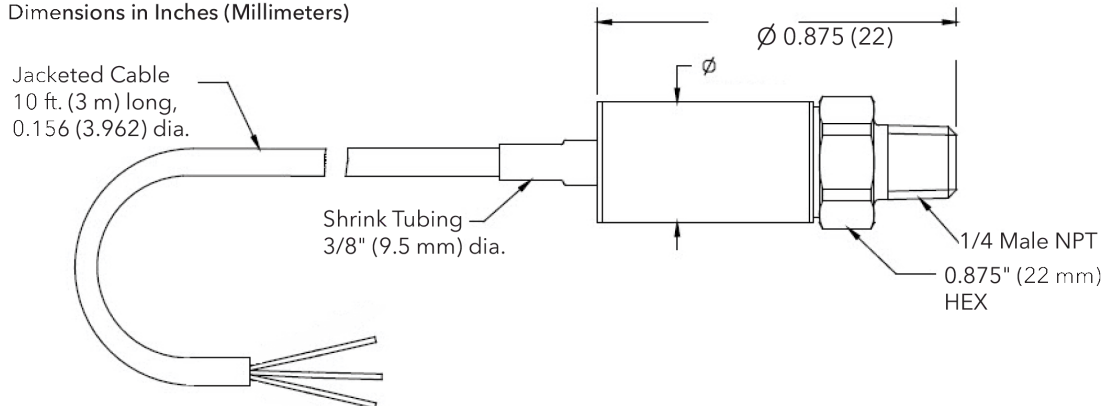

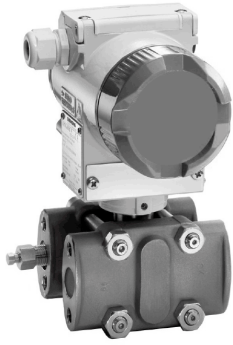


Differential Pressure Sensor/ Transmitter For Pumps with TECHNOLOGIC® Drives

FEATURES

- Relays reading to the Technologic controller up to 2000 ft. (610 m) away
- All wetted parts are 316 stainless steel
- Built-in RFI filter effective from 20 to 1000 MHz
- Withstands static pressures up to 2300 PSI (15858 kPa)
- 3 Valve bypass manifold (optional)
- 10 lbs. (4.5 kg) approximate weight

TECHNOLOGIC ANALOG SENSOR WIRING

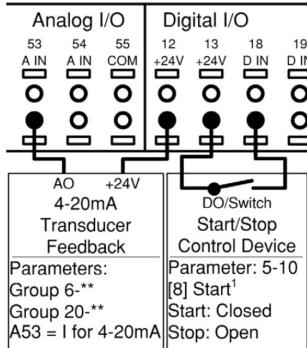

B&G PART NUMBERS

- S100089 Pressure range: 0 - 40 psi (0 - 276 kPa)
- S100091 Pressure range: 0 - 70 psi (0 - 483 kPa)
- S100092 Pressure range: 0 - 100 psi (0 - 689 kPa)


Consult factory for other ranges.

INSTALLATION CONSIDERATIONS

- Standard 18 AWG (1.194 mm dia.) 2 wire shielded cable located in a conduit separate from high voltage wiring
- 24 vdc power supplied from Technologic Controller for distance <2000 ft (610 m)

DIMENSIONAL INFORMATION

Dimensions in Inches (Millimeters)

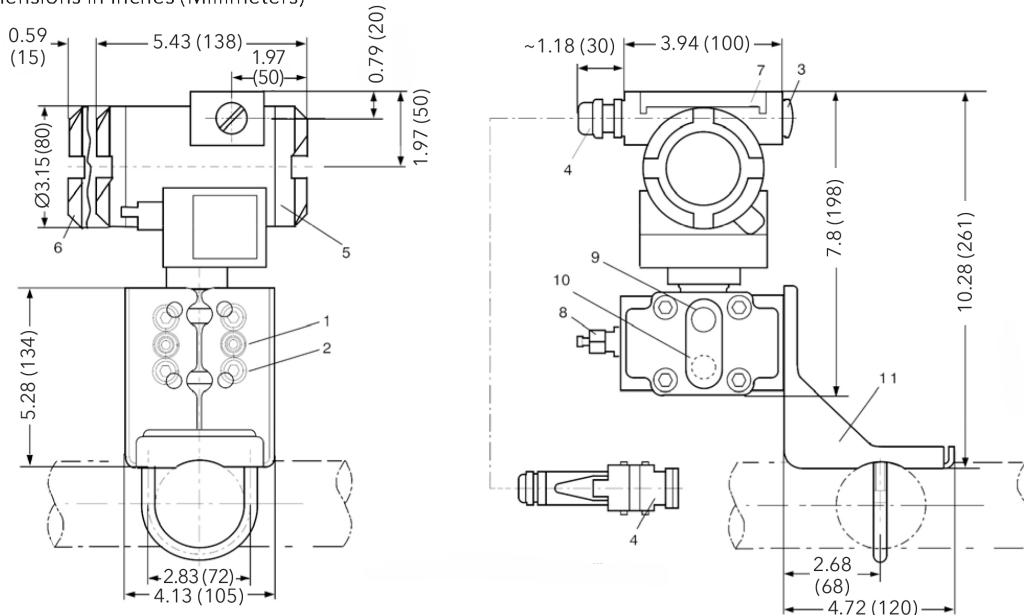

- 1 Process connection 1/4-18NPT for absolute pressure (+) side
- 2 Mounting thread 7/16-20 UNF to EN 61518
- 3 Dummy plug
- 4 Electrical connection: Screwed gland 1/2-14 NPT
- 5 Connection side

- 6 Electronic side, no digital display
- 7 Access cover over magnetic pushbuttons
- 8 Sealing screw with vent shown (optional)
- 9 Side vent for measuring liquid
- 10 Side vent for measuring gas (supplement H02)
- 11 Mounting bracket (2 shackles, 4 nuts, 4 U-plates, 1 angle) made of steel



Flow Sensor/Transmitter For Pumps with TECHNOLOGIC® Drives


The rugged Bell & Gossett Flow Sensor/Transmitter precisely measures system flow and transmits a proportional 4 to 20 mA DC signal to the Technologic Controller for display or program calculations.

FEATURES



- Suitable for mounting in vertical pipe
- Suitable for mounting in horizontal pipe within 45° of top dead center
- Non-magnetically sensed, non-fouling paddle wheel
- NEMA 4X Transmitter Enclosure
- Maximum Pressure Ratings:
1000 psi @ 100°F, 900 psi @ 200°F,
750 psi @ 300°F (6895 kPa @ 38°C, 6205 kPa @ 93°C,
5171 kPa @ 149°C)
- Maximum Temperature Ratings:
Fluid - 300°F (149°C) continuous service
Electronics - 150°F (66°C)
- Optional software and cable available for field programming
- 9.9 lbs (4.5 kg) approximate weight

DIMENSIONAL INFORMATION

Dimensions in Inches (Millimeters)

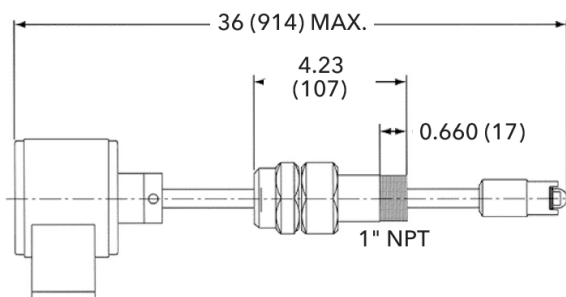

TECHNOLOGIC ANALOG SENSOR WIRING

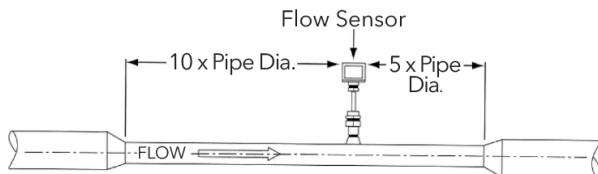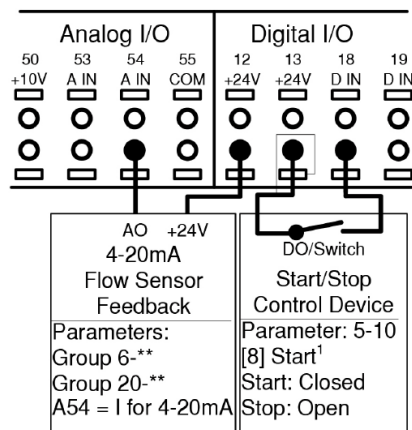


INSTALLATION CONSIDERATIONS

- Standard 18 AWG (1.194 mm dia.) gauge 3 wire shielded cable located in conduit separate from high voltage wiring
- 24 vdc power supplied from Technologic Controller
- Takes accurate readings and relays them to the Technologic Controller up to 2,000 ft. (610 m) away, when 10 pipe diameters upstream and 5 pipe diameters downstream of straight uninterrupted flow is present.

CALIBRATION CHART		
B&G Part No.	Pipe Size	Max. Flow
137411	3" Sch 40	250 gpm (16 l/sec)
137412	4" Sch 40	400 gpm (25 l/sec)
137413	6" Sch 40	850 gpm (54 l/sec)
137414	8" Sch 40	1750 gpm (110 l/sec)
137415	10" Sch 40	3150 gpm (199 l/sec)
137416	12" Sch 40	5000 gpm (315 l/sec)
137417	14" Sch 40	6400 gpm (404 l/sec)
137418	16" Sch 40	9100 gpm (574 l/sec)
137419	18" Sch 40	12400 gpm (782 l/sec)
137420	20" Sch 40	16500 gpm (1041 l/sec)

Consult factory for custom flow range calibration.

JOB:	REPRESENTATIVE:	
UNIT TAG:	ORDER NO.	DATE:
ENGINEER:	SUBMITTED BY:	DATE:
CONTRACTOR:	APPROVED BY:	DATE:



2.5x2.5x9.5C

Series e-80

In-Line Mounted Centrifugal Pumps

SPECIFICATIONS

FLOW _____ HEAD _____

HP _____ RPM _____

VOLTS _____

CYCLE _____ INPUT PHASE _____

ENCLOSURE _____

APPROX. WEIGHT _____

SPECIALS _____

MATERIALS OF CONSTRUCTION

Stainless Steel Fitted

MAXIMUM WORKING PRESSURE

- 175 psi (12 bar) with 125# ANSI flange drilling
- 250 psi (17 bar) with 250# ANSI flange drilling (requires 80-S)
- 300 psi (21 bar) W.P. with 250# ANSI flange drilling (Requires -S and EPR-Silicon Carbide-Silicon Carbide Seal)

MOUNTING


- In-Line Piping
- Flange Supports

PUMP VARIABLE SPEED CONTROL


- Integrated Technologic® Sensorless Control (ITSC)
- Integrated Technologic® (IT)
 - External input by others
 - Pressure Sensor(s)
 - Differential Pressure Sensor(s)
 - Flow Sensor(s)
- By Others

TYPE OF SEAL

- F Standard Seal w/ Flush Line (Buna-Carbon/Ceramic)
- S Stuffing Box construction w/ Flushed Mechanical Single Seal (EPR-Tungsten Carbide/Carbon)
- PF Stuffing Box Construction w/ Flushed Packing (Graphite Impregnated PTFE)

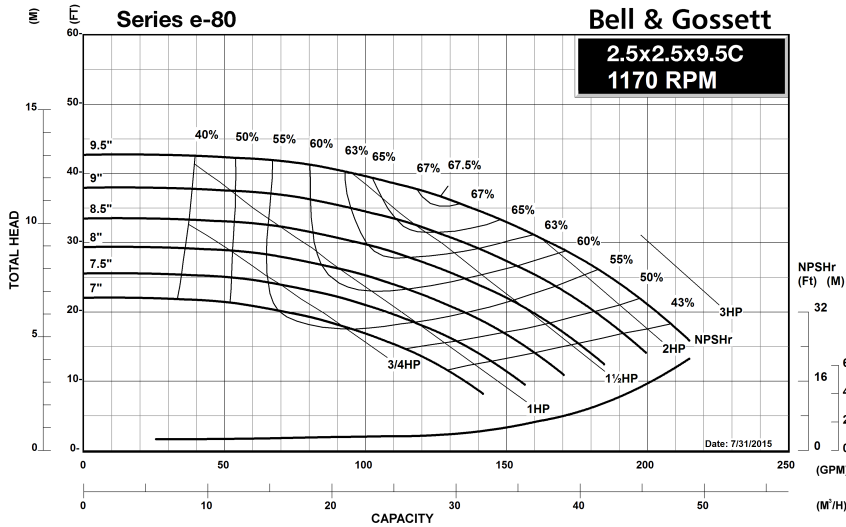

JOB:	REPRESENTATIVE:	
UNIT TAG:	ORDER NO.:	DATE:
ENGINEER:	SUBMITTED BY:	DATE:
CONTRACTOR:	APPROVED BY:	DATE:



2.5x2.5x9.5C

Series e-80

In-Line Mounted Centrifugal Pumps

SPECIFICATIONS

FLOW _____ HEAD _____

HP _____ RPM _____

VOLTS _____

CYCLE _____ INPUT PHASE _____

ENCLOSURE _____

APPROX. WEIGHT _____

SPECIALS _____

MATERIALS OF CONSTRUCTION

Stainless Steel Fitted

MAXIMUM WORKING PRESSURE

- 175 psi (12 bar) with 125# ANSI flange drilling
- 250 psi (17 bar) with 250# ANSI flange drilling (requires 80-S)
- 300 psi (21 bar) W.P. with 250# ANSI flange drilling (Requires -S and EPR-Silicon Carbide-Silicon Carbide Seal)

MOUNTING


- In-Line Piping
- Flange Supports

PUMP VARIABLE SPEED CONTROL


- Integrated Technologic® Sensorless Control (ITSC)
- Integrated Technologic® (IT)
 - External input by others
 - Pressure Sensor(s)
 - Differential Pressure Sensor(s)
 - Flow Sensor(s)
- By Others

TYPE OF SEAL

- F Standard Seal w/ Flush Line (Buna-Carbon/Ceramic)
- S Stuffing Box construction w/ Flushed Mechanical Single Seal (EPR-Tungsten Carbide/Carbon)
- PF Stuffing Box Construction w/ Flushed Packing (Graphite Impregnated PTFE)

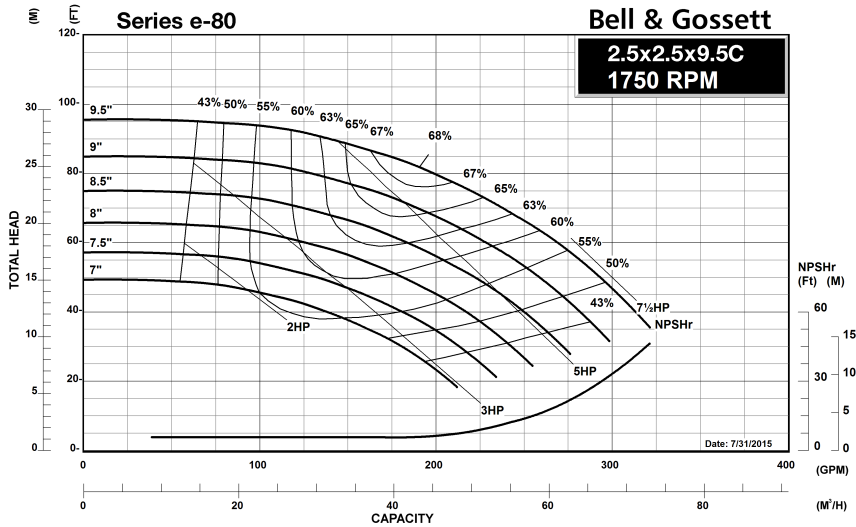

JOB:	REPRESENTATIVE:	
UNIT TAG:	ORDER NO.:	DATE:
ENGINEER:	SUBMITTED BY:	DATE:
CONTRACTOR:	APPROVED BY:	DATE:



2.5x2.5x9.5C

Series e-80

In-Line Mounted Centrifugal Pumps

SPECIFICATIONS

FLOW _____ HEAD _____

HP _____ RPM _____

VOLTS _____

CYCLE _____ INPUT PHASE _____

ENCLOSURE _____

APPROX. WEIGHT _____

SPECIALS _____

MATERIALS OF CONSTRUCTION

Stainless Steel Fitted

MAXIMUM WORKING PRESSURE

- 175 psi (12 bar) with 125# ANSI flange drilling
- 250 psi (17 bar) with 250# ANSI flange drilling (requires 80-S)
- 300 psi (21 bar) W.P. with 250# ANSI flange drilling (Requires -S and EPR-Silicon Carbide-Silicon Carbide Seal)

MOUNTING


- In-Line Piping
- Flange Supports


PUMP VARIABLE SPEED CONTROL

- Integrated Technologic® Sensorless Control (ITSC)
- Integrated Technologic® (IT)
 - External input by others
 - Pressure Sensor(s)
 - Differential Pressure Sensor(s)
 - Flow Sensor(s)
- By Others

TYPE OF SEAL

- F Standard Seal w/ Flush Line (Buna-Carbon/Ceramic)
- S Stuffing Box construction w/ Flushed Mechanical Single Seal (EPR-Tungsten Carbide/Carbon)
- PF Stuffing Box Construction w/ Flushed Packing (Graphite Impregnated PTFE)

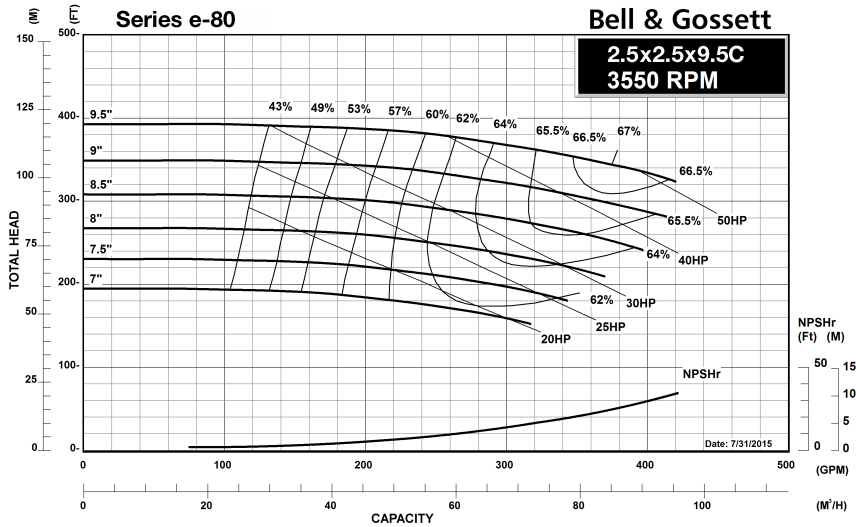

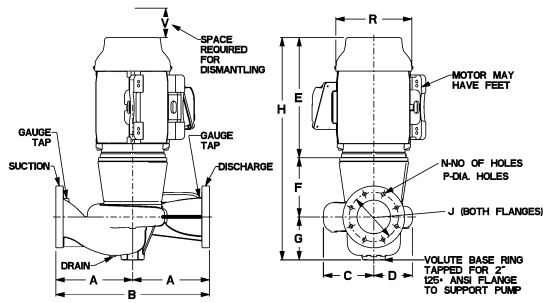

2.5x2.5x9.5C

Series e-80

Centrifugal Pump Submittal - In-Line Piping

DIMENSIONS - Inches (mm)

STANDARD SEAL

MOTOR FRAME	A	B	C	D	E (max)	F	G	H (max)	125# ANSI			250# ANSI			R	S (Max)*	V (min)	Suct/Disch Gauge Taps (NPT)	Drain Tap (NPT)
									J	N	P	J	N	P					
145JM	10.75 (273)	21.50 (546)	5.96 (151)	7.06 (179)	12.63 (321)	4.81 (122)	6.00 (152)	23.44 (595)	5.50 (140)	4	0.75 (19)	5.88 (149)	8	0.88 (22)	9.75 (248)	1.50 (38)	4.75 (121)	0.25	0.25
182JM	10.75 (273)	21.50 (546)	5.96 (151)	7.06 (179)	15.31 (389)	4.81 (122)	6.00 (152)	26.13 (664)	5.50 (140)	4	0.75 (19)	5.88 (149)	8	0.88 (22)	11.75 (298)	1.00 (25)	4.75 (121)	0.25	0.25
184JM	10.75 (273)	21.50 (546)	5.96 (151)	7.06 (179)	15.31 (389)	4.81 (122)	6.00 (152)	26.13 (664)	5.50 (140)	4	0.75 (19)	5.88 (149)	8	0.88 (22)	11.75 (298)	1.00 (25)	4.75 (121)	0.25	0.25
213JM	10.75 (273)	21.50 (546)	5.96 (151)	7.06 (179)	19.25 (489)	4.81 (122)	6.00 (152)	30.06 (764)	5.50 (140)	4	0.75 (19)	5.88 (149)	8	0.88 (22)	14.00 (356)	-	4.75 (121)	0.25	0.25
215JM	10.75 (273)	21.50 (546)	5.96 (151)	7.06 (179)	19.25 (489)	4.81 (122)	6.00 (152)	30.06 (764)	5.50 (140)	4	0.75 (19)	5.88 (149)	8	0.88 (22)	14.00 (356)	-	4.75 (121)	0.25	0.25
254JM	10.75 (273)	21.50 (546)	5.96 (151)	7.06 (179)	24.13 (613)	5.81 (148)	6.00 (152)	35.94 (913)	5.50 (140)	4	0.75 (19)	5.88 (149)	8	0.88 (22)	17.00 (432)	-	4.75 (121)	0.25	0.25
256JM	10.75 (273)	21.50 (546)	5.96 (151)	7.06 (179)	24.13 (613)	5.81 (148)	6.00 (152)	35.94 (913)	5.50 (140)	4	0.75 (19)	5.88 (149)	8	0.88 (22)	17.00 (432)	-	4.75 (121)	0.25	0.25
284JM	10.75 (273)	21.50 (546)	5.96 (151)	7.06 (179)	23.63 (600)	5.81 (148)	6.00 (152)	35.44 (900)	5.50 (140)	4	0.75 (19)	5.88 (149)	8	0.88 (22)	16.13 (410)	4.63 (117)	4.75 (121)	0.25	0.25
286JM	10.75 (273)	21.50 (546)	5.96 (151)	7.06 (179)	25.13 (638)	5.81 (148)	6.00 (152)	36.94 (938)	5.50 (140)	4	0.75 (19)	5.88 (149)	8	0.88 (22)	16.13 (410)	4.63 (117)	4.75 (121)	0.25	0.25
324JM	10.75 (273)	21.50 (546)	5.96 (151)	7.06 (179)	26.00 (660)	5.81 (148)	6.00 (152)	37.81 (960)	5.50 (140)	4	0.75 (19)	5.88 (149)	8	0.88 (22)	18.75 (476)	5.38 (137)	4.75 (121)	0.25	0.25
326JM	10.75 (273)	21.50 (546)	5.96 (151)	7.06 (179)	26.00 (660)	5.81 (148)	6.00 (152)	37.81 (960)	5.50 (140)	4	0.75 (19)	5.88 (149)	8	0.88 (22)	18.75 (476)	5.38 (137)	4.75 (121)	0.25	0.25

STUFFING BOX

MOTOR FRAME	A	B	C	D	E (max)	F	G	H (max)	125# ANSI			250# ANSI			R	S (Max)*	V (min)	Suct/Disch Gauge Taps (NPT)	Drain Tap (NPT)
									J	N	P	J	N	P					
145JP	10.75 (273)	21.50 (546)	5.96 (151)	7.06 (179)	12.63 (321)	7.94 (202)	6.00 (152)	26.56 (675)	5.50 (140)	4	0.75 (19)	5.88 (149)	8	0.88 (22)	9.75 (248)	1.50 (38)	4.75 (121)	0.25	0.25
182JP	10.75 (273)	21.50 (546)	5.96 (151)	7.06 (179)	15.31 (389)	7.94 (202)	6.00 (152)	29.25 (743)	5.50 (140)	4	0.75 (19)	5.88 (149)	8	0.88 (22)	11.75 (298)	1.00 (25)	4.75 (121)	0.25	0.25
184JP	10.75 (273)	21.50 (546)	5.96 (151)	7.06 (179)	15.31 (389)	7.94 (202)	6.00 (152)	29.25 (743)	5.50 (140)	4	0.75 (19)	5.88 (149)	8	0.88 (22)	11.75 (298)	1.00 (25)	4.75 (121)	0.25	0.25
213JP	10.75 (273)	21.50 (546)	5.96 (151)	7.06 (179)	19.25 (489)	8.69 (221)	6.00 (152)	33.94 (862)	5.50 (140)	4	0.75 (19)	5.88 (149)	8	0.88 (22)	14.00 (356)	-	4.75 (121)	0.25	0.25
215JP	10.75 (273)	21.50 (546)	5.96 (151)	7.06 (179)	19.25 (489)	8.69 (221)	6.00 (152)	33.94 (862)	5.50 (140)	4	0.75 (19)	5.88 (149)	8	0.88 (22)	14.00 (356)	-	4.75 (121)	0.25	0.25
254JP	10.75 (273)	21.50 (546)	5.96 (151)	7.06 (179)	24.13 (613)	8.69 (221)	6.00 (152)	38.81 (986)	5.50 (140)	4	0.75 (19)	5.88 (149)	8	0.88 (22)	17.00 (432)	-	4.75 (121)	0.25	0.25
256JP	10.75 (273)	21.50 (546)	5.96 (151)	7.06 (179)	24.13 (613)	8.69 (221)	6.00 (152)	38.81 (986)	5.50 (140)	4	0.75 (19)	5.88 (149)	8	0.88 (22)	17.00 (432)	-	4.75 (121)	0.25	0.25
284JP	10.75 (273)	21.50 (546)	5.96 (151)	7.06 (179)	23.63 (600)	8.69 (221)	6.00 (152)	38.31 (973)	5.50 (140)	4	0.75 (19)	5.88 (149)	8	0.88 (22)	16.13 (410)	4.63 (117)	4.75 (121)	0.25	0.25
286JP	10.75 (273)	21.50 (546)	5.96 (151)	7.06 (179)	25.13 (638)	8.69 (221)	6.00 (152)	39.81 (1011)	5.50 (140)	4	0.75 (19)	5.88 (149)	8	0.88 (22)	16.13 (410)	4.63 (117)	4.75 (121)	0.25	0.25
324JP	10.75 (273)	21.50 (546)	5.96 (151)	7.06 (179)	26.00 (660)	8.69 (221)	6.00 (152)	40.69 (1033)	5.50 (140)	4	0.75 (19)	5.88 (149)	8	0.88 (22)	18.75 (476)	5.38 (137)	4.75 (121)	0.25	0.25
326JP	10.75 (273)	21.50 (546)	5.96 (151)	7.06 (179)	26.00 (660)	8.69 (221)	6.00 (152)	40.69 (1033)	5.50 (140)	4	0.75 (19)	5.88 (149)	8	0.88 (22)	18.75 (476)	5.38 (137)	4.75 (121)	0.25	0.25


Dimensions are subject to change. Not to be used for construction purposes unless certified.

NOTE: For Single phase Motors add 1" to dimensions E & H.

*Dimensions are for ODP Motors. For TEFC add S dimension to dimensions E & H.

Xylem Inc.
 8200 N. Austin Avenue, Morton Grove, IL 60053
 Phone: (847)966-3700 Fax: (847)965-8379
 www.bellgossett.com
 Bell & Gossett is a trademark of Xylem Inc. or one of its subsidiaries.
 © 2015 Xylem Inc.



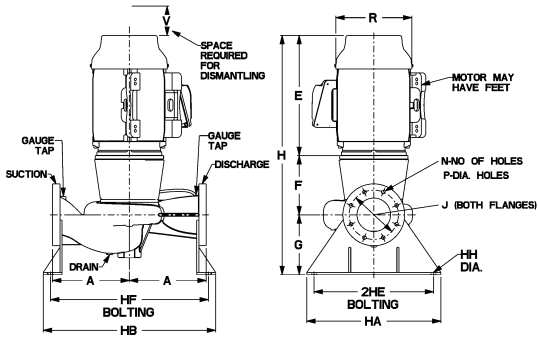

2.5x2.5x9.5C

Series e-80

Centrifugal Pump Submittal - Flange Support Mounting

DIMENSIONS - Inches (mm)

STANDARD SEAL

MOTOR FRAME	A	HF BOLTING	HB	2HE BOLTING	HA	HH DIA	E (max)	F	G	H (max)	125# ANSI			250# ANSI			R	S (Max)*	V (min)	Suct/Disch Gauge Taps (NPT)	Drain Tap (NPT)
											J	N	P	J	N	P					
145JM	10.75 (273)	23.73 (603)	27.23 (692)	21.50 (546)	25.00 (635)	0.88 (22)	12.63 (321)	4.81 (122)	6.00 (152)	23.44 (595)	5.50 (140)	4	0.75 (19)	5.88 (149)	8	0.88 (22)	9.75 (248)	1.50 (38)	4.75 (121)	0.25	0.25
182JM	10.75 (273)	23.73 (603)	27.23 (692)	21.50 (546)	25.00 (635)	0.88 (22)	15.31 (389)	4.81 (122)	6.00 (152)	26.13 (664)	5.50 (140)	4	0.75 (19)	5.88 (149)	8	0.88 (22)	11.75 (298)	1.00 (25)	4.75 (121)	0.25	0.25
184JM	10.75 (273)	23.73 (603)	27.23 (692)	21.50 (546)	25.00 (635)	0.88 (22)	15.31 (389)	4.81 (122)	6.00 (152)	26.13 (664)	5.50 (140)	4	0.75 (19)	5.88 (149)	8	0.88 (22)	11.75 (298)	1.00 (25)	4.75 (121)	0.25	0.25
213JM	10.75 (273)	23.73 (603)	27.23 (692)	21.50 (546)	25.00 (635)	0.88 (22)	19.25 (489)	4.81 (122)	6.00 (152)	30.06 (764)	5.50 (140)	4	0.75 (19)	5.88 (149)	8	0.88 (22)	14.00 (356)	-	4.75 (121)	0.25	0.25
215JM	10.75 (273)	23.73 (603)	27.23 (692)	21.50 (546)	25.00 (635)	0.88 (22)	19.25 (489)	4.81 (122)	6.00 (152)	30.06 (764)	5.50 (140)	4	0.75 (19)	5.88 (149)	8	0.88 (22)	14.00 (356)	-	4.75 (121)	0.25	0.25
254JM	10.75 (273)	23.73 (603)	27.23 (692)	21.50 (546)	25.00 (635)	0.88 (22)	24.13 (613)	5.81 (148)	6.00 (152)	35.94 (913)	5.50 (140)	4	0.75 (19)	5.88 (149)	8	0.88 (22)	17.00 (432)	-	4.75 (121)	0.25	0.25
256JM	10.75 (273)	23.73 (603)	27.23 (692)	21.50 (546)	25.00 (635)	0.88 (22)	24.13 (613)	5.81 (148)	6.00 (152)	35.94 (913)	5.50 (140)	4	0.75 (19)	5.88 (149)	8	0.88 (22)	17.00 (432)	-	4.75 (121)	0.25	0.25
284JM	10.75 (273)	23.73 (603)	27.23 (692)	21.50 (546)	25.00 (635)	0.88 (22)	23.63 (600)	5.81 (148)	6.00 (152)	35.44 (900)	5.50 (140)	4	0.75 (19)	5.88 (149)	8	0.88 (22)	16.13 (410)	4.63 (117)	4.75 (121)	0.25	0.25
286JM	10.75 (273)	23.73 (603)	27.23 (692)	21.50 (546)	25.00 (635)	0.88 (22)	25.13 (638)	5.81 (148)	6.00 (152)	36.94 (938)	5.50 (140)	4	0.75 (19)	5.88 (149)	8	0.88 (22)	16.13 (410)	4.63 (117)	4.75 (121)	0.25	0.25
324JM	10.75 (273)	23.73 (603)	27.23 (692)	21.50 (546)	25.00 (635)	0.88 (22)	26.00 (660)	5.81 (148)	6.00 (152)	37.81 (960)	5.50 (140)	4	0.75 (19)	5.88 (149)	8	0.88 (22)	18.75 (476)	5.38 (137)	4.75 (121)	0.25	0.25
326JM	10.75 (273)	23.73 (603)	27.23 (692)	21.50 (546)	25.00 (635)	0.88 (22)	26.00 (660)	5.81 (148)	6.00 (152)	37.81 (960)	5.50 (140)	4	0.75 (19)	5.88 (149)	8	0.88 (22)	18.75 (476)	5.38 (137)	4.75 (121)	0.25	0.25

STUFFING BOX

MOTOR FRAME	A	HF BOLTING	HB	2HE BOLTING	HA	HH DIA	E (max)	F	G	H (max)	125# ANSI			250# ANSI			R	S (Max)*	V (min)	Suct/Disch Gauge Taps (NPT)	Drain Tap (NPT)
											J	N	P	J	N	P					
145JP	10.75 (273)	23.73 (603)	27.23 (692)	21.50 (546)	25.00 (635)	0.88 (22)	12.63 (321)	7.94 (202)	6.00 (152)	26.56 (675)	5.50 (140)	4	0.75 (19)	5.88 (149)	8	0.88 (22)	9.75 (248)	1.50 (38)	4.75 (121)	0.25	0.25
182JP	10.75 (273)	23.73 (603)	27.23 (692)	21.50 (546)	25.00 (635)	0.88 (22)	15.31 (389)	7.94 (202)	6.00 (152)	29.25 (743)	5.50 (140)	4	0.75 (19)	5.88 (149)	8	0.88 (22)	11.75 (298)	1.00 (25)	4.75 (121)	0.25	0.25
184JP	10.75 (273)	23.73 (603)	27.23 (692)	21.50 (546)	25.00 (635)	0.88 (22)	15.31 (389)	7.94 (202)	6.00 (152)	29.25 (743)	5.50 (140)	4	0.75 (19)	5.88 (149)	8	0.88 (22)	11.75 (298)	1.00 (25)	4.75 (121)	0.25	0.25
213JP	10.75 (273)	23.73 (603)	27.23 (692)	21.50 (546)	25.00 (635)	0.88 (22)	19.25 (489)	8.69 (221)	6.00 (152)	33.94 (862)	5.50 (140)	4	0.75 (19)	5.88 (149)	8	0.88 (22)	14.00 (356)	-	4.75 (121)	0.25	0.25
215JP	10.75 (273)	23.73 (603)	27.23 (692)	21.50 (546)	25.00 (635)	0.88 (22)	19.25 (489)	8.69 (221)	6.00 (152)	33.94 (862)	5.50 (140)	4	0.75 (19)	5.88 (149)	8	0.88 (22)	14.00 (356)	-	4.75 (121)	0.25	0.25
254JP	10.75 (273)	23.73 (603)	27.23 (692)	21.50 (546)	25.00 (635)	0.88 (22)	24.13 (613)	8.69 (221)	6.00 (152)	38.81 (986)	5.50 (140)	4	0.75 (19)	5.88 (149)	8	0.88 (22)	17.00 (432)	-	4.75 (121)	0.25	0.25
256JP	10.75 (273)	23.73 (603)	27.23 (692)	21.50 (546)	25.00 (635)	0.88 (22)	24.13 (613)	8.69 (221)	6.00 (152)	38.81 (986)	5.50 (140)	4	0.75 (19)	5.88 (149)	8	0.88 (22)	17.00 (432)	-	4.75 (121)	0.25	0.25
284JP	10.75 (273)	23.73 (603)	27.23 (692)	21.50 (546)	25.00 (635)	0.88 (22)	23.63 (600)	8.69 (221)	6.00 (152)	38.31 (973)	5.50 (140)	4	0.75 (19)	5.88 (149)	8	0.88 (22)	16.13 (410)	4.63 (117)	4.75 (121)	0.25	0.25
286JP	10.75 (273)	23.73 (603)	27.23 (692)	21.50 (546)	25.00 (635)	0.88 (22)	25.13 (638)	8.69 (221)	6.00 (152)	39.81 (1011)	5.50 (140)	4	0.75 (19)	5.88 (149)	8	0.88 (22)	16.13 (410)	4.63 (117)	4.75 (121)	0.25	0.25
324JM	10.75 (273)	23.73 (603)	27.23 (692)	21.50 (546)	25.00 (635)	0.88 (22)	26.00 (660)	8.69 (221)	6.00 (152)	40.69 (1033)	5.50 (140)	4	0.75 (19)	5.88 (149)	8	0.88 (22)	18.75 (476)	5.38 (137)	4.75 (121)	0.25	0.25
326JM	10.75 (273)	23.73 (603)	27.23 (692)	21.50 (546)	25.00 (635)	0.88 (22)	26.00 (660)	8.69 (221)	6.00 (152)	40.69 (1033)	5.50 (140)	4	0.75 (19)	5.88 (149)	8	0.88 (22)	18.75 (476)	5.38 (137)	4.75 (121)	0.25	0.25


Dimensions are subject to change. Not to be used for construction purposes unless certified.

NOTE: For Single phase Motors add 1" to dimensions E & H.

*Dimensions are for ODP Motors. For TEFC add S dimension to dimensions E & H.


Xylem Inc.
 8200 N. Austin Avenue, Morton Grove, IL 60053
 Phone: (847)966-3700 Fax: (847)965-8379
 www.bellgossett.com
 Bell & Gossett is a trademark of Xylem Inc. or one of its subsidiaries.
 © 2015 Xylem Inc.





2.5x2.5x9.5C Series e-80 In-Line Mounted Centrifugal Pumps With Integrated Technologic® Control

TECHNOLOGIC STANDARD FEATURES	
CONTROL METHOD WITH INTEGRATED TECHNOLOGIC® SENSORLESS CONTROL (ITSC)	Factory configured for sensorless operation.
CONTROL METHOD WITH INTEGRATED TECHNOLOGIC® (IT)	Field configurable for sensor by others, building management system input, or optional sensor(s) provided.
ENCLOSURE	NEMA 12 (same as IP55 & UL type 12)
POWER DISCONNECT SWITCH	Included standard. Fused Disconnect Switch optional with three phase input voltage.
HARMONIC SUPPRESSION	Integrated non-saturating dual DC link reactors provide better harmonic performance than a 5% AC line reactor.
COOLING	Fan-cooled through temperature controlled and easy replacement.
AMBIENT TEMPERATURE RATING	14°F to 113°F (-10°C to 45°C)
COMMUNICATION PROTOCOLS	BACnet, Modbus RTU, N2 Metasys, FLN Apogee
ANALOG INPUTS	2 configurable for either voltage (0 to 10VDC) or current(0/4 to 20mA)
ANALOG OUTPUTS	1 (0/4 to 20mA) up to 500 ohm load accurate to 1% of full scale
DIGITAL INPUTS	4 (0 to 24VDC), NPN or PNP, 0 to 24VDC, on 5 msec scan interval, Up to 2 can be configured as pulse inputs.
DIGITAL OUTPUTS	2 (0 to 24VDC), 40mA max current, configurable as pulse outputs.
RELAY OUTPUTS	2 programmable, 240VAC or 400VAC up to 2 A
MINIMUM CONTROL HEAD	_____ ft (default set to 40% of design head if not unknown)

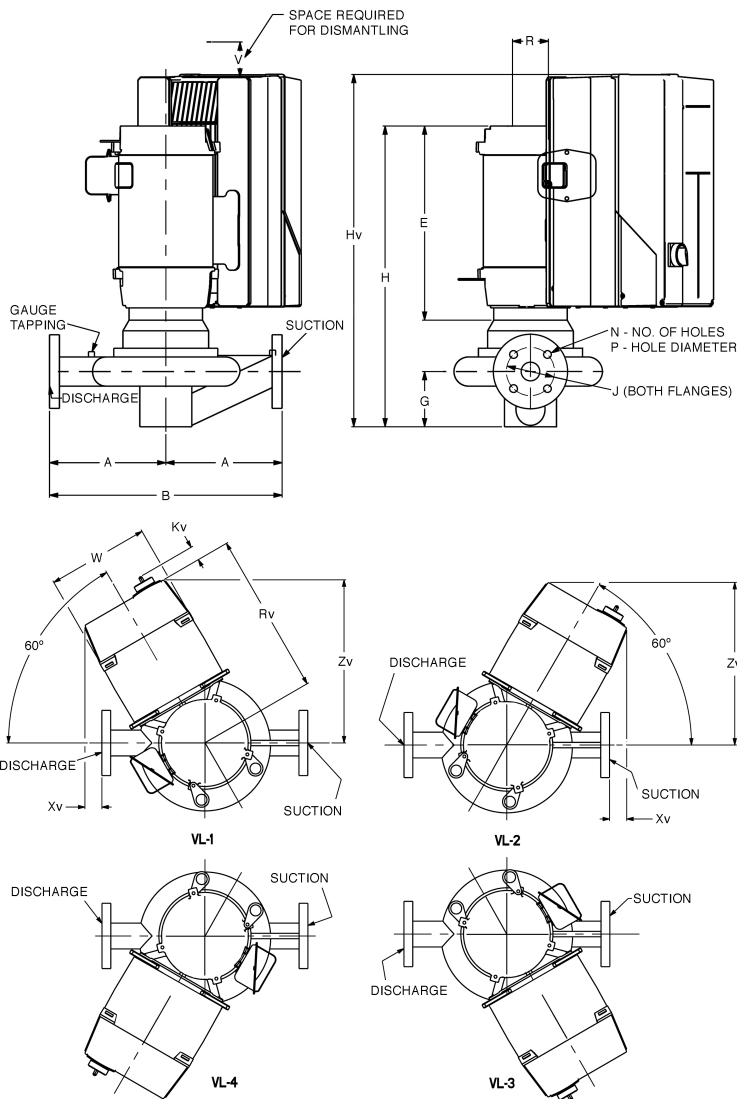

Xylem Inc.
8200 N. Austin Avenue
Morton Grove, IL 60053
Phone: (847)966-3700 Fax: (847)965-8379
www.bellgossett.com
Bell & Gossett is a trademark of Xylem Inc. or one of its subsidiaries.
© 2015 Xylem Inc.

xylem
Let's Solve Water

Series e-80 2.5x2.5x9.5C

B-139.10

In-Line Mounted Centrifugal Pumps With Integrated Technologic® Control

DIMENSIONS - Inches (mm)

STANDARD SEAL

STUFFING BOX

MOTOR FRAME	VFD	Rv	Zv	W	Hv	Xv	MOTOR FRAME	VFD	Rv	Zv	W	Hv	Xv
145JM	A5	11.78 (299)	12.31 (313)	9.50 (241)	30.14 (766)	1.19 (30)	145JP	A5	11.78 (299)	12.31 (313)	9.50 (241)	33.27 (845)	1.19 (30)
	B1	14.07 (357)	13.91 (353)	9.50 (241)	32.49 (825)	2.79 (71)		B1	14.07 (357)	13.91 (353)	9.50 (241)	35.62 (905)	2.79 (71)
182JM	A5	12.78 (325)	13.19 (335)	9.50 (241)	29.28 (744)	0.69 (17)	182JP	A5	12.78 (325)	13.19 (335)	9.50 (241)	32.41 (823)	0.69 (17)
	B1	15.07 (383)	14.79 (376)	9.50 (241)	30.28 (769)	2.29 (58)		B1	15.07 (383)	14.79 (376)	9.50 (241)	33.41 (849)	2.29 (58)
184JM	A5	12.78 (325)	13.19 (335)	9.50 (241)	29.28 (744)	0.69 (17)	184JP	A5	12.78 (325)	13.19 (335)	9.50 (241)	32.41 (823)	0.69 (17)
	B1	15.07 (383)	14.79 (376)	9.50 (241)	30.28 (769)	2.29 (58)		B1	15.07 (383)	14.79 (376)	9.50 (241)	33.41 (849)	2.29 (58)
213JM	A5	13.53 (344)	13.83 (351)	9.50 (241)	32.70 (831)	0.31 (8)	213JP	A5	13.53 (344)	13.83 (351)	9.50 (241)	36.58 (929)	0.31 (8)
	B1	15.84 (402)	15.84 (402)	9.50 (241)	34.30 (871)	0.88 (22)		B1	15.84 (402)	15.84 (402)	9.50 (241)	38.17 (970)	0.88 (22)
	B2	15.84 (402)	15.84 (402)	9.50 (241)	40.04 (1017)	0.88 (22)		B2	15.84 (402)	15.84 (402)	9.50 (241)	43.91 (1115)	2.48 (63)
215JM	A5	13.53 (344)	13.83 (351)	9.50 (241)	31.23 (793)	0.31 (8)	215JP	A5	13.53 (344)	13.83 (351)	9.50 (241)	35.11 (892)	0.31 (8)
	B1	15.84 (402)	15.84 (402)	9.50 (241)	32.77 (832)	0.88 (22)		B1	15.84 (402)	15.84 (402)	9.50 (241)	36.64 (931)	0.88 (22)
	B2	15.84 (402)	15.84 (402)	9.50 (241)	38.51 (978)	0.88 (22)		B2	15.84 (402)	15.84 (402)	9.50 (241)	42.38 (1076)	0.88 (22)
	C1	17.81 (452)	19.04 (484)	12.10 (307)	40.53 (1029)	4.08 (104)		C1	17.81 (452)	19.04 (484)	12.10 (307)	44.40 (1128)	4.08 (104)
254JM	-	-	-	-	-	-	254JP	-	-	-	-	-	-
256JM	B1	16.83 (427)	16.70 (424)	9.50 (241)	38.38 (975)	1.38 (35)	256JP	B1	16.83 (427)	16.70 (424)	9.50 (241)	41.25 (1048)	1.38 (35)
	B2	16.83 (427)	16.70 (424)	9.50 (241)	42.84 (1088)	1.38 (35)		B2	16.83 (427)	16.70 (424)	9.50 (241)	45.71 (1161)	1.38 (35)
	C1	18.83 (478)	18.97 (482)	12.09 (307)	43.72 (1110)	3.28 (83)		C1	18.83 (478)	18.97 (482)	12.09 (307)	46.59 (1183)	3.28 (83)
	C2	19.61 (498)	(21) (540)	14.59 (371)	48.38 (1229)	5.58 (142)		C2	19.61 (498)	(21) (540)	14.59 (371)	51.25 (1302)	5.58 (142)
284JM	B1	17.58 (446)	17.36 (441)	9.50 (241)	37.75 (959)	1.75 (44)	284JP	B1	17.58 (446)	17.36 (441)	9.50 (241)	40.63 (1032)	1.75 (44)
	B2	17.58 (446)	17.36 (441)	9.50 (241)	42.20 (1072)	1.75 (44)		B2	17.58 (446)	17.36 (441)	9.50 (241)	45.08 (1145)	1.75 (44)
	C1	19.58 (497)	19.63 (498)	12.09 (307)	44.61 (1133)	3.66 (93)		C1	19.58 (497)	19.63 (498)	12.09 (307)	47.48 (1206)	3.66 (93)
	C2	20.36 (517)	(22) (557)	14.59 (371)	47.76 (1213)	5.96 (151)		C2	20.36 (517)	(22) (557)	14.59 (371)	50.63 (1286)	5.96 (151)
286JM	B2	17.58 (446)	17.36 (441)	9.50 (241)	43.70 (1110)	1.75 (44)	286JP	B2	17.58 (446)	17.36 (441)	9.50 (241)	46.58 (1183)	1.75 (44)
	C1	19.58 (497)	19.63 (498)	12.09 (307)	46.11 (1171)	3.66 (93)		C1	19.58 (497)	19.63 (498)	12.09 (307)	48.98 (1244)	3.66 (93)
	C2	20.36 (517)	(22) (557)	14.59 (371)	49.26 (1251)	5.96 (151)		C2	20.36 (517)	(22) (557)	14.59 (371)	52.13 (1324)	5.96 (151)
324JM	B2	18.58 (472)	18.22 (463)	9.50 (241)	43.05 (1093)	2.25 (57)	324JP	B2	18.58 (472)	18.22 (463)	9.50 (241)	45.92 (1166)	2.25 (57)
	C1	20.58 (523)	20.48 (520)	12.09 (307)	43.39 (1102)	4.16 (106)		C1	20.58 (523)	20.48 (520)	12.09 (307)	46.27 (1175)	4.16 (106)
	C2	21.58 (548)	21.95 (558)	14.59 (371)	47.95 (1218)	5.69 (144)		C2	21.58 (548)	21.95 (558)	14.59 (371)	50.83 (1291)	5.69 (144)
326JM	C1	20.58 (523)	20.48 (520)	12.09 (307)	43.39 (1102)	4.16 (106)	326JP	C1	20.58 (523)	20.48 (520)	12.09 (307)	46.27 (1175)	4.16 (106)
	C2	21.58 (548)	21.95 (558)	14.59 (371)	47.95 (1218)	5.69 (144)		C2	21.58 (548)	21.95 (558)	14.59 (371)	50.83 (1291)	5.69 (144)

NOTE: Drives with single phase input have three phase output and include three phase motors.

Kv=2 (50)

Xylem Inc.
8200 N. Austin Avenue, Morton Grove, IL 60053
Phone: (847)966-3700 Fax: (847)965-8379
www.bellgossett.com
Bell & Gossett is a trademark of Xylem Inc. or one of its subsidiaries.
© 2015 Xylem Inc.






Pressure Sensor/Transmitter For Pumps with TECHNOLOGIC® Drives

FEATURES

- 4-20mA output
- 10-28 VDC supply voltage
- Operating Temperature -40 to 85°C (-40 to 185°F)
- Storage Temperature -40 to 100°C (-40 to 212°F)
- Enclosure IP-66 (housing only)
- High Strength Stainless Steel Construction
- No Oil, Welds or Internal O-rings
- Wide Operating Temperature
- Low Static and Thermal Errors
- Compatible with Wide Variety of Liquids and Gases
- EMI/RFI Protection
- UL/cUL 508 Approved (with housing)
- 1lb. (0.45 kg) approximate weight

TECHNOLOGIC ANALOG SENSOR WIRING

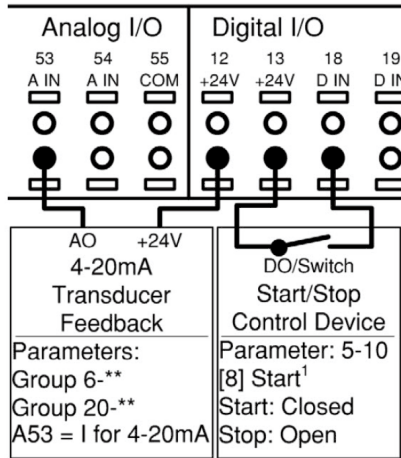

B&G PART NUMBERS

- S13203 Pressure range: 0-100 psi (0-689 kPa)
- S13204 Pressure range: 0-300 psi (0-2068 kPa)


Consult factory for other ranges.


INSTALLATION CONSIDERATIONS

- Standard 24 AWG (0.61 mm dia.) 2 wire shielded cable located in a conduit separate from high voltage wiring
- 24 vdc power supplied from Technologic Controller

DIMENSIONAL INFORMATION

Dimensions in Inches (Millimeters)

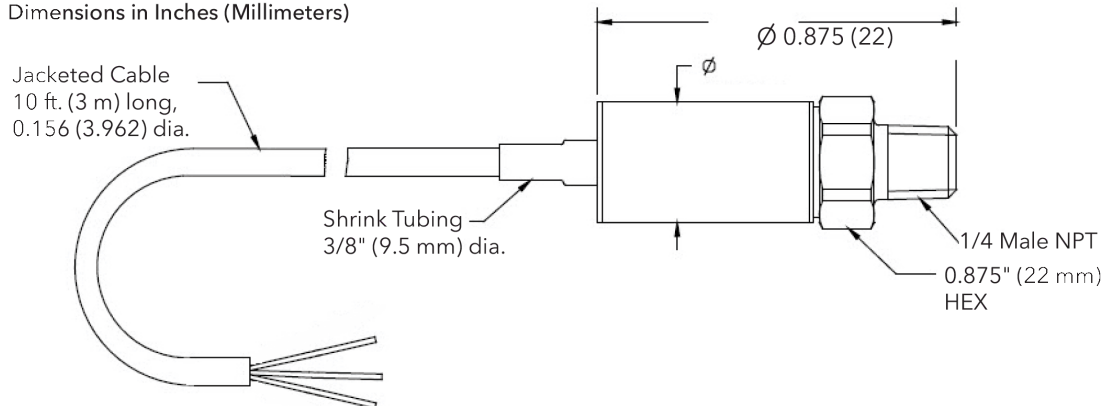

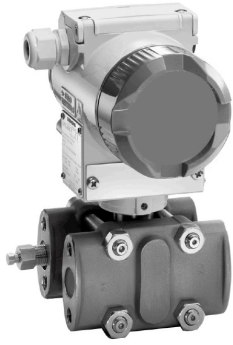


Differential Pressure Sensor/ Transmitter For Pumps with TECHNOLOGIC® Drives

FEATURES

- Relays reading to the Technologic controller up to 2000 ft. (610 m) away
- All wetted parts are 316 stainless steel
- Built-in RFI filter effective from 20 to 1000 MHz
- Withstands static pressures up to 2300 PSI (15858 kPa)
- 3 Valve bypass manifold (optional)
- 10 lbs. (4.5 kg) approximate weight

TECHNOLOGIC ANALOG SENSOR WIRING

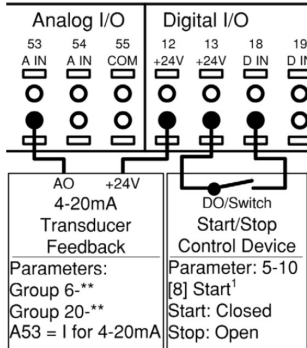

B&G PART NUMBERS

- S100089 Pressure range: 0 - 40 psi (0 - 276 kPa)
- S100091 Pressure range: 0 - 70 psi (0 - 483 kPa)
- S100092 Pressure range: 0 - 100 psi (0 - 689 kPa)


Consult factory for other ranges.

INSTALLATION CONSIDERATIONS

- Standard 18 AWG (1.194 mm dia.) 2 wire shielded cable located in a conduit separate from high voltage wiring
- 24 vdc power supplied from Technologic Controller for distance <2000 ft (610 m)

DIMENSIONAL INFORMATION

Dimensions in Inches (Millimeters)

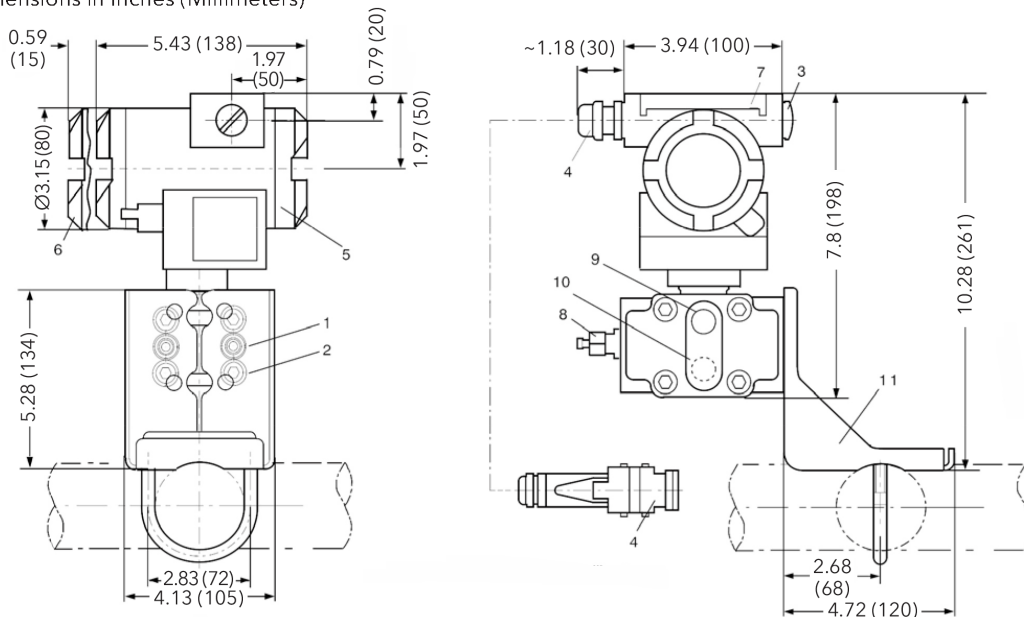

- 1 Process connection 1/4-18NPT for absolute pressure (+) side
- 2 Mounting thread 7/16-20 UNF to EN 61518
- 3 Dummy plug
- 4 Electrical connection: Screwed gland 1/2-14 NPT
- 5 Connection side

- 6 Electronic side, no digital display
- 7 Access cover over magnetic pushbuttons
- 8 Sealing screw with vent shown (optional)
- 9 Side vent for measuring liquid
- 10 Side vent for measuring gas (supplement H02)
- 11 Mounting bracket (2 shackles, 4 nuts, 4 U-plates, 1 angle) made of steel



Flow Sensor/Transmitter For Pumps with TECHNOLOGIC® Drives


The rugged Bell & Gossett Flow Sensor/Transmitter precisely measures system flow and transmits a proportional 4 to 20 mA DC signal to the Technologic Controller for display or program calculations.

FEATURES



- Suitable for mounting in vertical pipe
- Suitable for mounting in horizontal pipe within 45° of top dead center
- Non-magnetically sensed, non-fouling paddle wheel
- NEMA 4X Transmitter Enclosure
- Maximum Pressure Ratings:
 - 1000 psi @ 100°F, 900 psi @ 200°F,
 - 750 psi @ 300°F (6895 kPa @ 38°C, 6205 kPa @ 93°C, 5171 kPa @ 149°C)
- Maximum Temperature Ratings:
 - Fluid - 300°F (149°C) continuous service
 - Electronics - 150°F (66°C)
- Optional software and cable available for field programming
- 9.9 lbs (4.5 kg) approximate weight

DIMENSIONAL INFORMATION

Dimensions in Inches (Millimeters)

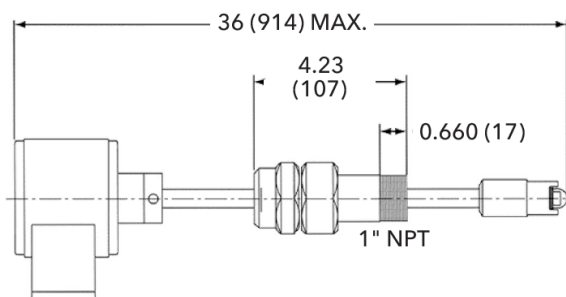

TECHNOLOGIC ANALOG SENSOR WIRING

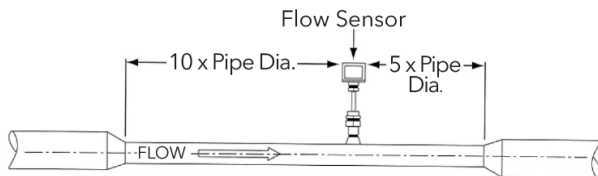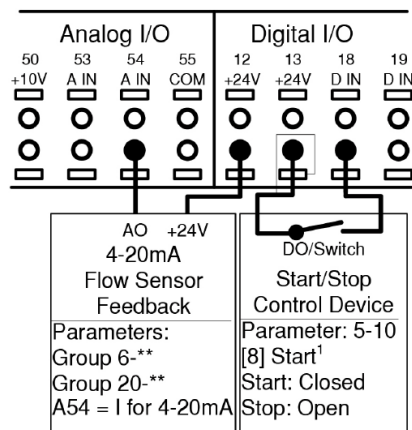


INSTALLATION CONSIDERATIONS

- Standard 18 AWG (1.194 mm dia.) gauge 3 wire shielded cable located in conduit separate from high voltage wiring
- 24 vdc power supplied from Technologic Controller
- Takes accurate readings and relays them to the Technologic Controller up to 2,000 ft. (610 m) away, when 10 pipe diameters upstream and 5 pipe diameters downstream of straight uninterrupted flow is present.

CALIBRATION CHART		
B&G Part No.	Pipe Size	Max. Flow
137411	3" Sch 40	250 gpm (16 l/sec)
137412	4" Sch 40	400 gpm (25 l/sec)
137413	6" Sch 40	850 gpm (54 l/sec)
137414	8" Sch 40	1750 gpm (110 l/sec)
137415	10" Sch 40	3150 gpm (199 l/sec)
137416	12" Sch 40	5000 gpm (315 l/sec)
137417	14" Sch 40	6400 gpm (404 l/sec)
137418	16" Sch 40	9100 gpm (574 l/sec)
137419	18" Sch 40	12400 gpm (782 l/sec)
137420	20" Sch 40	16500 gpm (1041 l/sec)

Consult factory for custom flow range calibration.

JOB:	REPRESENTATIVE:	
UNIT TAG:	ORDER NO.:	DATE:
ENGINEER:	SUBMITTED BY:	DATE:
CONTRACTOR:	APPROVED BY:	DATE:



2x2x7B Series e-80 In-Line Mounted Centrifugal Pumps

SPECIFICATIONS

FLOW _____ HEAD _____
 HP _____ RPM _____
 VOLTS _____
 CYCLE _____ INPUT PHASE _____
 ENCLOSURE _____
 APPROX. WEIGHT _____
 SPECIALS _____

MATERIALS OF CONSTRUCTION

Stainless Steel Fitted

MAXIMUM WORKING PRESSURE

- 175 psi (12 bar) with 125# ANSI flange drilling
- 250 psi (17 bar) with 250# ANSI flange drilling (requires 80-S)
- 300 psi (21 bar) W.P. with 250# ANSI flange drilling (Requires -S and EPR-Silicon Carbide-Silicon Carbide Seal)

MOUNTING


- In-Line Piping
- Flange Supports

PUMP VARIABLE SPEED CONTROL


- Integrated Technologic® Sensorless Control (ITSC)
- Integrated Technologic® (IT)
 - External input by others
 - Pressure Sensor(s)
 - Differential Pressure Sensor(s)
 - Flow Sensor(s)
- By Others

TYPE OF SEAL

- F Standard Seal w/ Flush Line (Buna-Carbon/Ceramic)
- S Stuffing Box construction w/ Flushed Mechanical Single Seal (EPR-Tungsten Carbide/Carbon)
- PF Stuffing Box Construction w/ Flushed Packing (Graphite Impregnated PTFE)

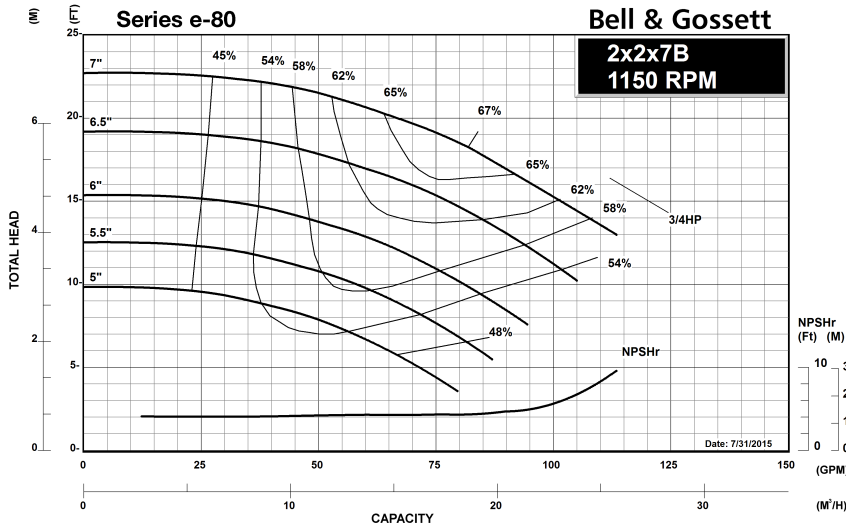

JOB:	REPRESENTATIVE:	
UNIT TAG:	ORDER NO.:	DATE:
ENGINEER:	SUBMITTED BY:	DATE:
CONTRACTOR:	APPROVED BY:	DATE:



2x2x7B Series e-80 In-Line Mounted Centrifugal Pumps

SPECIFICATIONS

FLOW _____ HEAD _____
 HP _____ RPM _____
 VOLTS _____
 CYCLE _____ INPUT PHASE _____
 ENCLOSURE _____
 APPROX. WEIGHT _____
 SPECIALS _____

MATERIALS OF CONSTRUCTION

Stainless Steel Fitted

MAXIMUM WORKING PRESSURE

- 175 psi (12 bar) with 125# ANSI flange drilling
- 250 psi (17 bar) with 250# ANSI flange drilling (requires 80-S)
- 300 psi (21 bar) W.P. with 250# ANSI flange drilling (Requires -S and EPR-Silicon Carbide-Silicon Carbide Seal)

MOUNTING


- In-Line Piping
- Flange Supports

PUMP VARIABLE SPEED CONTROL


- Integrated Technologic® Sensorless Control (ITSC)
- Integrated Technologic® (IT)
 - External input by others
 - Pressure Sensor(s)
 - Differential Pressure Sensor(s)
 - Flow Sensor(s)
- By Others

TYPE OF SEAL

- F Standard Seal w/ Flush Line (Buna-Carbon/Ceramic)
- S Stuffing Box construction w/ Flushed Mechanical Single Seal (EPR-Tungsten Carbide/Carbon)
- PF Stuffing Box Construction w/ Flushed Packing (Graphite Impregnated PTFE)

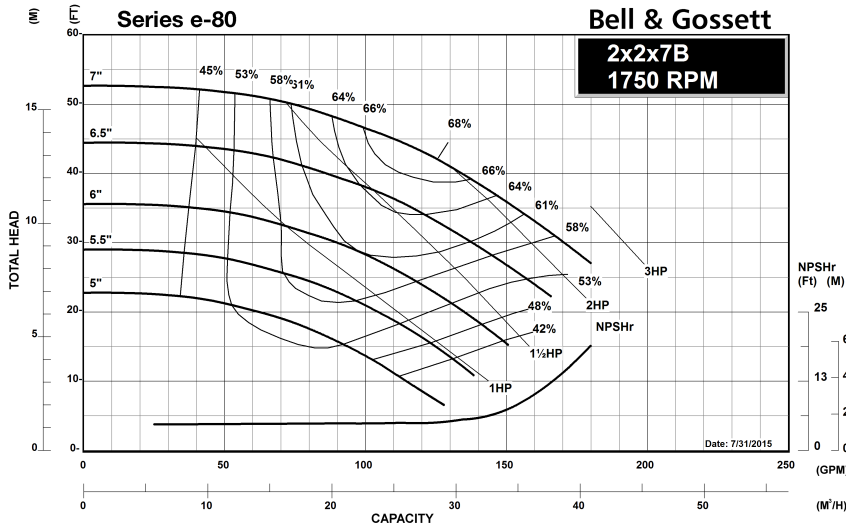

JOB:	REPRESENTATIVE:	
UNIT TAG:	ORDER NO.:	DATE:
ENGINEER:	SUBMITTED BY:	DATE:
CONTRACTOR:	APPROVED BY:	DATE:



2x2x7B

Series e-80

In-Line Mounted Centrifugal Pumps

SPECIFICATIONS

FLOW _____ HEAD _____

HP _____ RPM _____

VOLTS _____

CYCLE _____ INPUT PHASE _____

ENCLOSURE _____

APPROX. WEIGHT _____

SPECIALS _____

MATERIALS OF CONSTRUCTION

Stainless Steel Fitted

MAXIMUM WORKING PRESSURE

- 175 psi (12 bar) with 125# ANSI flange drilling
- 250 psi (17 bar) with 250# ANSI flange drilling (requires 80-S)
- 300 psi (21 bar) W.P. with 250# ANSI flange drilling (Requires -S and EPR-Silicon Carbide-Silicon Carbide Seal)

MOUNTING


- In-Line Piping
- Flange Supports


PUMP VARIABLE SPEED CONTROL

- Integrated Technologic® Sensorless Control (ITSC)
- Integrated Technologic® (IT)
 - External input by others
 - Pressure Sensor(s)
 - Differential Pressure Sensor(s)
 - Flow Sensor(s)
- By Others

TYPE OF SEAL

- F Standard Seal w/ Flush Line (Buna-Carbon/Ceramic)
- S Stuffing Box construction w/ Flushed Mechanical Single Seal (EPR-Tungsten Carbide/Carbon)
- PF Stuffing Box Construction w/ Flushed Packing (Graphite Impregnated PTFE)

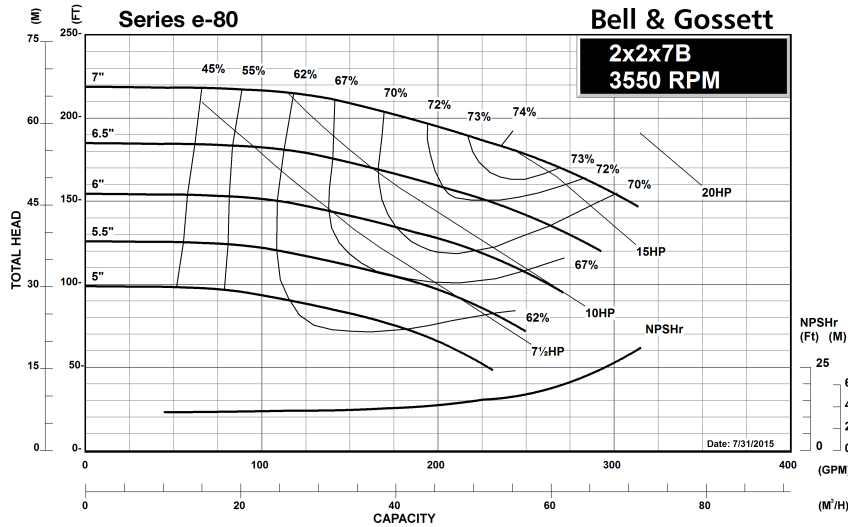

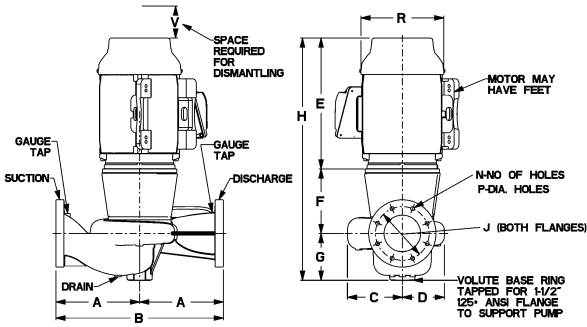

2x2x7B Series e-80 Centrifugal Pump Submittal - In-Line Piping

DIMENSIONS - Inches (mm)

STANDARD SEAL

MOTOR FRAME	A	B	C	D	E (max)	F	G	H (max)	125# ANSI			250# ANSI			R	S (Max)*	V (min)	Suct/Disch Gauge Taps (NPT)	Drain Tap (NPT)
									J	N	P	J	N	P					
									143JM	8.50 (216)	17.00 (432)	4.65 (118)	5.12 (130)	11.63 (295)					
145JM	8.50 (216)	17.00 (432)	4.65 (118)	5.12 (130)	12.63 (321)	4.63 (117)	5.13 (130)	22.38 (568)	4.75 (121)	4	0.75 (19)	5.00 (127)	8	0.75 (19)	9.75 (248)	1.50 (38)	4.00 (102)	0.25	0.25
182JM	8.50 (216)	17.00 (432)	4.65 (118)	5.12 (130)	15.31 (389)	4.63 (117)	5.13 (130)	25.06 (637)	4.75 (121)	4	0.75 (19)	5.00 (127)	8	0.75 (19)	11.75 (298)	1.00 (25)	4.00 (102)	0.25	0.25
184JM	8.50 (216)	17.00 (432)	4.65 (118)	5.12 (130)	15.31 (389)	4.63 (117)	5.13 (130)	25.06 (637)	4.75 (121)	4	0.75 (19)	5.00 (127)	8	0.75 (19)	11.75 (298)	1.00 (25)	4.00 (102)	0.25	0.25
213JM	8.50 (216)	17.00 (432)	4.65 (118)	5.12 (130)	19.25 (489)	4.63 (117)	5.13 (130)	29.00 (737)	4.75 (121)	4	0.75 (19)	5.00 (127)	8	0.75 (19)	14.00 (356)	-	4.00 (102)	0.25	0.25
215JM	8.50 (216)	17.00 (432)	4.65 (118)	5.12 (130)	19.25 (489)	4.63 (117)	5.13 (130)	29.00 (737)	4.75 (121)	4	0.75 (19)	5.00 (127)	8	0.75 (19)	14.00 (356)	-	4.00 (102)	0.25	0.25
254JM	8.50 (216)	17.00 (432)	4.65 (118)	5.12 (130)	24.13 (613)	5.63 (143)	5.13 (130)	34.88 (886)	4.75 (121)	4	0.75 (19)	5.00 (127)	8	0.75 (19)	17.00 (432)	-	4.00 (102)	0.25	0.25


STUFFING BOX

MOTOR FRAME	A	B	C	D	E (max)	F	G	H (max)	125# ANSI			250# ANSI			R	S (Max)*	V (min)	Suct/Disch Gauge Taps (NPT)	Drain Tap (NPT)
									J	N	P	J	N	P					
									143JP	8.50 (216)	17.00 (432)	4.65 (118)	5.12 (130)	11.63 (295)					
145JP	8.50 (216)	17.00 (432)	4.65 (118)	5.12 (130)	12.63 (321)	7.75 (197)	5.13 (130)	25.50 (648)	4.75 (121)	4	0.75 (19)	5.00 (127)	8	0.75 (19)	9.75 (248)	1.50 (38)	4.00 (102)	0.25	0.25
182JP	8.50 (216)	17.00 (432)	4.65 (118)	5.12 (130)	15.31 (389)	7.75 (197)	5.13 (130)	28.19 (716)	4.75 (121)	4	0.75 (19)	5.00 (127)	8	0.75 (19)	11.75 (298)	1.00 (25)	4.00 (102)	0.25	0.25
184JP	8.50 (216)	17.00 (432)	4.65 (118)	5.12 (130)	15.31 (389)	7.75 (197)	5.13 (130)	28.19 (716)	4.75 (121)	4	0.75 (19)	5.00 (127)	8	0.75 (19)	11.75 (298)	1.00 (25)	4.00 (102)	0.25	0.25
213JP	8.50 (216)	17.00 (432)	4.65 (118)	5.12 (130)	19.25 (489)	8.50 (216)	5.13 (130)	32.88 (835)	4.75 (121)	4	0.75 (19)	5.00 (127)	8	0.75 (19)	14.00 (356)	-	4.00 (102)	0.25	0.25
215JP	8.50 (216)	17.00 (432)	4.65 (118)	5.12 (130)	19.25 (489)	8.50 (216)	5.13 (130)	32.88 (835)	4.75 (121)	4	0.75 (19)	5.00 (127)	8	0.75 (19)	14.00 (356)	-	4.00 (102)	0.25	0.25
254JP	8.50 (216)	17.00 (432)	4.65 (118)	5.12 (130)	24.13 (613)	8.50 (216)	5.13 (130)	37.75 (959)	4.75 (121)	4	0.75 (19)	5.00 (127)	8	0.75 (19)	17.00 (432)	-	4.00 (102)	0.25	0.25

Dimensions are subject to change. Not to be used for construction purposes unless certified.

NOTE: For Single phase Motors add 1" to dimensions E & H.

*Dimensions are for ODP Motors. For TEFC add S dimension to dimensions E & H.

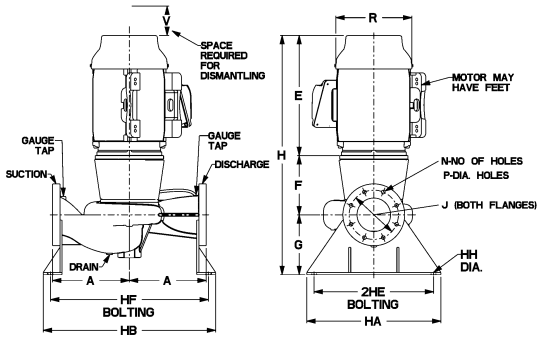

2x2x7B Series e-80 Centrifugal Pump Submittal - Flange Support Mounting

DIMENSIONS - Inches (mm)

STANDARD SEAL

MOTOR FRAME	A	HF BOLTING	HB	2HE BOLTING	HA	HH DIA	E (max)	F	G	H (max)	125# ANSI			250# ANSI			R	S (Max)*	V (min)	Suct/Disch Gauge Taps (NPT)	Drain Tap (NPT)
											J	N	P	J	N	P					
143JM	8.50 (216)	19.50 (495)	23.00 (584)	21.50 (546)	25.00 (635)	0.88 (22)	11.63 (295)	4.63 (117)	5.13 (130)	21.38 (543)	4.75 (121)	4	0.75 (19)	5.00 (127)	8	0.75 (19)	9.75 (248)	1.50 (38)	4.00 (102)	0.25	0.25
145JM	8.50 (216)	19.50 (495)	23.00 (584)	21.50 (546)	25.00 (635)	0.88 (22)	12.63 (321)	4.63 (117)	5.13 (130)	22.38 (568)	4.75 (121)	4	0.75 (19)	5.00 (127)	8	0.75 (19)	9.75 (248)	1.50 (38)	4.00 (102)	0.25	0.25
182JM	8.50 (216)	19.50 (495)	23.00 (584)	21.50 (546)	25.00 (635)	0.88 (22)	15.31 (389)	4.63 (117)	5.13 (130)	25.06 (637)	4.75 (121)	4	0.75 (19)	5.00 (127)	8	0.75 (19)	11.75 (298)	1.00 (25)	4.00 (102)	0.25	0.25
184JM	8.50 (216)	19.50 (495)	23.00 (584)	21.50 (546)	25.00 (635)	0.88 (22)	15.31 (389)	4.63 (117)	5.13 (130)	25.06 (637)	4.75 (121)	4	0.75 (19)	5.00 (127)	8	0.75 (19)	11.75 (298)	1.00 (25)	4.00 (102)	0.25	0.25
213JM	8.50 (216)	19.50 (495)	23.00 (584)	21.50 (546)	25.00 (635)	0.88 (22)	19.25 (489)	4.63 (117)	5.13 (130)	29.00 (737)	4.75 (121)	4	0.75 (19)	5.00 (127)	8	0.75 (19)	14.00 (356)	-	4.00 (102)	0.25	0.25
215JM	8.50 (216)	19.50 (495)	23.00 (584)	21.50 (546)	25.00 (635)	0.88 (22)	19.25 (489)	4.63 (117)	5.13 (130)	29.00 (737)	4.75 (121)	4	0.75 (19)	5.00 (127)	8	0.75 (19)	14.00 (356)	-	4.00 (102)	0.25	0.25
254JM	8.50 (216)	19.50 (495)	23.00 (584)	21.50 (546)	25.00 (635)	0.88 (22)	24.13 (613)	5.63 (143)	5.13 (130)	34.88 (886)	4.75 (121)	4	0.75 (19)	5.00 (127)	8	0.75 (19)	17.00 (432)	-	4.00 (102)	0.25	0.25
256JP	9.50 (241)	21.74 (552)	25.24 (641)	16.50 (419)	20.00 (508)	0.88 (22)	24.13 (613)	8.56 (217)	4.50 (114)	37.25 (946)	3.88 (98)	4	0.63 (16)	4.50 (114)	4	0.88 (22)	17.00 (432)	-	4.00 (102)	0.25	0.25
284JP	9.50 (241)	21.74 (552)	25.24 (641)	16.50 (419)	20.00 (508)	0.88 (22)	23.63 (600)	8.56 (217)	4.50 (114)	36.75 (933)	3.88 (98)	4	0.63 (16)	4.50 (114)	4	0.88 (22)	16.13 (410)	4.63 (117)	4.00 (102)	0.25	0.25
286JP	9.50 (241)	21.74 (552)	25.24 (641)	16.50 (419)	20.00 (508)	0.88 (22)	25.13 (638)	8.56 (217)	4.50 (114)	38.25 (972)	3.88 (98)	4	0.63 (16)	4.50 (114)	4	0.88 (22)	16.13 (410)	4.63 (117)	4.00 (102)	0.25	0.25

STUFFING BOX

MOTOR FRAME	A	HF BOLTING	HB	2HE BOLTING	HA	HH DIA	E (max)	F	G	H (max)	125# ANSI			250# ANSI			R	S (Max)*	V (min)	Suct/Disch Gauge Taps (NPT)	Drain Tap (NPT)
											J	N	P	J	N	P					
143JP	8.50 (216)	19.50 (495)	23.00 (584)	21.50 (546)	25.00 (635)	0.88 (22)	11.63 (295)	7.75 (197)	5.13 (130)	24.50 (622)	4.75 (121)	4	0.75 (19)	5.00 (127)	8	0.75 (19)	9.75 (248)	1.50 (38)	4.00 (102)	0.25	0.25
145JP	8.50 (216)	19.50 (495)	23.00 (584)	21.50 (546)	25.00 (635)	0.88 (22)	12.63 (321)	7.75 (197)	5.13 (130)	25.50 (648)	4.75 (121)	4	0.75 (19)	5.00 (127)	8	0.75 (19)	9.75 (248)	1.50 (38)	4.00 (102)	0.25	0.25
182JP	8.50 (216)	19.50 (495)	23.00 (584)	21.50 (546)	25.00 (635)	0.88 (22)	15.31 (389)	7.75 (197)	5.13 (130)	28.19 (716)	4.75 (121)	4	0.75 (19)	5.00 (127)	8	0.75 (19)	11.75 (298)	1.00 (25)	4.00 (102)	0.25	0.25
184JP	8.50 (216)	19.50 (495)	23.00 (584)	21.50 (546)	25.00 (635)	0.88 (22)	15.31 (389)	7.75 (197)	5.13 (130)	28.19 (716)	4.75 (121)	4	0.75 (19)	5.00 (127)	8	0.75 (19)	11.75 (298)	1.00 (25)	4.00 (102)	0.25	0.25
213JP	8.50 (216)	19.50 (495)	23.00 (584)	21.50 (546)	25.00 (635)	0.88 (22)	19.25 (489)	8.50 (216)	5.13 (130)	32.88 (835)	4.75 (121)	4	0.75 (19)	5.00 (127)	8	0.75 (19)	14.00 (356)	-	4.00 (102)	0.25	0.25
215JP	8.50 (216)	19.50 (495)	23.00 (584)	21.50 (546)	25.00 (635)	0.88 (22)	19.25 (489)	8.50 (216)	5.13 (130)	32.88 (835)	4.75 (121)	4	0.75 (19)	5.00 (127)	8	0.75 (19)	14.00 (356)	-	4.00 (102)	0.25	0.25
254JP	8.50 (216)	19.50 (495)	23.00 (584)	21.50 (546)	25.00 (635)	0.88 (22)	24.13 (613)	8.50 (216)	5.13 (130)	37.75 (959)	4.75 (121)	4	0.75 (19)	5.00 (127)	8	0.75 (19)	17.00 (432)	-	4.00 (102)	0.25	0.25
256JP	9.50 (241)	21.74 (552)	25.24 (641)	16.50 (419)	20.00 (508)	0.88 (22)	24.13 (613)	8.56 (217)	4.50 (114)	37.25 (946)	3.88 (98)	4	0.63 (16)	4.50 (114)	4	0.88 (22)	17.00 (432)	-	4.00 (102)	0.25	0.25
284JP	9.50 (241)	21.74 (552)	25.24 (641)	16.50 (419)	20.00 (508)	0.88 (22)	23.63 (600)	8.56 (217)	4.50 (114)	36.75 (933)	3.88 (98)	4	0.63 (16)	4.50 (114)	4	0.88 (22)	16.13 (410)	4.63 (117)	4.00 (102)	0.25	0.25
286JP	9.50 (241)	21.74 (552)	25.24 (641)	16.50 (419)	20.00 (508)	0.88 (22)	25.13 (638)	8.56 (217)	4.50 (114)	38.13 (968)	3.88 (98)	4	0.63 (16)	4.50 (114)	4	0.88 (22)	16.13 (410)	4.63 (117)	4.00 (102)	0.25	0.25


Dimensions are subject to change. Not to be used for construction purposes unless certified.

NOTE: For Single phase Motors add 1" to dimensions E & H.

*Dimensions are for ODP Motors. For TEFC add S dimension to dimensions E & H.

Xylem Inc.
8200 N. Austin Avenue, Morton Grove, IL 60053
Phone: (847)966-3700 Fax: (847)965-8379
www.bellgossett.com
Bell & Gossett is a trademark of Xylem Inc. or one of its subsidiaries.
© 2015 Xylem Inc.







2x2x7B Series e-80

In-Line Mounted Centrifugal Pumps
With Integrated Technologic® Control

TECHNOLOGIC STANDARD FEATURES	
CONTROL METHOD WITH INTEGRATED TECHNOLOGIC® SENSORLESS CONTROL (ITSC)	Factory configured for sensorless operation.
CONTROL METHOD WITH INTEGRATED TECHNOLOGIC® (IT)	Field configurable for sensor by others, building management system input, or optional sensor(s) provided.
ENCLOSURE	NEMA 12 (same as IP55 & UL type 12)
POWER DISCONNECT SWITCH	Included standard. Fused Disconnect Switch optional with three phase input voltage.
HARMONIC SUPPRESSION	Integrated non-saturating dual DC link reactors provide better harmonic performance than a 5% AC line reactor.
COOLING	Fan-cooled through temperature controlled and easy replacement.
AMBIENT TEMPERATURE RATING	14°F to 113°F (-10°C to 45°C)
COMMUNICATION PROTOCOLS	BACnet, Modbus RTU, N2 Metasys, FLN Apogee
ANALOG INPUTS	2 configurable for either voltage (0 to 10VDC) or current(0/4 to 20mA)
ANALOG OUTPUTS	1 (0/4 to 20mA) up to 500 ohm load accurate to 1% of full scale
DIGITAL INPUTS	4 (0 to 24VDC), NPN or PNP, 0 to 24VDC, on 5 msec scan interval, Up to 2 can be configured as pulse inputs.
DIGITAL OUTPUTS	2 (0 to 24VDC), 40mA max current, configurable as pulse outputs.
RELAY OUTPUTS	2 programmable, 240VAC or 400VAC up to 2 A
MINIMUM CONTROL HEAD	_____ ft (default set to 40% of design head if not unknown)

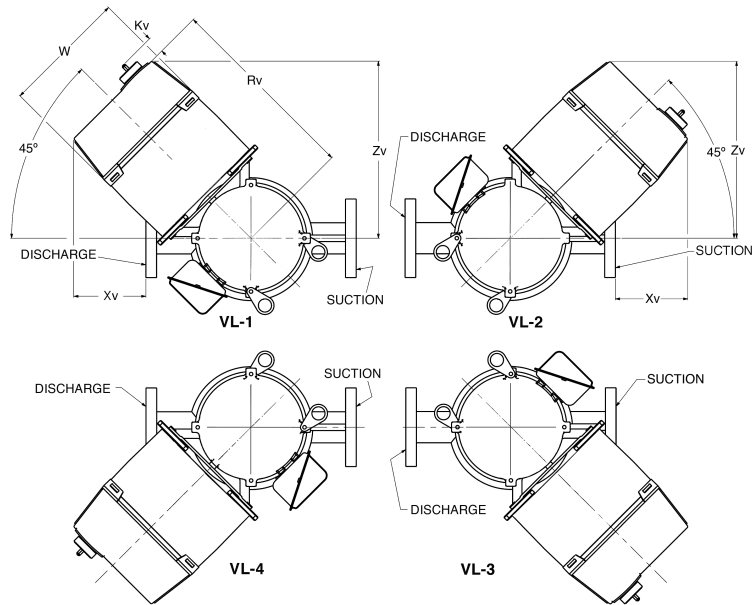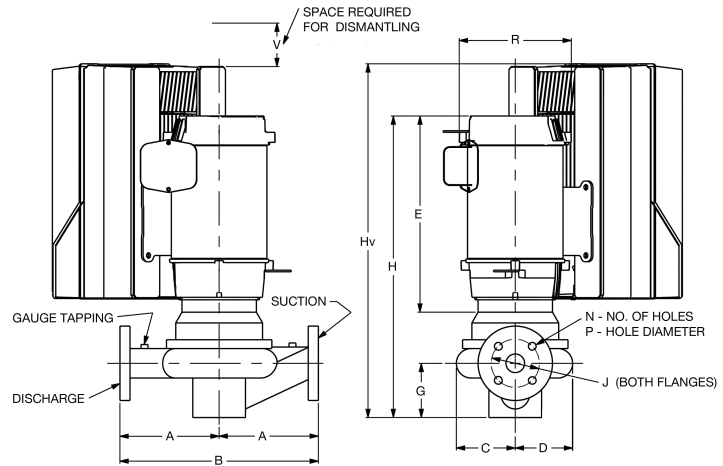

Series e-80 2x2x7B

In-Line Mounted Centrifugal Pumps

With Integrated Technologic® Control

B-139.4

DIMENSIONS - Inches (mm)							STANDARD SEAL							STUFFING BOX						
MOTOR FRAME	VFD	Rv	Zv	W	Hv	Xv	MOTOR FRAME	VFD	Rv	Zv	W	Hv	Xv	MOTOR FRAME	VFD	Rv	Zv	W	Hv	Xv
143JM	A5	11.78 (299)	11.33 (288)	9.50 (241)	27.77 (705)	2.83 (72)	143JP	A5	11.78 (299)	11.33 (288)	9.50 (241)	30.89 (785)	2.83 (72)	143JM	A5	11.78 (299)	11.33 (288)	9.50 (241)	31.89 (810)	2.83 (72)
145JM	A5	11.78 (299)	11.33 (288)	9.50 (241)	28.77 (731)	2.83 (72)	145JP	A5	11.78 (299)	11.33 (288)	9.50 (241)	31.89 (810)	2.83 (72)	145JM	B1	14.07 (357)	12.93 (328)	9.50 (241)	34.24 (870)	4.43 (112)
182JM	B1	14.07 (357)	12.93 (328)	9.50 (241)	31.12 (790)	4.43 (112)	182JP	B1	14.07 (357)	12.93 (328)	9.50 (241)	34.24 (870)	4.43 (112)	182JM	A5	12.78 (325)	12.03 (306)	9.50 (241)	31.09 (790)	3.53 (90)
184JM	A5	12.78 (325)	12.03 (306)	9.50 (241)	27.97 (710)	3.53 (90)	184JP	A5	12.78 (325)	12.03 (306)	9.50 (241)	31.09 (790)	3.53 (90)	184JM	B1	15.07 (383)	13.63 (346)	9.50 (241)	32.09 (815)	5.13 (130)
184JM	B1	15.07 (383)	13.63 (346)	9.50 (241)	28.97 (736)	5.13 (130)	184JP	B1	15.07 (383)	13.63 (346)	9.50 (241)	32.09 (815)	5.13 (130)	184JM	A5	12.78 (325)	12.03 (306)	9.50 (241)	31.09 (790)	3.53 (90)
213JM	A5	15.08 (383)	13.69 (348)	9.50 (241)	29.03 (737)	5.19 (132)	213JP	A5	12.78 (325)	12.03 (306)	9.50 (241)	31.09 (790)	3.53 (90)	213JM	B1	15.08 (383)	13.69 (348)	9.50 (241)	32.16 (817)	5.19 (132)
213JM	B1	15.08 (383)	13.69 (348)	9.50 (241)	29.03 (737)	5.19 (132)	213JP	B1	15.08 (383)	13.69 (348)	9.50 (241)	32.16 (817)	5.19 (132)	213JM	B2	15.84 (402)	14.22 (361)	9.50 (241)	42.54 (1080)	5.72 (145)
213JM	B2	15.84 (402)	14.22 (361)	9.50 (241)	38.66 (982)	5.72 (145)	213JP	B2	15.84 (402)	14.22 (361)	9.50 (241)	42.54 (1080)	5.72 (145)	213JM	A5	13.53 (344)	12.56 (319)	9.50 (241)	35.20 (894)	4.06 (103)
215JM	A5	13.53 (344)	12.56 (319)	9.50 (241)	29.86 (758)	4.06 (103)	215JP	A5	13.53 (344)	12.56 (319)	9.50 (241)	33.73 (857)	4.06 (103)	215JM	B1	15.84 (402)	14.22 (361)	9.50 (241)	35.27 (896)	5.72 (145)
215JM	B1	15.84 (402)	14.22 (361)	9.50 (241)	31.39 (797)	5.72 (145)	215JP	B1	15.84 (402)	14.22 (361)	9.50 (241)	35.27 (896)	5.72 (145)	215JM	B2	15.84 (402)	14.22 (361)	9.50 (241)	41.01 (1042)	5.72 (145)
215JM	B2	15.84 (402)	14.22 (361)	9.50 (241)	37.13 (943)	5.72 (145)	215JP	B2	15.84 (402)	14.22 (361)	9.50 (241)	41.01 (1042)	5.72 (145)	215JM	C1	17.81 (452)	17.42 (442)	12.10 (307)	43.03 (1093)	8.92 (227)
215JM	C1	17.81 (452)	17.42 (442)	12.10 (307)	39.15 (994)	8.92 (227)	215JP	C1	17.81 (452)	17.42 (442)	12.10 (307)	43.03 (1093)	8.92 (227)	215JM	B1	16.83 (427)	14.92 (379)	9.50 (241)	40.50 (1029)	6.42 (163)
254JM	B1	16.83 (427)	14.92 (379)	9.50 (241)	37.63 (956)	6.42 (163)	254JP	B1	16.83 (427)	14.92 (379)	9.50 (241)	40.50 (1029)	6.42 (163)	254JM	B2	16.83 (427)	14.92 (379)	9.50 (241)	44.95 (1142)	6.42 (163)
254JM	B2	16.83 (427)	14.92 (379)	9.50 (241)	42.08 (1069)	6.42 (163)	254JP	B2	16.83 (427)	14.92 (379)	9.50 (241)	44.95 (1142)	6.42 (163)	254JM	C1	18.83 (478)	18.97 (482)	12.09 (307)	44.97 (1142)	4.53 (115)
254JM	B1	16.83 (427)	16.70 (424)	9.50 (241)	39.63 (1006)	2.63 (67)	254JP	C1	18.83 (478)	18.97 (482)	12.09 (307)	44.97 (1142)	4.53 (115)	254JM	B1	17.58 (446)	17.36 (441)	9.50 (241)	39.00 (991)	3.00 (76)
254JM	B2	16.83 (427)	16.70 (424)	9.50 (241)	44.08 (1120)	2.63 (67)	254JP	B1	17.58 (446)	17.36 (441)	9.50 (241)	39.00 (991)	3.00 (76)	254JM	B2	17.58 (446)	17.36 (441)	9.50 (241)	43.45 (1104)	3.00 (76)
254JM	C1	18.83 (478)	18.97 (482)	12.09 (307)	44.97 (1142)	4.53 (115)	254JP	B2	17.58 (446)	17.36 (441)	9.50 (241)	43.45 (1104)	3.00 (76)	254JM	C1	19.58 (497)	19.63 (498)	12.09 (307)	47.23 (1200)	4.91 (125)
254JM	B1	17.58 (446)	17.36 (441)	9.50 (241)	39.00 (991)	3.00 (76)	254JP	C1	19.58 (497)	19.63 (498)	12.09 (307)	47.23 (1200)	4.91 (125)	254JM	B2	17.58 (446)	17.36 (441)	9.50 (241)	44.83 (1139)	3.00 (76)
254JM	B2	17.58 (446)	17.36 (441)	9.50 (241)	43.45 (1104)	3.00 (76)	254JP	B2	17.58 (446)	17.36 (441)	9.50 (241)	44.83 (1139)	3.00 (76)	254JM	C1	19.58 (497)	19.63 (498)	12.09 (307)	47.23 (1200)	4.91 (125)
254JM	C1	19.58 (497)	19.63 (498)	12.09 (307)	45.86 (1165)	4.91 (125)	254JP	C1	19.58 (497)	19.63 (498)	12.09 (307)	47.23 (1200)	4.91 (125)	254JM	C1	21.55 (547)	22.83 (580)	14.69 (373)	44.29 (1125)	8.11 (206)
254JM	B2	17.58 (446)	17.36 (441)	9.50 (241)	44.97 (1142)	3.00 (76)	254JP	C1	21.55 (547)	22.83 (580)	14.69 (373)	44.29 (1125)	8.11 (206)	254JM	C1	19.58 (497)	19.63 (498)	12.09 (307)	47.36 (1203)	4.91 (125)
254JM	C1	19.58 (497)	19.63 (498)	12.09 (307)	47.36 (1203)	4.91 (125)	254JP	C1	19.58 (497)	19.63 (498)	12.09 (307)	47.36 (1203)	4.91 (125)	254JM	C1	21.55 (547)	22.83 (580)	14.69 (373)	43.34 (1101)	8.11 (206)

NOTE: Drives with single phase input have three phase output and include three phase motors.
Kv=2 (50)

Xylem Inc.
8200 N. Austin Avenue, Morton Grove, IL 60053
Phone: (847)966-3700 Fax: (847)965-8379
www.bellgossett.com
Bell & Gossett is a trademark of Xylem Inc. or one of its subsidiaries.
© 2015 Xylem Inc.






Pressure Sensor/Transmitter For Pumps with TECHNOLOGIC® Drives

FEATURES

- 4-20mA output
- 10-28 VDC supply voltage
- Operating Temperature -40 to 85°C (-40 to 185°F)
- Storage Temperature -40 to 100°C (-40 to 212°F)
- Enclosure IP-66 (housing only)
- High Strength Stainless Steel Construction
- No Oil, Welds or Internal O-rings
- Wide Operating Temperature
- Low Static and Thermal Errors
- Compatible with Wide Variety of Liquids and Gases
- EMI/RFI Protection
- UL/cUL 508 Approved (with housing)
- 1lb. (0.45 kg) approximate weight

TECHNOLOGIC ANALOG SENSOR WIRING

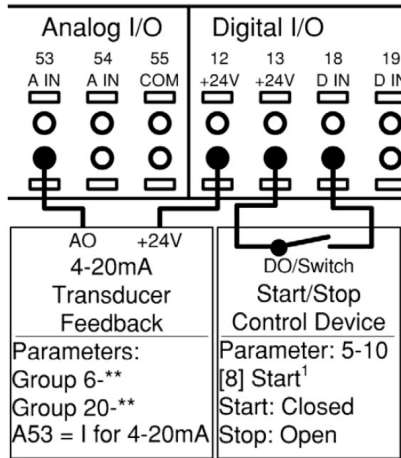

B&G PART NUMBERS

- S13203 Pressure range: 0-100 psi (0-689 kPa)
- S13204 Pressure range: 0-300 psi (0-2068 kPa)


Consult factory for other ranges.


INSTALLATION CONSIDERATIONS

- Standard 24 AWG (0.61 mm dia.) 2 wire shielded cable located in a conduit separate from high voltage wiring
- 24 vdc power supplied from Technologic Controller

DIMENSIONAL INFORMATION

Dimensions in Inches (Millimeters)

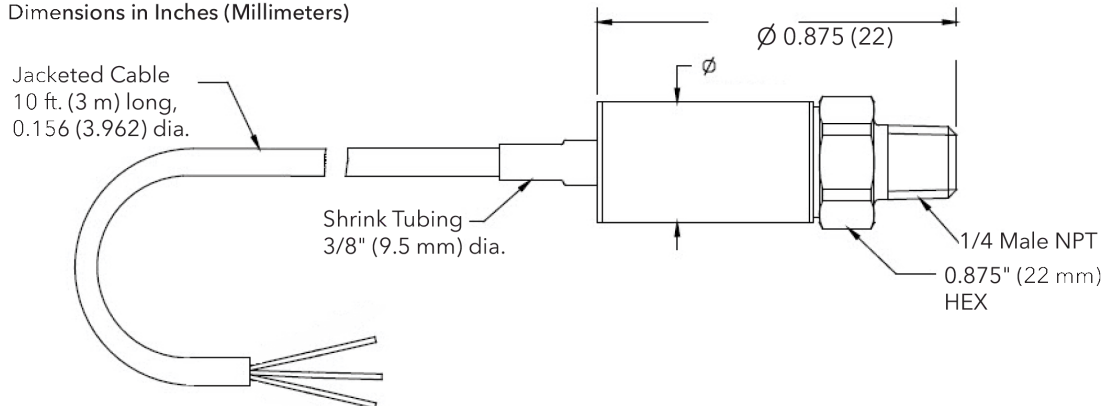

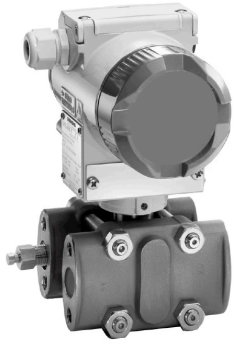


Differential Pressure Sensor/ Transmitter For Pumps with TECHNOLOGIC® Drives

FEATURES

- Relays reading to the Technologic controller up to 2000 ft. (610 m) away
- All wetted parts are 316 stainless steel
- Built-in RFI filter effective from 20 to 1000 MHz
- Withstands static pressures up to 2300 PSI (15858 kPa)
- 3 Valve bypass manifold (optional)
- 10 lbs. (4.5 kg) approximate weight

TECHNOLOGIC ANALOG SENSOR WIRING

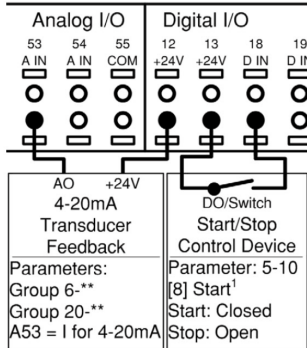

B&G PART NUMBERS

- S100089 Pressure range: 0 - 40 psi (0 - 276 kPa)
- S100091 Pressure range: 0 - 70 psi (0 - 483 kPa)
- S100092 Pressure range: 0 - 100 psi (0 - 689 kPa)


Consult factory for other ranges.

INSTALLATION CONSIDERATIONS

- Standard 18 AWG (1.194 mm dia.) 2 wire shielded cable located in a conduit separate from high voltage wiring
- 24 vdc power supplied from Technologic Controller for distance <2000 ft (610 m)

DIMENSIONAL INFORMATION

Dimensions in Inches (Millimeters)

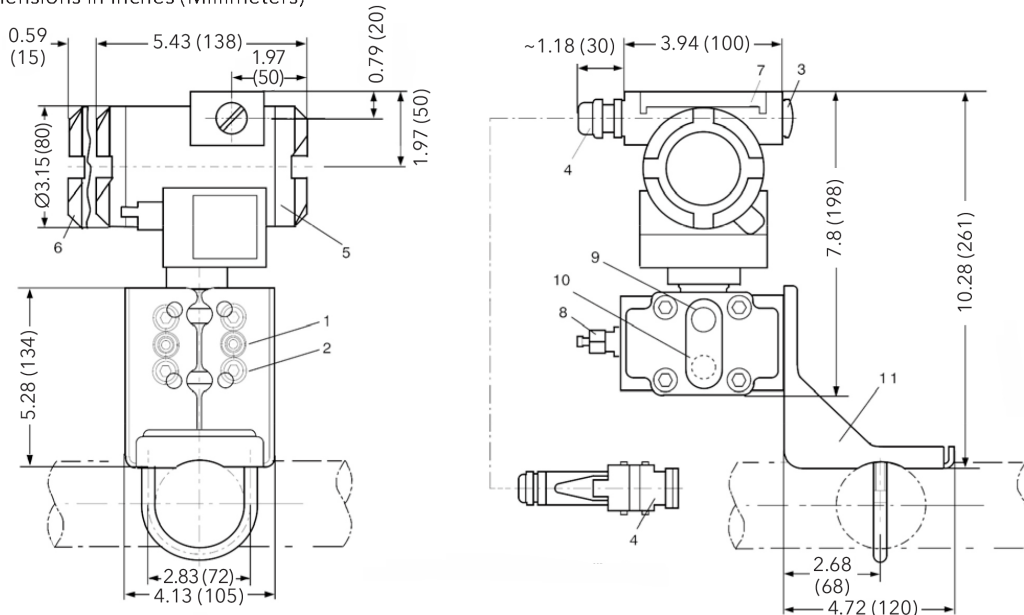

- 1 Process connection 1/4-18NPT for absolute pressure (+) side
- 2 Mounting thread 7/16-20 UNF to EN 61518
- 3 Dummy plug
- 4 Electrical connection: Screwed gland 1/2-14 NPT
- 5 Connection side

- 6 Electronic side, no digital display
- 7 Access cover over magnetic pushbuttons
- 8 Sealing screw with vent shown (optional)
- 9 Side vent for measuring liquid
- 10 Side vent for measuring gas (supplement H02)
- 11 Mounting bracket (2 shackles, 4 nuts, 4 U-plates, 1 angle) made of steel



Flow Sensor/Transmitter For Pumps with TECHNOLOGIC® Drives


The rugged Bell & Gossett Flow Sensor/Transmitter precisely measures system flow and transmits a proportional 4 to 20 mA DC signal to the Technologic Controller for display or program calculations.

FEATURES



- Suitable for mounting in vertical pipe
- Suitable for mounting in horizontal pipe within 45° of top dead center
- Non-magnetically sensed, non-fouling paddle wheel
- NEMA 4X Transmitter Enclosure
- Maximum Pressure Ratings:
 - 1000 psi @ 100°F, 900 psi @ 200°F,
 - 750 psi @ 300°F (6895 kPa @ 38°C, 6205 kPa @ 93°C, 5171 kPa @ 149°C)
- Maximum Temperature Ratings:
 - Fluid - 300°F (149°C) continuous service
 - Electronics - 150°F (66°C)
- Optional software and cable available for field programming
- 9.9 lbs (4.5 kg) approximate weight

DIMENSIONAL INFORMATION

Dimensions in Inches (Millimeters)

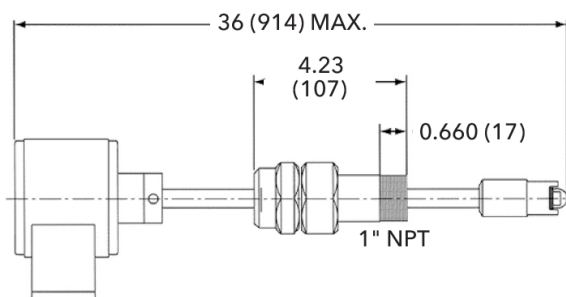

TECHNOLOGIC ANALOG SENSOR WIRING

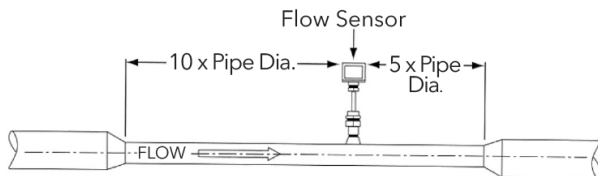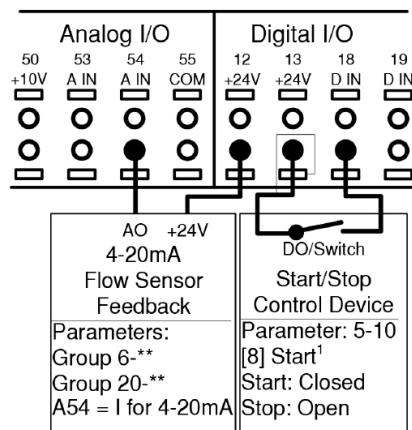


INSTALLATION CONSIDERATIONS

- Standard 18 AWG (1.194 mm dia.) gauge 3 wire shielded cable located in conduit separate from high voltage wiring
- 24 vdc power supplied from Technologic Controller
- Takes accurate readings and relays them to the Technologic Controller up to 2,000 ft. (610 m) away, when 10 pipe diameters upstream and 5 pipe diameters downstream of straight uninterrupted flow is present.

CALIBRATION CHART		
B&G Part No.	Pipe Size	Max. Flow
137411	3" Sch 40	250 gpm (16 l/sec)
137412	4" Sch 40	400 gpm (25 l/sec)
137413	6" Sch 40	850 gpm (54 l/sec)
137414	8" Sch 40	1750 gpm (110 l/sec)
137415	10" Sch 40	3150 gpm (199 l/sec)
137416	12" Sch 40	5000 gpm (315 l/sec)
137417	14" Sch 40	6400 gpm (404 l/sec)
137418	16" Sch 40	9100 gpm (574 l/sec)
137419	18" Sch 40	12400 gpm (782 l/sec)
137420	20" Sch 40	16500 gpm (1041 l/sec)

Consult factory for custom flow range calibration.

JOB:	REPRESENTATIVE:	
UNIT TAG:	ORDER NO.	DATE:
ENGINEER:	SUBMITTED BY:	DATE:
CONTRACTOR:	APPROVED BY:	DATE:



2x2x9.5C Series e-80 In-Line Mounted Centrifugal Pumps

SPECIFICATIONS

FLOW _____ HEAD _____
 HP _____ RPM _____
 VOLTS _____
 CYCLE _____ INPUT PHASE _____
 ENCLOSURE _____
 APPROX. WEIGHT _____
 SPECIALS _____

MATERIALS OF CONSTRUCTION

Stainless Steel Fitted

MAXIMUM WORKING PRESSURE

- 175 psi (12 bar) with 125# ANSI flange drilling
- 250 psi (17 bar) with 250# ANSI flange drilling (requires 80-S)
- 300 psi (21 bar) W.P. with 250# ANSI flange drilling (Requires -S and EPR-Silicon Carbide-Silicon Carbide Seal)

MOUNTING


- In-Line Piping
- Flange Supports

PUMP VARIABLE SPEED CONTROL


- Integrated Technologic® Sensorless Control (ITSC)
- Integrated Technologic® (IT)
 - External input by others
 - Pressure Sensor(s)
 - Differential Pressure Sensor(s)
 - Flow Sensor(s)
- By Others

TYPE OF SEAL

- F Standard Seal w/ Flush Line (Buna-Carbon/Ceramic)
- S Stuffing Box construction w/ Flushed Mechanical Single Seal (EPR-Tungsten Carbide/Carbon)
- PF Stuffing Box Construction w/ Flushed Packing (Graphite Impregnated PTFE)

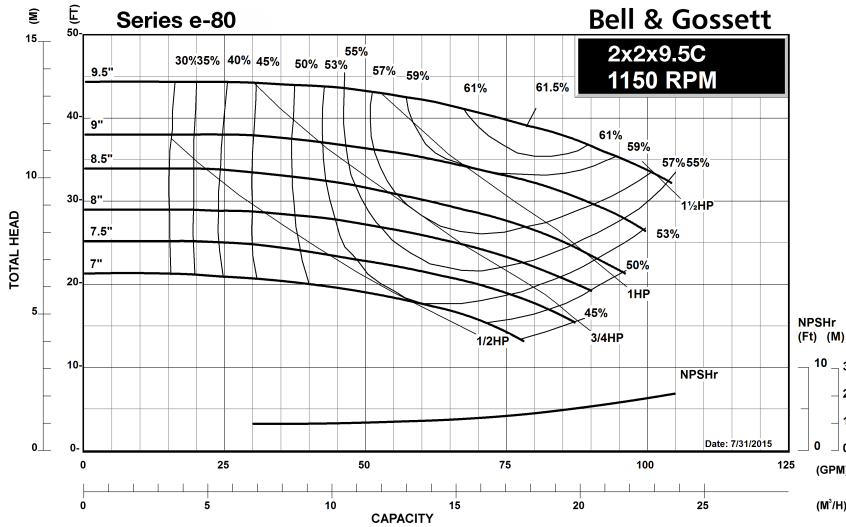

JOB:	REPRESENTATIVE:	
UNIT TAG:	ORDER NO.:	DATE:
ENGINEER:	SUBMITTED BY:	DATE:
CONTRACTOR:	APPROVED BY:	DATE:



2x2x9.5C Series e-80 In-Line Mounted Centrifugal Pumps

SPECIFICATIONS

FLOW _____ HEAD _____
 HP _____ RPM _____
 VOLTS _____
 CYCLE _____ INPUT PHASE _____
 ENCLOSURE _____
 APPROX. WEIGHT _____
 SPECIALS _____

MATERIALS OF CONSTRUCTION

Stainless Steel Fitted

MAXIMUM WORKING PRESSURE

- 175 psi (12 bar) with 125# ANSI flange drilling
- 250 psi (17 bar) with 250# ANSI flange drilling (requires 80-S)
- 300 psi (21 bar) W.P. with 250# ANSI flange drilling (Requires -S and EPR-Silicon Carbide-Silicon Carbide Seal)

MOUNTING


- In-Line Piping
- Flange Supports

PUMP VARIABLE SPEED CONTROL


- Integrated Technologic® Sensorless Control (ITSC)
- Integrated Technologic® (IT)
 - External input by others
 - Pressure Sensor(s)
 - Differential Pressure Sensor(s)
 - Flow Sensor(s)
- By Others

TYPE OF SEAL

- F Standard Seal w/ Flush Line (Buna-Carbon/Ceramic)
- S Stuffing Box construction w/ Flushed Mechanical Single Seal (EPR-Tungsten Carbide/Carbon)
- PF Stuffing Box Construction w/ Flushed Packing (Graphite Impregnated PTFE)

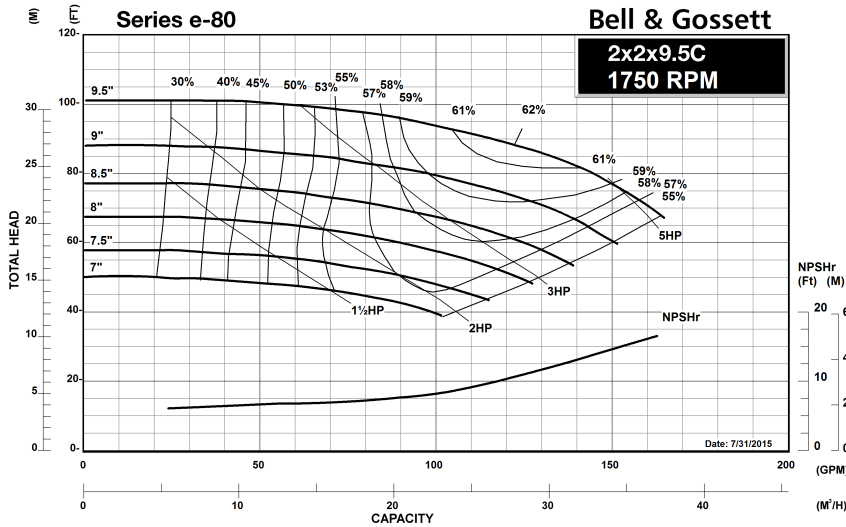

JOB:	REPRESENTATIVE:	
UNIT TAG:	ORDER NO.:	DATE:
ENGINEER:	SUBMITTED BY:	DATE:
CONTRACTOR:	APPROVED BY:	DATE:



2x2x9.5C Series e-80 In-Line Mounted Centrifugal Pumps

SPECIFICATIONS

FLOW _____ HEAD _____
 HP _____ RPM _____
 VOLTS _____
 CYCLE _____ INPUT PHASE _____
 ENCLOSURE _____
 APPROX. WEIGHT _____
 SPECIALS _____

MATERIALS OF CONSTRUCTION

Stainless Steel Fitted

MAXIMUM WORKING PRESSURE

- 175 psi (12 bar) with 125# ANSI flange drilling
- 250 psi (17 bar) with 250# ANSI flange drilling (requires 80-S)
- 300 psi (21 bar) W.P. with 250# ANSI flange drilling (Requires -S and EPR-Silicon Carbide-Silicon Carbide Seal)

MOUNTING


- In-Line Piping
- Flange Supports


PUMP VARIABLE SPEED CONTROL

- Integrated Technologic® Sensorless Control (ITSC)
- Integrated Technologic® (IT)
 - External input by others
 - Pressure Sensor(s)
 - Differential Pressure Sensor(s)
 - Flow Sensor(s)
- By Others

TYPE OF SEAL

- F Standard Seal w/ Flush Line (Buna-Carbon/Ceramic)
- S Stuffing Box construction w/ Flushed Mechanical Single Seal (EPR-Tungsten Carbide/Carbon)
- PF Stuffing Box Construction w/ Flushed Packing (Graphite Impregnated PTFE)

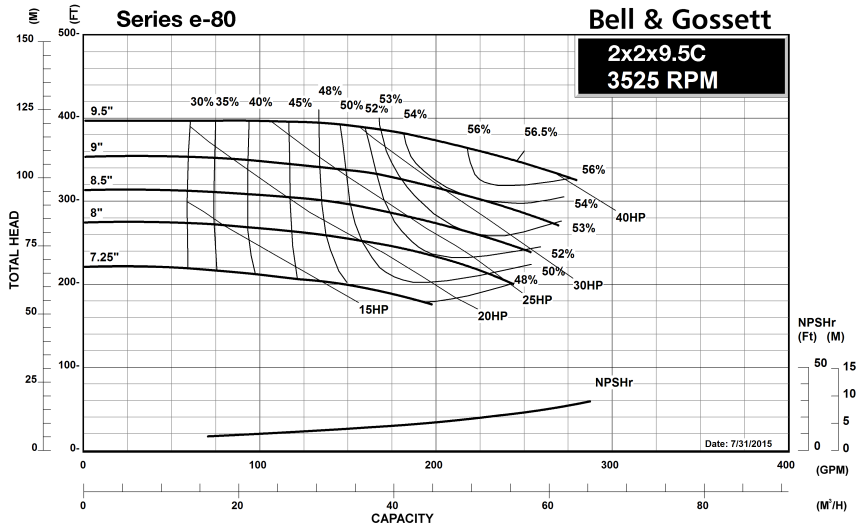

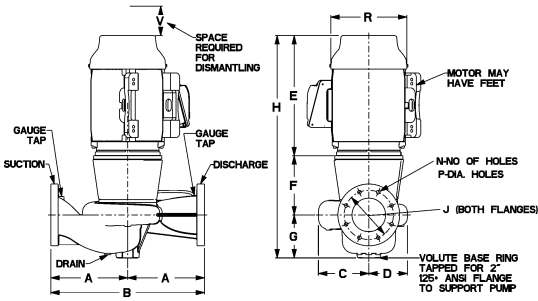

2x2x9.5C Series e-80 Centrifugal Pump Submittal - In-Line Piping

DIMENSIONS - Inches (mm)

STANDARD SEAL

MOTOR FRAME	A	B	C	D	E (max)	F	G	H (max)	125# ANSI			250# ANSI			R	S (Max)*	V (min)	Suct/Disch Gauge Taps (NPT)	Drain Tap (NPT)
									J	N	P	J	N	P					
145JM	10.00 (254)	20.00 (508)	6.00 (152)	6.50 (165)	12.63 (321)	4.75 (121)	5.38 (137)	22.75 (578)	4.75 (121)	4	0.75 (19)	5.00 (127)	8	0.75 (19)	9.75 (248)	1.50 (38)	4.50 (114)	0.25	0.25
182JM	10.00 (254)	20.00 (508)	6.00 (152)	6.50 (165)	15.31 (389)	4.75 (121)	5.38 (137)	25.44 (646)	4.75 (121)	4	0.75 (19)	5.00 (127)	8	0.75 (19)	11.75 (298)	1.00 (25)	4.50 (114)	0.25	0.25
184JM	10.00 (254)	20.00 (508)	6.00 (152)	6.50 (165)	15.31 (389)	4.75 (121)	5.38 (137)	25.44 (646)	4.75 (121)	4	0.75 (19)	5.00 (127)	8	0.75 (19)	11.75 (298)	1.00 (25)	4.50 (114)	0.25	0.25
213JM	10.00 (254)	20.00 (508)	6.00 (152)	6.50 (165)	19.25 (489)	4.75 (121)	5.38 (137)	29.38 (746)	4.75 (121)	4	0.75 (19)	5.00 (127)	8	0.75 (19)	14.00 (356)	-	4.50 (114)	0.25	0.25
215JM	10.00 (254)	20.00 (508)	6.00 (152)	6.50 (165)	19.25 (489)	4.75 (121)	5.38 (137)	29.38 (746)	4.75 (121)	4	0.75 (19)	5.00 (127)	8	0.75 (19)	14.00 (356)	-	4.50 (114)	0.25	0.25
254JM	10.00 (254)	20.00 (508)	6.00 (152)	6.50 (165)	24.13 (613)	5.75 (146)	5.38 (137)	35.25 (895)	4.75 (121)	4	0.75 (19)	5.00 (127)	8	0.75 (19)	17.00 (432)	-	4.50 (114)	0.25	0.25
256JM	10.00 (254)	20.00 (508)	6.00 (152)	6.50 (165)	24.13 (613)	5.75 (146)	5.38 (137)	35.25 (895)	4.75 (121)	4	0.75 (19)	5.00 (127)	8	0.75 (19)	17.00 (432)	-	4.50 (114)	0.25	0.25
284JM	10.00 (254)	20.00 (508)	6.00 (152)	6.50 (165)	23.63 (600)	5.75 (146)	5.38 (137)	34.75 (883)	4.75 (121)	4	0.75 (19)	5.00 (127)	8	0.75 (19)	16.13 (410)	4.63 (117)	4.50 (114)	0.25	0.25
286JM	10.00 (254)	20.00 (508)	6.00 (152)	6.50 (165)	25.13 (638)	5.75 (146)	5.38 (137)	36.25 (921)	4.75 (121)	4	0.75 (19)	5.00 (127)	8	0.75 (19)	16.13 (410)	4.63 (117)	4.50 (114)	0.25	0.25
324JM	10.00 (254)	20.00 (508)	6.00 (152)	6.50 (165)	26.00 (660)	5.75 (146)	5.38 (137)	37.13 (943)	4.75 (121)	4	0.75 (19)	5.00 (127)	8	0.75 (19)	18.75 (476)	5.38 (137)	4.50 (114)	0.25	0.25

STUFFING BOX

MOTOR FRAME	A	B	C	D	E (max)	F	G	H (max)	125# ANSI			250# ANSI			R	S (Max)*	V (min)	Suct/Disch Gauge Taps (NPT)	Drain Tap (NPT)
									J	N	P	J	N	P					
145JP	10.00 (254)	20.00 (508)	6.00 (152)	6.50 (165)	12.63 (321)	7.88 (200)	5.38 (137)	25.88 (657)	4.75 (121)	4	0.75 (19)	5.00 (127)	8	0.75 (19)	9.75 (248)	1.50 (38)	4.50 (114)	0.25	0.25
182JP	10.00 (254)	20.00 (508)	6.00 (152)	6.50 (165)	15.31 (389)	7.88 (200)	5.38 (137)	28.56 (725)	4.75 (121)	4	0.75 (19)	5.00 (127)	8	0.75 (19)	11.75 (298)	1.00 (25)	4.50 (114)	0.25	0.25
184JP	10.00 (254)	20.00 (508)	6.00 (152)	6.50 (165)	15.31 (389)	7.88 (200)	5.38 (137)	28.56 (725)	4.75 (121)	4	0.75 (19)	5.00 (127)	8	0.75 (19)	11.75 (298)	1.00 (25)	4.50 (114)	0.25	0.25
213JP	10.00 (254)	20.00 (508)	6.00 (152)	6.50 (165)	19.25 (489)	8.63 (219)	5.38 (137)	33.25 (845)	4.75 (121)	4	0.75 (19)	5.00 (127)	8	0.75 (19)	14.00 (356)	-	4.50 (114)	0.25	0.25
215JP	10.00 (254)	20.00 (508)	6.00 (152)	6.50 (165)	19.25 (489)	8.63 (219)	5.38 (137)	33.25 (845)	4.75 (121)	4	0.75 (19)	5.00 (127)	8	0.75 (19)	14.00 (356)	-	4.50 (114)	0.25	0.25
254JP	10.00 (254)	20.00 (508)	6.00 (152)	6.50 (165)	24.13 (613)	8.63 (219)	5.38 (137)	38.13 (968)	4.75 (121)	4	0.75 (19)	5.00 (127)	8	0.75 (19)	17.00 (432)	-	4.50 (114)	0.25	0.25
256JP	10.00 (254)	20.00 (508)	6.00 (152)	6.50 (165)	24.13 (613)	8.63 (219)	5.38 (137)	38.13 (968)	4.75 (121)	4	0.75 (19)	5.00 (127)	8	0.75 (19)	17.00 (432)	-	4.50 (114)	0.25	0.25
284JP	10.00 (254)	20.00 (508)	6.00 (152)	6.50 (165)	23.63 (600)	8.63 (219)	5.38 (137)	37.63 (956)	4.75 (121)	4	0.75 (19)	5.00 (127)	8	0.75 (19)	16.13 (410)	4.63 (117)	4.50 (114)	0.25	0.25
286JP	10.00 (254)	20.00 (508)	6.00 (152)	6.50 (165)	25.13 (638)	8.63 (219)	5.38 (137)	39.13 (994)	4.75 (121)	4	0.75 (19)	5.00 (127)	8	0.75 (19)	16.13 (410)	4.63 (117)	4.50 (114)	0.25	0.25
324JP	10.00 (254)	20.00 (508)	6.00 (152)	6.50 (165)	26.00 (660)	8.63 (219)	5.38 (137)	40.00 (1016)	4.75 (121)	4	0.75 (19)	5.00 (127)	8	0.75 (19)	18.75 (476)	5.38 (137)	4.50 (114)	0.25	0.25


Dimensions are subject to change. Not to be used for construction purposes unless certified.

NOTE: For Single phase Motors add 1" to dimensions E & H.

*Dimensions are for ODP Motors. For TEFC add S dimension to dimensions E & H.

Xylem Inc.
8200 N. Austin Avenue, Morton Grove, IL 60053
Phone: (847)966-3700 Fax: (847)965-8379
www.bellgossett.com
Bell & Gossett is a trademark of Xylem Inc. or one of its subsidiaries.
© 2015 Xylem Inc.



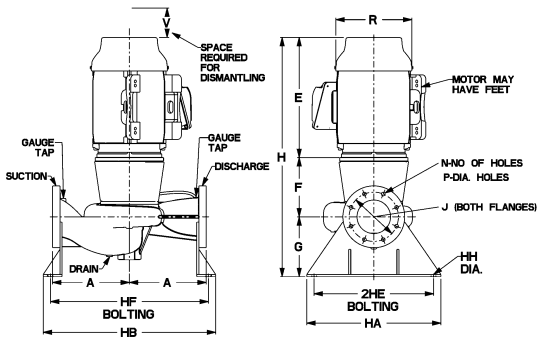

2x2x9.5C Series e-80 Centrifugal Pump Submittal - Flange Support Mounting

DIMENSIONS - Inches (mm)

STANDARD SEAL

MOTOR FRAME	A	HF BOLTING	HB	2HE BOLTING	HA	HH DIA	E (max)	F	G	H (max)	125# ANSI			250# ANSI			R	S (Max)*	V (min)	Suct/Disch Gauge Taps (NPT)	Drain Tap (NPT)
											J	N	P	J	N	P					
145JM	10.00 (254)	22.50 (572)	26.00 (660)	21.50 (546)	25.00 (635)	0.88 (22)	12.63 (321)	4.75 (121)	5.38 (137)	22.75 (578)	4.75 (121)	4	0.75 (19)	5.00 (127)	8	0.75 (19)	9.75 (248)	1.50 (38)	4.50 (114)	0.25	0.25
182JM	10.00 (254)	22.50 (572)	26.00 (660)	21.50 (546)	25.00 (635)	0.88 (22)	15.31 (389)	4.75 (121)	5.38 (137)	25.44 (646)	4.75 (121)	4	0.75 (19)	5.00 (127)	8	0.75 (19)	11.75 (298)	1.00 (25)	4.50 (114)	0.25	0.25
184JM	10.00 (254)	22.50 (572)	26.00 (660)	21.50 (546)	25.00 (635)	0.88 (22)	15.31 (389)	4.75 (121)	5.38 (137)	25.44 (646)	4.75 (121)	4	0.75 (19)	5.00 (127)	8	0.75 (19)	11.75 (298)	1.00 (25)	4.50 (114)	0.25	0.25
213JM	10.00 (254)	22.50 (572)	26.00 (660)	21.50 (546)	25.00 (635)	0.88 (22)	19.25 (489)	4.75 (121)	5.38 (137)	29.38 (746)	4.75 (121)	4	0.75 (19)	5.00 (127)	8	0.75 (19)	14.00 (356)	-	4.50 (114)	0.25	0.25
215JM	10.00 (254)	22.50 (572)	26.00 (660)	21.50 (546)	25.00 (635)	0.88 (22)	19.25 (489)	4.75 (121)	5.38 (137)	29.38 (746)	4.75 (121)	4	0.75 (19)	5.00 (127)	8	0.75 (19)	14.00 (356)	-	4.50 (114)	0.25	0.25
254JM	10.00 (254)	22.50 (572)	26.00 (660)	21.50 (546)	25.00 (635)	0.88 (22)	24.13 (613)	5.75 (146)	5.38 (137)	35.25 (895)	4.75 (121)	4	0.75 (19)	5.00 (127)	8	0.75 (19)	17.00 (432)	-	4.50 (114)	0.25	0.25
256JM	10.00 (254)	22.50 (572)	26.00 (660)	21.50 (546)	25.00 (635)	0.88 (22)	24.13 (613)	5.75 (146)	5.38 (137)	35.25 (895)	4.75 (121)	4	0.75 (19)	5.00 (127)	8	0.75 (19)	17.00 (432)	-	4.50 (114)	0.25	0.25
284JM	10.00 (254)	22.50 (572)	26.00 (660)	21.50 (546)	25.00 (635)	0.88 (22)	23.63 (600)	5.75 (146)	5.38 (137)	34.75 (883)	4.75 (121)	4	0.75 (19)	5.00 (127)	8	0.75 (19)	16.13 (410)	4.63 (117)	4.50 (114)	0.25	0.25
286JM	10.00 (254)	22.50 (572)	26.00 (660)	21.50 (546)	25.00 (635)	0.88 (22)	25.13 (638)	5.75 (146)	5.38 (137)	36.25 (921)	4.75 (121)	4	0.75 (19)	5.00 (127)	8	0.75 (19)	16.13 (410)	4.63 (117)	4.50 (114)	0.25	0.25
324JM	10.00 (254)	22.50 (572)	26.00 (660)	21.50 (546)	25.00 (635)	0.88 (22)	26.00 (660)	5.75 (146)	5.38 (137)	37.13 (943)	4.75 (121)	4	0.75 (19)	5.00 (127)	8	0.75 (19)	18.75 (476)	5.38 (137)	4.50 (114)	0.25	0.25

STUFFING BOX

MOTOR FRAME	A	HF BOLTING	HB	2HE BOLTING	HA	HH DIA	E (max)	F	G	H (max)	125# ANSI			250# ANSI			R	S (Max)*	V (min)	Suct/Disch Gauge Taps (NPT)	Drain Tap (NPT)
											J	N	P	J	N	P					
145JP	10.00 (254)	22.50 (572)	26.00 (660)	21.50 (546)	25.00 (635)	0.88 (22)	12.63 (321)	7.88 (200)	5.38 (137)	25.88 (657)	4.75 (121)	4	0.75 (19)	5.00 (127)	8	0.75 (19)	9.75 (248)	1.50 (38)	4.50 (114)	0.25	0.25
182JP	10.00 (254)	22.50 (572)	26.00 (660)	21.50 (546)	25.00 (635)	0.88 (22)	15.31 (389)	7.88 (200)	5.38 (137)	28.56 (725)	4.75 (121)	4	0.75 (19)	5.00 (127)	8	0.75 (19)	11.75 (298)	1.00 (25)	4.50 (114)	0.25	0.25
184JP	10.00 (254)	22.50 (572)	26.00 (660)	21.50 (546)	25.00 (635)	0.88 (22)	15.31 (389)	7.88 (200)	5.38 (137)	28.56 (725)	4.75 (121)	4	0.75 (19)	5.00 (127)	8	0.75 (19)	11.75 (298)	1.00 (25)	4.50 (114)	0.25	0.25
213JP	10.00 (254)	22.50 (572)	26.00 (660)	21.50 (546)	25.00 (635)	0.88 (22)	19.25 (489)	8.63 (219)	5.38 (137)	33.25 (845)	4.75 (121)	4	0.75 (19)	5.00 (127)	8	0.75 (19)	14.00 (356)	-	4.50 (114)	0.25	0.25
215JP	10.00 (254)	22.50 (572)	26.00 (660)	21.50 (546)	25.00 (635)	0.88 (22)	19.25 (489)	8.63 (219)	5.38 (137)	33.25 (845)	4.75 (121)	4	0.75 (19)	5.00 (127)	8	0.75 (19)	14.00 (356)	-	4.50 (114)	0.25	0.25
254JP	10.00 (254)	22.50 (572)	26.00 (660)	21.50 (546)	25.00 (635)	0.88 (22)	24.13 (613)	8.63 (219)	5.38 (137)	38.13 (968)	4.75 (121)	4	0.75 (19)	5.00 (127)	8	0.75 (19)	17.00 (432)	-	4.50 (114)	0.25	0.25
256JP	10.00 (254)	22.50 (572)	26.00 (660)	21.50 (546)	25.00 (635)	0.88 (22)	24.13 (613)	8.63 (219)	5.38 (137)	38.13 (968)	4.75 (121)	4	0.75 (19)	5.00 (127)	8	0.75 (19)	17.00 (432)	-	4.50 (114)	0.25	0.25
284JP	10.00 (254)	22.50 (572)	26.00 (660)	21.50 (546)	25.00 (635)	0.88 (22)	23.63 (600)	8.63 (219)	5.38 (137)	37.63 (956)	4.75 (121)	4	0.75 (19)	5.00 (127)	8	0.75 (19)	16.13 (410)	4.63 (117)	4.50 (114)	0.25	0.25
286JP	10.00 (254)	22.50 (572)	26.00 (660)	21.50 (546)	25.00 (635)	0.88 (22)	25.13 (638)	8.63 (219)	5.38 (137)	39.13 (994)	4.75 (121)	4	0.75 (19)	5.00 (127)	8	0.75 (19)	16.13 (410)	4.63 (117)	4.50 (114)	0.25	0.25
324JP	10.00 (254)	22.50 (572)	26.00 (660)	21.50 (546)	25.00 (635)	0.88 (22)	26.00 (660)	8.63 (219)	5.38 (137)	40.00 (1016)	4.75 (121)	4	0.75 (19)	5.00 (127)	8	0.75 (19)	18.75 (476)	5.38 (137)	4.50 (114)	0.25	0.25


Dimensions are subject to change. Not to be used for construction purposes unless certified.

NOTE: For Single phase Motors add 1" to dimensions E & H.

*Dimensions are for ODP Motors. For TEFC add S dimension to dimensions E & H.


Xylem Inc.
8200 N. Austin Avenue, Morton Grove, IL 60053
Phone: (847)966-3700 Fax: (847)965-8379
www.bellgossett.com
Bell & Gossett is a trademark of Xylem Inc. or one of its subsidiaries.
© 2015 Xylem Inc.

xylem
Let's Solve Water



2x2x9.5C Series e-80 In-Line Mounted Centrifugal Pumps With Integrated Technologic® Control

TECHNOLOGIC STANDARD FEATURES	
CONTROL METHOD WITH INTEGRATED TECHNOLOGIC® SENSORLESS CONTROL (ITSC)	Factory configured for sensorless operation.
CONTROL METHOD WITH INTEGRATED TECHNOLOGIC® (IT)	Field configurable for sensor by others, building management system input, or optional sensor(s) provided.
ENCLOSURE	NEMA 12 (same as IP55 & UL type 12)
POWER DISCONNECT SWITCH	Included standard. Fused Disconnect Switch optional with three phase input voltage.
HARMONIC SUPPRESSION	Integrated non-saturating dual DC link reactors provide better harmonic performance than a 5% AC line reactor.
COOLING	Fan-cooled through temperature controlled and easy replacement.
AMBIENT TEMPERATURE RATING	14°F to 113°F (-10°C to 45°C)
COMMUNICATION PROTOCOLS	BACnet, Modbus RTU, N2 Metasys, FLN Apogee
ANALOG INPUTS	2 configurable for either voltage (0 to 10VDC) or current(0/4 to 20mA)
ANALOG OUTPUTS	1 (0/4 to 20mA) up to 500 ohm load accurate to 1% of full scale
DIGITAL INPUTS	4 (0 to 24VDC), NPN or PNP, 0 to 24VDC, on 5 msec scan interval, Up to 2 can be configured as pulse inputs.
DIGITAL OUTPUTS	2 (0 to 24VDC), 40mA max current, configurable as pulse outputs.
RELAY OUTPUTS	2 programmable, 240VAC or 400VAC up to 2 A
MINIMUM CONTROL HEAD	_____ ft (default set to 40% of design head if not unknown)

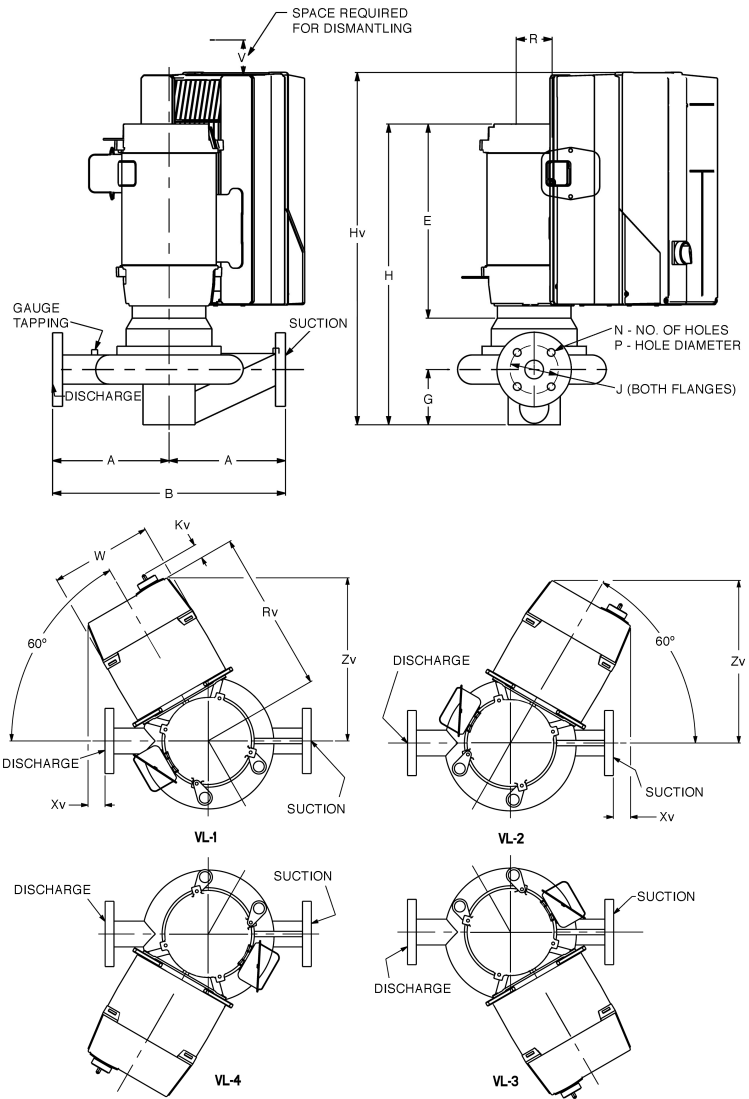

Series e-80 2x2x9.5C

In-Line Mounted Centrifugal Pumps

With Integrated Technologic® Control

B-139.6

DIMENSIONS - Inches (mm)

STANDARD SEAL

STUFFING BOX

MOTOR FRAME	VFD	Rv	Zv	W	Hv	Xv	MOTOR FRAME	VFD	Rv	Zv	W	Hv	Xv
145JM	A5	11.78 (299)	12.31 (313)	9.50 (241)	29.39 (747)	0.44 (11)	145JP	A5	11.78 (299)	12.31 (313)	9.50 (241)	32.52 (826)	0.44 (11)
	B1	14.07 (357)	13.91 (353)	9.50 (241)	31.74 (806)	2.04 (52)		B1	14.07 (357)	13.91 (353)	9.50 (241)	34.87 (886)	2.04 (52)
182JM	A5	12.78 (325)	13.19 (335)	9.50 (241)	28.59 (726)	0.06 (2)	182JP	A5	12.78 (325)	13.19 (335)	9.50 (241)	31.72 (806)	0.06 (2)
	B1	15.07 (383)	14.79 (376)	9.50 (241)	29.59 (752)	1.66 (42)		B1	15.07 (383)	14.79 (376)	9.50 (241)	32.72 (831)	1.66 (42)
184JM	A5	12.78 (325)	13.19 (335)	9.50 (241)	28.59 (726)	0.06 (2)	184JP	A5	12.78 (325)	13.19 (335)	9.50 (241)	31.72 (806)	0.06 (2)
	B1	15.07 (383)	14.79 (376)	9.50 (241)	29.59 (752)	1.66 (42)		B1	15.07 (383)	14.79 (376)	9.50 (241)	32.72 (831)	1.66 (42)
213JM	A5	13.53 (344)	13.83 (351)	9.50 (241)	31.95 (812)	0.44 (11)	213JP	A5	13.53 (344)	13.83 (351)	9.50 (241)	35.83 (910)	0.44 (11)
	B1	15.84 (402)	15.84 (402)	9.50 (241)	33.55 (852)	1.63 (41)		B1	15.84 (402)	15.84 (402)	9.50 (241)	37.42 (951)	1.63 (41)
	B2	15.84 (402)	15.84 (402)	9.50 (241)	39.29 (998)	1.63 (41)		B2	15.84 (402)	15.84 (402)	9.50 (241)	43.16 (1096)	1.63 (41)
215JM	A5	13.53 (344)	13.83 (351)	9.50 (241)	30.48 (774)	0.44 (11)	215JP	A5	13.53 (344)	13.83 (351)	9.50 (241)	34.36 (873)	0.44 (11)
	B1	15.82 (402)	15.43 (392)	9.50 (241)	31.73 (806)	2.04 (52)		B1	15.82 (402)	15.43 (392)	9.50 (241)	35.61 (904)	2.04 (52)
	B2	15.82 (402)	15.43 (392)	9.50 (241)	37.47 (952)	2.04 (52)		B2	13.53 (344)	13.83 (351)	9.50 (241)	40.10 (1019)	0.44 (11)
	C1	17.79 (452)	18.63 (473)	12.10 (307)	39.49 (1003)	5.24 (133)		C1	15.50 (394)	17.03 (433)	12.10 (307)	42.12 (1070)	3.64 (92)
254JM	B1	16.83 (427)	16.70 (424)	9.50 (241)	38.25 (972)	2.13 (54)	254JP	B1	16.83 (427)	16.70 (424)	9.50 (241)	41.25 (1048)	2.13 (54)
	B2	16.83 (427)	16.70 (424)	9.50 (241)	42.70 (1085)	2.13 (54)		B2	16.83 (427)	16.70 (424)	9.50 (241)	45.58 (1158)	2.13 (54)
	C1	18.80 (477)	19.90 (506)	12.10 (307)	43.96 (1117)	5.33 (135)		C1	18.80 (477)	19.90 (506)	12.10 (307)	46.84 (1190)	5.33 (135)
256JM	B1	16.83 (427)	16.70 (424)	9.50 (241)	37.63 (956)	2.13 (54)	256JP	B1	16.83 (427)	16.70 (424)	9.50 (241)	40.50 (1029)	2.13 (54)
	B2	16.83 (427)	16.70 (424)	9.50 (241)	42.08 (1069)	2.13 (54)		B2	16.83 (427)	16.70 (424)	9.50 (241)	44.95 (1142)	2.13 (54)
	C1	18.83 (478)	18.97 (482)	12.09 (307)	42.97 (1091)	4.03 (102)		C1	18.83 (478)	18.97 (482)	12.09 (307)	45.84 (1164)	4.03 (102)
	C2	19.61 (498)	21.27 (540)	14.59 (371)	47.63 (1210)	6.33 (161)		C2	19.61 (498)	21.27 (540)	14.59 (371)	50.50 (1283)	6.33 (161)
284JM	B1	17.58 (446)	17.36 (441)	9.50 (241)	37.00 (940)	2.50 (64)	284JP	B1	17.58 (446)	17.36 (441)	9.50 (241)	39.88 (1013)	2.50 (64)
	B2	17.58 (446)	17.36 (441)	9.50 (241)	41.46 (1053)	2.50 (64)		B2	17.58 (446)	17.36 (441)	9.50 (241)	44.34 (1126)	2.50 (64)
	C1	19.58 (497)	19.63 (498)	12.09 (307)	43.86 (1114)	4.41 (112)		C1	19.58 (497)	19.63 (498)	12.09 (307)	46.73 (1187)	4.41 (112)
	C2	20.36 (517)	21.93 (557)	14.59 (371)	47.01 (1194)	6.71 (170)		C2	20.36 (517)	21.93 (557)	14.59 (371)	49.88 (1267)	6.71 (170)
286JM	B2	17.58 (446)	17.36 (441)	9.50 (241)	42.95 (1091)	2.50 (64)	286JP	B2	17.58 (446)	17.36 (441)	9.50 (241)	45.83 (1164)	2.50 (64)
	C1	19.58 (497)	19.63 (498)	12.09 (307)	45.36 (1152)	4.41 (112)		C1	19.58 (497)	19.63 (498)	12.09 (307)	48.23 (1225)	4.41 (112)
	C2	20.36 (517)	21.93 (557)	14.59 (371)	48.51 (1232)	6.71 (170)		C2	20.36 (517)	21.93 (557)	14.59 (371)	51.38 (1305)	6.71 (170)
324JM	B2	18.58 (472)	18.22 (463)	9.50 (241)	42.30 (1074)	3.00 (76)	324JP	B2	18.58 (472)	18.22 (463)	9.50 (241)	45.17 (1147)	3.00 (76)
	C1	20.58 (523)	20.48 (520)	12.09 (307)	42.64 (1083)	4.91 (125)		C1	20.58 (523)	20.48 (520)	12.09 (307)	45.52 (1156)	4.91 (125)
	C2	21.58 (548)	21.95 (558)	14.59 (371)	47.20 (1199)	6.44 (164)		C2	21.58 (548)	21.95 (558)	14.59 (371)	50.08 (1272)	6.44 (164)

NOTE: Drives with single phase input have three phase output and include three phase motors.

Kv=2 (50)

Xylem Inc.
 8200 N. Austin Avenue, Morton Grove, IL 60053
 Phone: (847)966-3700 Fax: (847)965-8379
 www.bellgossett.com
 Bell & Gossett is a trademark of Xylem Inc. or one of its subsidiaries.
 © 2015 Xylem Inc.






Pressure Sensor/Transmitter For Pumps with TECHNOLOGIC® Drives

FEATURES

- 4-20mA output
- 10-28 VDC supply voltage
- Operating Temperature -40 to 85°C (-40 to 185°F)
- Storage Temperature -40 to 100°C (-40 to 212°F)
- Enclosure IP-66 (housing only)
- High Strength Stainless Steel Construction
- No Oil, Welds or Internal O-rings
- Wide Operating Temperature
- Low Static and Thermal Errors
- Compatible with Wide Variety of Liquids and Gases
- EMI/RFI Protection
- UL/cUL 508 Approved (with housing)
- 1lb. (0.45 kg) approximate weight

TECHNOLOGIC ANALOG SENSOR WIRING

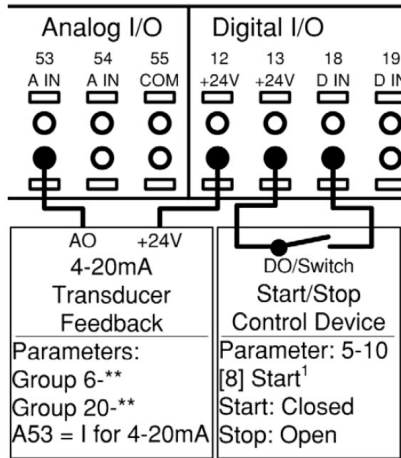

B&G PART NUMBERS

- S13203 Pressure range: 0-100 psi (0-689 kPa)
- S13204 Pressure range: 0-300 psi (0-2068 kPa)


Consult factory for other ranges.


INSTALLATION CONSIDERATIONS

- Standard 24 AWG (0.61 mm dia.) 2 wire shielded cable located in a conduit separate from high voltage wiring
- 24 vdc power supplied from Technologic Controller

DIMENSIONAL INFORMATION

Dimensions in Inches (Millimeters)

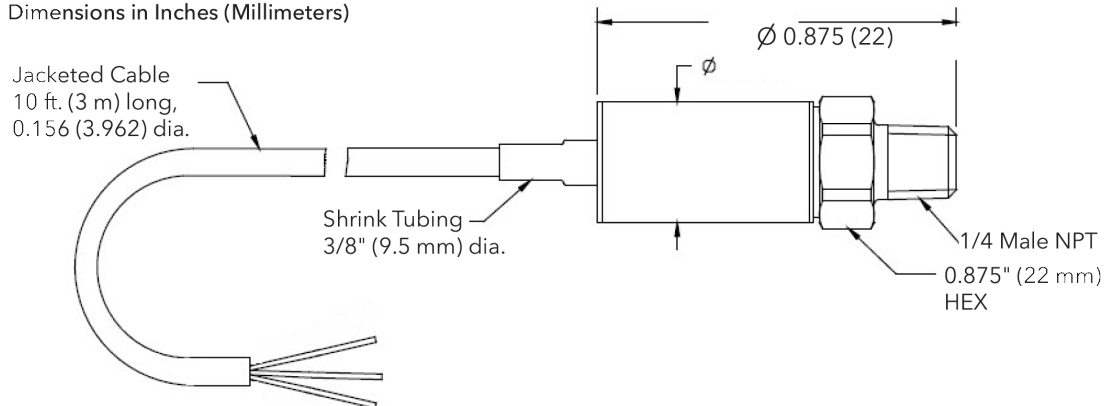

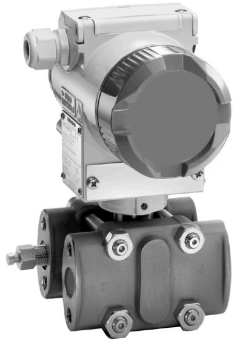


Differential Pressure Sensor/ Transmitter For Pumps with TECHNOLOGIC® Drives

FEATURES

- Relays reading to the Technologic controller up to 2000 ft. (610 m) away
- All wetted parts are 316 stainless steel
- Built-in RFI filter effective from 20 to 1000 MHz
- Withstands static pressures up to 2300 PSI (15858 kPa)
- 3 Valve bypass manifold (optional)
- 10 lbs. (4.5 kg) approximate weight

TECHNOLOGIC ANALOG SENSOR WIRING

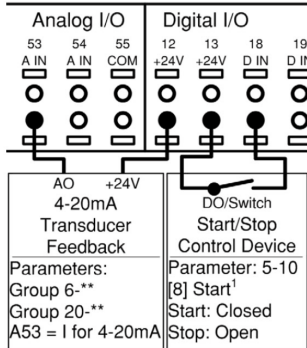

B&G PART NUMBERS

- S100089 Pressure range: 0 - 40 psi (0 - 276 kPa)
- S100091 Pressure range: 0 - 70 psi (0 - 483 kPa)
- S100092 Pressure range: 0 - 100 psi (0 - 689 kPa)


Consult factory for other ranges.

INSTALLATION CONSIDERATIONS

- Standard 18 AWG (1.194 mm dia.) 2 wire shielded cable located in a conduit separate from high voltage wiring
- 24 vdc power supplied from Technologic Controller for distance <2000 ft (610 m)

DIMENSIONAL INFORMATION

Dimensions in Inches (Millimeters)

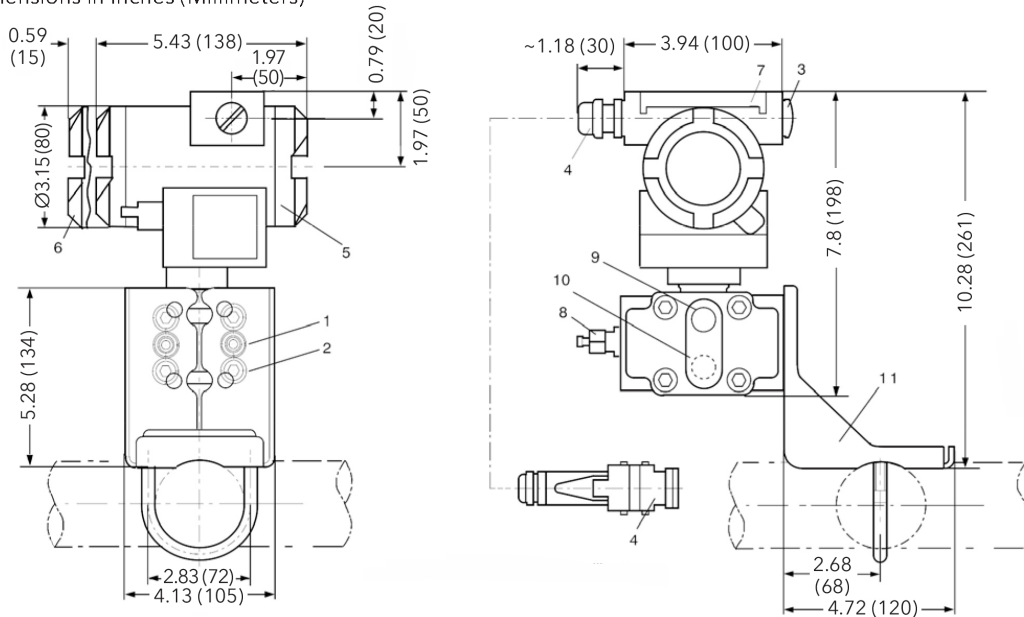

- 1 Process connection 1/4-18NPT for absolute pressure (+) side
- 2 Mounting thread 7/16-20 UNF to EN 61518
- 3 Dummy plug
- 4 Electrical connection: Screwed gland 1/2-14 NPT
- 5 Connection side

- 6 Electronic side, no digital display
- 7 Access cover over magnetic pushbuttons
- 8 Sealing screw with vent shown (optional)
- 9 Side vent for measuring liquid
- 10 Side vent for measuring gas (supplement H02)
- 11 Mounting bracket (2 shackles, 4 nuts, 4 U-plates, 1 angle) made of steel



Flow Sensor/Transmitter For Pumps with TECHNOLOGIC® Drives


The rugged Bell & Gossett Flow Sensor/Transmitter precisely measures system flow and transmits a proportional 4 to 20 mA DC signal to the Technologic Controller for display or program calculations.

FEATURES



- Suitable for mounting in vertical pipe
- Suitable for mounting in horizontal pipe within 45° of top dead center
- Non-magnetically sensed, non-fouling paddle wheel
- NEMA 4X Transmitter Enclosure
- Maximum Pressure Ratings:
 - 1000 psi @ 100°F, 900 psi @ 200°F,
 - 750 psi @ 300°F (6895 kPa @ 38°C, 6205 kPa @ 93°C, 5171 kPa @ 149°C)
- Maximum Temperature Ratings:
 - Fluid - 300°F (149°C) continuous service
 - Electronics - 150°F (66°C)
- Optional software and cable available for field programming
- 9.9 lbs (4.5 kg) approximate weight

DIMENSIONAL INFORMATION

Dimensions in Inches (Millimeters)

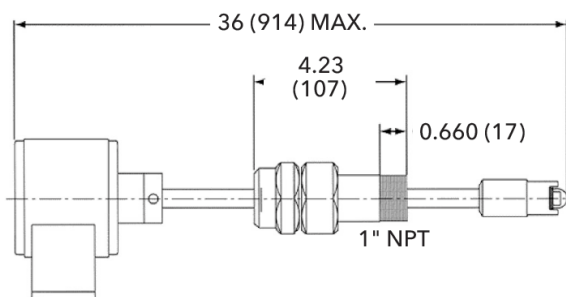

TECHNOLOGIC ANALOG SENSOR WIRING

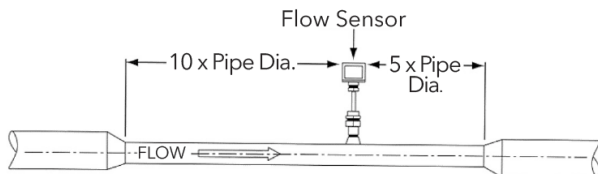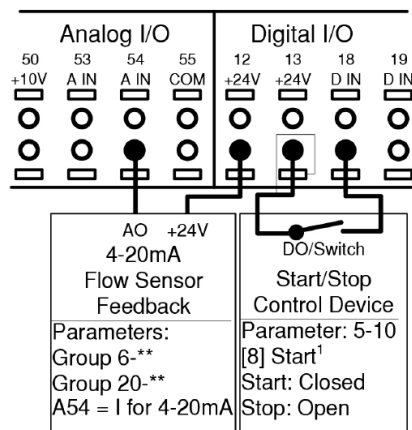


INSTALLATION CONSIDERATIONS

- Standard 18 AWG (1.194 mm dia.) gauge 3 wire shielded cable located in conduit separate from high voltage wiring
- 24 vdc power supplied from Technologic Controller
- Takes accurate readings and relays them to the Technologic Controller up to 2,000 ft. (610 m) away, when 10 pipe diameters upstream and 5 pipe diameters downstream of straight uninterrupted flow is present.

CALIBRATION CHART		
B&G Part No.	Pipe Size	Max. Flow
137411	3" Sch 40	250 gpm (16 l/sec)
137412	4" Sch 40	400 gpm (25 l/sec)
137413	6" Sch 40	850 gpm (54 l/sec)
137414	8" Sch 40	1750 gpm (110 l/sec)
137415	10" Sch 40	3150 gpm (199 l/sec)
137416	12" Sch 40	5000 gpm (315 l/sec)
137417	14" Sch 40	6400 gpm (404 l/sec)
137418	16" Sch 40	9100 gpm (574 l/sec)
137419	18" Sch 40	12400 gpm (782 l/sec)
137420	20" Sch 40	16500 gpm (1041 l/sec)

Consult factory for custom flow range calibration.

JOB:	REPRESENTATIVE:	
UNIT TAG:	ORDER NO.	DATE:
ENGINEER:	SUBMITTED BY:	DATE:
CONTRACTOR:	APPROVED BY:	DATE:



3x3x7C Series e-80 In-Line Mounted Centrifugal Pumps

SPECIFICATIONS

FLOW _____ HEAD _____
 HP _____ RPM _____
 VOLTS _____
 CYCLE _____ INPUT PHASE _____
 ENCLOSURE _____
 APPROX. WEIGHT _____
 SPECIALS _____

MATERIALS OF CONSTRUCTION

Stainless Steel Fitted

MAXIMUM WORKING PRESSURE

- 175 psi (12 bar) with 125# ANSI flange drilling
- 250 psi (17 bar) with 250# ANSI flange drilling (requires 80-S)
- 300 psi (21 bar) W.P. with 250# ANSI flange drilling (Requires -S and EPR-Silicon Carbide-Silicon Carbide Seal)

MOUNTING


- In-Line Piping
- Flange Supports

PUMP VARIABLE SPEED CONTROL


- Integrated Technologic® Sensorless Control (ITSC)
- Integrated Technologic® (IT)
 - External input by others
 - Pressure Sensor(s)
 - Differential Pressure Sensor(s)
 - Flow Sensor(s)
- By Others

TYPE OF SEAL

- F Standard Seal w/ Flush Line (Buna-Carbon/Ceramic)
- S Stuffing Box construction w/ Flushed Mechanical Single Seal (EPR-Tungsten Carbide/Carbon)
- PF Stuffing Box Construction w/ Flushed Packing (Graphite Impregnated PTFE)

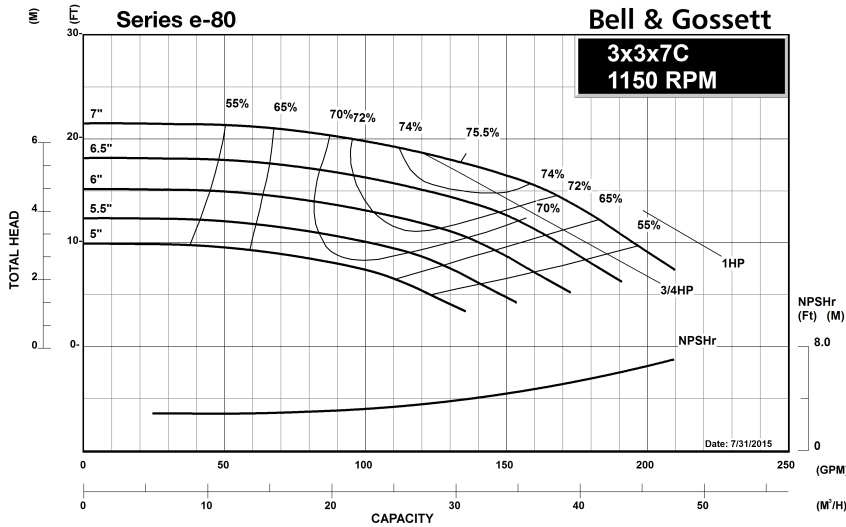

JOB:	REPRESENTATIVE:	
UNIT TAG:	ORDER NO.:	DATE:
ENGINEER:	SUBMITTED BY:	DATE:
CONTRACTOR:	APPROVED BY:	DATE:



3x3x7C

Series e-80

In-Line Mounted Centrifugal Pumps

SPECIFICATIONS

FLOW _____ HEAD _____

HP _____ RPM _____

VOLTS _____

CYCLE _____ INPUT PHASE _____

ENCLOSURE _____

APPROX. WEIGHT _____

SPECIALS _____

MATERIALS OF CONSTRUCTION

Stainless Steel Fitted

MAXIMUM WORKING PRESSURE

- 175 psi (12 bar) with 125# ANSI flange drilling
- 250 psi (17 bar) with 250# ANSI flange drilling (requires 80-S)
- 300 psi (21 bar) W.P. with 250# ANSI flange drilling (Requires -S and EPR-Silicon Carbide-Silicon Carbide Seal)

MOUNTING


- In-Line Piping
- Flange Supports

PUMP VARIABLE SPEED CONTROL


- Integrated Technologic® Sensorless Control (ITSC)
- Integrated Technologic® (IT)
 - External input by others
 - Pressure Sensor(s)
 - Differential Pressure Sensor(s)
 - Flow Sensor(s)
- By Others

TYPE OF SEAL

- F Standard Seal w/ Flush Line (Buna-Carbon/Ceramic)
- S Stuffing Box construction w/ Flushed Mechanical Single Seal (EPR-Tungsten Carbide/Carbon)
- PF Stuffing Box Construction w/ Flushed Packing (Graphite Impregnated PTFE)

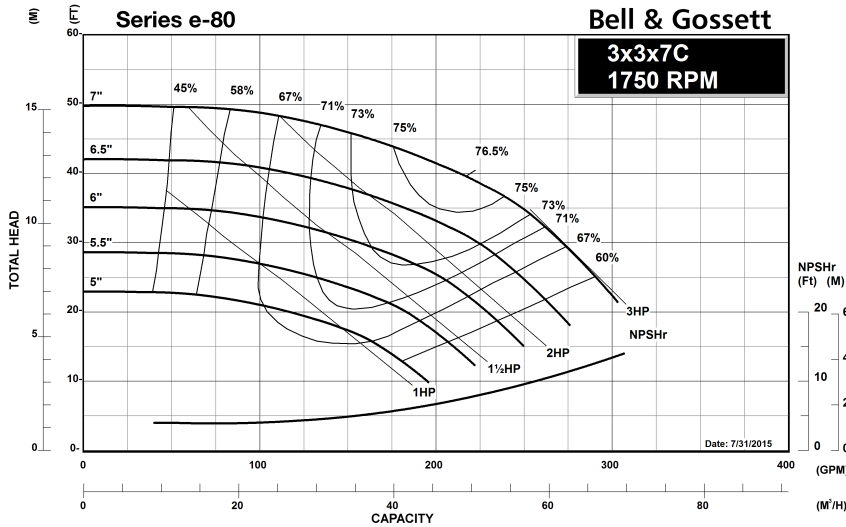

JOB:	REPRESENTATIVE:	
UNIT TAG:	ORDER NO.:	DATE:
ENGINEER:	SUBMITTED BY:	DATE:
CONTRACTOR:	APPROVED BY:	DATE:



3x3x7C Series e-80 In-Line Mounted Centrifugal Pumps

SPECIFICATIONS

FLOW _____ HEAD _____
 HP _____ RPM _____
 VOLTS _____
 CYCLE _____ INPUT PHASE _____
 ENCLOSURE _____
 APPROX. WEIGHT _____
 SPECIALS _____

MATERIALS OF CONSTRUCTION

Stainless Steel Fitted

MAXIMUM WORKING PRESSURE

- 175 psi (12 bar) with 125# ANSI flange drilling
- 250 psi (17 bar) with 250# ANSI flange drilling (requires 80-S)
- 300 psi (21 bar) W.P. with 250# ANSI flange drilling (Requires -S and EPR-Silicon Carbide-Silicon Carbide Seal)

MOUNTING


- In-Line Piping
- Flange Supports


PUMP VARIABLE SPEED CONTROL

- Integrated Technologic® Sensorless Control (ITSC)
- Integrated Technologic® (IT)
 - External input by others
 - Pressure Sensor(s)
 - Differential Pressure Sensor(s)
 - Flow Sensor(s)
- By Others

TYPE OF SEAL

- F Standard Seal w/ Flush Line (Buna-Carbon/Ceramic)
- S Stuffing Box construction w/ Flushed Mechanical Single Seal (EPR-Tungsten Carbide/Carbon)
- PF Stuffing Box Construction w/ Flushed Packing (Graphite Impregnated PTFE)

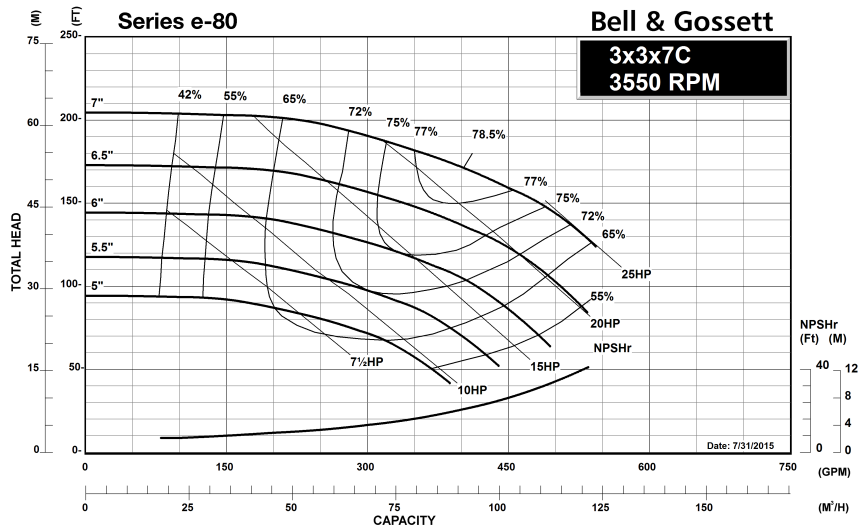

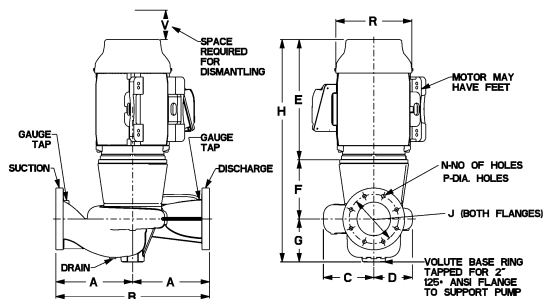

3x3x7C Series e-80 Centrifugal Pump Submittal - In-Line Piping

DIMENSIONS - Inches (mm)

STANDARD SEAL

MOTOR FRAME	A	B	C	D	E (max)	F	G	H (max)	125# ANSI			250# ANSI			R	S (Max)*	V (min)	Suct/Disch Gauge Taps (NPT)	Drain Tap (NPT)
									J	N	P	J	N	P					
									143JM	9.50 (241)	19.00 (483)	4.98 (126)	6.25 (159)	11.63 (295)					
145JM	9.50 (241)	19.00 (483)	4.98 (126)	6.25 (159)	12.63 (321)	4.88 (124)	5.85 (149)	23.35 (593)	6.00 (152)	4	0.75 (19)	6.63 (168)	8	0.88 (22)	9.75 (248)	1.50 (38)	4.50 (114)	0.25	0.25
182JM	9.50 (241)	19.00 (483)	4.98 (126)	6.25 (159)	15.31 (389)	4.88 (124)	5.85 (149)	26.04 (661)	6.00 (152)	4	0.75 (19)	6.63 (168)	8	0.88 (22)	11.75 (298)	1.00 (25)	4.50 (114)	0.25	0.25
184JM	9.50 (241)	19.00 (483)	4.98 (126)	6.25 (159)	15.31 (389)	4.88 (124)	5.85 (149)	26.04 (661)	6.00 (152)	4	0.75 (19)	6.63 (168)	8	0.88 (22)	11.75 (298)	1.00 (25)	4.50 (114)	0.25	0.25
213JM	9.50 (241)	19.00 (483)	4.98 (126)	6.25 (159)	19.25 (489)	4.88 (124)	5.85 (149)	29.98 (761)	6.00 (152)	4	0.75 (19)	6.63 (168)	8	0.88 (22)	14.00 (356)	-	4.50 (114)	0.25	0.25
215JM	9.50 (241)	19.00 (483)	4.98 (126)	6.25 (159)	19.25 (489)	4.88 (124)	5.85 (149)	29.98 (761)	6.00 (152)	4	0.75 (19)	6.63 (168)	8	0.88 (22)	14.00 (356)	-	4.50 (114)	0.25	0.25
254JM	9.50 (241)	19.00 (483)	4.98 (126)	6.25 (159)	24.13 (613)	5.88 (149)	5.85 (149)	35.85 (911)	6.00 (152)	4	0.75 (19)	6.63 (168)	8	0.88 (22)	17.00 (432)	-	4.50 (114)	0.25	0.25
256JM	9.50 (241)	19.00 (483)	4.98 (126)	6.25 (159)	24.13 (613)	5.88 (149)	5.85 (149)	35.85 (911)	6.00 (152)	4	0.75 (19)	6.63 (168)	8	0.88 (22)	17.00 (432)	-	4.50 (114)	0.25	0.25
284JP	9.50 (241)	19.00 (483)	5.88 (149)	6.25 (159)	23.63 (600)	8.56 (217)	4.50 (114)	36.75 (933)	3.88 (98)	4	0.63 (16)	4.50 (114)	4	0.88 (22)	16.13 (410)	4.63 (117)	4.00 (102)	0.25	0.25
286JP	9.50 (241)	19.00 (483)	5.88 (149)	6.25 (159)	25.13 (638)	8.56 (217)	4.50 (114)	38.25 (972)	3.88 (98)	4	0.63 (16)	4.50 (114)	4	0.88 (22)	16.13 (410)	4.63 (117)	4.00 (102)	0.25	0.25

STUFFING BOX

MOTOR FRAME	A	B	C	D	E (max)	F	G	H (max)	125# ANSI			250# ANSI			R	S (Max)*	V (min)	Suct/Disch Gauge Taps (NPT)	Drain Tap (NPT)
									J	N	P	J	N	P					
									143JP	9.50 (241)	19.00 (483)	4.98 (126)	6.25 (159)	11.63 (295)					
145JP	9.50 (241)	19.00 (483)	4.98 (126)	6.25 (159)	12.63 (321)	8.00 (203)	5.85 (149)	26.48 (672)	6.00 (152)	4	0.75 (19)	6.63 (168)	8	0.88 (22)	9.75 (248)	1.50 (38)	4.50 (114)	0.25	0.25
182JP	9.50 (241)	19.00 (483)	4.98 (126)	6.25 (159)	15.31 (389)	8.00 (203)	5.85 (149)	29.16 (741)	6.00 (152)	4	0.75 (19)	6.63 (168)	8	0.88 (22)	11.75 (298)	1.00 (25)	4.50 (114)	0.25	0.25
184JP	9.50 (241)	19.00 (483)	4.98 (126)	6.25 (159)	15.31 (389)	8.00 (203)	5.85 (149)	29.16 (741)	6.00 (152)	4	0.75 (19)	6.63 (168)	8	0.88 (22)	11.75 (298)	1.00 (25)	4.50 (114)	0.25	0.25
213JP	9.50 (241)	19.00 (483)	4.98 (126)	6.25 (159)	19.25 (489)	8.75 (222)	5.85 (149)	33.85 (860)	6.00 (152)	4	0.75 (19)	6.63 (168)	8	0.88 (22)	14.00 (356)	-	4.50 (114)	0.25	0.25
215JP	9.50 (241)	19.00 (483)	4.98 (126)	6.25 (159)	19.25 (489)	8.38 (213)	5.85 (149)	33.48 (850)	6.00 (152)	4	0.75 (19)	6.63 (168)	8	0.88 (22)	14.00 (356)	-	4.50 (114)	0.25	0.25
254JP	9.50 (241)	19.00 (483)	4.98 (126)	6.25 (159)	24.13 (613)	8.75 (222)	5.85 (149)	38.73 (984)	6.00 (152)	4	0.75 (19)	6.63 (168)	8	0.88 (22)	17.00 (432)	-	4.50 (114)	0.25	0.25
256JP	9.50 (241)	19.00 (483)	4.98 (126)	6.25 (159)	24.13 (613)	8.75 (222)	5.85 (149)	38.73 (984)	6.00 (152)	4	0.75 (19)	6.63 (168)	8	0.88 (22)	17.00 (432)	-	4.50 (114)	0.25	0.25
284JP	9.50 (241)	19.00 (483)	5.88 (149)	6.25 (159)	23.63 (600)	8.56 (217)	4.50 (114)	36.75 (933)	3.88 (98)	4	0.63 (16)	4.50 (114)	4	0.88 (22)	16.13 (410)	4.63 (117)	4.00 (102)	0.25	0.25
286JP	9.50 (241)	19.00 (483)	5.88 (149)	6.25 (159)	25.13 (638)	8.56 (217)	4.50 (114)	38.13 (968)	3.88 (98)	4	0.63 (16)	4.50 (114)	4	0.88 (22)	16.13 (410)	4.63 (117)	4.00 (102)	0.25	0.25


Dimensions are subject to change. Not to be used for construction purposes unless certified.

NOTE: For Single phase Motors add 1" to dimensions E & H.

*Dimensions are for ODP Motors. For TEFC add S dimension to dimensions E & H.

Xylem Inc.
8200 N. Austin Avenue, Morton Grove, IL 60053
Phone: (847)966-3700 Fax: (847)965-8379
www.bellgossett.com
Bell & Gossett is a trademark of Xylem Inc. or one of its subsidiaries.
© 2015 Xylem Inc.



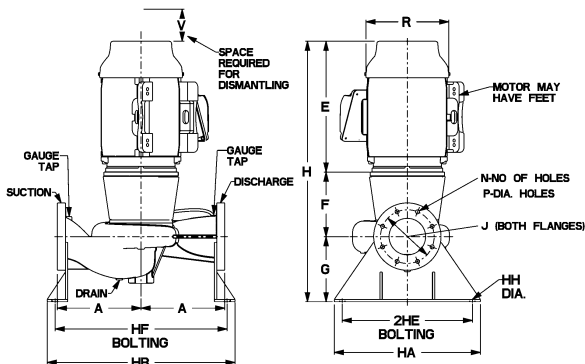

3x3x7C Series e-80 Centrifugal Pump Submittal - Flange Support Mounting

DIMENSIONS - Inches (mm)

STANDARD SEAL

MOTOR FRAME	A	HF BOLTING	HB	2HE BOLTING	HA	HH DIA	E (max)	F	G	H (max)	125# ANSI			250# ANSI			R	S (Max)*	V (min)	Suct/Disch Gauge Taps (NPT)	Drain Tap (NPT)
											J	N	P	J	N	P					
143JM	9.50 (241)	20.95 (532)	24.45 (621)	21.50 (546)	25.00 (635)	0.88 (22)	11.63 (295)	4.88 (124)	5.85 (149)	22.35 (568)	6.00 (152)	4 (19)	0.75 (168)	6.63 (22)	8 (22)	0.88 (248)	9.75 (38)	1.50 (114)	4.50 (114)	0.25	0.25
145JM	9.50 (241)	20.95 (532)	24.45 (621)	21.50 (546)	25.00 (635)	0.88 (22)	12.63 (321)	4.88 (124)	5.85 (149)	23.35 (593)	6.00 (152)	4 (19)	0.75 (168)	6.63 (22)	8 (22)	0.88 (248)	9.75 (38)	1.50 (114)	4.50 (114)	0.25	0.25
182JM	9.50 (241)	20.95 (532)	24.45 (621)	21.50 (546)	25.00 (635)	0.88 (22)	15.31 (389)	4.88 (124)	5.85 (149)	26.04 (661)	6.00 (152)	4 (19)	0.75 (168)	6.63 (22)	8 (22)	0.88 (298)	11.75 (25)	1.00 (114)	4.50 (114)	0.25	0.25
184JM	9.50 (241)	20.95 (532)	24.45 (621)	21.50 (546)	25.00 (635)	0.88 (22)	15.31 (389)	4.88 (124)	5.85 (149)	26.04 (661)	6.00 (152)	4 (19)	0.75 (168)	6.63 (22)	8 (22)	0.88 (298)	11.75 (25)	1.00 (114)	4.50 (114)	0.25	0.25
213JM	9.50 (241)	20.95 (532)	24.45 (621)	21.50 (546)	25.00 (635)	0.88 (22)	19.25 (489)	4.88 (124)	5.85 (149)	29.98 (761)	6.00 (152)	4 (19)	0.75 (168)	6.63 (22)	8 (22)	0.88 (356)	14.00 (356)	-	4.50 (114)	0.25	0.25
215JM	9.50 (241)	20.95 (532)	24.45 (621)	21.50 (546)	25.00 (635)	0.88 (22)	19.25 (489)	4.88 (124)	5.85 (149)	29.98 (761)	6.00 (152)	4 (19)	0.75 (168)	6.63 (22)	8 (22)	0.88 (356)	14.00 (356)	-	4.50 (114)	0.25	0.25
254JP	9.50 (241)	20.95 (532)	24.45 (621)	21.50 (546)	25.00 (635)	0.88 (22)	24.13 (613)	5.88 (149)	5.85 (149)	35.85 (911)	6.00 (152)	4 (19)	0.75 (168)	6.63 (22)	8 (22)	0.88 (432)	17.00 (432)	-	4.50 (114)	0.25	0.25
256JP	9.50 (241)	20.95 (532)	24.45 (621)	21.50 (546)	25.00 (635)	0.88 (22)	24.13 (613)	5.88 (149)	5.85 (149)	35.85 (911)	6.00 (152)	4 (19)	0.75 (168)	6.63 (22)	8 (22)	0.88 (432)	17.00 (432)	-	4.50 (114)	0.25	0.25


STUFFING BOX

MOTOR FRAME	A	HF BOLTING	HB	2HE BOLTING	HA	HH DIA	E (max)	F	G	H (max)	125# ANSI			250# ANSI			R	S (Max)*	V (min)	Suct/Disch Gauge Taps (NPT)	Drain Tap (NPT)
											J	N	P	J	N	P					
143JP	9.50 (241)	20.95 (532)	24.45 (621)	21.50 (546)	25.00 (635)	0.88 (22)	11.63 (295)	8.00 (203)	5.85 (149)	25.48 (647)	6.00 (152)	4 (19)	0.75 (168)	6.63 (22)	8 (22)	0.88 (248)	9.75 (38)	1.50 (114)	4.50 (114)	0.25	0.25
145JP	9.50 (241)	20.95 (532)	24.45 (621)	21.50 (546)	25.00 (635)	0.88 (22)	12.63 (321)	8.00 (203)	5.85 (149)	26.48 (672)	6.00 (152)	4 (19)	0.75 (168)	6.63 (22)	8 (22)	0.88 (248)	9.75 (38)	1.50 (114)	4.50 (114)	0.25	0.25
182JP	9.50 (241)	20.95 (532)	24.45 (621)	21.50 (546)	25.00 (635)	0.88 (22)	15.31 (389)	8.00 (203)	5.85 (149)	29.16 (741)	6.00 (152)	4 (19)	0.75 (168)	6.63 (22)	8 (22)	0.88 (298)	11.75 (25)	1.00 (114)	4.50 (114)	0.25	0.25
184JP	9.50 (241)	20.95 (532)	24.45 (621)	21.50 (546)	25.00 (635)	0.88 (22)	15.31 (389)	8.00 (203)	5.85 (149)	29.16 (741)	6.00 (152)	4 (19)	0.75 (168)	6.63 (22)	8 (22)	0.88 (298)	11.75 (25)	1.00 (114)	4.50 (114)	0.25	0.25
213JP	9.50 (241)	20.95 (532)	24.45 (621)	21.50 (546)	25.00 (635)	0.88 (22)	19.25 (489)	8.75 (222)	5.85 (149)	33.85 (860)	6.00 (152)	4 (19)	0.75 (168)	6.63 (22)	8 (22)	0.88 (356)	14.00 (356)	-	4.50 (114)	0.25	0.25
215JP	9.50 (241)	20.95 (532)	24.45 (621)	21.50 (546)	25.00 (635)	0.88 (22)	19.25 (489)	8.38 (213)	5.85 (149)	33.48 (850)	6.00 (152)	4 (19)	0.75 (168)	6.63 (22)	8 (22)	0.88 (356)	14.00 (356)	-	4.50 (114)	0.25	0.25
254JP	9.50 (241)	20.95 (532)	24.45 (621)	21.50 (546)	25.00 (635)	0.88 (22)	24.13 (613)	8.75 (222)	5.85 (149)	38.73 (984)	6.00 (152)	4 (19)	0.75 (168)	6.63 (22)	8 (22)	0.88 (432)	17.00 (432)	-	4.50 (114)	0.25	0.25
256JP	9.50 (241)	20.95 (532)	24.45 (621)	21.50 (546)	25.00 (635)	0.88 (22)	24.13 (613)	8.75 (222)	5.85 (149)	38.73 (984)	6.00 (152)	4 (19)	0.75 (168)	6.63 (22)	8 (22)	0.88 (432)	17.00 (432)	-	4.50 (114)	0.25	0.25

Dimensions are subject to change. Not to be used for construction purposes unless certified.

NOTE: For Single phase Motors add 1" to dimensions E & H.



*Dimensions are for ODP Motors. For TEFC add S dimension to dimensions E & H.



3x3x7C Series e-80

In-Line Mounted Centrifugal Pumps
With Integrated Technologic® Control

TECHNOLOGIC STANDARD FEATURES	
CONTROL METHOD WITH INTEGRATED TECHNOLOGIC® SENSORLESS CONTROL (ITSC)	Factory configured for sensorless operation.
CONTROL METHOD WITH INTEGRATED TECHNOLOGIC® (IT)	Field configurable for sensor by others, building management system input, or optional sensor(s) provided.
ENCLOSURE	NEMA 12 (same as IP55 & UL type 12)
POWER DISCONNECT SWITCH	Included standard. Fused Disconnect Switch optional with three phase input voltage.
HARMONIC SUPPRESSION	Integrated non-saturating dual DC link reactors provide better harmonic performance than a 5% AC line reactor.
COOLING	Fan-cooled through temperature controlled and easy replacement.
AMBIENT TEMPERATURE RATING	14°F to 113°F (-10°C to 45°C)
COMMUNICATION PROTOCOLS	BACnet, Modbus RTU, N2 Metasys, FLN Apogee
ANALOG INPUTS	2 configurable for either voltage (0 to 10VDC) or current(0/4 to 20mA)
ANALOG OUTPUTS	1 (0/4 to 20mA) up to 500 ohm load accurate to 1% of full scale
DIGITAL INPUTS	4 (0 to 24VDC), NPN or PNP, 0 to 24VDC, on 5 msec scan interval, Up to 2 can be configured as pulse inputs.
DIGITAL OUTPUTS	2 (0 to 24VDC), 40mA max current, configurable as pulse outputs.
RELAY OUTPUTS	2 programmable, 240VAC or 400VAC up to 2 A
MINIMUM CONTROL HEAD	_____ ft (default set to 40% of design head if not unknown)

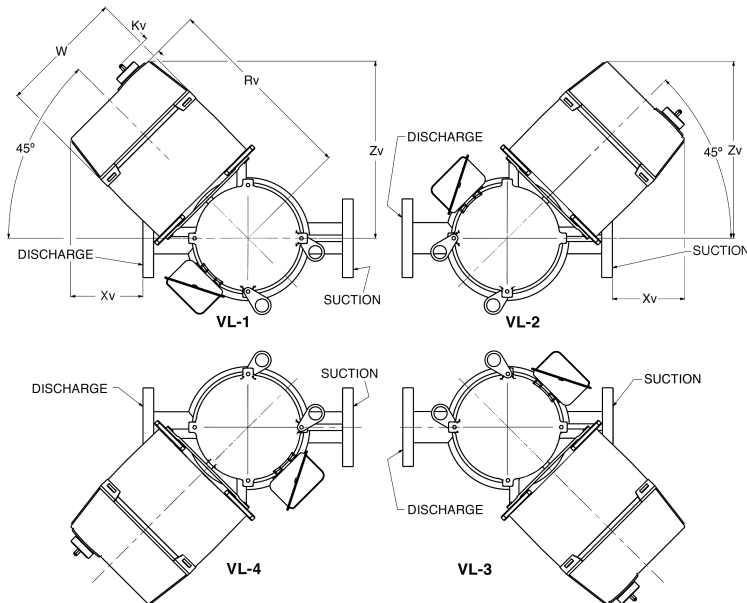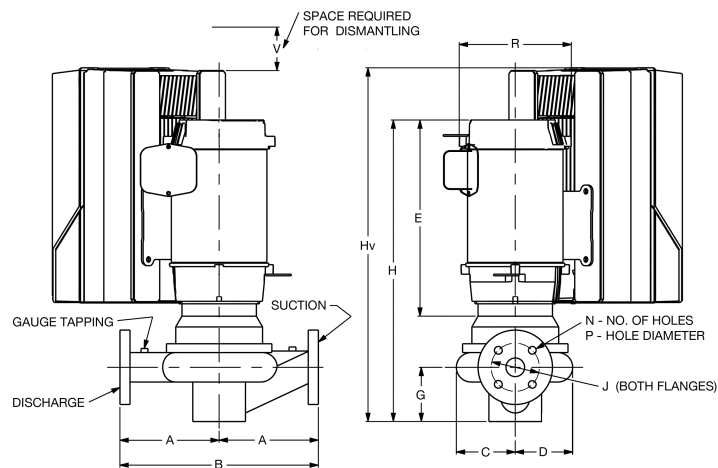

Series e-80 3x3x7C

In-Line Mounted Centrifugal Pumps

With Integrated Technologic® Control

B-139.12

DIMENSIONS - Inches (mm)		STANDARD SEAL				
MOTOR FRAME	VFD	Rv	Zv	W	Hv	Xv
143JM	A5	11.78 (299)	11.33 (288)	9.50 (241)	28.64 (727)	1.83 (46)
145JM	A5	11.78 (299)	11.33 (288)	9.50 (241)	29.64 (753)	1.83 (46)
	B1	14.07 (357)	12.93 (328)	9.50 (241)	31.99 (813)	3.43 (87)
182JM	A5	12.78 (325)	12.03 (306)	9.50 (241)	28.91 (734)	2.53 (64)
	B1	15.07 (383)	13.63 (346)	9.50 (241)	29.91 (760)	4.13 (105)
184JM	A5	12.78 (325)	12.03 (306)	9.50 (241)	28.91 (734)	2.53 (64)
	B1	15.07 (383)	13.63 (346)	9.50 (241)	29.91 (760)	4.13 (105)
213JM	A5	13.53 (344)	12.56 (319)	9.50 (241)	32.20 (818)	3.06 (78)
	B1	15.84 (402)	14.22 (361)	9.50 (241)	33.80 (858)	4.72 (120)
	B2	15.84 (402)	14.22 (361)	9.50 (241)	39.54 (1004)	4.72 (120)
215JM	A5	13.53 (344)	12.56 (319)	9.50 (241)	30.73 (781)	3.06 (78)
	B1	15.84 (402)	14.22 (361)	9.50 (241)	32.27 (820)	4.72 (120)
	B2	15.84 (402)	14.22 (361)	9.50 (241)	38.01 (965)	4.72 (120)
	C1	17.81 (452)	17.42 (442)	12.10 (307)	40.03 (1017)	7.92 (201)
254JM	B1	16.83 (427)	14.92 (379)	9.50 (241)	38.50 (978)	5.42 (138)
	B2	16.83 (427)	14.92 (379)	9.50 (241)	42.95 (1091)	5.42 (138)
	C1	18.80 (477)	18.12 (460)	12.10 (307)	44.21 (1123)	8.62 (219)
256JM	B1	16.83 (427)	14.92 (379)	9.50 (241)	37.88 (962)	5.42 (138)
	B2	16.83 (427)	14.92 (379)	9.50 (241)	42.33 (1075)	5.42 (138)
	C1	18.83 (478)	17.09 (434)	12.09 (307)	43.22 (1098)	7.59 (193)
	C2	19.61 (498)	19.39 (493)	14.59 (371)	47.88 (1216)	9.89 (251)

STUFFING BOX						
MOTOR FRAME	VFD	Rv	Zv	W	Hv	Xv
143JP	A5	11.78 (299)	11.33 (288)	9.50 (241)	31.77 (807)	1.83 (46)
145JP	A5	11.78 (299)	11.33 (288)	9.50 (241)	32.77 (832)	1.83 (46)
	B1	14.07 (357)	12.93 (328)	9.50 (241)	35.12 (892)	3.43 (87)
182JP	A5	12.78 (325)	12.03 (306)	9.50 (241)	32.03 (814)	2.53 (64)
	B1	15.07 (383)	13.63 (346)	9.50 (241)	33.03 (839)	4.13 (105)
184JP	A5	12.78 (325)	12.03 (306)	9.50 (241)	32.03 (814)	2.53 (64)
	B1	15.07 (383)	13.63 (346)	9.50 (241)	33.03 (839)	4.13 (105)
213JP	A5	13.53 (344)	12.56 (319)	9.50 (241)	36.08 (916)	3.06 (78)
	B1	15.84 (402)	14.22 (361)	9.50 (241)	37.67 (957)	4.72 (120)
	B2	15.84 (402)	14.22 (361)	9.50 (241)	43.41 (1103)	4.72 (120)
215JP	A5	13.53 (344)	12.56 (319)	9.50 (241)	34.61 (879)	3.06 (78)
	B1	15.84 (402)	14.22 (361)	9.50 (241)	36.14 (918)	4.72 (120)
	B2	15.84 (402)	14.22 (361)	9.50 (241)	41.88 (1064)	4.72 (120)
	C1	17.81 (452)	17.42 (442)	12.10 (307)	43.90 (1115)	7.92 (201)
254JP	B1	16.83 (427)	14.92 (379)	9.50 (241)	41.38 (1051)	5.42 (138)
	B2	16.83 (427)	14.92 (379)	9.50 (241)	45.83 (1164)	5.42 (138)
	C1	18.80 (477)	18.12 (460)	12.10 (307)	47.09 (1196)	8.62 (219)
256JP	B1	16.83 (427)	14.92 (379)	9.50 (241)	40.75 (1035)	5.42 (138)
	B2	16.83 (427)	14.92 (379)	9.50 (241)	45.20 (1148)	5.42 (138)
	C1	18.83 (478)	17.09 (434)	12.09 (307)	46.09 (1171)	7.59 (193)
	C2	19.61 (498)	19.39 (493)	14.59 (371)	50.75 (1289)	9.89 (251)

NOTE: Drives with single phase input have three phase output and include three phase motors.

Kv=2 (50)




Pressure Sensor/Transmitter For Pumps with TECHNOLOGIC® Drives

FEATURES

- 4-20mA output
- 10-28 VDC supply voltage
- Operating Temperature -40 to 85°C (-40 to 185°F)
- Storage Temperature -40 to 100°C (-40 to 212°F)
- Enclosure IP-66 (housing only)
- High Strength Stainless Steel Construction
- No Oil, Welds or Internal O-rings
- Wide Operating Temperature
- Low Static and Thermal Errors
- Compatible with Wide Variety of Liquids and Gases
- EMI/RFI Protection
- UL/cUL 508 Approved (with housing)
- 1lb. (0.45 kg) approximate weight

TECHNOLOGIC ANALOG SENSOR WIRING

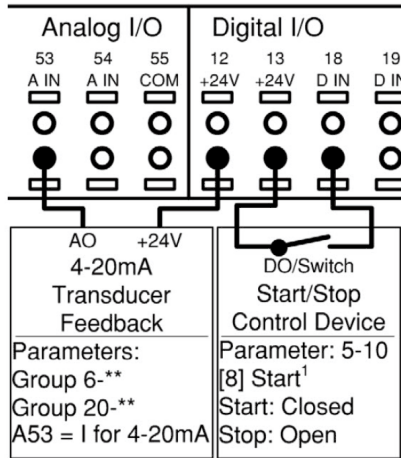

B&G PART NUMBERS

- S13203 Pressure range: 0-100 psi (0-689 kPa)
- S13204 Pressure range: 0-300 psi (0-2068 kPa)


Consult factory for other ranges.


INSTALLATION CONSIDERATIONS

- Standard 24 AWG (0.61 mm dia.) 2 wire shielded cable located in a conduit separate from high voltage wiring
- 24 vdc power supplied from Technologic Controller

DIMENSIONAL INFORMATION

Dimensions in Inches (Millimeters)

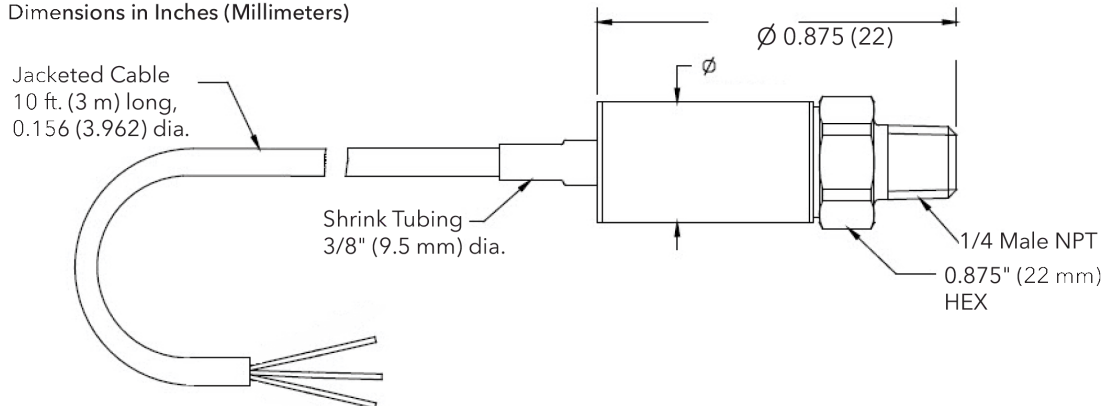

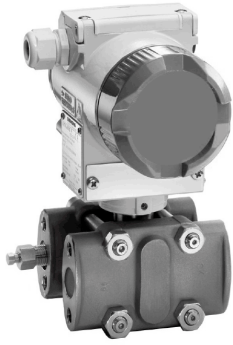


Differential Pressure Sensor/ Transmitter For Pumps with TECHNOLOGIC® Drives

FEATURES

- Relays reading to the Technologic controller up to 2000 ft. (610 m) away
- All wetted parts are 316 stainless steel
- Built-in RFI filter effective from 20 to 1000 MHz
- Withstands static pressures up to 2300 PSI (15858 kPa)
- 3 Valve bypass manifold (optional)
- 10 lbs. (4.5 kg) approximate weight

TECHNOLOGIC ANALOG SENSOR WIRING

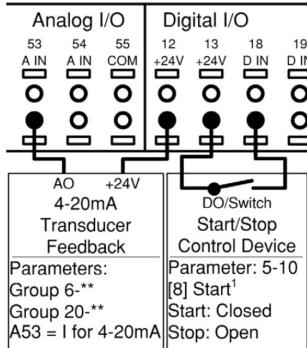

B&G PART NUMBERS

- S100089 Pressure range: 0 - 40 psi (0 - 276 kPa)
- S100091 Pressure range: 0 - 70 psi (0 - 483 kPa)
- S100092 Pressure range: 0 - 100 psi (0 - 689 kPa)


Consult factory for other ranges.

INSTALLATION CONSIDERATIONS

- Standard 18 AWG (1.194 mm dia.) 2 wire shielded cable located in a conduit separate from high voltage wiring
- 24 vdc power supplied from Technologic Controller for distance <2000 ft (610 m)

DIMENSIONAL INFORMATION

Dimensions in Inches (Millimeters)

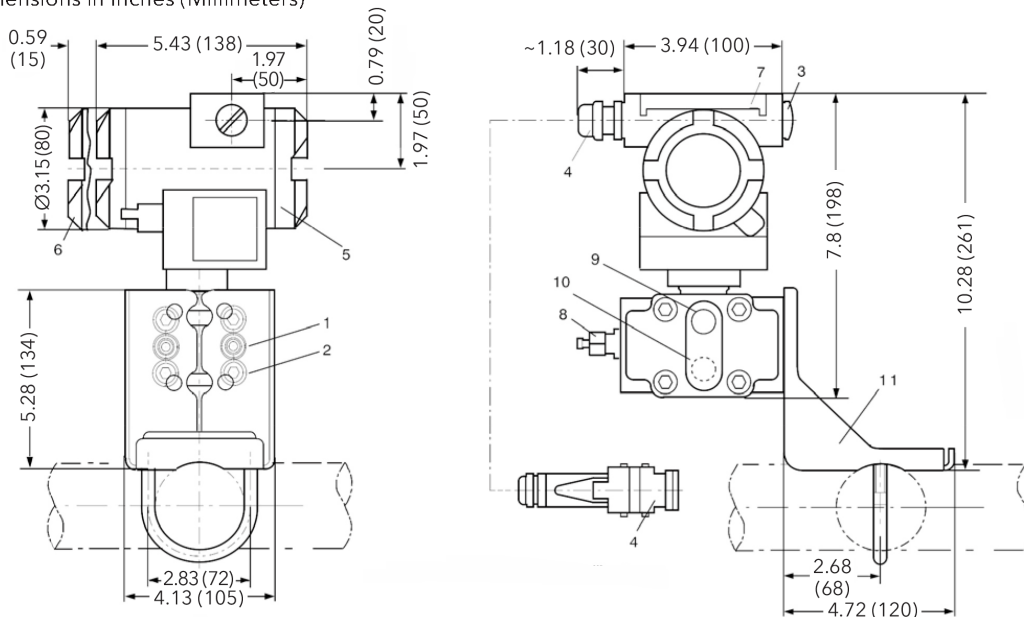

- 1 Process connection 1/4-18NPT for absolute pressure (+) side
- 2 Mounting thread 7/16-20 UNF to EN 61518
- 3 Dummy plug
- 4 Electrical connection: Screwed gland 1/2-14 NPT
- 5 Connection side

- 6 Electronic side, no digital display
- 7 Access cover over magnetic pushbuttons
- 8 Sealing screw with vent shown (optional)
- 9 Side vent for measuring liquid
- 10 Side vent for measuring gas (supplement H02)
- 11 Mounting bracket (2 shackles, 4 nuts, 4 U-plates, 1 angle) made of steel



Flow Sensor/Transmitter For Pumps with TECHNOLOGIC® Drives


The rugged Bell & Gossett Flow Sensor/Transmitter precisely measures system flow and transmits a proportional 4 to 20 mA DC signal to the Technologic Controller for display or program calculations.

FEATURES



- Suitable for mounting in vertical pipe
- Suitable for mounting in horizontal pipe within 45° of top dead center
- Non-magnetically sensed, non-fouling paddle wheel
- NEMA 4X Transmitter Enclosure
- Maximum Pressure Ratings:
 - 1000 psi @ 100°F, 900 psi @ 200°F,
 - 750 psi @ 300°F (6895 kPa @ 38°C, 6205 kPa @ 93°C, 5171 kPa @ 149°C)
- Maximum Temperature Ratings:
 - Fluid - 300°F (149°C) continuous service
 - Electronics - 150°F (66°C)
- Optional software and cable available for field programming
- 9.9 lbs (4.5 kg) approximate weight

DIMENSIONAL INFORMATION

Dimensions in Inches (Millimeters)

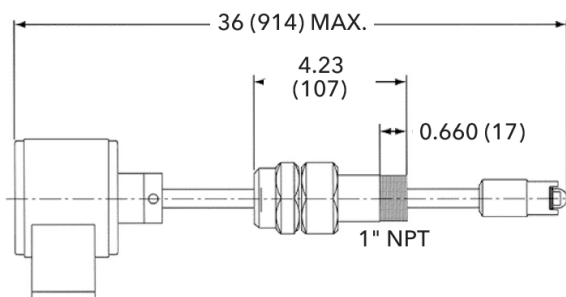

TECHNOLOGIC ANALOG SENSOR WIRING

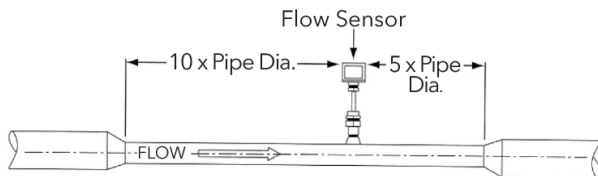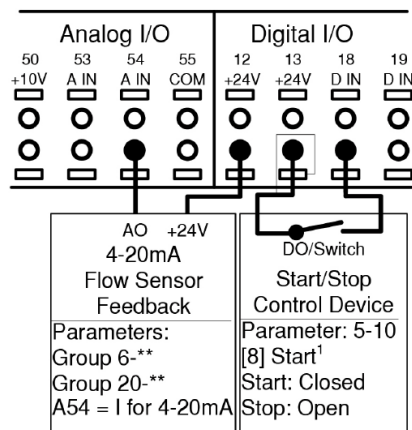


INSTALLATION CONSIDERATIONS

- Standard 18 AWG (1.194 mm dia.) gauge 3 wire shielded cable located in conduit separate from high voltage wiring
- 24 vdc power supplied from Technologic Controller
- Takes accurate readings and relays them to the Technologic Controller up to 2,000 ft. (610 m) away, when 10 pipe diameters upstream and 5 pipe diameters downstream of straight uninterrupted flow is present.

CALIBRATION CHART		
B&G Part No.	Pipe Size	Max. Flow
137411	3" Sch 40	250 gpm (16 l/sec)
137412	4" Sch 40	400 gpm (25 l/sec)
137413	6" Sch 40	850 gpm (54 l/sec)
137414	8" Sch 40	1750 gpm (110 l/sec)
137415	10" Sch 40	3150 gpm (199 l/sec)
137416	12" Sch 40	5000 gpm (315 l/sec)
137417	14" Sch 40	6400 gpm (404 l/sec)
137418	16" Sch 40	9100 gpm (574 l/sec)
137419	18" Sch 40	12400 gpm (782 l/sec)
137420	20" Sch 40	16500 gpm (1041 l/sec)

Consult factory for custom flow range calibration.

JOB:	REPRESENTATIVE:	
UNIT TAG:	ORDER NO.:	DATE:
ENGINEER:	SUBMITTED BY:	DATE:
CONTRACTOR:	APPROVED BY:	DATE:



3x3x9.5C Series e-80 In-Line Mounted Centrifugal Pumps

SPECIFICATIONS

FLOW _____ HEAD _____
 HP _____ RPM _____
 VOLTS _____
 CYCLE _____ INPUT PHASE _____
 ENCLOSURE _____
 APPROX. WEIGHT _____
 SPECIALS _____

MATERIALS OF CONSTRUCTION

Stainless Steel Fitted

MAXIMUM WORKING PRESSURE

- 175 psi (12 bar) with 125# ANSI flange drilling
- 250 psi (17 bar) with 250# ANSI flange drilling (requires 80-S)
- 300 psi (21 bar) W.P. with 250# ANSI flange drilling (Requires -S and EPR-Silicon Carbide-Silicon Carbide Seal)

MOUNTING


- In-Line Piping
- Flange Supports

PUMP VARIABLE SPEED CONTROL


- Integrated Technologic® Sensorless Control (ITSC)
- Integrated Technologic® (IT)
 - External input by others
 - Pressure Sensor(s)
 - Differential Pressure Sensor(s)
 - Flow Sensor(s)
- By Others

TYPE OF SEAL

- F Standard Seal w/ Flush Line (Buna-Carbon/Ceramic)
- S Stuffing Box construction w/ Flushed Mechanical Single Seal (EPR-Tungsten Carbide/Carbon)
- PF Stuffing Box Construction w/ Flushed Packing (Graphite Impregnated PTFE)

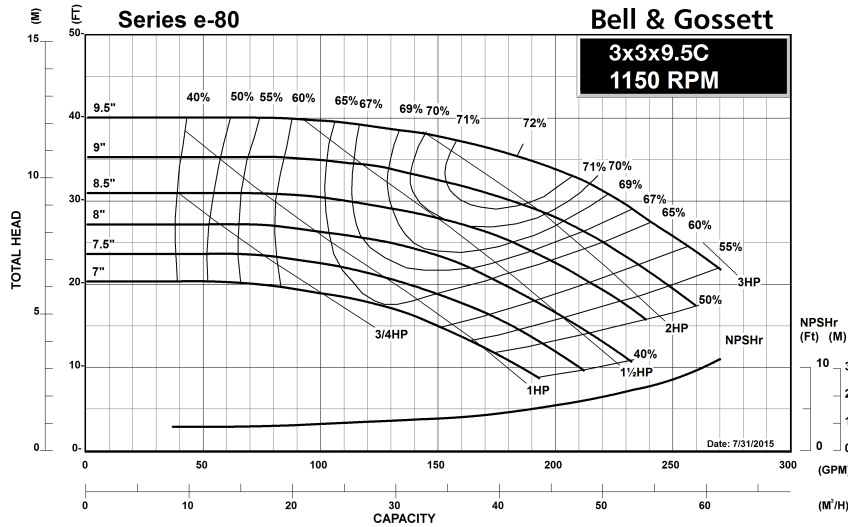

JOB:	REPRESENTATIVE:	
UNIT TAG:	ORDER NO.:	DATE:
ENGINEER:	SUBMITTED BY:	DATE:
CONTRACTOR:	APPROVED BY:	DATE:



3x3x9.5C Series e-80 In-Line Mounted Centrifugal Pumps

SPECIFICATIONS

FLOW _____ HEAD _____
 HP _____ RPM _____
 VOLTS _____
 CYCLE _____ INPUT PHASE _____
 ENCLOSURE _____
 APPROX. WEIGHT _____
 SPECIALS _____

MATERIALS OF CONSTRUCTION

Stainless Steel Fitted

MAXIMUM WORKING PRESSURE

- 175 psi (12 bar) with 125# ANSI flange drilling
- 250 psi (17 bar) with 250# ANSI flange drilling (requires 80-S)
- 300 psi (21 bar) W.P. with 250# ANSI flange drilling (Requires -S and EPR-Silicon Carbide-Silicon Carbide Seal)

MOUNTING


- In-Line Piping
- Flange Supports

PUMP VARIABLE SPEED CONTROL


- Integrated Technologic® Sensorless Control (ITSC)
- Integrated Technologic® (IT)
 - External input by others
 - Pressure Sensor(s)
 - Differential Pressure Sensor(s)
 - Flow Sensor(s)
- By Others

TYPE OF SEAL

- F Standard Seal w/ Flush Line (Buna-Carbon/Ceramic)
- S Stuffing Box construction w/ Flushed Mechanical Single Seal (EPR-Tungsten Carbide/Carbon)
- PF Stuffing Box Construction w/ Flushed Packing (Graphite Impregnated PTFE)

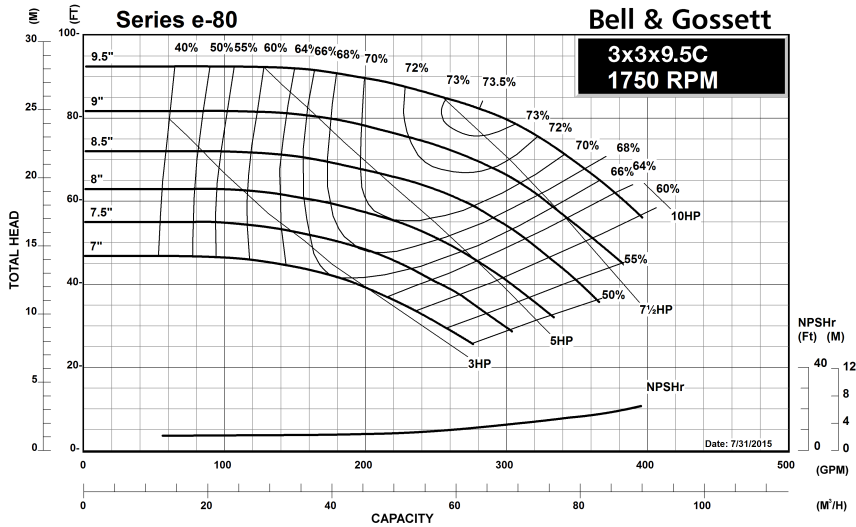

JOB:	REPRESENTATIVE:	
UNIT TAG:	ORDER NO.:	DATE:
ENGINEER:	SUBMITTED BY:	DATE:
CONTRACTOR:	APPROVED BY:	DATE:



3x3x9.5C Series e-80 In-Line Mounted Centrifugal Pumps

SPECIFICATIONS

FLOW _____ HEAD _____
 HP _____ RPM _____
 VOLTS _____
 CYCLE _____ INPUT PHASE _____
 ENCLOSURE _____
 APPROX. WEIGHT _____
 SPECIALS _____

MATERIALS OF CONSTRUCTION

Stainless Steel Fitted

MAXIMUM WORKING PRESSURE

- 175 psi (12 bar) with 125# ANSI flange drilling
- 250 psi (17 bar) with 250# ANSI flange drilling (requires 80-S)
- 300 psi (21 bar) W.P. with 250# ANSI flange drilling (Requires -S and EPR-Silicon Carbide-Silicon Carbide Seal)

MOUNTING


- In-Line Piping
- Flange Supports


PUMP VARIABLE SPEED CONTROL

- Integrated Technologic® Sensorless Control (ITSC)
- Integrated Technologic® (IT)
 - External input by others
 - Pressure Sensor(s)
 - Differential Pressure Sensor(s)
 - Flow Sensor(s)
- By Others

TYPE OF SEAL

- F Standard Seal w/ Flush Line (Buna-Carbon/Ceramic)
- S Stuffing Box construction w/ Flushed Mechanical Single Seal (EPR-Tungsten Carbide/Carbon)
- PF Stuffing Box Construction w/ Flushed Packing (Graphite Impregnated PTFE)

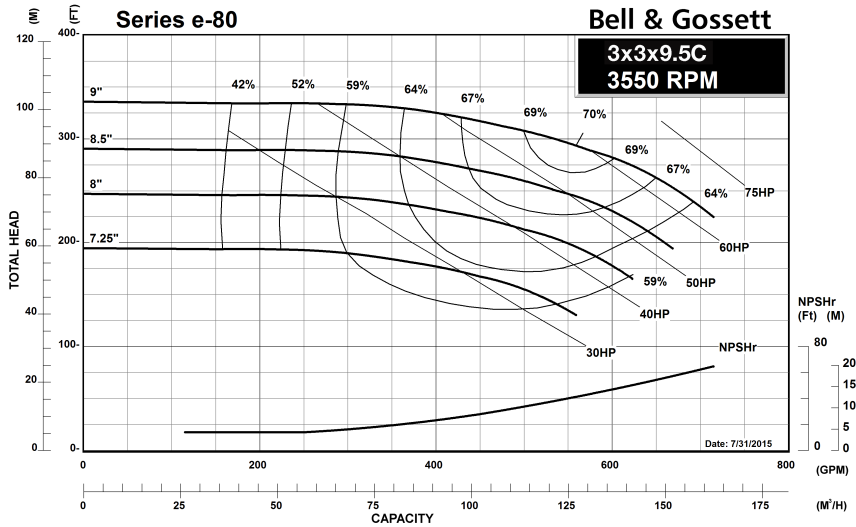

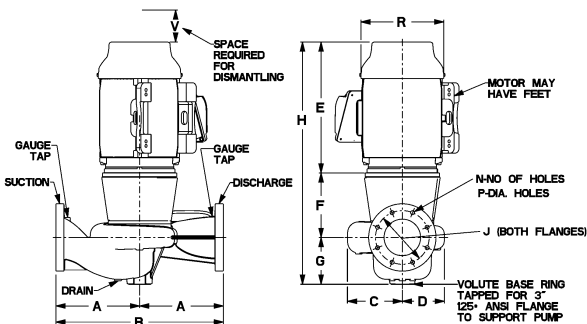

3x3x9.5C Series e-80 Centrifugal Pump Submittal - In-Line Piping

DIMENSIONS - Inches (mm)

STANDARD SEAL

MOTOR FRAME	A	B	C	D	E (max)	F	G	H (max)	125# ANSI			250# ANSI			R	S (Max)*	V (min)	Suct/Disch Gauge Taps (NPT)	Drain Tap (NPT)
									J	N	P	J	N	P					
184JM	11.50 (292)	23.00 (584)	6.53 (166)	7.40 (188)	15.38 (391)	4.81 (122)	6.13 (156)	26.31 (668)	6.00 (152)	4	0.75 (19)	6.63 (168)	8	0.88 (22)	11.75 (298)	0.31 (8)	4.50 (114)	0.25	0.25
213JM	11.50 (292)	23.00 (584)	6.53 (166)	7.40 (188)	19.25 (489)	4.81 (122)	6.13 (156)	30.19 (767)	6.00 (152)	4	0.75 (19)	6.63 (168)	8	0.88 (22)	14.00 (356)	1.00 (25)	4.50 (114)	0.25	0.25
215JM	11.50 (292)	23.00 (584)	6.53 (166)	7.40 (188)	19.25 (489)	4.81 (122)	6.13 (156)	30.19 (767)	6.00 (152)	4	0.75 (19)	6.63 (168)	8	0.88 (22)	14.00 (356)	2.50 (64)	4.50 (114)	0.25	0.25
254JM	11.50 (292)	23.00 (584)	6.53 (166)	7.40 (188)	24.13 (613)	5.81 (148)	6.13 (156)	36.06 (916)	6.00 (152)	4	0.75 (19)	6.63 (168)	8	0.88 (22)	17.00 (432)	1.00 (25)	4.50 (114)	0.25	0.25
256JM	11.50 (292)	23.00 (584)	6.53 (166)	7.40 (188)	24.13 (613)	5.81 (148)	6.13 (156)	36.06 (916)	6.00 (152)	4	0.75 (19)	6.63 (168)	8	0.88 (22)	17.00 (432)	2.75 (70)	4.50 (114)	0.25	0.25
284JM	11.50 (292)	23.00 (584)	6.53 (166)	7.40 (188)	22.63 (575)	5.81 (148)	6.13 (156)	34.56 (878)	6.00 (152)	4	0.75 (19)	6.63 (168)	8	0.88 (22)	16.13 (410)	5.63 (143)	4.50 (114)	0.25	0.25
286JM	11.50 (292)	23.00 (584)	6.53 (166)	7.40 (188)	24.13 (613)	5.81 (148)	6.13 (156)	36.06 (916)	6.00 (152)	4	0.75 (19)	6.63 (168)	8	0.88 (22)	16.13 (410)	5.25 (133)	4.50 (114)	0.25	0.25
324JM	11.50 (292)	23.00 (584)	6.53 (166)	7.40 (188)	26.00 (660)	5.81 (148)	6.13 (156)	37.94 (964)	6.00 (152)	4	0.75 (19)	6.63 (168)	8	0.88 (22)	18.75 (476)	5.38 (137)	4.50 (114)	0.25	0.25
326JM	11.50 (292)	23.00 (584)	6.53 (166)	7.40 (188)	26.00 (660)	5.81 (148)	6.13 (156)	37.94 (964)	6.00 (152)	4	0.75 (19)	6.63 (168)	8	0.88 (22)	18.75 (476)	6.88 (175)	4.50 (114)	0.25	0.25

STUFFING BOX

MOTOR FRAME	A	B	C	D	E (max)	F	G	H (max)	125# ANSI			250# ANSI			R	S (Max)*	V (min)	Suct/Disch Gauge Taps (NPT)	Drain Tap (NPT)
									J	N	P	J	N	P					
184JP	11.50 (292)	23.00 (584)	6.53 (166)	7.40 (188)	15.38 (391)	7.94 (202)	6.13 (156)	29.44 (748)	6.00 (152)	4	0.75 (19)	6.63 (168)	8	0.88 (22)	11.75 (298)	0.31 (8)	4.50 (114)	0.25	0.25
213JP	11.50 (292)	23.00 (584)	6.53 (166)	7.40 (188)	19.25 (489)	8.69 (221)	6.13 (156)	34.06 (865)	6.00 (152)	4	0.75 (19)	6.63 (168)	8	0.88 (22)	14.00 (356)	1.00 (25)	4.50 (114)	0.25	0.25
215JP	11.50 (292)	23.00 (584)	6.53 (166)	7.40 (188)	19.25 (489)	8.69 (221)	6.13 (156)	34.06 (865)	6.00 (152)	4	0.75 (19)	6.63 (168)	8	0.88 (22)	14.00 (356)	2.50 (64)	4.50 (114)	0.25	0.25
254JP	11.50 (292)	23.00 (584)	6.53 (166)	7.40 (188)	24.13 (613)	8.69 (221)	6.13 (156)	38.94 (989)	6.00 (152)	4	0.75 (19)	6.63 (168)	8	0.88 (22)	17.00 (432)	1.00 (25)	4.50 (114)	0.25	0.25
256JP	11.50 (292)	23.00 (584)	6.53 (166)	7.40 (188)	24.13 (613)	8.69 (221)	6.13 (156)	38.94 (989)	6.00 (152)	4	0.75 (19)	6.63 (168)	8	0.88 (22)	17.00 (432)	2.75 (70)	4.50 (114)	0.25	0.25
284JP	11.50 (292)	23.00 (584)	6.53 (166)	7.40 (188)	22.63 (575)	8.69 (221)	6.13 (156)	37.44 (951)	6.00 (152)	4	0.75 (19)	6.63 (168)	8	0.88 (22)	16.13 (410)	5.63 (143)	4.50 (114)	0.25	0.25
286JP	11.50 (292)	23.00 (584)	6.53 (166)	7.40 (188)	24.13 (613)	8.69 (221)	6.13 (156)	38.94 (989)	6.00 (152)	4	0.75 (19)	6.63 (168)	8	0.88 (22)	16.13 (410)	5.25 (133)	4.50 (114)	0.25	0.25
324JP	11.50 (292)	23.00 (584)	6.53 (166)	7.40 (188)	26.00 (660)	8.69 (221)	6.13 (156)	40.81 (1037)	6.00 (152)	4	0.75 (19)	6.63 (168)	8	0.88 (22)	18.75 (476)	5.38 (137)	4.50 (114)	0.25	0.25
326JP	11.50 (292)	23.00 (584)	6.53 (166)	7.40 (188)	26.00 (660)	8.69 (221)	6.13 (156)	40.81 (1037)	6.00 (152)	4	0.75 (19)	6.63 (168)	8	0.88 (22)	18.75 (476)	6.88 (175)	4.50 (114)	0.25	0.25


Dimensions are subject to change. Not to be used for construction purposes unless certified.

NOTE: For Single phase Motors add 1" to dimensions E & H.

*Dimensions are for ODP Motors. For TEFC add S dimension to dimensions E & H.

Xylem Inc.
8200 N. Austin Avenue, Morton Grove, IL 60053
Phone: (847)966-3700 Fax: (847)965-8379
www.bellgossett.com
Bell & Gossett is a trademark of Xylem Inc. or one of its subsidiaries.
© 2015 Xylem Inc.



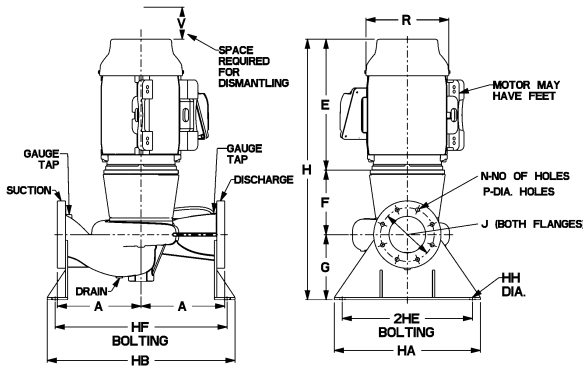

3x3x9.5C Series e-80 Centrifugal Pump Submittal - Flange Support Mounting

DIMENSIONS - Inches (mm)

STANDARD SEAL

MOTOR FRAME	A	HF BOLTING	HB	2HE BOLTING	HA	HH DIA	E (max)	F	G	H (max)	125# ANSI			250# ANSI			R	S (Max)*	V (min)	Suct/Disch Gauge Taps (NPT)	Drain Tap (NPT)
											J	N	P	J	N	P					
184JM	11.50 (292)	25.10 (638)	28.60 (726)	21.50 (546)	25.00 (635)	0.88 (22)	15.38 (391)	4.81 (122)	6.13 (156)	26.31 (668)	6.00 (152)	4	0.75 (19)	6.63 (168)	8	0.88 (22)	11.75 (298)	0.31 (8)	4.50 (114)	0.25	0.25
213JM	11.50 (292)	25.10 (638)	28.60 (726)	21.50 (546)	25.00 (635)	0.88 (22)	19.25 (489)	4.81 (122)	6.13 (156)	30.19 (767)	6.00 (152)	4	0.75 (19)	6.63 (168)	8	0.88 (22)	14.00 (356)	1.00 (25)	4.50 (114)	0.25	0.25
215JM	11.50 (292)	25.10 (638)	28.60 (726)	21.50 (546)	25.00 (635)	0.88 (22)	19.25 (489)	4.81 (122)	6.13 (156)	30.19 (767)	6.00 (152)	4	0.75 (19)	6.63 (168)	8	0.88 (22)	14.00 (356)	2.50 (64)	4.50 (114)	0.25	0.25
254JM	11.50 (292)	25.10 (638)	28.60 (726)	21.50 (546)	25.00 (635)	0.88 (22)	24.13 (613)	5.81 (148)	6.13 (156)	36.06 (916)	6.00 (152)	4	0.75 (19)	6.63 (168)	8	0.88 (22)	17.00 (432)	1.00 (25)	4.50 (114)	0.25	0.25
256JM	11.50 (292)	25.10 (638)	28.60 (726)	21.50 (546)	25.00 (635)	0.88 (22)	24.13 (613)	5.81 (148)	6.13 (156)	36.06 (916)	6.00 (152)	4	0.75 (19)	6.63 (168)	8	0.88 (22)	17.00 (432)	2.75 (70)	4.50 (114)	0.25	0.25
284JM	11.50 (292)	25.10 (638)	28.60 (726)	21.50 (546)	25.00 (635)	0.88 (22)	22.63 (575)	5.81 (148)	6.13 (156)	34.56 (878)	6.00 (152)	4	0.75 (19)	6.63 (168)	8	0.88 (22)	16.13 (410)	5.63 (143)	4.50 (114)	0.25	0.25
286JM	11.50 (292)	25.10 (638)	28.60 (726)	21.50 (546)	25.00 (635)	0.88 (22)	24.13 (613)	5.81 (148)	6.13 (156)	36.06 (916)	6.00 (152)	4	0.75 (19)	6.63 (168)	8	0.88 (22)	16.13 (410)	5.25 (133)	4.50 (114)	0.25	0.25
324JM	11.50 (292)	25.10 (638)	28.60 (726)	21.50 (546)	25.00 (635)	0.88 (22)	26.00 (660)	5.81 (148)	6.13 (156)	37.94 (964)	6.00 (152)	4	0.75 (19)	6.63 (168)	8	0.88 (22)	18.75 (476)	5.38 (137)	4.50 (114)	0.25	0.25
326JM	11.50 (292)	25.10 (638)	28.60 (726)	21.50 (546)	25.00 (635)	0.88 (22)	26.00 (660)	5.81 (148)	6.13 (156)	37.94 (964)	6.00 (152)	4	0.75 (19)	6.63 (168)	8	0.88 (22)	18.75 (476)	6.88 (175)	4.50 (114)	0.25	0.25

STUFFING BOX

MOTOR FRAME	A	HF BOLTING	HB	2HE BOLTING	HA	HH DIA	E (max)	F	G	H (max)	125# ANSI			250# ANSI			R	S (Max)*	V (min)	Suct/Disch Gauge Taps (NPT)	Drain Tap (NPT)
											J	N	P	J	N	P					
184JP	11.50 (292)	25.10 (638)	28.60 (726)	21.50 (546)	25.00 (635)	0.88 (22)	15.38 (391)	7.94 (202)	6.13 (156)	29.44 (748)	6.00 (152)	4	0.75 (19)	6.63 (168)	8	0.88 (22)	11.75 (298)	0.31 (8)	4.50 (114)	0.25	0.25
213JP	11.50 (292)	25.10 (638)	28.60 (726)	21.50 (546)	25.00 (635)	0.88 (22)	19.25 (489)	8.69 (221)	6.13 (156)	34.06 (865)	6.00 (152)	4	0.75 (19)	6.63 (168)	8	0.88 (22)	14.00 (356)	1.00 (25)	4.50 (114)	0.25	0.25
215JP	11.50 (292)	25.10 (638)	28.60 (726)	21.50 (546)	25.00 (635)	0.88 (22)	19.25 (489)	8.69 (221)	6.13 (156)	34.06 (865)	6.00 (152)	4	0.75 (19)	6.63 (168)	8	0.88 (22)	14.00 (356)	2.50 (64)	4.50 (114)	0.25	0.25
254JP	11.50 (292)	25.10 (638)	28.60 (726)	21.50 (546)	25.00 (635)	0.88 (22)	24.13 (613)	8.69 (221)	6.13 (156)	38.94 (989)	6.00 (152)	4	0.75 (19)	6.63 (168)	8	0.88 (22)	17.00 (432)	1.00 (25)	4.50 (114)	0.25	0.25
256JP	11.50 (292)	25.10 (638)	28.60 (726)	21.50 (546)	25.00 (635)	0.88 (22)	24.13 (613)	8.69 (221)	6.13 (156)	38.94 (989)	6.00 (152)	4	0.75 (19)	6.63 (168)	8	0.88 (22)	17.00 (432)	2.75 (70)	4.50 (114)	0.25	0.25
284JP	11.50 (292)	25.10 (638)	28.60 (726)	21.50 (546)	25.00 (635)	0.88 (22)	22.63 (575)	8.69 (221)	6.13 (156)	37.44 (951)	6.00 (152)	4	0.75 (19)	6.63 (168)	8	0.88 (22)	16.13 (410)	5.63 (143)	4.50 (114)	0.25	0.25
286JP	11.50 (292)	25.10 (638)	28.60 (726)	21.50 (546)	25.00 (635)	0.88 (22)	24.13 (613)	8.69 (221)	6.13 (156)	38.94 (989)	6.00 (152)	4	0.75 (19)	6.63 (168)	8	0.88 (22)	16.13 (410)	5.25 (133)	4.50 (114)	0.25	0.25
324JP	11.50 (292)	25.10 (638)	28.60 (726)	21.50 (546)	25.00 (635)	0.88 (22)	26.00 (660)	8.69 (221)	6.13 (156)	40.81 (1037)	6.00 (152)	4	0.75 (19)	6.63 (168)	8	0.88 (22)	18.75 (476)	5.38 (137)	4.50 (114)	0.25	0.25
326JP	11.50 (292)	25.10 (638)	28.60 (726)	21.50 (546)	25.00 (635)	0.88 (22)	26.00 (660)	8.69 (221)	6.13 (156)	40.81 (1037)	6.00 (152)	4	0.75 (19)	6.63 (168)	8	0.88 (22)	18.75 (476)	6.88 (175)	4.50 (114)	0.25	0.25


Dimensions are subject to change. Not to be used for construction purposes unless certified.

NOTE: For Single phase Motors add 1" to dimensions E & H.

*Dimensions are for ODP Motors. For TEFC add S dimension to dimensions E & H.

Xylem Inc.
8200 N. Austin Avenue, Morton Grove, IL 60053
Phone: (847)966-3700 Fax: (847)965-8379
www.bellgossett.com
Bell & Gossett is a trademark of Xylem Inc. or one of its subsidiaries.
© 2015 Xylem Inc.






3x3x9.5C Series e-80

In-Line Mounted Centrifugal Pumps With Integrated Technologic® Control

TECHNOLOGIC STANDARD FEATURES	
CONTROL METHOD WITH INTEGRATED TECHNOLOGIC® SENSORLESS CONTROL (ITSC)	Factory configured for sensorless operation.
CONTROL METHOD WITH INTEGRATED TECHNOLOGIC® (IT)	Field configurable for sensor by others, building management system input, or optional sensor(s) provided.
ENCLOSURE	NEMA 12 (same as IP55 & UL type 12)
POWER DISCONNECT SWITCH	Included standard. Fused Disconnect Switch optional with three phase input voltage.
HARMONIC SUPPRESSION	Integrated non-saturating dual DC link reactors provide better harmonic performance than a 5% AC line reactor.
COOLING	Fan-cooled through temperature controlled and easy replacement.
AMBIENT TEMPERATURE RATING	14°F to 113°F (-10°C to 45°C)
COMMUNICATION PROTOCOLS	BACnet, Modbus RTU, N2 Metasys, FLN Apogee
ANALOG INPUTS	2 configurable for either voltage (0 to 10VDC) or current(0/4 to 20mA)
ANALOG OUTPUTS	1 (0/4 to 20mA) up to 500 ohm load accurate to 1% of full scale
DIGITAL INPUTS	4 (0 to 24VDC), NPN or PNP, 0 to 24VDC, on 5 msec scan interval, Up to 2 can be configured as pulse inputs.
DIGITAL OUTPUTS	2 (0 to 24VDC), 40mA max current, configurable as pulse outputs.
RELAY OUTPUTS	2 programmable, 240VAC or 400VAC up to 2 A
MINIMUM CONTROL HEAD	_____ ft (default set to 40% of design head if not unknown)

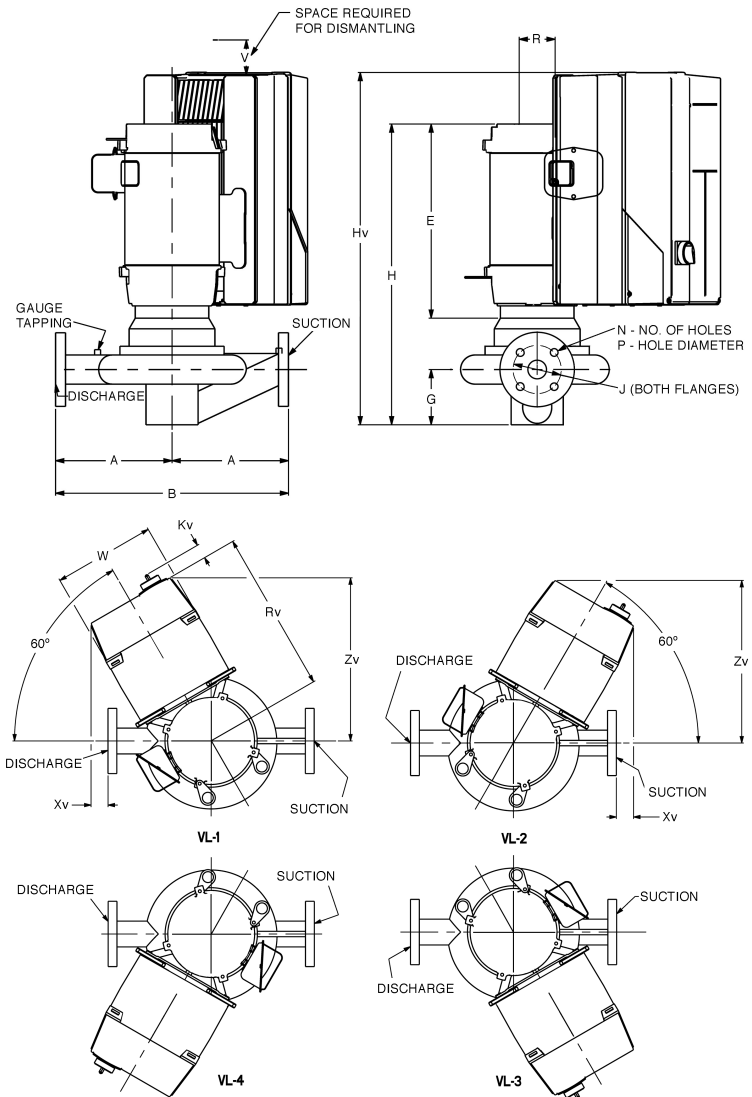

Series e-80 3x3x9.5C

B-139.14

In-Line Mounted Centrifugal Pumps

With Integrated Technologic® Control

DIMENSIONS - Inches (mm)

STANDARD SEAL

STUFFING BOX

MOTOR FRAME	VFD	Rv	Zv	W	Hv	Xv	MOTOR FRAME	VFD	Rv	Zv	W	Hv	Xv
184JM	A5	12.78 (325)	13.19 (335)	9.50 (241)	29.41 (747)	1.44 (37)	184JP	A5	12.78 (325)	13.19 (335)	9.50 (241)	32.53 (826)	1.44 (37)
	B1	15.07 (383)	14.79 (376)	9.50 (241)	30.41 (772)	3.04 (77)		B1	15.07 (383)	14.79 (376)	9.50 (241)	33.53 (852)	3.04 (77)
213JM	A5	13.53 (344)	13.83 (351)	9.50 (241)	32.83 (834)	1.06 (27)	213JP	A5	13.53 (344)	13.83 (351)	9.50 (241)	36.70 (932)	1.06 (27)
	B1	15.83 (402)	15.84 (402)	9.50 (241)	34.42 (874)	0.13 (3)		B1	15.83 (402)	15.84 (402)	9.50 (241)	38.30 (973)	0.13 (3)
	B2	15.83 (402)	15.84 (402)	9.50 (241)	40.16 (1020)	0.13 (3)		B2	15.83 (402)	15.84 (402)	9.50 (241)	44.04 (1119)	0.13 (3)
215JM	A5	13.53 (344)	13.83 (351)	9.50 (241)	31.36 (797)	1.06 (27)	215P	A5	13.53 (344)	13.83 (351)	9.50 (241)	35.23 (895)	1.06 (27)
	B1	15.83 (402)	15.84 (402)	9.50 (241)	32.89 (835)	0.13 (3)		B1	15.83 (402)	15.84 (402)	9.50 (241)	36.72 (933)	0.13 (3)
	B2	15.83 (402)	15.84 (402)	9.50 (241)	38.63 (981)	0.13 (3)		B2	15.83 (402)	15.84 (402)	9.50 (241)	42.46 (1078)	0.13 (3)
	C1	17.80 (452)	19.04 (484)	12.10 (307)	40.65 (1033)	3.33 (84)		C1	17.80 (452)	19.04 (484)	12.10 (307)	44.48 (1130)	3.33 (84)
254JM	B1	16.83 (427)	16.70 (424)	9.50 (241)	39.12 (994)	0.63 (16)	254JP	B1	16.83 (427)	16.70 (424)	9.50 (241)	39.12 (994)	0.63 (16)
	B2	16.83 (427)	16.70 (424)	9.50 (241)	43.58 (1107)	0.63 (16)		B2	16.83 (427)	16.70 (424)	9.50 (241)	43.58 (1107)	0.63 (16)
	C1	18.80 (477)	19.90 (506)	12.10 (307)	44.84 (1139)	3.83 (97)		C1	18.80 (477)	19.90 (506)	12.10 (307)	44.84 (1139)	3.83 (97)
256JM	B1	16.83 (427)	16.70 (424)	9.50 (241)	38.49 (978)	0.63 (16)	256JP	B1	16.83 (427)	16.70 (424)	9.50 (241)	38.49 (978)	0.63 (16)
	B2	16.83 (427)	16.70 (424)	9.50 (241)	42.95 (1091)	0.63 (16)		B2	16.83 (427)	16.70 (424)	9.50 (241)	42.95 (1091)	0.63 (16)
	C1	18.80 (477)	19.90 (506)	12.10 (307)	44.21 (1123)	3.83 (97)		C1	18.80 (477)	19.90 (506)	12.10 (307)	44.21 (1123)	3.83 (97)
	C2	19.58 (497)	22.20 (564)	14.60 (371)	48.87 (1241)	6.13 (156)		C2	19.58 (497)	22.20 (564)	14.60 (371)	48.87 (1241)	6.13 (156)
284JM	B1	17.58 (446)	17.36 (441)	9.50 (241)	36.74 (933)	1.00 (25)	284JP	B1	17.58 (446)	17.36 (441)	9.50 (241)	36.74 (933)	1.00 (25)
	B2	17.58 (446)	17.36 (441)	9.50 (241)	41.20 (1046)	1.00 (25)		B2	17.58 (446)	17.36 (441)	9.50 (241)	41.20 (1047)	1.00 (25)
	C1	19.55 (497)	20.56 (522)	12.10 (307)	43.97 (1117)	4.20 (107)		C1	19.55 (497)	20.56 (522)	12.10 (307)	43.97 (1117)	4.20 (107)
	C2	20.33 (516)	22.86 (581)	14.60 (371)	47.12 (1197)	6.50 (165)		C2	20.33 (516)	22.86 (581)	14.60 (371)	47.12 (1197)	6.50 (165)
286JM	B2	17.58 (446)	17.36 (441)	9.50 (241)	42.70 (1085)	1.00 (25)	286JP	B2	17.58 (446)	17.36 (441)	9.50 (241)	42.70 (1085)	1.00 (25)
	C1	19.58 (497)	19.63 (498)	12.09 (307)	45.11 (1146)	2.91 (74)		C1	19.58 (497)	19.63 (498)	12.09 (307)	45.11 (1146)	2.91 (74)
	C2	20.36 (517)	21.93 (557)	14.59 (371)	48.26 (1226)	5.21 (132)		C2	20.36 (517)	21.93 (557)	14.59 (371)	48.26 (1226)	5.21 (132)
324JM	B2	18.58 (472)	18.22 (463)	9.50 (241)	42.30 (1074)	1.50 (38)	324JP	B2	18.58 (472)	18.22 (463)	9.50 (241)	42.30 (1074)	1.50 (38)
	C1	20.58 (523)	20.48 (520)	12.09 (307)	42.64 (1083)	3.41 (87)		C1	20.58 (523)	20.48 (520)	12.09 (307)	42.64 (1083)	3.41 (87)
	C2	21.58 (548)	21.95 (558)	14.59 (371)	47.20 (1199)	4.94 (125)		C2	21.58 (548)	21.95 (558)	14.59 (371)	47.20 (1199)	4.94 (125)
326JM	C1	20.58 (523)	20.48 (520)	12.09 (307)	42.64 (1083)	3.41 (87)	326JP	C1	20.58 (523)	20.48 (520)	12.09 (307)	42.64 (1083)	3.41 (87)
	C2	21.58 (548)	21.95 (558)	14.59 (371)	47.20 (1199)	4.94 (125)		C2	21.58 (548)	21.95 (558)	14.59 (371)	47.20 (1199)	4.94 (125)

NOTE: Drives with single phase input have three phase output and include three phase motors.

Kv=2 (50)

Xylem Inc.
 8200 N. Austin Avenue, Morton Grove, IL 60053
 Phone: (847)966-3700 Fax: (847)965-8379
 www.bellgossett.com
 Bell & Gossett is a trademark of Xylem Inc. or one of its subsidiaries.
 © 2015 Xylem Inc.






Pressure Sensor/Transmitter For Pumps with TECHNOLOGIC® Drives

FEATURES

- 4-20mA output
- 10-28 VDC supply voltage
- Operating Temperature -40 to 85°C (-40 to 185°F)
- Storage Temperature -40 to 100°C (-40 to 212°F)
- Enclosure IP-66 (housing only)
- High Strength Stainless Steel Construction
- No Oil, Welds or Internal O-rings
- Wide Operating Temperature
- Low Static and Thermal Errors
- Compatible with Wide Variety of Liquids and Gases
- EMI/RFI Protection
- UL/cUL 508 Approved (with housing)
- 1lb. (0.45 kg) approximate weight

TECHNOLOGIC ANALOG SENSOR WIRING

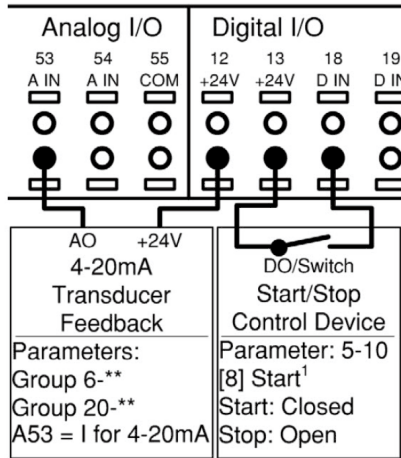

B&G PART NUMBERS

- S13203 Pressure range: 0-100 psi (0-689 kPa)
- S13204 Pressure range: 0-300 psi (0-2068 kPa)


Consult factory for other ranges.


INSTALLATION CONSIDERATIONS

- Standard 24 AWG (0.61 mm dia.) 2 wire shielded cable located in a conduit separate from high voltage wiring
- 24 vdc power supplied from Technologic Controller

DIMENSIONAL INFORMATION

Dimensions in Inches (Millimeters)

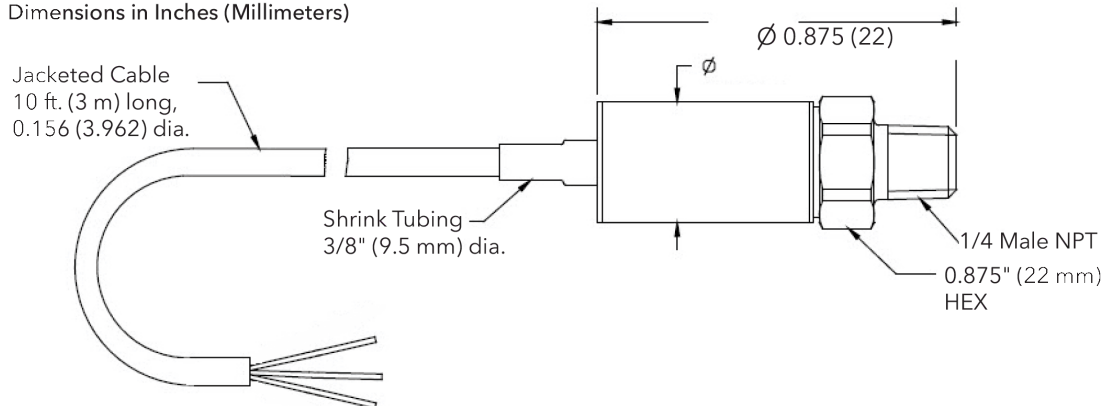

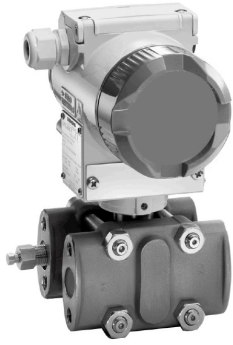


Differential Pressure Sensor/ Transmitter For Pumps with TECHNOLOGIC® Drives

FEATURES

- Relays reading to the Technologic controller up to 2000 ft. (610 m) away
- All wetted parts are 316 stainless steel
- Built-in RFI filter effective from 20 to 1000 MHz
- Withstands static pressures up to 2300 PSI (15858 kPa)
- 3 Valve bypass manifold (optional)
- 10 lbs. (4.5 kg) approximate weight

TECHNOLOGIC ANALOG SENSOR WIRING

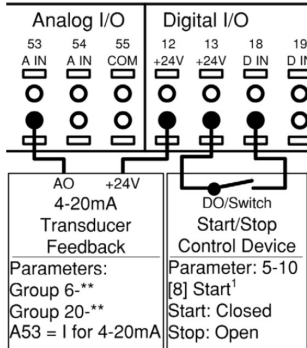

B&G PART NUMBERS

- S100089 Pressure range: 0 - 40 psi (0 - 276 kPa)
- S100091 Pressure range: 0 - 70 psi (0 - 483 kPa)
- S100092 Pressure range: 0 - 100 psi (0 - 689 kPa)


Consult factory for other ranges.

INSTALLATION CONSIDERATIONS

- Standard 18 AWG (1.194 mm dia.) 2 wire shielded cable located in a conduit separate from high voltage wiring
- 24 vdc power supplied from Technologic Controller for distance <2000 ft (610 m)

DIMENSIONAL INFORMATION

Dimensions in Inches (Millimeters)

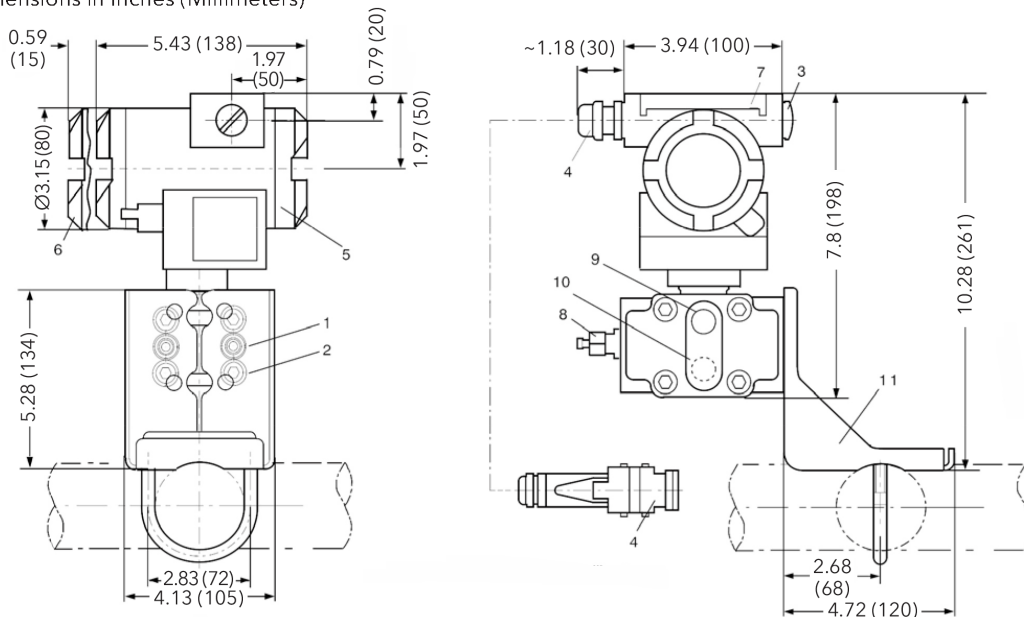

- 1 Process connection 1/4-18NPT for absolute pressure (+) side
- 2 Mounting thread 7/16-20 UNF to EN 61518
- 3 Dummy plug
- 4 Electrical connection: Screwed gland 1/2-14 NPT
- 5 Connection side

- 6 Electronic side, no digital display
- 7 Access cover over magnetic pushbuttons
- 8 Sealing screw with vent shown (optional)
- 9 Side vent for measuring liquid
- 10 Side vent for measuring gas (supplement H02)
- 11 Mounting bracket (2 shackles, 4 nuts, 4 U-plates, 1 angle) made of steel



Flow Sensor/Transmitter For Pumps with TECHNOLOGIC® Drives


The rugged Bell & Gossett Flow Sensor/Transmitter precisely measures system flow and transmits a proportional 4 to 20 mA DC signal to the Technologic Controller for display or program calculations.

FEATURES



- Suitable for mounting in vertical pipe
- Suitable for mounting in horizontal pipe within 45° of top dead center
- Non-magnetically sensed, non-fouling paddle wheel
- NEMA 4X Transmitter Enclosure
- Maximum Pressure Ratings:
1000 psi @ 100°F, 900 psi @ 200°F,
750 psi @ 300°F (6895 kPa @ 38°C, 6205 kPa @ 93°C,
5171 kPa @ 149°C)
- Maximum Temperature Ratings:
Fluid - 300°F (149°C) continuous service
Electronics - 150°F (66°C)
- Optional software and cable available for field programming
- 9.9 lbs (4.5 kg) approximate weight

DIMENSIONAL INFORMATION

Dimensions in Inches (Millimeters)

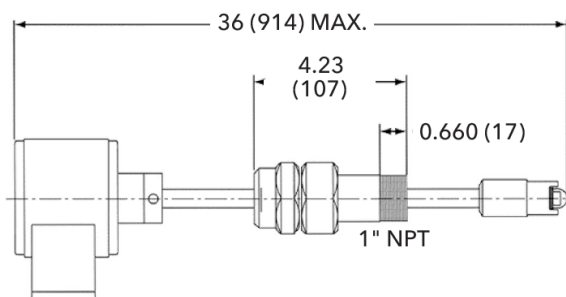

TECHNOLOGIC ANALOG SENSOR WIRING

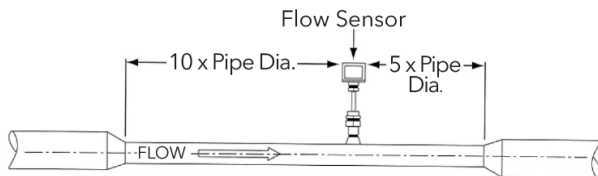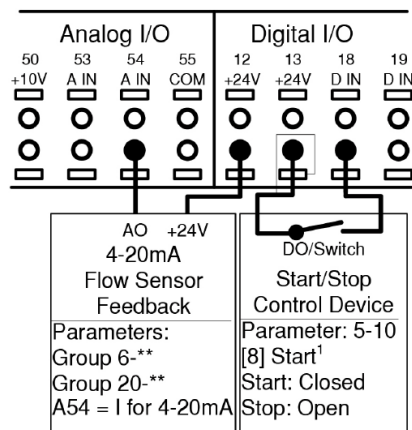


INSTALLATION CONSIDERATIONS

- Standard 18 AWG (1.194 mm dia.) gauge 3 wire shielded cable located in conduit separate from high voltage wiring
- 24 vdc power supplied from Technologic Controller
- Takes accurate readings and relays them to the Technologic Controller up to 2,000 ft. (610 m) away, when 10 pipe diameters upstream and 5 pipe diameters downstream of straight uninterrupted flow is present.

CALIBRATION CHART		
B&G Part No.	Pipe Size	Max. Flow
137411	3" Sch 40	250 gpm (16 l/sec)
137412	4" Sch 40	400 gpm (25 l/sec)
137413	6" Sch 40	850 gpm (54 l/sec)
137414	8" Sch 40	1750 gpm (110 l/sec)
137415	10" Sch 40	3150 gpm (199 l/sec)
137416	12" Sch 40	5000 gpm (315 l/sec)
137417	14" Sch 40	6400 gpm (404 l/sec)
137418	16" Sch 40	9100 gpm (574 l/sec)
137419	18" Sch 40	12400 gpm (782 l/sec)
137420	20" Sch 40	16500 gpm (1041 l/sec)

Consult factory for custom flow range calibration.

JOB:	REPRESENTATIVE:	
UNIT TAG:	ORDER NO.:	DATE:
ENGINEER:	SUBMITTED BY:	DATE:
CONTRACTOR:	APPROVED BY:	DATE:



3x3x11B Series e-80 In-Line Mounted Centrifugal Pumps

SPECIFICATIONS

FLOW _____ HEAD _____
 HP _____ RPM _____
 VOLTS _____
 CYCLE _____ INPUT PHASE _____
 ENCLOSURE _____
 APPROX. WEIGHT _____
 SPECIALS _____

MATERIALS OF CONSTRUCTION

Stainless Steel Fitted

MAXIMUM WORKING PRESSURE

- 175 psi (12 bar) with 125# ANSI flange drilling
- 250 psi (17 bar) with 250# ANSI flange drilling (requires 80-S)
- 300 psi (21 bar) W.P. with 250# ANSI flange drilling (Requires -S and EPR-Silicon Carbide-Silicon Carbide Seal)

MOUNTING


- In-Line Piping
- Flange Supports

PUMP VARIABLE SPEED CONTROL


- Integrated Technologic® Sensorless Control (ITSC)
- Integrated Technologic® (IT)
 - External input by others
 - Pressure Sensor(s)
 - Differential Pressure Sensor(s)
 - Flow Sensor(s)
- By Others

TYPE OF SEAL

- F Standard Seal w/ Flush Line (Buna-Carbon/Ceramic)
- S Stuffing Box construction w/ Flushed Mechanical Single Seal (EPR-Tungsten Carbide/Carbon)
- PF Stuffing Box Construction w/ Flushed Packing (Graphite Impregnated PTFE)

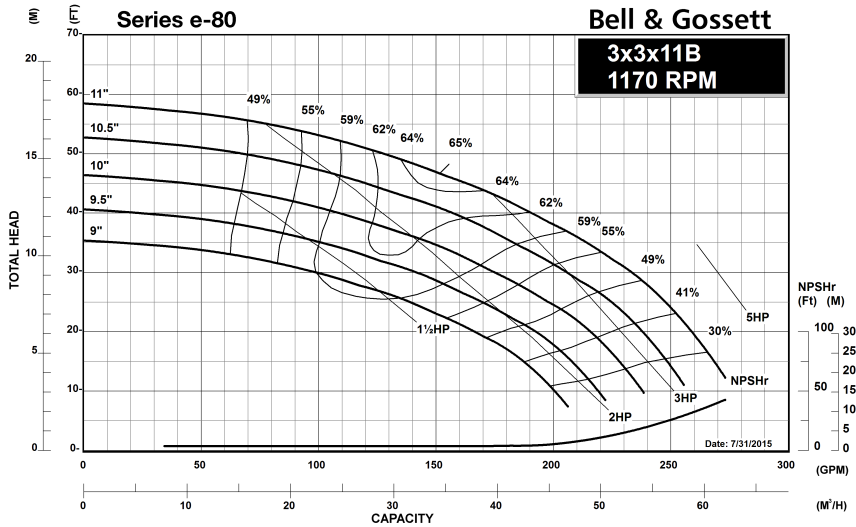

JOB:	REPRESENTATIVE:	
UNIT TAG:	ORDER NO.:	DATE:
ENGINEER:	SUBMITTED BY:	DATE:
CONTRACTOR:	APPROVED BY:	DATE:



3x3x11B Series e-80 In-Line Mounted Centrifugal Pumps

SPECIFICATIONS

FLOW _____ HEAD _____
 HP _____ RPM _____
 VOLTS _____
 CYCLE _____ INPUT PHASE _____
 ENCLOSURE _____
 APPROX. WEIGHT _____
 SPECIALS _____

MATERIALS OF CONSTRUCTION

Stainless Steel Fitted

MAXIMUM WORKING PRESSURE

- 175 psi (12 bar) with 125# ANSI flange drilling
- 250 psi (17 bar) with 250# ANSI flange drilling (requires 80-S)
- 300 psi (21 bar) W.P. with 250# ANSI flange drilling (Requires -S and EPR-Silicon Carbide-Silicon Carbide Seal)

MOUNTING


- In-Line Piping
- Flange Supports

PUMP VARIABLE SPEED CONTROL


- Integrated Technologic® Sensorless Control (ITSC)
- Integrated Technologic® (IT)
 - External input by others
 - Pressure Sensor(s)
 - Differential Pressure Sensor(s)
 - Flow Sensor(s)
- By Others

TYPE OF SEAL

- F Standard Seal w/ Flush Line (Buna-Carbon/Ceramic)
- S Stuffing Box construction w/ Flushed Mechanical Single Seal (EPR-Tungsten Carbide/Carbon)
- PF Stuffing Box Construction w/ Flushed Packing (Graphite Impregnated PTFE)

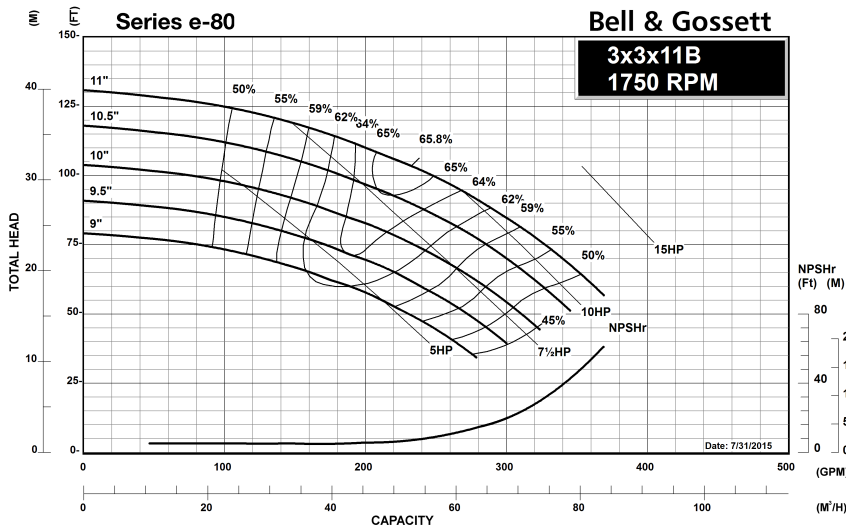

JOB:	REPRESENTATIVE:	
UNIT TAG:	ORDER NO.:	DATE:
ENGINEER:	SUBMITTED BY:	DATE:
CONTRACTOR:	APPROVED BY:	DATE:



3x3x11B Series e-80 In-Line Mounted Centrifugal Pumps

SPECIFICATIONS

FLOW _____ HEAD _____
 HP _____ RPM _____
 VOLTS _____
 CYCLE _____ INPUT PHASE _____
 ENCLOSURE _____
 APPROX. WEIGHT _____
 SPECIALS _____

MATERIALS OF CONSTRUCTION

Stainless Steel Fitted

MAXIMUM WORKING PRESSURE

- 175 psi (12 bar) with 125# ANSI flange drilling
- 250 psi (17 bar) with 250# ANSI flange drilling (requires 80-S)
- 300 psi (21 bar) W.P. with 250# ANSI flange drilling (Requires -S and EPR-Silicon Carbide-Silicon Carbide Seal)

MOUNTING


- In-Line Piping
- Flange Supports


PUMP VARIABLE SPEED CONTROL

- Integrated Technologic® Sensorless Control (ITSC)
- Integrated Technologic® (IT)
 - External input by others
 - Pressure Sensor(s)
 - Differential Pressure Sensor(s)
 - Flow Sensor(s)
- By Others

TYPE OF SEAL

- F Standard Seal w/ Flush Line (Buna-Carbon/Ceramic)
- S Stuffing Box construction w/ Flushed Mechanical Single Seal (EPR-Tungsten Carbide/Carbon)
- PF Stuffing Box Construction w/ Flushed Packing (Graphite Impregnated PTFE)

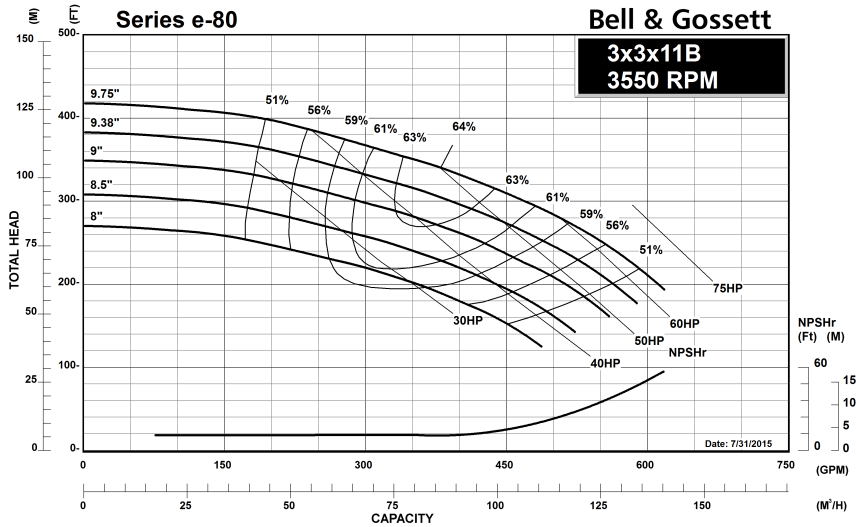

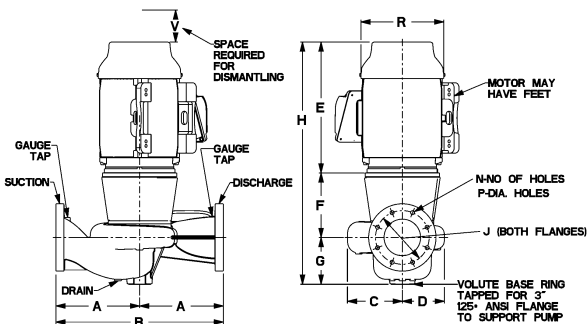

3x3x11B Series e-80 Centrifugal Pump Submittal - In-Line Piping

DIMENSIONS - Inches (mm)

STANDARD SEAL

MOTOR FRAME	A	B	C	D	E (max)	F	G	H (max)	125# ANSI			250# ANSI			R	S (Max)*	V (min)	Suct/Disch Gauge Taps (NPT)	Drain Tap (NPT)
									J	N	P	J	N	P					
									213JM	12.00 (305)	24.00 (610)	6.99 (177)	7.13 (181)	19.25 (489)					
215JM	12.00 (305)	24.00 (610)	6.99 (177)	7.13 (181)	19.25 (489)	4.19 (106)	6.75 (171)	30.19 (767)	6.00 (152)	4 (19)	0.75 (19)	6.63 (168)	8 (22)	0.88 (356)	14.00 (356)	-	5.75 (146)	0.25	0.25
254JM	12.00 (305)	24.00 (610)	6.99 (177)	7.13 (181)	24.13 (613)	4.67 (119)	6.75 (171)	35.54 (903)	6.00 (152)	4 (19)	0.75 (19)	6.63 (168)	8 (22)	0.88 (432)	17.00 (432)	-	5.75 (146)	0.25	0.25
256JM	12.00 (305)	24.00 (610)	6.99 (177)	7.13 (181)	24.13 (613)	4.67 (119)	6.75 (171)	35.54 (903)	6.00 (152)	4 (19)	0.75 (19)	6.63 (168)	8 (22)	0.88 (432)	17.00 (432)	-	5.75 (146)	0.25	0.25
284JM	12.00 (305)	24.00 (610)	6.99 (177)	7.13 (181)	23.63 (600)	4.67 (119)	6.75 (171)	35.04 (890)	6.00 (152)	4 (19)	0.75 (19)	6.63 (168)	8 (22)	0.88 (410)	16.13 (410)	4.63 (117)	5.75 (146)	0.25	0.25
286JM	12.00 (305)	24.00 (610)	6.99 (177)	7.13 (181)	25.13 (638)	4.67 (119)	6.75 (171)	36.54 (928)	6.00 (152)	4 (19)	0.75 (19)	6.63 (168)	8 (22)	0.88 (410)	16.13 (410)	4.63 (117)	5.75 (146)	0.25	0.25
324JM	12.00 (305)	24.00 (610)	6.99 (177)	7.13 (181)	26.00 (660)	4.67 (119)	6.75 (171)	37.42 (950)	6.00 (152)	4 (19)	0.75 (19)	6.63 (168)	8 (22)	0.88 (476)	18.75 (476)	4.63 (117)	5.75 (146)	0.25	0.25
326JM	12.00 (305)	24.00 (610)	6.99 (177)	7.13 (181)	26.00 (660)	4.67 (119)	6.75 (171)	37.42 (950)	6.00 (152)	4 (19)	0.75 (19)	6.63 (168)	8 (22)	0.88 (476)	18.75 (476)	4.63 (117)	5.75 (146)	0.25	0.25


STUFFING BOX

MOTOR FRAME	A	B	C	D	E (max)	F	G	H (max)	125# ANSI			250# ANSI			R	S (Max)*	V (min)	Suct/Disch Gauge Taps (NPT)	Drain Tap (NPT)
									J	N	P	J	N	P					
									213JP	12.00 (305)	24.00 (610)	6.99 (177)	7.13 (181)	19.25 (489)					
215JP	12.00 (305)	24.00 (610)	6.99 (177)	7.13 (181)	19.25 (489)	7.19 (183)	6.75 (171)	33.19 (843)	6.00 (152)	4 (19)	0.75 (19)	6.63 (168)	8 (22)	0.88 (356)	14.00 (356)	-	5.75 (146)	0.25	0.25
254JP	12.00 (305)	24.00 (610)	6.99 (177)	7.13 (181)	24.13 (613)	7.50 (191)	6.75 (171)	38.38 (975)	6.00 (152)	4 (19)	0.75 (19)	6.63 (168)	8 (22)	0.88 (432)	17.00 (432)	-	5.75 (146)	0.25	0.25
256JP	12.00 (305)	24.00 (610)	6.99 (177)	7.13 (181)	24.13 (613)	7.50 (191)	6.75 (171)	38.38 (975)	6.00 (152)	4 (19)	0.75 (19)	6.63 (168)	8 (22)	0.88 (432)	17.00 (432)	-	5.75 (146)	0.25	0.25
284JP	12.00 (305)	24.00 (610)	6.99 (177)	7.13 (181)	23.63 (600)	7.50 (191)	6.75 (171)	37.88 (962)	6.00 (152)	4 (19)	0.75 (19)	6.63 (168)	8 (22)	0.88 (410)	16.13 (410)	4.63 (117)	5.75 (146)	0.25	0.25
286P	12.00 (305)	24.00 (610)	6.99 (177)	7.13 (181)	25.13 (638)	7.50 (191)	6.75 (171)	39.38 (1000)	6.00 (152)	4 (19)	0.75 (19)	6.63 (168)	8 (22)	0.88 (410)	16.13 (410)	4.63 (117)	5.75 (146)	0.25	0.25
324JP	12.00 (305)	24.00 (610)	6.99 (177)	7.13 (181)	26.00 (660)	7.50 (191)	6.75 (171)	40.25 (1022)	6.00 (152)	4 (19)	0.75 (19)	6.63 (168)	8 (22)	0.88 (476)	18.75 (476)	4.63 (117)	5.75 (146)	0.25	0.25
326JP	12.00 (305)	24.00 (610)	6.99 (177)	7.13 (181)	26.00 (660)	7.50 (191)	6.75 (171)	40.25 (1022)	6.00 (152)	4 (19)	0.75 (19)	6.63 (168)	8 (22)	0.88 (476)	18.75 (476)	4.63 (117)	5.75 (146)	0.25	0.25
284JP	9.50 (241)	19.00 (483)	5.88 (149)	6.25 (159)	23.63 (600)	8.56 (217)	4.50 (114)	36.75 (933)	3.88 (98)	4 (16)	0.63 (16)	4.50 (114)	4 (22)	0.88 (410)	16.13 (410)	4.63 (117)	4.00 (102)	0.25	0.25
286JP	9.50 (241)	19.00 (483)	5.88 (149)	6.25 (159)	25.13 (638)	8.56 (217)	4.50 (114)	38.13 (968)	3.88 (98)	4 (16)	0.63 (16)	4.50 (114)	4 (22)	0.88 (410)	16.13 (410)	4.63 (117)	4.00 (102)	0.25	0.25

Dimensions are subject to change. Not to be used for construction purposes unless certified.

NOTE: For Single phase Motors add 1" to dimensions E & H.

*Dimensions are for ODP Motors. For TEFC add S dimension to dimensions E & H.

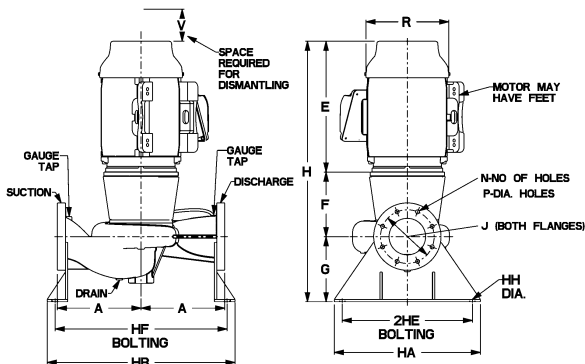

3x3x11B Series e-80

Centrifugal Pump Submittal - Flange Support Mounting

DIMENSIONS - Inches (mm)

STANDARD SEAL

MOTOR FRAME	A	HF BOLTING	HB	2HE BOLTING	HA	HH DIA	E (max)	F	G	H (max)	125# ANSI			250# ANSI			R	S (Max)*	V (min)	Suct/Disch Gauge Taps (NPT)	Drain Tap (NPT)
											J	N	P	J	N	P					
213JM	12.00 (305)	25.94 (659)	29.44 (748)	21.50 (546)	25.00 (635)	0.88 (22)	19.25 (489)	4.19 (106)	6.75 (171)	30.19 (767)	6.00 (152)	4	0.75 (19)	6.63 (168)	8	0.88 (22)	14.00 (356)	-	5.75 (146)	0.25	0.25
215JM	12.00 (305)	25.94 (659)	29.44 (748)	21.50 (546)	25.00 (635)	0.88 (22)	19.25 (489)	4.19 (106)	6.75 (171)	30.19 (767)	6.00 (152)	4	0.75 (19)	6.63 (168)	8	0.88 (22)	14.00 (356)	-	5.75 (146)	0.25	0.25
254JM	12.00 (305)	25.94 (659)	29.44 (748)	21.50 (546)	25.00 (635)	0.88 (22)	24.13 (613)	4.67 (119)	6.75 (171)	35.54 (903)	6.00 (152)	4	0.75 (19)	6.63 (168)	8	0.88 (22)	17.00 (432)	-	5.75 (146)	0.25	0.25
256JM	12.00 (305)	25.94 (659)	29.44 (748)	21.50 (546)	25.00 (635)	0.88 (22)	24.13 (613)	4.67 (119)	6.75 (171)	35.54 (903)	6.00 (152)	4	0.75 (19)	6.63 (168)	8	0.88 (22)	17.00 (432)	-	5.75 (146)	0.25	0.25
284JM	12.00 (305)	25.94 (659)	29.44 (748)	21.50 (546)	25.00 (635)	0.88 (22)	23.63 (600)	4.67 (119)	6.75 (171)	35.04 (890)	6.00 (152)	4	0.75 (19)	6.63 (168)	8	0.88 (22)	16.13 (410)	4.63 (117)	5.75 (146)	0.25	0.25
286JM	12.00 (305)	25.94 (659)	29.44 (748)	21.50 (546)	25.00 (635)	0.88 (22)	25.13 (638)	4.67 (119)	6.75 (171)	36.54 (928)	6.00 (152)	4	0.75 (19)	6.63 (168)	8	0.88 (22)	16.13 (410)	4.63 (117)	5.75 (146)	0.25	0.25
324JM	12.00 (305)	25.94 (659)	29.44 (748)	21.50 (546)	25.00 (635)	0.88 (22)	26.00 (660)	4.67 (119)	6.75 (171)	37.42 (950)	6.00 (152)	4	0.75 (19)	6.63 (168)	8	0.88 (22)	18.75 (476)	4.63 (117)	5.75 (146)	0.25	0.25
326JM	12.00 (305)	25.94 (659)	29.44 (748)	21.50 (546)	25.00 (635)	0.88 (22)	26.00 (660)	4.67 (119)	6.75 (171)	37.42 (950)	6.00 (152)	4	0.75 (19)	6.63 (168)	8	0.88 (22)	18.75 (476)	4.63 (117)	5.75 (146)	0.25	0.25


STUFFING BOX

MOTOR FRAME	A	HF BOLTING	HB	2HE BOLTING	HA	HH DIA	E (max)	F	G	H (max)	125# ANSI			250# ANSI			R	S (Max)*	V (min)	Suct/Disch Gauge Taps (NPT)	Drain Tap (NPT)
											J	N	P	J	N	P					
213JP	12.00 (305)	25.94 (659)	29.44 (748)	21.50 (546)	25.00 (635)	0.88 (22)	19.25 (489)	7.19 (183)	6.75 (171)	33.19 (843)	6.00 (152)	4	0.75 (19)	6.63 (168)	8	0.88 (22)	14.00 (356)	-	5.75 (146)	0.25	0.25
215JP	12.00 (305)	25.94 (659)	29.44 (748)	21.50 (546)	25.00 (635)	0.88 (22)	19.25 (489)	7.19 (183)	6.75 (171)	33.19 (843)	6.00 (152)	4	0.75 (19)	6.63 (168)	8	0.88 (22)	14.00 (356)	-	5.75 (146)	0.25	0.25
254JP	12.00 (305)	25.94 (659)	29.44 (748)	21.50 (546)	25.00 (635)	0.88 (22)	24.13 (613)	7.50 (191)	6.75 (171)	38.38 (975)	6.00 (152)	4	0.75 (19)	6.63 (168)	8	0.88 (22)	17.00 (432)	-	5.75 (146)	0.25	0.25
256JP	12.00 (305)	25.94 (659)	29.44 (748)	21.50 (546)	25.00 (635)	0.88 (22)	24.13 (613)	7.50 (191)	6.75 (171)	38.38 (975)	6.00 (152)	4	0.75 (19)	6.63 (168)	8	0.88 (22)	17.00 (432)	-	5.75 (146)	0.25	0.25
284JP	12.00 (305)	25.94 (659)	29.44 (748)	21.50 (546)	25.00 (635)	0.88 (22)	23.63 (600)	7.50 (191)	6.75 (171)	37.88 (962)	6.00 (152)	4	0.75 (19)	6.63 (168)	8	0.88 (22)	16.13 (410)	4.63 (117)	5.75 (146)	0.25	0.25
286P	12.00 (305)	25.94 (659)	29.44 (748)	21.50 (546)	25.00 (635)	0.88 (22)	25.13 (638)	7.50 (191)	6.75 (171)	39.38 (1000)	6.00 (152)	4	0.75 (19)	6.63 (168)	8	0.88 (22)	16.13 (410)	4.63 (117)	5.75 (146)	0.25	0.25
324JP	12.00 (305)	25.94 (659)	29.44 (748)	21.50 (546)	25.00 (635)	0.88 (22)	26.00 (660)	7.50 (191)	6.75 (171)	40.25 (1022)	6.00 (152)	4	0.75 (19)	6.63 (168)	8	0.88 (22)	18.75 (476)	4.63 (117)	5.75 (146)	0.25	0.25
326JP	12.00 (305)	25.94 (659)	29.44 (748)	21.50 (546)	25.00 (635)	0.88 (22)	26.00 (660)	7.50 (191)	6.75 (171)	40.25 (1022)	6.00 (152)	4	0.75 (19)	6.63 (168)	8	0.88 (22)	18.75 (476)	4.63 (117)	5.75 (146)	0.25	0.25

Dimensions are subject to change. Not to be used for construction purposes unless certified.

NOTE: For Single phase Motors add 1" to dimensions E & H.



*Dimensions are for ODP Motors. For TEFC add S dimension to dimensions E & H.



3x3x11B Series e-80

In-Line Mounted Centrifugal Pumps With Integrated Technologic® Control

TECHNOLOGIC STANDARD FEATURES	
CONTROL METHOD WITH INTEGRATED TECHNOLOGIC® SENSORLESS CONTROL (ITSC)	Factory configured for sensorless operation.
CONTROL METHOD WITH INTEGRATED TECHNOLOGIC® (IT)	Field configurable for sensor by others, building management system input, or optional sensor(s) provided.
ENCLOSURE	NEMA 12 (same as IP55 & UL type 12)
POWER DISCONNECT SWITCH	Included standard. Fused Disconnect Switch optional with three phase input voltage.
HARMONIC SUPPRESSION	Integrated non-saturating dual DC link reactors provide better harmonic performance than a 5% AC line reactor.
COOLING	Fan-cooled through temperature controlled and easy replacement.
AMBIENT TEMPERATURE RATING	14°F to 113°F (-10°C to 45°C)
COMMUNICATION PROTOCOLS	BACnet, Modbus RTU, N2 Metasys, FLN Apogee
ANALOG INPUTS	2 configurable for either voltage (0 to 10VDC) or current(0/4 to 20mA)
ANALOG OUTPUTS	1 (0/4 to 20mA) up to 500 ohm load accurate to 1% of full scale
DIGITAL INPUTS	4 (0 to 24VDC), NPN or PNP, 0 to 24VDC, on 5 msec scan interval, Up to 2 can be configured as pulse inputs.
DIGITAL OUTPUTS	2 (0 to 24VDC), 40mA max current, configurable as pulse outputs.
RELAY OUTPUTS	2 programmable, 240VAC or 400VAC up to 2 A
MINIMUM CONTROL HEAD	_____ ft (default set to 40% of design head if not unknown)

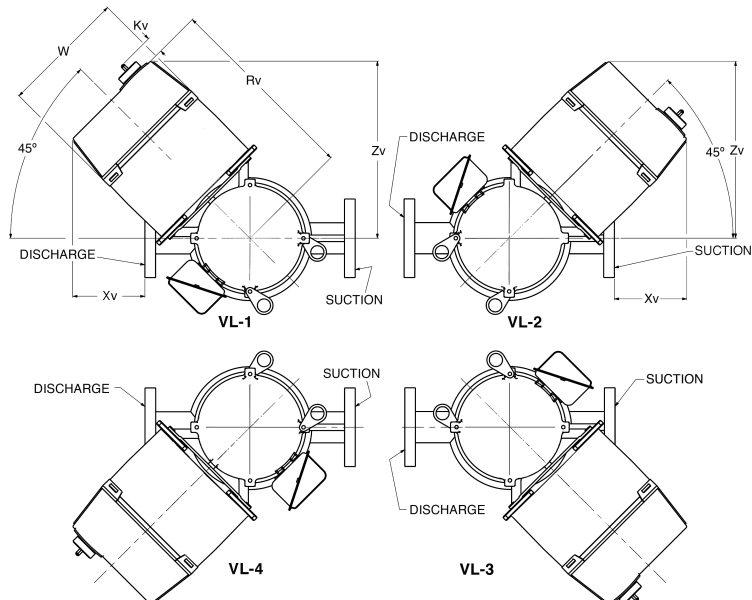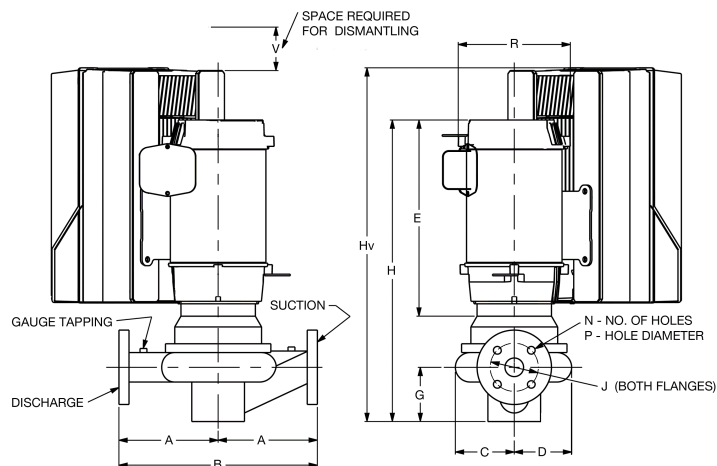

Series e-80 3x3x11B

In-Line Mounted Centrifugal Pumps

With Integrated Technologic® Control

B.139.16

DIMENSIONS - Inches (mm)							STANDARD SEAL						STUFFING BOX														
MOTOR FRAME	VFD	Rv	Zv	W	Hv	Xv	MOTOR FRAME	VFD	Rv	Zv	W	Hv	Xv	MOTOR FRAME	VFD	Rv	Zv	W	Hv	Xv							
213JM	A5	13.53 (344)	12.56 (319)	9.50 (241)	32.77 (832)	1.31 (33)	213JP	A5	13.53 (344)	12.56 (319)	9.50 (241)	35.77 (908)	1.31 (33)	215JM	A5	13.53 (344)	12.56 (319)	9.50 (241)	34.30 (871)	1.31 (33)	215JP	A5	13.53 (344)	12.56 (319)	9.50 (241)	34.30 (871)	1.31 (33)
	B1	15.82 (402)	14.16 (360)	9.50 (241)	34.02 (864)	2.91 (74)		B1	15.82 (402)	14.16 (360)	9.50 (241)	37.02 (940)	2.91 (74)		B1	15.82 (402)	14.16 (360)	9.50 (241)	35.55 (903)	2.91 (74)		B1	15.82 (402)	14.16 (360)	9.50 (241)	35.55 (903)	2.91 (74)
	B2	15.82 (402)	14.16 (360)	9.50 (241)	39.76 (1010)	2.91 (74)		B2	15.82 (402)	14.16 (360)	9.50 (241)	42.76 (1086)	2.91 (74)		B2	15.82 (402)	14.16 (360)	9.50 (241)	41.29 (1049)	2.91 (74)		B2	15.82 (402)	14.16 (360)	9.50 (241)	41.29 (1049)	2.91 (74)
254JM	A5	13.53 (344)	12.56 (319)	9.50 (241)	31.30 (795)	1.31 (33)	254JP	A5	13.53 (344)	12.56 (319)	9.50 (241)	34.30 (871)	1.31 (33)	256JM	B1	16.83 (427)	14.92 (379)	9.50 (241)	38.54 (979)	3.63 (92)	256JP	B1	16.83 (427)	14.92 (379)	9.50 (241)	40.75 (1035)	3.63 (92)
	B1	15.82 (402)	14.16 (360)	9.50 (241)	32.55 (827)	2.91 (74)		B1	16.83 (427)	14.92 (379)	9.50 (241)	45.84 (1164)	3.63 (92)		B2	16.83 (427)	14.92 (379)	9.50 (241)	48.29 (1227)	9.13 (232)		B2	16.83 (427)	14.92 (379)	9.50 (241)	45.20 (1148)	3.63 (92)
	B2	15.82 (402)	14.16 (360)	9.50 (241)	38.29 (972)	2.91 (74)		B2	16.83 (427)	14.92 (379)	9.50 (241)	47.10 (1196)	6.83 (173)		C1	18.77 (477)	18.12 (460)	12.10 (307)	44.26 (1124)	6.83 (173)		C1	18.77 (477)	18.12 (460)	12.10 (307)	46.46 (1180)	6.83 (173)
	C1	17.76 (451)	17.36 (441)	12.10 (307)	40.31 (1024)	6.11 (155)		C1	18.77 (477)	18.12 (460)	12.10 (307)	47.10 (1196)	6.83 (173)		C2	19.55 (497)	20.42 (519)	14.60 (371)	48.29 (1227)	9.13 (232)		C2	19.55 (497)	20.42 (519)	14.60 (371)	51.12 (1299)	9.13 (232)
284JM	B1	16.83 (427)	14.92 (379)	9.50 (241)	37.92 (963)	3.63 (92)	284JP	B1	16.83 (427)	14.92 (379)	9.50 (241)	40.75 (1035)	3.63 (92)	286JM	B1	17.58 (446)	15.45 (393)	9.50 (241)	43.25 (1098)	3.77 (96)	286JP	B1	17.58 (446)	15.45 (393)	9.50 (241)	46.08 (1170)	3.77 (96)
	B2	16.83 (427)	14.92 (379)	9.50 (241)	42.37 (1076)	3.63 (92)		B2	16.83 (427)	14.92 (379)	9.50 (241)	45.20 (1148)	3.63 (92)		C1	19.58 (497)	17.63 (448)	12.09 (307)	45.65 (1160)	6.50 (165)		C1	19.58 (497)	17.63 (448)	12.09 (307)	48.48 (1232)	6.50 (165)
	C1	18.77 (477)	18.12 (460)	12.10 (307)	43.63 (1108)	6.83 (173)		C1	18.77 (477)	18.12 (460)	12.10 (307)	46.46 (1180)	6.83 (173)		C2	19.58 (497)	17.63 (448)	12.09 (307)	44.15 (1122)	3.63 (92)		C2	19.58 (497)	17.63 (448)	12.09 (307)	44.15 (1122)	3.63 (92)
	C2	19.55 (497)	20.42 (519)	14.60 (371)	48.29 (1227)	9.13 (232)		C2	19.55 (497)	20.42 (519)	14.60 (371)	51.12 (1299)	9.13 (232)		B2	17.58 (446)	15.45 (393)	9.50 (241)	42.59 (1082)	4.88 (124)		B2	17.58 (446)	15.45 (393)	9.50 (241)	45.42 (1154)	4.88 (124)
324JM	B2	18.58 (472)	16.16 (410)	9.50 (241)	42.59 (1082)	4.88 (124)	324JP	B2	18.58 (472)	16.16 (410)	9.50 (241)	45.42 (1154)	4.88 (124)	326JM	C1	20.58 (523)	18.33 (466)	12.09 (307)	42.94 (1091)	7.17 (182)	326JP	C1	20.58 (523)	18.33 (466)	12.09 (307)	45.77 (1162)	7.17 (182)
	C1	20.58 (523)	18.33 (466)	12.09 (307)	42.94 (1091)	7.17 (182)		C1	20.58 (523)	18.33 (466)	12.09 (307)	46.98 (1193)	3.63 (92)		C2	21.58 (548)	19.88 (505)	14.59 (371)	47.50 (1206)	8.81 (224)		C2	21.58 (548)	19.88 (505)	14.59 (371)	50.33 (1278)	8.81 (224)

NOTE: Drives with single phase input have three phase output and include three phase motors.
Kv=2 (50)

Xylem Inc.
8200 N. Austin Avenue, Morton Grove, IL 60053
Phone: (847)966-3700 Fax: (847)965-8379
www.bellgossett.com
Bell & Gossett is a trademark of Xylem Inc. or one of its subsidiaries.
© 2015 Xylem Inc.

xylem
Let's Solve Water




Pressure Sensor/Transmitter For Pumps with TECHNOLOGIC® Drives

FEATURES

- 4-20mA output
- 10-28 VDC supply voltage
- Operating Temperature -40 to 85°C (-40 to 185°F)
- Storage Temperature -40 to 100°C (-40 to 212°F)
- Enclosure IP-66 (housing only)
- High Strength Stainless Steel Construction
- No Oil, Welds or Internal O-rings
- Wide Operating Temperature
- Low Static and Thermal Errors
- Compatible with Wide Variety of Liquids and Gases
- EMI/RFI Protection
- UL/cUL 508 Approved (with housing)
- 1lb. (0.45 kg) approximate weight

TECHNOLOGIC ANALOG SENSOR WIRING

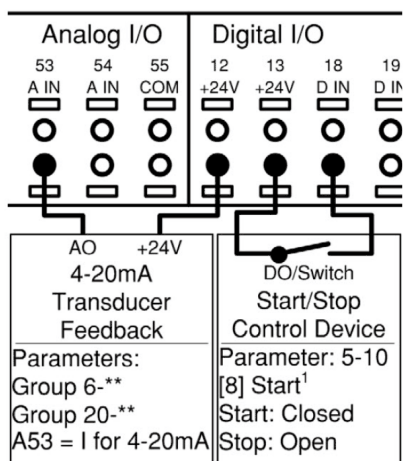

B&G PART NUMBERS

- S13203 Pressure range: 0-100 psi (0-689 kPa)
- S13204 Pressure range: 0-300 psi (0-2068 kPa)


Consult factory for other ranges.


INSTALLATION CONSIDERATIONS

- Standard 24 AWG (0.61 mm dia.) 2 wire shielded cable located in a conduit separate from high voltage wiring
- 24 vdc power supplied from Technologic Controller

DIMENSIONAL INFORMATION

Dimensions in Inches (Millimeters)

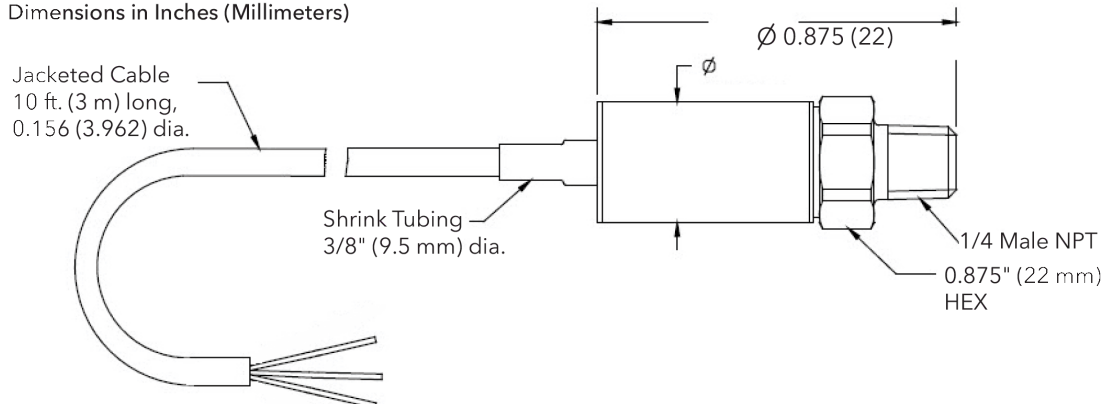

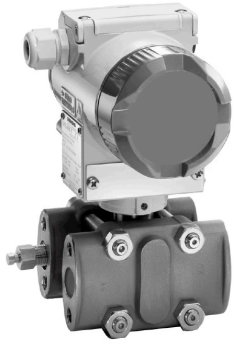


Differential Pressure Sensor/ Transmitter For Pumps with TECHNOLOGIC® Drives

FEATURES

- Relays reading to the Technologic controller up to 2000 ft. (610 m) away
- All wetted parts are 316 stainless steel
- Built-in RFI filter effective from 20 to 1000 MHz
- Withstands static pressures up to 2300 PSI (15858 kPa)
- 3 Valve bypass manifold (optional)
- 10 lbs. (4.5 kg) approximate weight

TECHNOLOGIC ANALOG SENSOR WIRING

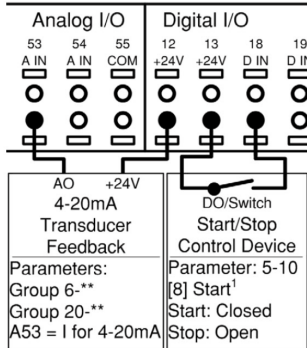

B&G PART NUMBERS

- S100089 Pressure range: 0 - 40 psi (0 - 276 kPa)
- S100091 Pressure range: 0 - 70 psi (0 - 483 kPa)
- S100092 Pressure range: 0 - 100 psi (0 - 689 kPa)



Consult factory for other ranges.

INSTALLATION CONSIDERATIONS

- Standard 18 AWG (1.194 mm dia.) 2 wire shielded cable located in a conduit separate from high voltage wiring
- 24 vdc power supplied from Technologic Controller for distance <2000 ft (610 m)

DIMENSIONAL INFORMATION

Dimensions in Inches (Millimeters)

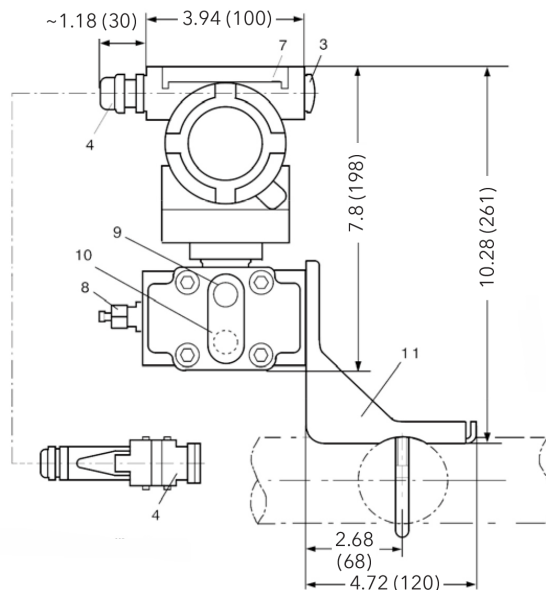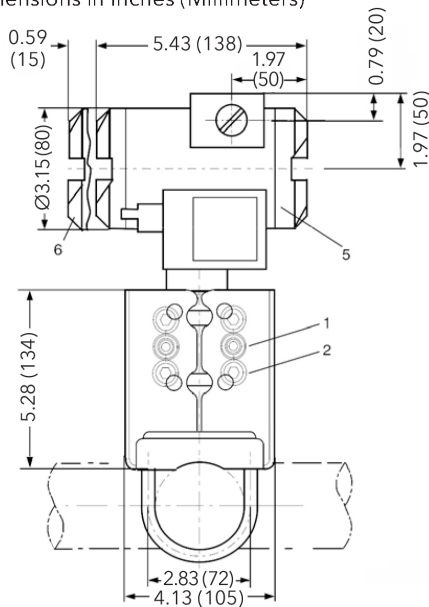

- 1 Process connection 1/4-18NPT for absolute pressure (+) side
- 2 Mounting thread 7/16-20 UNF to EN 61518
- 3 Dummy plug
- 4 Electrical connection: Screwed gland 1/2-14 NPT
- 5 Connection side

- 6 Electronic side, no digital display
- 7 Access cover over magnetic pushbuttons
- 8 Sealing screw with vent shown (optional)
- 9 Side vent for measuring liquid
- 10 Side vent for measuring gas (supplement H02)
- 11 Mounting bracket (2 shackles, 4 nuts, 4 U-plates, 1 angle) made of steel



Flow Sensor/Transmitter For Pumps with TECHNOLOGIC® Drives


The rugged Bell & Gossett Flow Sensor/Transmitter precisely measures system flow and transmits a proportional 4 to 20 mA DC signal to the Technologic Controller for display or program calculations.

FEATURES



- Suitable for mounting in vertical pipe
- Suitable for mounting in horizontal pipe within 45° of top dead center
- Non-magnetically sensed, non-fouling paddle wheel
- NEMA 4X Transmitter Enclosure
- Maximum Pressure Ratings:
 - 1000 psi @ 100°F, 900 psi @ 200°F,
 - 750 psi @ 300°F (6895 kPa @ 38°C, 6205 kPa @ 93°C, 5171 kPa @ 149°C)
- Maximum Temperature Ratings:
 - Fluid - 300°F (149°C) continuous service
 - Electronics - 150°F (66°C)
- Optional software and cable available for field programming
- 9.9 lbs (4.5 kg) approximate weight

DIMENSIONAL INFORMATION

Dimensions in Inches (Millimeters)

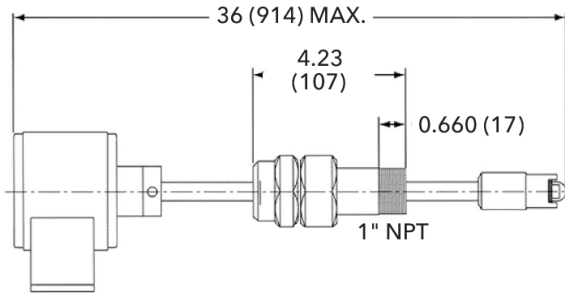

TECHNOLOGIC ANALOG SENSOR WIRING

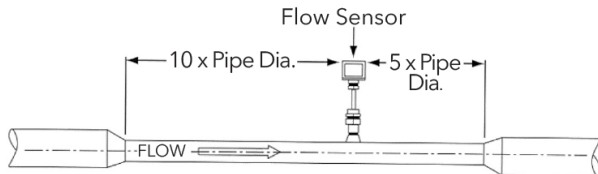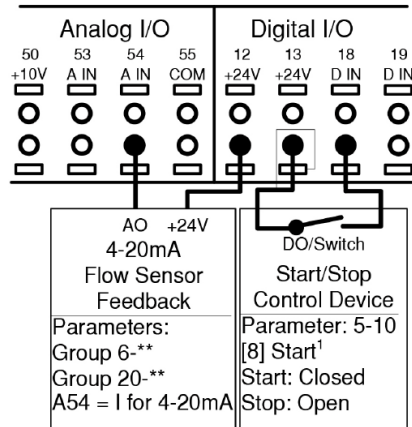


INSTALLATION CONSIDERATIONS

- Standard 18 AWG (1.194 mm dia.) gauge 3 wire shielded cable located in conduit separate from high voltage wiring
- 24 vdc power supplied from Technologic Controller
- Takes accurate readings and relays them to the Technologic Controller up to 2,000 ft. (610 m) away, when 10 pipe diameters upstream and 5 pipe diameters downstream of straight uninterrupted flow is present.

CALIBRATION CHART		
B&G Part No.	Pipe Size	Max. Flow
137411	3" Sch 40	250 gpm (16 l/sec)
137412	4" Sch 40	400 gpm (25 l/sec)
137413	6" Sch 40	850 gpm (54 l/sec)
137414	8" Sch 40	1750 gpm (110 l/sec)
137415	10" Sch 40	3150 gpm (199 l/sec)
137416	12" Sch 40	5000 gpm (315 l/sec)
137417	14" Sch 40	6400 gpm (404 l/sec)
137418	16" Sch 40	9100 gpm (574 l/sec)
137419	18" Sch 40	12400 gpm (782 l/sec)
137420	20" Sch 40	16500 gpm (1041 l/sec)

Consult factory for custom flow range calibration.

JOB:	REPRESENTATIVE:	
UNIT TAG:	ORDER NO.:	DATE:
ENGINEER:	SUBMITTED BY:	DATE:
CONTRACTOR:	APPROVED BY:	DATE:



4x4x7B

Series e-80

In-Line Mounted Centrifugal Pumps

SPECIFICATIONS

FLOW _____ HEAD _____

HP _____ RPM _____

VOLTS _____

CYCLE _____ INPUT PHASE _____

ENCLOSURE _____

APPROX. WEIGHT _____

SPECIALS _____

MATERIALS OF CONSTRUCTION

Stainless Steel Fitted

MAXIMUM WORKING PRESSURE

- 175 psi (12 bar) with 125# ANSI flange drilling
- 250 psi (17 bar) with 250# ANSI flange drilling (requires 80-S)
- 300 psi (21 bar) W.P. with 250# ANSI flange drilling (Requires -S and EPR-Silicon Carbide-Silicon Carbide Seal)

MOUNTING


- In-Line Piping
- Flange Supports

PUMP VARIABLE SPEED CONTROL


- Integrated Technologic® Sensorless Control (ITSC)
- Integrated Technologic® (IT)
 - External input by others
 - Pressure Sensor(s)
 - Differential Pressure Sensor(s)
 - Flow Sensor(s)
- By Others

TYPE OF SEAL

- F Standard Seal w/ Flush Line (Buna-Carbon/Ceramic)
- S Stuffing Box construction w/ Flushed Mechanical Single Seal (EPR-Tungsten Carbide/Carbon)
- PF Stuffing Box Construction w/ Flushed Packing (Graphite Impregnated PTFE)

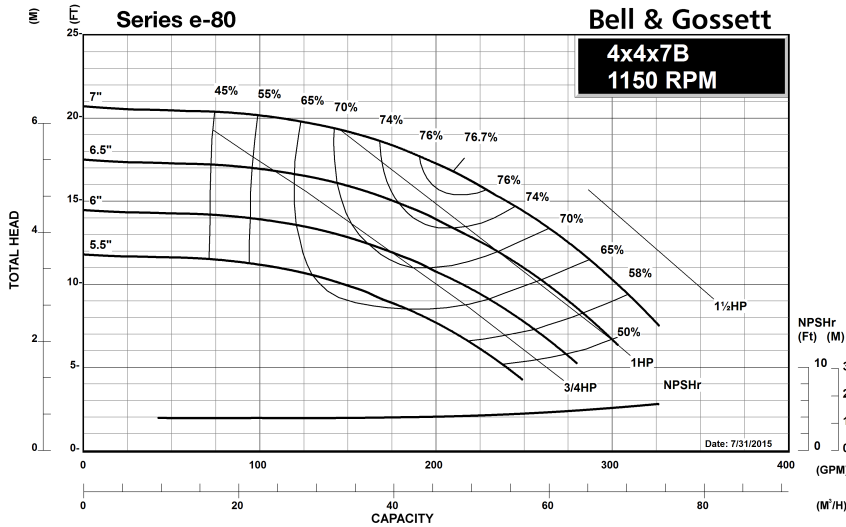

JOB:	REPRESENTATIVE:	
UNIT TAG:	ORDER NO.:	DATE:
ENGINEER:	SUBMITTED BY:	DATE:
CONTRACTOR:	APPROVED BY:	DATE:



4x4x7B

Series e-80

In-Line Mounted Centrifugal Pumps

SPECIFICATIONS

FLOW _____ HEAD _____

HP _____ RPM _____

VOLTS _____

CYCLE _____ INPUT PHASE _____

ENCLOSURE _____

APPROX. WEIGHT _____

SPECIALS _____

MATERIALS OF CONSTRUCTION

Stainless Steel Fitted

MAXIMUM WORKING PRESSURE

- 175 psi (12 bar) with 125# ANSI flange drilling
- 250 psi (17 bar) with 250# ANSI flange drilling (requires 80-S)
- 300 psi (21 bar) W.P. with 250# ANSI flange drilling (Requires -S and EPR-Silicon Carbide-Silicon Carbide Seal)

MOUNTING


- In-Line Piping
- Flange Supports

PUMP VARIABLE SPEED CONTROL


- Integrated Technologic® Sensorless Control (ITSC)
- Integrated Technologic® (IT)
 - External input by others
 - Pressure Sensor(s)
 - Differential Pressure Sensor(s)
 - Flow Sensor(s)
- By Others

TYPE OF SEAL

- F Standard Seal w/ Flush Line (Buna-Carbon/Ceramic)
- S Stuffing Box construction w/ Flushed Mechanical Single Seal (EPR-Tungsten Carbide/Carbon)
- PF Stuffing Box Construction w/ Flushed Packing (Graphite Impregnated PTFE)

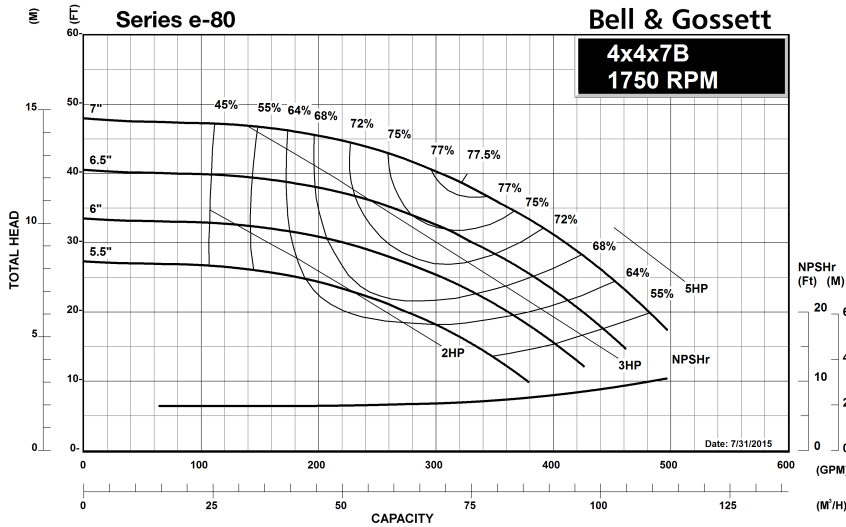

JOB:	REPRESENTATIVE:	
UNIT TAG:	ORDER NO.:	DATE:
ENGINEER:	SUBMITTED BY:	DATE:
CONTRACTOR:	APPROVED BY:	DATE:



4x4x7B

Series e-80

In-Line Mounted Centrifugal Pumps

SPECIFICATIONS

FLOW _____ HEAD _____

HP _____ RPM _____

VOLTS _____

CYCLE _____ INPUT PHASE _____

ENCLOSURE _____

APPROX. WEIGHT _____

SPECIALS _____

MATERIALS OF CONSTRUCTION

Stainless Steel Fitted

MAXIMUM WORKING PRESSURE

- 175 psi (12 bar) with 125# ANSI flange drilling
- 250 psi (17 bar) with 250# ANSI flange drilling (requires 80-S)
- 300 psi (21 bar) W.P. with 250# ANSI flange drilling (Requires -S and EPR-Silicon Carbide-Silicon Carbide Seal)

MOUNTING


- In-Line Piping
- Flange Supports


PUMP VARIABLE SPEED CONTROL

- Integrated Technologic® Sensorless Control (ITSC)
- Integrated Technologic® (IT)
 - External input by others
 - Pressure Sensor(s)
 - Differential Pressure Sensor(s)
 - Flow Sensor(s)
- By Others

TYPE OF SEAL

- F Standard Seal w/ Flush Line (Buna-Carbon/Ceramic)
- S Stuffing Box construction w/ Flushed Mechanical Single Seal (EPR-Tungsten Carbide/Carbon)
- PF Stuffing Box Construction w/ Flushed Packing (Graphite Impregnated PTFE)

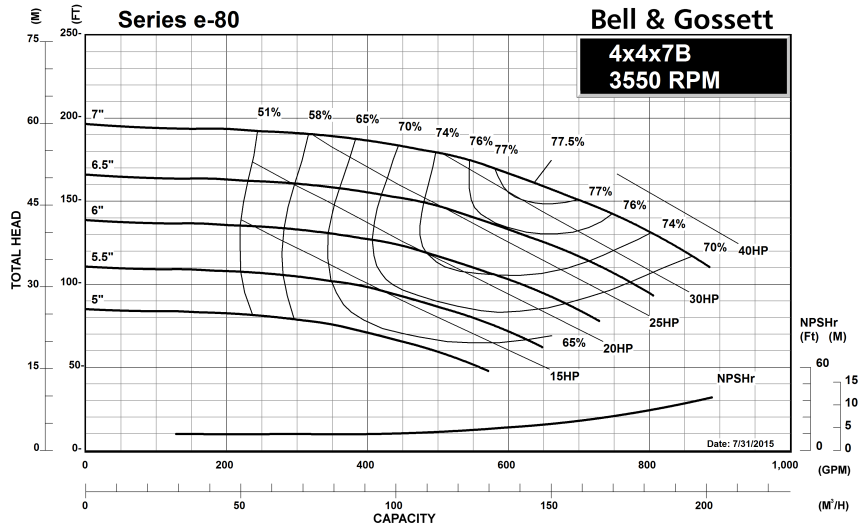

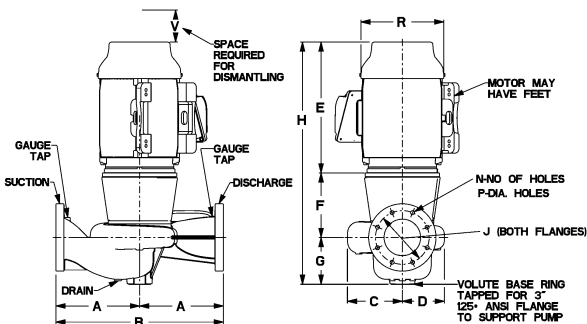

4x4x7B Series e-80 Centrifugal Pump Submittal - In-Line Piping

DIMENSIONS - Inches (mm)

STANDARD SEAL

MOTOR FRAME	A	B	C	D	E (max)	F	G	H (max)	125# ANSI			250# ANSI			R	S (Max)*	V (min)	Suct/Disch Gauge Taps (NPT)	Drain Tap (NPT)
									J	N	P	J	N	P					
145JM	10.50 (267)	21.00 (533)	5.28 (134)	6.53 (166)	12.63 (321)	5.13 (130)	6.57 (167)	24.32 (618)	7.50 (191)	8	0.75 (19)	7.88 (200)	8	0.88 (22)	9.75 (248)	1.50 (38)	5.00 (127)	0.25	0.25
182JM	10.50 (267)	21.00 (533)	5.28 (134)	6.53 (166)	15.31 (389)	5.13 (130)	6.57 (167)	27.01 (686)	7.50 (191)	8	0.75 (19)	7.88 (200)	8	0.88 (22)	11.75 (298)	1.00 (25)	5.00 (127)	0.25	0.25
184JM	10.50 (267)	21.00 (533)	5.28 (134)	6.53 (166)	15.31 (389)	5.13 (130)	6.57 (167)	27.01 (686)	7.50 (191)	8	0.75 (19)	7.88 (200)	8	0.88 (22)	11.75 (298)	1.00 (25)	5.00 (127)	0.25	0.25
213JM	10.50 (267)	21.00 (533)	5.28 (134)	6.53 (166)	19.25 (489)	5.13 (130)	6.57 (167)	30.94 (786)	7.50 (191)	8	0.75 (19)	7.88 (200)	8	0.88 (22)	14.00 (356)	-	5.00 (127)	0.25	0.25
215JM	10.50 (267)	21.00 (533)	5.28 (134)	6.53 (166)	19.25 (489)	5.13 (130)	6.57 (167)	30.94 (786)	7.50 (191)	8	0.75 (19)	7.88 (200)	8	0.88 (22)	14.00 (356)	-	5.00 (127)	0.25	0.25
254JM	10.50 (267)	21.00 (533)	5.28 (134)	6.53 (166)	24.13 (613)	6.13 (156)	6.57 (167)	36.82 (935)	7.50 (191)	8	0.75 (19)	7.88 (200)	8	0.88 (22)	17.00 (432)	-	5.00 (127)	0.25	0.25
256JM	10.50 (267)	21.00 (533)	5.28 (134)	6.53 (166)	24.13 (613)	6.13 (156)	6.57 (167)	36.82 (935)	7.50 (191)	8	0.75 (19)	7.88 (200)	8	0.88 (22)	17.00 (432)	-	5.00 (127)	0.25	0.25
284JM	10.50 (267)	21.00 (533)	5.28 (134)	6.53 (166)	23.63 (600)	6.13 (156)	6.57 (167)	36.32 (922)	7.50 (191)	8	0.75 (19)	7.88 (200)	8	0.88 (22)	16.13 (410)	4.63 (117)	5.00 (127)	0.25	0.25
286JP	9.50 (241)	19.00 (483)	5.88 (149)	6.25 (159)	25.13 (638)	8.56 (217)	4.50 (114)	38.25 (972)	3.88 (98)	4	0.63 (16)	4.50 (114)	4	0.88 (22)	16.13 (410)	4.63 (117)	4.00 (102)	0.25	0.25

STUFFING BOX

MOTOR FRAME	A	B	C	D	E (max)	F	G	H (max)	125# ANSI			250# ANSI			R	S (Max)*	V (min)	Suct/Disch Gauge Taps (NPT)	Drain Tap (NPT)
									J	N	P	J	N	P					
145JP	10.50 (267)	21.00 (533)	5.28 (134)	6.53 (166)	12.63 (321)	8.25 (210)	6.57 (167)	27.44 (697)	7.50 (191)	8	0.75 (19)	7.88 (200)	8	0.88 (22)	9.75 (248)	1.50 (38)	5.00 (127)	0.25	0.25
182JP	10.50 (267)	21.00 (533)	5.28 (134)	6.53 (166)	15.31 (389)	8.25 (210)	6.57 (167)	30.13 (765)	7.50 (191)	8	0.75 (19)	7.88 (200)	8	0.88 (22)	11.75 (298)	1.00 (25)	5.00 (127)	0.25	0.25
184JP	10.50 (267)	21.00 (533)	5.28 (134)	6.53 (166)	15.31 (389)	8.25 (210)	6.57 (167)	30.13 (765)	7.50 (191)	8	0.75 (19)	7.88 (200)	8	0.88 (22)	11.75 (298)	1.00 (25)	5.00 (127)	0.25	0.25
213JP	10.50 (267)	21.00 (533)	5.28 (134)	6.53 (166)	19.25 (489)	9.00 (229)	6.57 (167)	34.82 (884)	7.50 (191)	8	0.75 (19)	7.88 (200)	8	0.88 (22)	14.00 (356)	-	5.00 (127)	0.25	0.25
215JP	10.50 (267)	21.00 (533)	5.28 (134)	6.53 (166)	19.25 (489)	9.00 (229)	6.57 (167)	34.82 (884)	7.50 (191)	8	0.75 (19)	7.88 (200)	8	0.88 (22)	14.00 (356)	-	5.00 (127)	0.25	0.25
254JP	10.50 (267)	21.00 (533)	5.28 (134)	6.53 (166)	24.13 (613)	9.00 (229)	6.57 (167)	39.69 (1008)	7.50 (191)	8	0.75 (19)	7.88 (200)	8	0.88 (22)	17.00 (432)	-	5.00 (127)	0.25	0.25
256JP	10.50 (267)	21.00 (533)	5.28 (134)	6.53 (166)	24.13 (613)	9.00 (229)	6.57 (167)	39.69 (1008)	7.50 (191)	8	0.75 (19)	7.88 (200)	8	0.88 (22)	17.00 (432)	-	5.00 (127)	0.25	0.25
284JP	10.50 (267)	21.00 (533)	5.28 (134)	6.53 (166)	23.63 (600)	9.00 (229)	6.57 (167)	39.19 (995)	7.50 (191)	8	0.75 (19)	7.88 (200)	8	0.88 (22)	16.13 (410)	4.63 (117)	5.00 (127)	0.25	0.25
286JP	9.50 (241)	19.00 (483)	5.88 (149)	6.25 (159)	25.13 (638)	8.56 (217)	4.50 (114)	38.13 (968)	3.88 (98)	4	0.63 (16)	4.50 (114)	4	0.88 (22)	16.13 (410)	4.63 (117)	4.00 (102)	0.25	0.25


Dimensions are subject to change. Not to be used for construction purposes unless certified.

NOTE: For Single phase Motors add 1" to dimensions E & H.

*Dimensions are for ODP Motors. For TEFC add S dimension to dimensions E & H.

Xylem Inc.
8200 N. Austin Avenue, Morton Grove, IL 60053
Phone: (847)966-3700 Fax: (847)965-8379
www.bellgossett.com
Bell & Gossett is a trademark of Xylem Inc. or one of its subsidiaries.
© 2015 Xylem Inc.



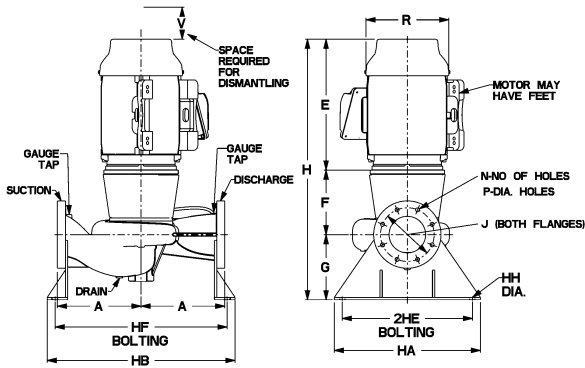

4x4x7B Series e-80 Centrifugal Pump Submittal - Flange Support Mounting

DIMENSIONS - Inches (mm)

STANDARD SEAL

MOTOR FRAME	A	HF BOLTING	HB	2HE BOLTING	HA	HH DIA	E (max)	F	G	H (max)	125# ANSI			250# ANSI			R	S (Max)*	V (min)	Suct/Disch Gauge Taps (NPT)	Drain Tap (NPT)
											J	N	P	J	N	P					
145JM	10.50 (267)	22.66 (576)	26.16 (664)	21.50 (546)	25.00 (635)	0.88 (22)	12.63 (321)	5.13 (130)	6.57 (167)	24.32 (618)	7.50 (191)	8 (19)	0.75 (200)	7.88 (200)	8 (22)	0.88 (248)	9.75 (248)	1.50 (38)	5.00 (127)	0.25	0.25
182JM	10.50 (267)	22.66 (576)	26.16 (664)	21.50 (546)	25.00 (635)	0.88 (22)	15.31 (389)	5.13 (130)	6.57 (167)	27.01 (686)	7.50 (191)	8 (19)	0.75 (200)	7.88 (200)	8 (22)	0.88 (298)	11.75 (298)	1.00 (25)	5.00 (127)	0.25	0.25
184JM	10.50 (267)	22.66 (576)	26.16 (664)	21.50 (546)	25.00 (635)	0.88 (22)	15.31 (389)	5.13 (130)	6.57 (167)	27.01 (686)	7.50 (191)	8 (19)	0.75 (200)	7.88 (200)	8 (22)	0.88 (298)	11.75 (298)	1.00 (25)	5.00 (127)	0.25	0.25
213JM	10.50 (267)	22.66 (576)	26.16 (664)	21.50 (546)	25.00 (635)	0.88 (22)	19.25 (489)	5.13 (130)	6.57 (167)	30.94 (786)	7.50 (191)	8 (19)	0.75 (200)	7.88 (200)	8 (22)	0.88 (356)	14.00 (356)	-	5.00 (127)	0.25	0.25
215JM	10.50 (267)	22.66 (576)	26.16 (664)	21.50 (546)	25.00 (635)	0.88 (22)	19.25 (489)	5.13 (130)	6.57 (167)	30.94 (786)	7.50 (191)	8 (19)	0.75 (200)	7.88 (200)	8 (22)	0.88 (356)	14.00 (356)	-	5.00 (127)	0.25	0.25
254JP	10.50 (267)	22.66 (576)	26.16 (664)	21.50 (546)	25.00 (635)	0.88 (22)	24.13 (613)	6.13 (156)	6.57 (167)	36.82 (935)	7.50 (191)	8 (19)	0.75 (200)	7.88 (200)	8 (22)	0.88 (432)	17.00 (432)	-	5.00 (127)	0.25	0.25
256JP	10.50 (267)	22.66 (576)	26.16 (664)	21.50 (546)	25.00 (635)	0.88 (22)	24.13 (613)	6.13 (156)	6.57 (167)	36.82 (935)	7.50 (191)	8 (19)	0.75 (200)	7.88 (200)	8 (22)	0.88 (432)	17.00 (432)	-	5.00 (127)	0.25	0.25
284JP	10.50 (267)	22.66 (576)	26.16 (664)	21.50 (546)	25.00 (635)	0.88 (22)	23.63 (600)	6.13 (156)	6.57 (167)	36.32 (922)	7.50 (191)	8 (19)	0.75 (200)	7.88 (200)	8 (22)	0.88 (410)	16.13 (410)	4.63 (117)	5.00 (127)	0.25	0.25


STUFFING BOX

MOTOR FRAME	A	HF BOLTING	HB	2HE BOLTING	HA	HH DIA	E (max)	F	G	H (max)	125# ANSI			250# ANSI			R	S (Max)*	V (min)	Suct/Disch Gauge Taps (NPT)	Drain Tap (NPT)
											J	N	P	J	N	P					
145JP	10.50 (267)	22.66 (576)	26.16 (664)	21.50 (546)	25.00 (635)	0.88 (22)	12.63 (321)	8.25 (210)	6.57 (167)	27.44 (697)	7.50 (191)	8 (19)	0.75 (200)	7.88 (200)	8 (22)	0.88 (248)	9.75 (248)	1.50 (38)	5.00 (127)	0.25	0.25
182JP	10.50 (267)	22.66 (576)	26.16 (664)	21.50 (546)	25.00 (635)	0.88 (22)	15.31 (389)	8.25 (210)	6.57 (167)	30.13 (765)	7.50 (191)	8 (19)	0.75 (200)	7.88 (200)	8 (22)	0.88 (298)	11.75 (298)	1.00 (25)	5.00 (127)	0.25	0.25
184JP	10.50 (267)	22.66 (576)	26.16 (664)	21.50 (546)	25.00 (635)	0.88 (22)	15.31 (389)	8.25 (210)	6.57 (167)	30.13 (765)	7.50 (191)	8 (19)	0.75 (200)	7.88 (200)	8 (22)	0.88 (298)	11.75 (298)	1.00 (25)	5.00 (127)	0.25	0.25
213JP	10.50 (267)	22.66 (576)	26.16 (664)	21.50 (546)	25.00 (635)	0.88 (22)	19.25 (489)	9.00 (229)	6.57 (167)	34.82 (884)	7.50 (191)	8 (19)	0.75 (200)	7.88 (200)	8 (22)	0.88 (356)	14.00 (356)	-	5.00 (127)	0.25	0.25
215JP	10.50 (267)	22.66 (576)	26.16 (664)	21.50 (546)	25.00 (635)	0.88 (22)	19.25 (489)	9.00 (229)	6.57 (167)	34.82 (884)	7.50 (191)	8 (19)	0.75 (200)	7.88 (200)	8 (22)	0.88 (356)	14.00 (356)	-	5.00 (127)	0.25	0.25
254JP	10.50 (267)	22.66 (576)	26.16 (664)	21.50 (546)	25.00 (635)	0.88 (22)	24.13 (613)	9.00 (229)	6.57 (167)	39.69 (1008)	7.50 (191)	8 (19)	0.75 (200)	7.88 (200)	8 (22)	0.88 (432)	17.00 (432)	-	5.00 (127)	0.25	0.25
256JP	10.50 (267)	22.66 (576)	26.16 (664)	21.50 (546)	25.00 (635)	0.88 (22)	24.13 (613)	9.00 (229)	6.57 (167)	39.69 (1008)	7.50 (191)	8 (19)	0.75 (200)	7.88 (200)	8 (22)	0.88 (432)	17.00 (432)	-	5.00 (127)	0.25	0.25
284JP	10.50 (267)	22.66 (576)	26.16 (664)	21.50 (546)	25.00 (635)	0.88 (22)	23.63 (600)	9.00 (229)	6.57 (167)	39.19 (995)	7.50 (191)	8 (19)	0.75 (200)	7.88 (200)	8 (22)	0.88 (410)	16.13 (410)	4.63 (117)	5.00 (127)	0.25	0.25

Dimensions are subject to change. Not to be used for construction purposes unless certified.



NOTE: For Single phase Motors add 1" to dimensions E & H.

*Dimensions are for ODP Motors. For TEFC add S dimension to dimensions E & H.



4x4x7B Series e-80 In-Line Mounted Centrifugal Pumps With Integrated Technologic® Control

TECHNOLOGIC STANDARD FEATURES	
CONTROL METHOD WITH INTEGRATED TECHNOLOGIC® SENSORLESS CONTROL (ITSC)	Factory configured for sensorless operation.
CONTROL METHOD WITH INTEGRATED TECHNOLOGIC® (IT)	Field configurable for sensor by others, building management system input, or optional sensor(s) provided.
ENCLOSURE	NEMA 12 (same as IP55 & UL type 12)
POWER DISCONNECT SWITCH	Included standard. Fused Disconnect Switch optional with three phase input voltage.
HARMONIC SUPPRESSION	Integrated non-saturating dual DC link reactors provide better harmonic performance than a 5% AC line reactor.
COOLING	Fan-cooled through temperature controlled and easy replacement.
AMBIENT TEMPERATURE RATING	14°F to 113°F (-10°C to 45°C)
COMMUNICATION PROTOCOLS	BACnet, Modbus RTU, N2 Metasys, FLN Apogee
ANALOG INPUTS	2 configurable for either voltage (0 to 10VDC) or current(0/4 to 20mA)
ANALOG OUTPUTS	1 (0/4 to 20mA) up to 500 ohm load accurate to 1% of full scale
DIGITAL INPUTS	4 (0 to 24VDC), NPN or PNP, 0 to 24VDC, on 5 msec scan interval, Up to 2 can be configured as pulse inputs.
DIGITAL OUTPUTS	2 (0 to 24VDC), 40mA max current, configurable as pulse outputs.
RELAY OUTPUTS	2 programmable, 240VAC or 400VAC up to 2 A
MINIMUM CONTROL HEAD	_____ ft (default set to 40% of design head if not unknown)

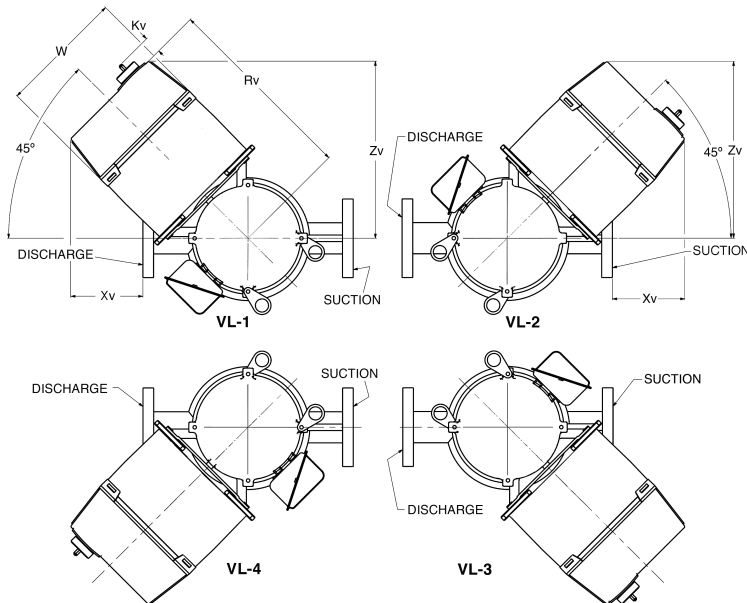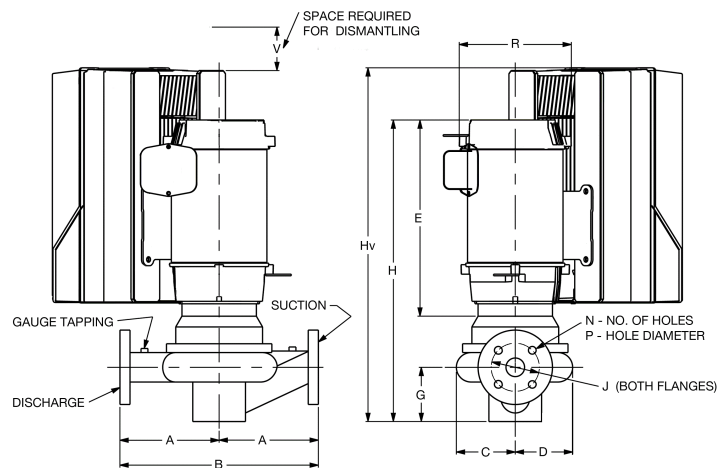

Series e-80 4x4x7B

In-Line Mounted Centrifugal Pumps

With Integrated Technologic® Control

B-139.18

DIMENSIONS - Inches (mm)							STANDARD SEAL						STUFFING BOX														
MOTOR FRAME	VFD	Rv	Zv	W	Hv	Xv	MOTOR FRAME	VFD	Rv	Zv	W	Hv	Xv	MOTOR FRAME	VFD	Rv	Zv	W	Hv	Xv							
145JM	A5	11.78 (299)	11.33 (288)	9.50 (241)	30.77 (781)	0.83 (21)	145JP	A5	11.78 (299)	11.33 (288)	9.50 (241)	33.89 (861)	0.83 (21)	182JM	A5	12.78 (325)	12.03 (306)	9.50 (241)	29.97 (761)	1.53 (39)	182JP	A5	12.78 (325)	12.03 (306)	9.50 (241)	33.09 (841)	1.53 (39)
	B1	14.07 (357)	12.93 (328)	9.50 (241)	33.12 (841)	2.43 (62)		B1	14.07 (357)	12.93 (328)	9.50 (241)	36.24 (921)	2.43 (62)		B1	15.07 (383)	13.63 (346)	9.50 (241)	30.97 (787)	3.13 (80)		B1	15.07 (383)	13.63 (346)	9.50 (241)	34.09 (866)	3.13 (80)
184JM	A5	12.78 (325)	12.03 (306)	9.50 (241)	29.97 (761)	1.53 (39)	184JP	A5	12.78 (325)	12.03 (306)	9.50 (241)	33.09 (841)	1.53 (39)	213JM	A5	12.78 (325)	12.03 (306)	9.50 (241)	29.97 (761)	1.53 (39)	213JP	A5	12.78 (325)	12.03 (306)	9.50 (241)	33.09 (841)	1.53 (39)
	B1	15.07 (383)	13.63 (346)	9.50 (241)	30.97 (787)	3.13 (80)		B1	15.07 (383)	13.63 (346)	9.50 (241)	34.09 (866)	3.13 (80)		B1	15.83 (402)	14.22 (361)	9.50 (241)	34.92 (887)	3.72 (94)		B1	15.83 (402)	14.22 (361)	9.50 (241)	38.80 (985)	3.72 (94)
215JM	B1	15.83 (402)	14.22 (361)	9.50 (241)	40.66 (1033)	3.72 (94)	215JP	B1	15.83 (402)	14.22 (361)	9.50 (241)	44.54 (1131)	3.72 (94)	254JM	B1	15.83 (402)	14.22 (361)	9.50 (241)	33.39 (848)	3.72 (94)	254JP	B1	15.83 (402)	14.22 (361)	9.50 (241)	37.27 (947)	3.72 (94)
	B2	15.83 (402)	14.22 (361)	9.50 (241)	39.13 (994)	3.72 (94)		B2	15.83 (402)	14.22 (361)	9.50 (241)	43.01 (1092)	3.72 (94)		B2	16.83 (427)	14.92 (379)	9.50 (241)	44.08 (1120)	4.42 (112)		B2	16.83 (427)	14.92 (379)	9.50 (241)	44.08 (1120)	4.42 (112)
	C1	17.80 (452)	17.42 (442)	12.10 (307)	41.15 (1045)	6.92 (176)		C1	17.80 (452)	17.42 (442)	12.10 (307)	45.03 (1144)	6.92 (176)		C1	18.80 (477)	18.12 (460)	12.10 (307)	45.34 (1152)	7.62 (194)		C1	18.80 (477)	18.12 (460)	12.10 (307)	45.34 (1152)	7.62 (194)
256JM	B1	16.83 (427)	14.92 (379)	9.50 (241)	39.00 (991)	4.42 (112)	256JP	B1	16.83 (427)	14.92 (379)	9.50 (241)	39.00 (991)	4.42 (112)	284JM	B1	16.83 (427)	14.92 (379)	9.50 (241)	39.00 (991)	4.42 (112)	284JP	B1	16.83 (427)	14.92 (379)	9.50 (241)	39.00 (991)	4.42 (112)
	B2	16.83 (427)	14.92 (379)	9.50 (241)	43.45 (1104)	4.42 (112)		B2	16.83 (427)	14.92 (379)	9.50 (241)	43.45 (1104)	4.42 (112)		B2	17.58 (446)	15.45 (393)	9.50 (241)	38.38 (975)	4.95 (126)		B2	17.58 (446)	15.45 (393)	9.50 (241)	38.38 (975)	4.95 (126)
	C1	18.83 (478)	17.09 (434)	12.09 (307)	44.34 (1126)	6.59 (167)		C1	18.83 (478)	17.09 (434)	12.09 (307)	44.34 (1126)	6.59 (167)		C1	19.58 (497)	17.63 (448)	12.09 (307)	45.23 (1149)	7.13 (181)		C1	19.58 (497)	17.63 (448)	12.09 (307)	45.23 (1149)	7.13 (181)
	C2	19.61 (498)	19.39 (493)	14.59 (371)	49.00 (1245)	8.89 (226)		C2	19.61 (498)	19.39 (493)	14.59 (371)	49.00 (1245)	8.89 (226)		C2	20.36 (517)	19.93 (506)	14.59 (371)	48.38 (1229)	9.43 (239)		C2	20.36 (517)	19.93 (506)	14.59 (371)	48.38 (1229)	9.43 (239)

NOTE: Drives with single phase input have three phase output and include three phase motors.

Kv=2 (50)

Xylem Inc.
 8200 N. Austin Avenue, Morton Grove, IL 60053
 Phone: (847)966-3700 Fax: (847)965-8379
 www.bellgossett.com
 Bell & Gossett is a trademark of Xylem Inc. or one of its subsidiaries.
 © 2015 Xylem Inc.

xylem
 Let's Solve Water




Pressure Sensor/Transmitter For Pumps with TECHNOLOGIC® Drives

FEATURES

- 4-20mA output
- 10-28 VDC supply voltage
- Operating Temperature -40 to 85°C (-40 to 185°F)
- Storage Temperature -40 to 100°C (-40 to 212°F)
- Enclosure IP-66 (housing only)
- High Strength Stainless Steel Construction
- No Oil, Welds or Internal O-rings
- Wide Operating Temperature
- Low Static and Thermal Errors
- Compatible with Wide Variety of Liquids and Gases
- EMI/RFI Protection
- UL/cUL 508 Approved (with housing)
- 1lb. (0.45 kg) approximate weight

TECHNOLOGIC ANALOG SENSOR WIRING

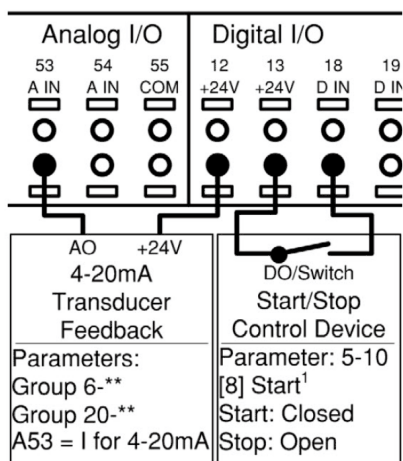

B&G PART NUMBERS

- S13203 Pressure range: 0-100 psi (0-689 kPa)
- S13204 Pressure range: 0-300 psi (0-2068 kPa)


Consult factory for other ranges.


INSTALLATION CONSIDERATIONS

- Standard 24 AWG (0.61 mm dia.) 2 wire shielded cable located in a conduit separate from high voltage wiring
- 24 vdc power supplied from Technologic Controller

DIMENSIONAL INFORMATION

Dimensions in Inches (Millimeters)

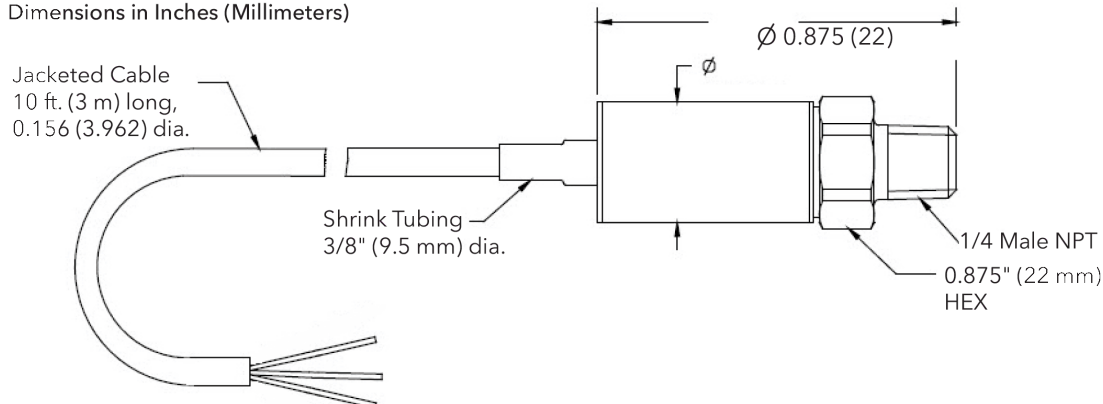

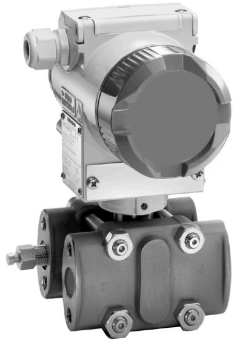


Differential Pressure Sensor/ Transmitter For Pumps with TECHNOLOGIC® Drives

FEATURES

- Relays reading to the Technologic controller up to 2000 ft. (610 m) away
- All wetted parts are 316 stainless steel
- Built-in RFI filter effective from 20 to 1000 MHz
- Withstands static pressures up to 2300 PSI (15858 kPa)
- 3 Valve bypass manifold (optional)
- 10 lbs. (4.5 kg) approximate weight

TECHNOLOGIC ANALOG SENSOR WIRING

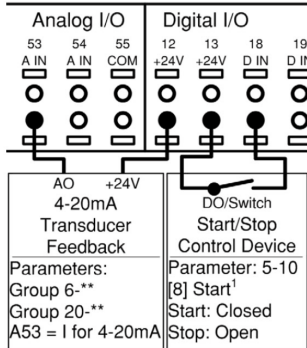

B&G PART NUMBERS

- S100089 Pressure range: 0 - 40 psi (0 - 276 kPa)
- S100091 Pressure range: 0 - 70 psi (0 - 483 kPa)
- S100092 Pressure range: 0 - 100 psi (0 - 689 kPa)


Consult factory for other ranges.

INSTALLATION CONSIDERATIONS

- Standard 18 AWG (1.194 mm dia.) 2 wire shielded cable located in a conduit separate from high voltage wiring
- 24 vdc power supplied from Technologic Controller for distance <2000 ft (610 m)

DIMENSIONAL INFORMATION

Dimensions in Inches (Millimeters)

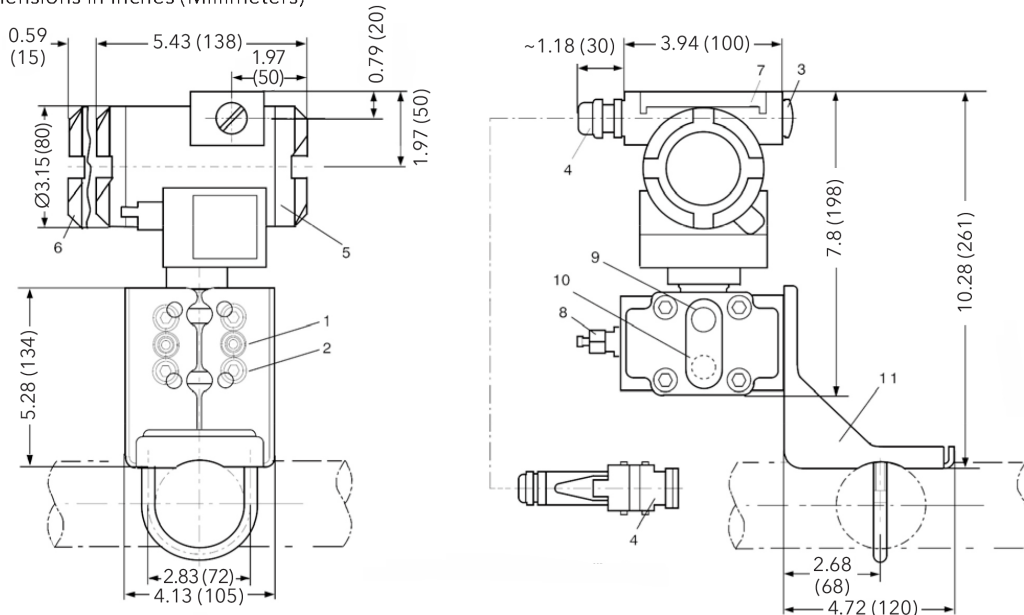

- 1 Process connection 1/4-18NPT for absolute pressure (+) side
- 2 Mounting thread 7/16-20 UNF to EN 61518
- 3 Dummy plug
- 4 Electrical connection: Screwed gland 1/2-14 NPT
- 5 Connection side

- 6 Electronic side, no digital display
- 7 Access cover over magnetic pushbuttons
- 8 Sealing screw with vent shown (optional)
- 9 Side vent for measuring liquid
- 10 Side vent for measuring gas (supplement H02)
- 11 Mounting bracket (2 shackles, 4 nuts, 4 U-plates, 1 angle) made of steel



Flow Sensor/Transmitter For Pumps with TECHNOLOGIC® Drives


The rugged Bell & Gossett Flow Sensor/Transmitter precisely measures system flow and transmits a proportional 4 to 20 mA DC signal to the Technologic Controller for display or program calculations.

FEATURES



- Suitable for mounting in vertical pipe
- Suitable for mounting in horizontal pipe within 45° of top dead center
- Non-magnetically sensed, non-fouling paddle wheel
- NEMA 4X Transmitter Enclosure
- Maximum Pressure Ratings:
 - 1000 psi @ 100°F, 900 psi @ 200°F,
 - 750 psi @ 300°F (6895 kPa @ 38°C, 6205 kPa @ 93°C, 5171 kPa @ 149°C)
- Maximum Temperature Ratings:
 - Fluid - 300°F (149°C) continuous service
 - Electronics - 150°F (66°C)
- Optional software and cable available for field programming
- 9.9 lbs (4.5 kg) approximate weight

DIMENSIONAL INFORMATION

Dimensions in Inches (Millimeters)

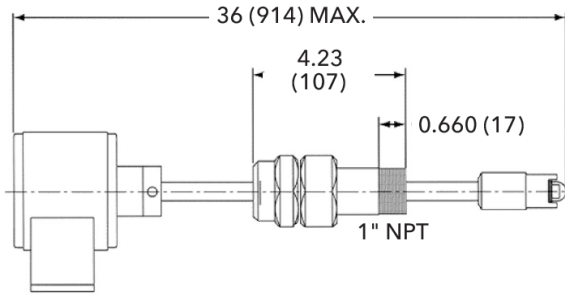

TECHNOLOGIC ANALOG SENSOR WIRING

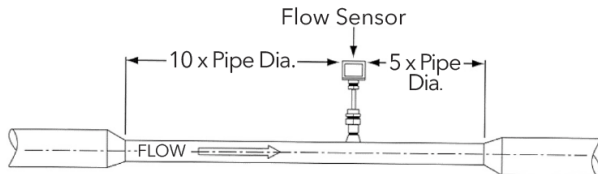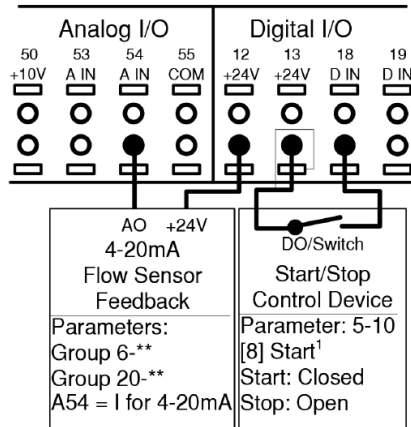


INSTALLATION CONSIDERATIONS

- Standard 18 AWG (1.194 mm dia.) gauge 3 wire shielded cable located in conduit separate from high voltage wiring
- 24 vdc power supplied from Technologic Controller
- Takes accurate readings and relays them to the Technologic Controller up to 2,000 ft. (610 m) away, when 10 pipe diameters upstream and 5 pipe diameters downstream of straight uninterrupted flow is present.

CALIBRATION CHART		
B&G Part No.	Pipe Size	Max. Flow
137411	3" Sch 40	250 gpm (16 l/sec)
137412	4" Sch 40	400 gpm (25 l/sec)
137413	6" Sch 40	850 gpm (54 l/sec)
137414	8" Sch 40	1750 gpm (110 l/sec)
137415	10" Sch 40	3150 gpm (199 l/sec)
137416	12" Sch 40	5000 gpm (315 l/sec)
137417	14" Sch 40	6400 gpm (404 l/sec)
137418	16" Sch 40	9100 gpm (574 l/sec)
137419	18" Sch 40	12400 gpm (782 l/sec)
137420	20" Sch 40	16500 gpm (1041 l/sec)

Consult factory for custom flow range calibration.

JOB:	REPRESENTATIVE:	
UNIT TAG:	ORDER NO.:	DATE:
ENGINEER:	SUBMITTED BY:	DATE:
CONTRACTOR:	APPROVED BY:	DATE:



4x4x9.5B

Series e-80

In-Line Mounted Centrifugal Pumps

SPECIFICATIONS

FLOW _____ HEAD _____

HP _____ RPM _____

VOLTS _____

CYCLE _____ INPUT PHASE _____

ENCLOSURE _____

APPROX. WEIGHT _____

SPECIALS _____

MATERIALS OF CONSTRUCTION

Stainless Steel Fitted

MAXIMUM WORKING PRESSURE

- 175 psi (12 bar) with 125# ANSI flange drilling
- 250 psi (17 bar) with 250# ANSI flange drilling (requires 80-S)
- 300 psi (21 bar) W.P. with 250# ANSI flange drilling (Requires -S and EPR-Silicon Carbide-Silicon Carbide Seal)

MOUNTING


- In-Line Piping
- Flange Supports

PUMP VARIABLE SPEED CONTROL


- Integrated Technologic® Sensorless Control (ITSC)
- Integrated Technologic® (IT)
 - External input by others
 - Pressure Sensor(s)
 - Differential Pressure Sensor(s)
 - Flow Sensor(s)
- By Others

TYPE OF SEAL

- F Standard Seal w/ Flush Line (Buna-Carbon/Ceramic)
- S Stuffing Box construction w/ Flushed Mechanical Single Seal (EPR-Tungsten Carbide/Carbon)
- PF Stuffing Box Construction w/ Flushed Packing (Graphite Impregnated PTFE)

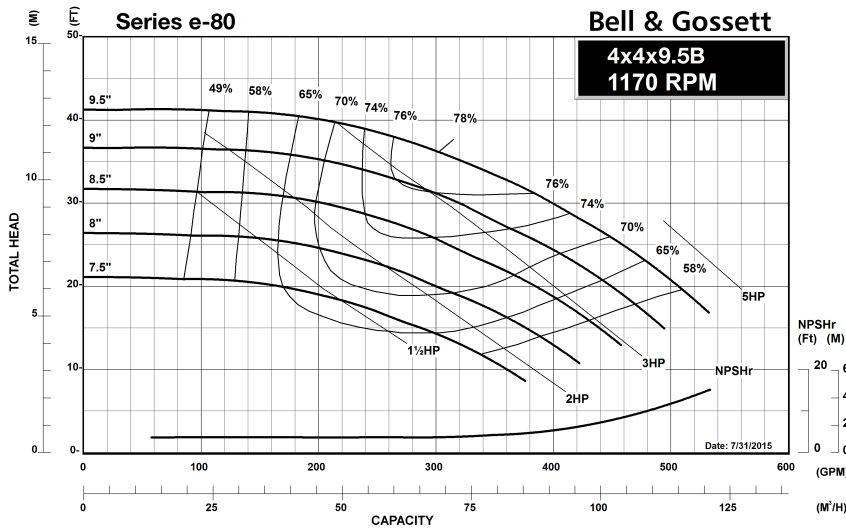

JOB:	REPRESENTATIVE:	
UNIT TAG:	ORDER NO.:	DATE:
ENGINEER:	SUBMITTED BY:	DATE:
CONTRACTOR:	APPROVED BY:	DATE:



4x4x9.5B

Series e-80

In-Line Mounted Centrifugal Pumps

SPECIFICATIONS

FLOW _____ HEAD _____

HP _____ RPM _____

VOLTS _____

CYCLE _____ INPUT PHASE _____

ENCLOSURE _____

APPROX. WEIGHT _____

SPECIALS _____

MATERIALS OF CONSTRUCTION

Stainless Steel Fitted

MAXIMUM WORKING PRESSURE

- 175 psi (12 bar) with 125# ANSI flange drilling
- 250 psi (17 bar) with 250# ANSI flange drilling (requires 80-S)
- 300 psi (21 bar) W.P. with 250# ANSI flange drilling (Requires -S and EPR-Silicon Carbide-Silicon Carbide Seal)

MOUNTING


- In-Line Piping
- Flange Supports


PUMP VARIABLE SPEED CONTROL

- Integrated Technologic® Sensorless Control (ITSC)
- Integrated Technologic® (IT)
 - External input by others
 - Pressure Sensor(s)
 - Differential Pressure Sensor(s)
 - Flow Sensor(s)
- By Others

TYPE OF SEAL

- F Standard Seal w/ Flush Line (Buna-Carbon/Ceramic)
- S Stuffing Box construction w/ Flushed Mechanical Single Seal (EPR-Tungsten Carbide/Carbon)
- PF Stuffing Box Construction w/ Flushed Packing (Graphite Impregnated PTFE)

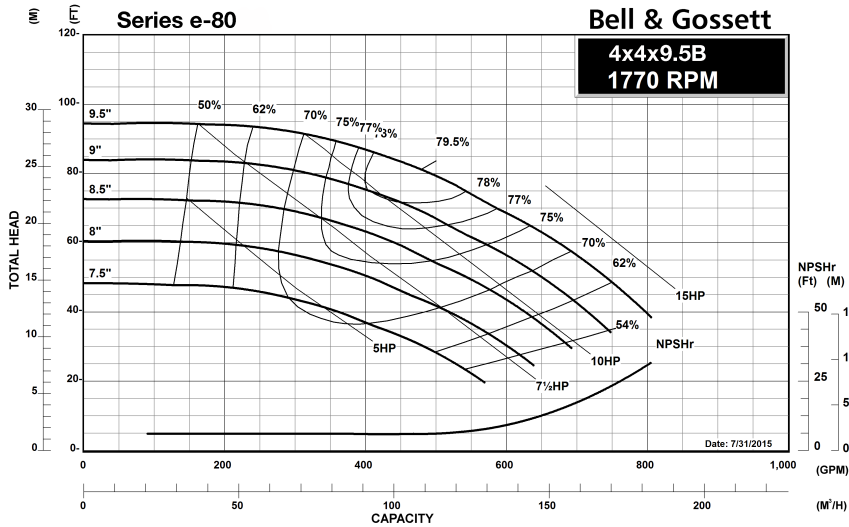

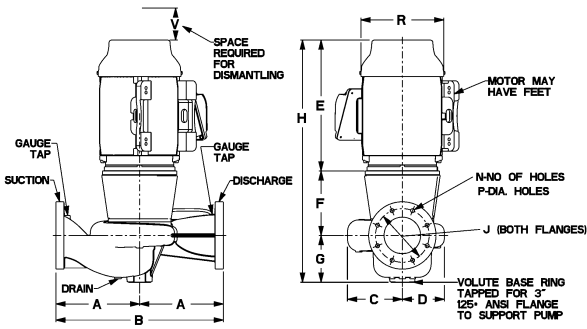

4x4x9.5B Series e-80 Centrifugal Pump Submittal - In-Line Piping

DIMENSIONS - Inches (mm)

STANDARD SEAL

MOTOR FRAME	A	B	C	D	E (max)	F	G	H (max)	125# ANSI			250# ANSI			R	S (Max)*	V (min)	Suct/Disch Gauge Taps (NPT)	Drain Tap (NPT)
									J	N	P	J	N	P					
									182JM	12.50 (318)	25.00 (635)	6.51 (165)	7.94 (202)	15.31 (389)					
184JM	12.50 (318)	25.00 (635)	6.51 (165)	7.94 (202)	15.31 (389)	5.13 (130)	7.25 (184)	27.69 (703)	7.50 (191)	8 (19)	0.75 (19)	7.88 (200)	8 (22)	0.88 (298)	11.75 (298)	1.00 (25)	5.00 (127)	0.25	0.25
213JM	12.50 (318)	25.00 (635)	6.51 (165)	7.94 (202)	19.25 (489)	5.13 (130)	7.25 (184)	31.62 (803)	7.50 (191)	8 (19)	0.75 (19)	7.88 (200)	8 (22)	0.88 (356)	14.00 (356)	-	5.00 (127)	0.25	0.25
215JM	12.50 (318)	25.00 (635)	6.51 (165)	7.94 (202)	19.25 (489)	5.13 (130)	7.25 (184)	31.62 (803)	7.50 (191)	8 (19)	0.75 (19)	7.88 (200)	8 (22)	0.88 (356)	14.00 (356)	-	5.00 (127)	0.25	0.25
254JM	12.50 (318)	25.00 (635)	6.51 (165)	7.94 (202)	24.13 (613)	6.13 (156)	7.25 (184)	37.50 (952)	7.50 (191)	8 (19)	0.75 (19)	7.88 (200)	8 (22)	0.88 (432)	17.00 (432)	-	5.00 (127)	0.25	0.25


STUFFING BOX

MOTOR FRAME	A	B	C	D	E (max)	F	G	H (max)	125# ANSI			250# ANSI			R	S (Max)*	V (min)	Suct/Disch Gauge Taps (NPT)	Drain Tap (NPT)
									J	N	P	J	N	P					
									182JP	12.50 (318)	25.00 (635)	6.51 (165)	7.94 (202)	15.31 (389)					
184JP	12.50 (318)	25.00 (635)	6.51 (165)	7.94 (202)	15.31 (389)	8.25 (210)	7.25 (184)	30.81 (783)	7.50 (191)	8 (19)	0.75 (19)	7.88 (200)	8 (22)	0.88 (298)	11.75 (298)	1.00 (25)	5.00 (127)	0.25	0.25
213JP	12.50 (318)	25.00 (635)	6.51 (165)	7.94 (202)	19.25 (489)	9.00 (229)	7.25 (184)	35.50 (902)	7.50 (191)	8 (19)	0.75 (19)	7.88 (200)	8 (22)	0.88 (356)	14.00 (356)	-	5.00 (127)	0.25	0.25
215JP	12.50 (318)	25.00 (635)	6.51 (165)	7.94 (202)	19.25 (489)	9.00 (229)	7.25 (184)	35.50 (902)	7.50 (191)	8 (19)	0.75 (19)	7.88 (200)	8 (22)	0.88 (356)	14.00 (356)	-	5.00 (127)	0.25	0.25
254JP	12.50 (318)	25.00 (635)	6.51 (165)	7.94 (202)	24.13 (613)	9.00 (229)	7.25 (184)	40.37 (1026)	7.50 (191)	8 (19)	0.75 (19)	7.88 (200)	8 (22)	0.88 (432)	17.00 (432)	-	5.00 (127)	0.25	0.25

Dimensions are subject to change. Not to be used for construction purposes unless certified.

NOTE: For Single phase Motors add 1" to dimensions E & H.

*Dimensions are for ODP Motors. For TEFC add S dimension to dimensions E & H.

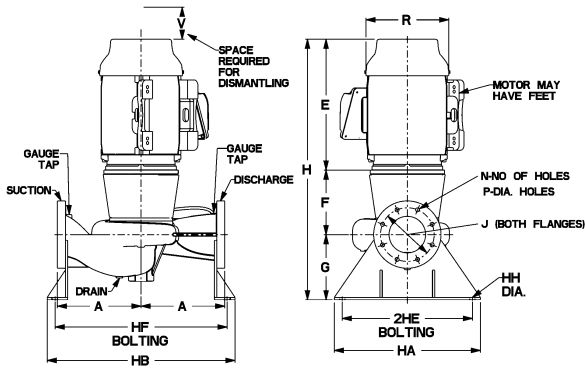

4x4x9.5B Series e-80 Centrifugal Pump Submittal - Flange Support Mounting

DIMENSIONS - Inches (mm)

STANDARD SEAL

MOTOR FRAME	A	HF BOLTING	HB	2HE BOLTING	HA	HH DIA	E (max)	F	G	H (max)	125# ANSI			250# ANSI			R	S (Max)*	V (min)	Suct/Disch Gauge Taps (NPT)	Drain Tap (NPT)
											J	N	P	J	N	P					
182JM	12.50 (318)	26.66 (677)	30.16 (766)	21.50 (546)	25.00 (635)	0.88 (22)	15.31 (389)	5.13 (130)	7.25 (184)	27.69 (703)	7.50 (191)	8 (19)	0.75 (200)	7.88 (22)	8 (22)	0.88 (298)	11.75 (298)	1.00 (25)	5.00 (127)	0.25	0.25
184JM	12.50 (318)	26.66 (677)	30.16 (766)	21.50 (546)	25.00 (635)	0.88 (22)	15.31 (389)	5.13 (130)	7.25 (184)	27.69 (703)	7.50 (191)	8 (19)	0.75 (200)	7.88 (22)	8 (22)	0.88 (298)	11.75 (298)	1.00 (25)	5.00 (127)	0.25	0.25
213JM	12.50 (318)	26.66 (677)	30.16 (766)	21.50 (546)	25.00 (635)	0.88 (22)	19.25 (489)	5.13 (130)	7.25 (184)	31.62 (803)	7.50 (191)	8 (19)	0.75 (200)	7.88 (22)	8 (22)	0.88 (356)	14.00 (356)	-	5.00 (127)	0.25	0.25
215JM	12.50 (318)	26.66 (677)	30.16 (766)	21.50 (546)	25.00 (635)	0.88 (22)	19.25 (489)	5.13 (130)	7.25 (184)	31.62 (803)	7.50 (191)	8 (19)	0.75 (200)	7.88 (22)	8 (22)	0.88 (356)	14.00 (356)	-	5.00 (127)	0.25	0.25
254JM	12.50 (318)	26.66 (677)	30.16 (766)	21.50 (546)	25.00 (635)	0.88 (22)	24.13 (613)	6.13 (156)	7.25 (184)	37.50 (952)	7.50 (191)	8 (19)	0.75 (200)	7.88 (22)	8 (22)	0.88 (432)	17.00 (432)	-	5.00 (127)	0.25	0.25


STUFFING BOX

MOTOR FRAME	A	HF BOLTING	HB	2HE BOLTING	HA	HH DIA	E (max)	F	G	H (max)	125# ANSI			250# ANSI			R	S (Max)*	V (min)	Suct/Disch Gauge Taps (NPT)	Drain Tap (NPT)
											J	N	P	J	N	P					
182JP	12.50 (318)	26.66 (677)	30.16 (766)	21.50 (546)	25.00 (635)	0.88 (22)	15.31 (389)	8.25 (210)	7.25 (184)	30.81 (783)	7.50 (191)	8 (19)	0.75 (200)	7.88 (22)	8 (22)	0.88 (298)	11.75 (298)	1.00 (25)	5.00 (127)	0.25	0.25
184JP	12.50 (318)	26.66 (677)	30.16 (766)	21.50 (546)	25.00 (635)	0.88 (22)	15.31 (389)	8.25 (210)	7.25 (184)	30.81 (783)	7.50 (191)	8 (19)	0.75 (200)	7.88 (22)	8 (22)	0.88 (298)	11.75 (298)	1.00 (25)	5.00 (127)	0.25	0.25
213JP	12.50 (318)	26.66 (677)	30.16 (766)	21.50 (546)	25.00 (635)	0.88 (22)	19.25 (489)	9.00 (229)	7.25 (184)	35.50 (902)	7.50 (191)	8 (19)	0.75 (200)	7.88 (22)	8 (22)	0.88 (356)	14.00 (356)	-	5.00 (127)	0.25	0.25
215JP	12.50 (318)	26.66 (677)	30.16 (766)	21.50 (546)	25.00 (635)	0.88 (22)	19.25 (489)	9.00 (229)	7.25 (184)	35.50 (902)	7.50 (191)	8 (19)	0.75 (200)	7.88 (22)	8 (22)	0.88 (356)	14.00 (356)	-	5.00 (127)	0.25	0.25
254JP	12.50 (318)	26.66 (677)	30.16 (766)	21.50 (546)	25.00 (635)	0.88 (22)	24.13 (613)	9.00 (229)	7.25 (184)	40.37 (1026)	7.50 (191)	8 (19)	0.75 (200)	7.88 (22)	8 (22)	0.88 (432)	17.00 (432)	-	5.00 (127)	0.25	0.25

Dimensions are subject to change. Not to be used for construction purposes unless certified.


NOTE: For Single phase Motors add 1" to dimensions E & H.

*Dimensions are for ODP Motors. For TEFC add S dimension to dimensions E & H.



4x4x9.5B Series e-80 In-Line Mounted Centrifugal Pumps With Integrated Technologic® Control

TECHNOLOGIC STANDARD FEATURES	
CONTROL METHOD WITH INTEGRATED TECHNOLOGIC® SENSORLESS CONTROL (ITSC)	Factory configured for sensorless operation.
CONTROL METHOD WITH INTEGRATED TECHNOLOGIC® (IT)	Field configurable for sensor by others, building management system input, or optional sensor(s) provided.
ENCLOSURE	NEMA 12 (same as IP55 & UL type 12)
POWER DISCONNECT SWITCH	Included standard. Fused Disconnect Switch optional with three phase input voltage.
HARMONIC SUPPRESSION	Integrated non-saturating dual DC link reactors provide better harmonic performance than a 5% AC line reactor.
COOLING	Fan-cooled through temperature controlled and easy replacement.
AMBIENT TEMPERATURE RATING	14°F to 113°F (-10°C to 45°C)
COMMUNICATION PROTOCOLS	BACnet, Modbus RTU, N2 Metasys, FLN Apogee
ANALOG INPUTS	2 configurable for either voltage (0 to 10VDC) or current(0/4 to 20mA)
ANALOG OUTPUTS	1 (0/4 to 20mA) up to 500 ohm load accurate to 1% of full scale
DIGITAL INPUTS	4 (0 to 24VDC), NPN or PNP, 0 to 24VDC, on 5 msec scan interval, Up to 2 can be configured as pulse inputs.
DIGITAL OUTPUTS	2 (0 to 24VDC), 40mA max current, configurable as pulse outputs.
RELAY OUTPUTS	2 programmable, 240VAC or 400VAC up to 2 A
MINIMUM CONTROL HEAD	_____ ft (default set to 40% of design head if not unknown)

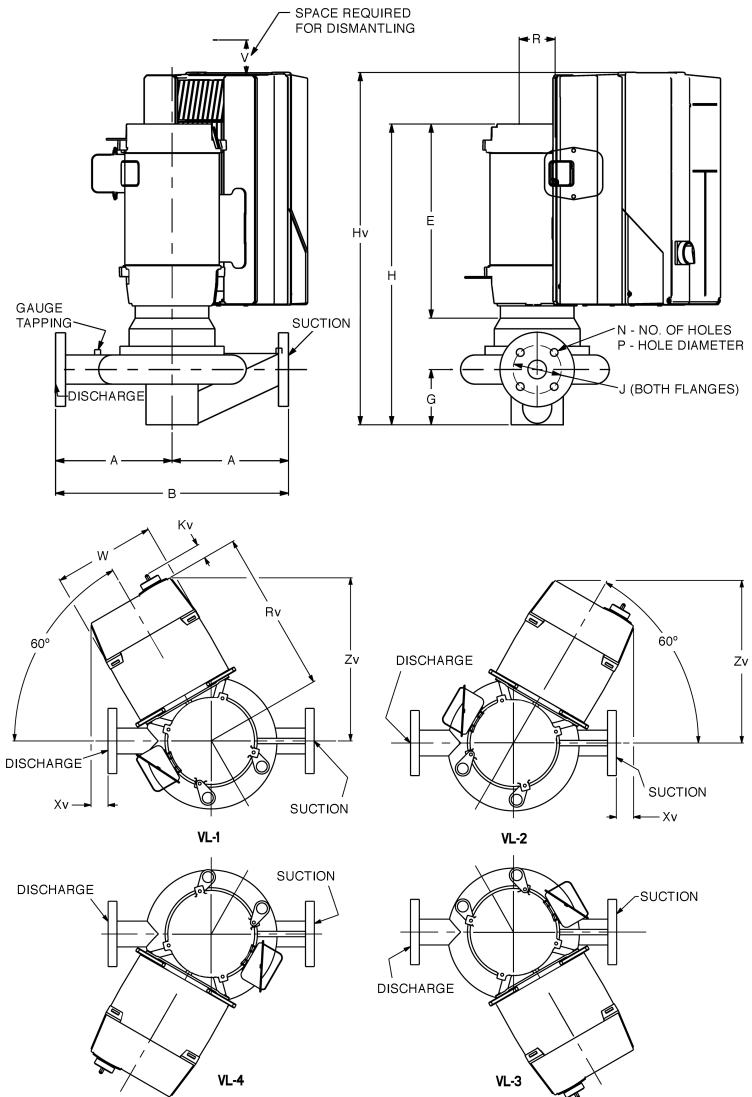

Series e-80 4x4x9.5B

B-139.20

In-Line Mounted Centrifugal Pumps
With Integrated Technologic® Control

DIMENSIONS - Inches (mm)							STUFFING BOX						
STANDARD SEAL													
MOTOR FRAME	VFD	Rv	Zv	W	Hv	Xv	MOTOR FRAME	VFD	Rv	Zv	W	Hv	Xv
182JM	A5	12.78125 324.64375	13.1875 334.9625	9.5 241.3	30.71875 780.25625	2.4375 61.9125	182JP	A5	12.78125 324.64375	13.1875 334.9625	9.5 241.3	33.84375 859.63125	2.4375 61.9125
	B1	15.07125 382.80975	14.7875 375.6025	9.5 241.3	31.71875 805.65625	4.0375 102.5525		B1	15.07125 382.80975	14.7875 375.6025	9.5 241.3	34.84375 885.03125	4.0375 102.5525
184JM	A5	12.78125 324.64375	13.1875 334.9625	9.5 241.3	30.71875 780.25625	2.4375 61.9125	184JP	A5	12.78125 324.64375	13.1875 334.9625	9.5 241.3	33.84375 859.63125	2.4375 61.9125
	B1	15.07125 382.80975	14.7875 375.6025	9.5 241.3	31.71875 805.65625	4.0375 102.5525		B1	15.07125 382.80975	14.7875 375.6025	9.5 241.3	34.84375 885.03125	4.0375 102.5525
213JM	A5	13.531 343.6874	13.828125 351.234375	9.5 241.3	34.078125 865.584375	2.0625 52.3875	213JP	A5	13.531 343.6874	13.828125 351.234375	9.5 241.3	37.953125 964.009375	2.0625 52.3875
	B1	15.844 402.4376	15.844 402.4376	9.5 241.3	35.671875 906.065625	0.875 22.225		B1	15.844 402.4376	15.844 402.4376	9.5 241.3	39.546875 1004.490625	0.875 22.225
	B2	15.844 402.4376	15.844 402.4376	9.5 241.3	41.411875 1051.861625	0.875 22.225		B2	15.844 402.4376	15.844 402.4376	9.5 241.3	45.286875 1150.286625	0.875 22.225
215JM	A5	13.531 343.6874	13.828125 351.234375	9.5 241.3	31.234375 793.353125	2.0625 52.3875	215JP	A5	13.531 343.6874	13.828125 351.234375	9.5 241.3	36.734375 933.053125	2.0625 52.3875
	B1	15.844 402.4376	15.844 402.4376	9.5 241.3	34.140625 867.171875	0.875 22.225		B1	15.844 402.4376	15.844 402.4376	9.5 241.3	38.265625 971.946875	0.875 22.225
	B2	15.844 402.4376	15.844 402.4376	9.5 241.3	39.880625 1012.967875	0.875 22.225		B2	15.844 402.4376	15.844 402.4376	9.5 241.3	44.005625 1117.742875	0.875 22.225
	C1	17.814 452.4756	19.044 483.7176	12.1 307.34	41.900625 1064.275875	4.075 103.505		C1	17.814 452.4756	19.044 483.7176	12.1 307.34	46.025625 1169.050875	4.075 103.505
254JM	B1	16.828125 427.434375	16.703125 424.259375	9.5 241.3	40.375 1025.525	0.375 9.525	254JP	B1	16.828125 427.434375	16.703125 424.259375	9.5 241.3	43.25 1098.55	0.375 9.525
	B2	16.828125 427.434375	16.703125 424.259375	9.5 241.3	44.835 1138.809	0.625 15.875		B2	16.828125 427.434375	16.703125 424.259375	9.5 241.3	47.71 1211.834	0.625 15.875
	C1	18.798125 477.472375	19.903125 505.539375	12.1 307.34	46.095 1170.813	3.825 97.155		C1	18.798125 477.472375	19.903125 505.539375	12.1 307.34	48.97 1243.838	3.825 97.155

NOTE: Drives with single phase input have three phase output and include three phase motors.
Kv=2 (50)




Pressure Sensor/Transmitter For Pumps with TECHNOLOGIC® Drives

FEATURES

- 4-20mA output
- 10-28 VDC supply voltage
- Operating Temperature -40 to 85°C (-40 to 185°F)
- Storage Temperature -40 to 100°C (-40 to 212°F)
- Enclosure IP-66 (housing only)
- High Strength Stainless Steel Construction
- No Oil, Welds or Internal O-rings
- Wide Operating Temperature
- Low Static and Thermal Errors
- Compatible with Wide Variety of Liquids and Gases
- EMI/RFI Protection
- UL/cUL 508 Approved (with housing)
- 1lb. (0.45 kg) approximate weight

TECHNOLOGIC ANALOG SENSOR WIRING

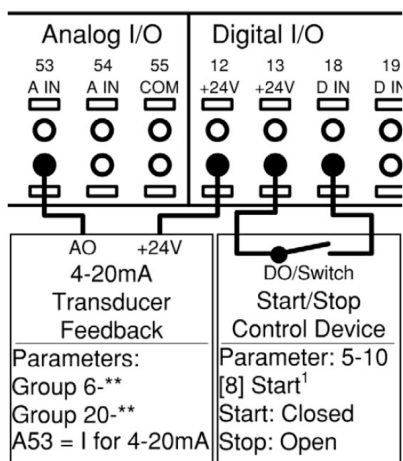

B&G PART NUMBERS

- S13203 Pressure range: 0-100 psi (0-689 kPa)
- S13204 Pressure range: 0-300 psi (0-2068 kPa)


Consult factory for other ranges.


INSTALLATION CONSIDERATIONS

- Standard 24 AWG (0.61 mm dia.) 2 wire shielded cable located in a conduit separate from high voltage wiring
- 24 vdc power supplied from Technologic Controller

DIMENSIONAL INFORMATION

Dimensions in Inches (Millimeters)

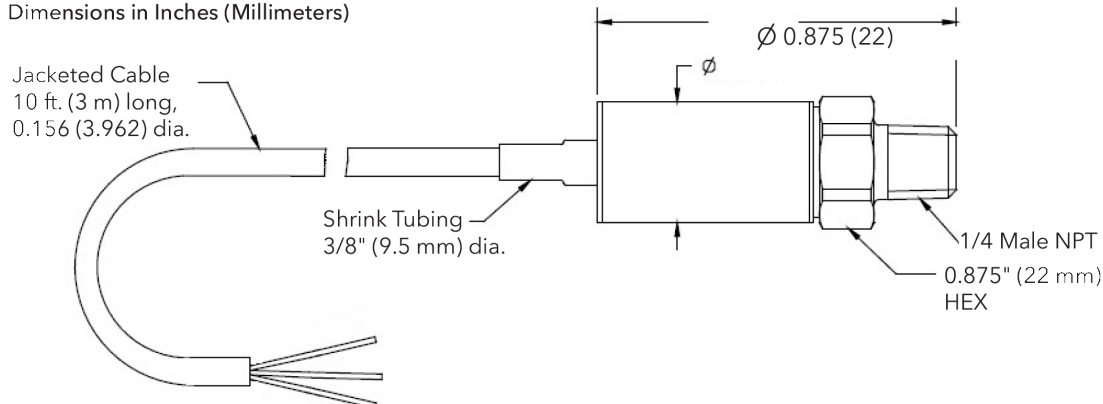

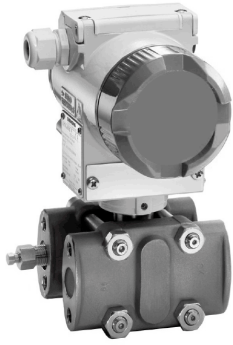


Differential Pressure Sensor/ Transmitter For Pumps with TECHNOLOGIC® Drives

FEATURES

- Relays reading to the Technologic controller up to 2000 ft. (610 m) away
- All wetted parts are 316 stainless steel
- Built-in RFI filter effective from 20 to 1000 MHz
- Withstands static pressures up to 2300 PSI (15858 kPa)
- 3 Valve bypass manifold (optional)
- 10 lbs. (4.5 kg) approximate weight

TECHNOLOGIC ANALOG SENSOR WIRING

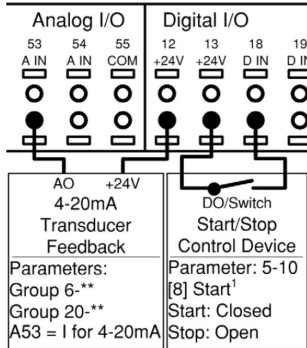

B&G PART NUMBERS

- S100089 Pressure range: 0 - 40 psi (0 - 276 kPa)
- S100091 Pressure range: 0 - 70 psi (0 - 483 kPa)
- S100092 Pressure range: 0 - 100 psi (0 - 689 kPa)


Consult factory for other ranges.

INSTALLATION CONSIDERATIONS

- Standard 18 AWG (1.194 mm dia.) 2 wire shielded cable located in a conduit separate from high voltage wiring
- 24 vdc power supplied from Technologic Controller for distance <2000 ft (610 m)

DIMENSIONAL INFORMATION

Dimensions in Inches (Millimeters)

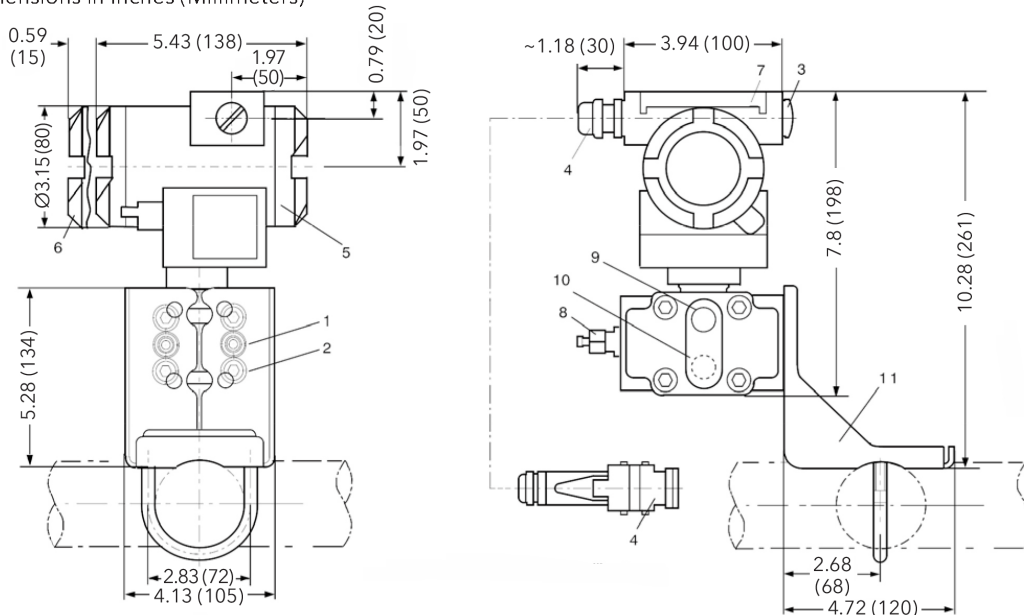

- 1 Process connection 1/4-18NPT for absolute pressure (+) side
- 2 Mounting thread 7/16-20 UNF to EN 61518
- 3 Dummy plug
- 4 Electrical connection: Screwed gland 1/2-14 NPT
- 5 Connection side

- 6 Electronic side, no digital display
- 7 Access cover over magnetic pushbuttons
- 8 Sealing screw with vent shown (optional)
- 9 Side vent for measuring liquid
- 10 Side vent for measuring gas (supplement H02)
- 11 Mounting bracket (2 shackles, 4 nuts, 4 U-plates, 1 angle) made of steel



Flow Sensor/Transmitter For Pumps with TECHNOLOGIC® Drives


The rugged Bell & Gossett Flow Sensor/Transmitter precisely measures system flow and transmits a proportional 4 to 20 mA DC signal to the Technologic Controller for display or program calculations.

FEATURES



- Suitable for mounting in vertical pipe
- Suitable for mounting in horizontal pipe within 45° of top dead center
- Non-magnetically sensed, non-fouling paddle wheel
- NEMA 4X Transmitter Enclosure
- Maximum Pressure Ratings:
 - 1000 psi @ 100°F, 900 psi @ 200°F,
 - 750 psi @ 300°F (6895 kPa @ 38°C, 6205 kPa @ 93°C, 5171 kPa @ 149°C)
- Maximum Temperature Ratings:
 - Fluid - 300°F (149°C) continuous service
 - Electronics - 150°F (66°C)
- Optional software and cable available for field programming
- 9.9 lbs (4.5 kg) approximate weight

DIMENSIONAL INFORMATION

Dimensions in Inches (Millimeters)

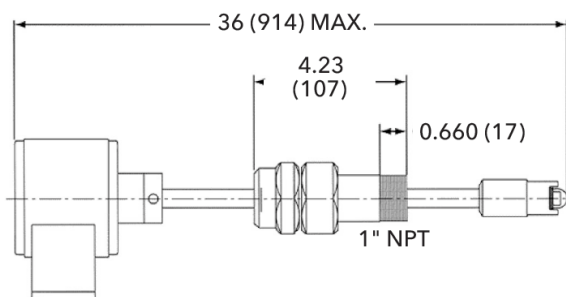

TECHNOLOGIC ANALOG SENSOR WIRING

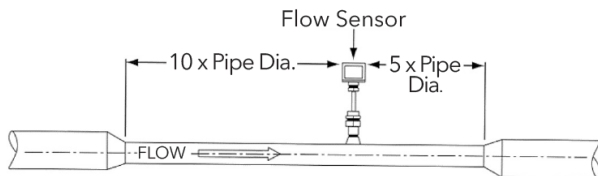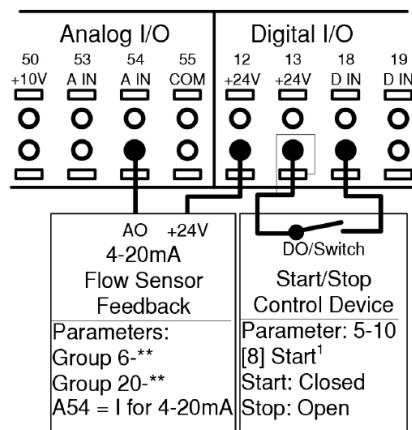


INSTALLATION CONSIDERATIONS

- Standard 18 AWG (1.194 mm dia.) gauge 3 wire shielded cable located in conduit separate from high voltage wiring
- 24 vdc power supplied from Technologic Controller
- Takes accurate readings and relays them to the Technologic Controller up to 2,000 ft. (610 m) away, when 10 pipe diameters upstream and 5 pipe diameters downstream of straight uninterrupted flow is present.

CALIBRATION CHART		
B&G Part No.	Pipe Size	Max. Flow
137411	3" Sch 40	250 gpm (16 l/sec)
137412	4" Sch 40	400 gpm (25 l/sec)
137413	6" Sch 40	850 gpm (54 l/sec)
137414	8" Sch 40	1750 gpm (110 l/sec)
137415	10" Sch 40	3150 gpm (199 l/sec)
137416	12" Sch 40	5000 gpm (315 l/sec)
137417	14" Sch 40	6400 gpm (404 l/sec)
137418	16" Sch 40	9100 gpm (574 l/sec)
137419	18" Sch 40	12400 gpm (782 l/sec)
137420	20" Sch 40	16500 gpm (1041 l/sec)

Consult factory for custom flow range calibration.

JOB:	REPRESENTATIVE:	
UNIT TAG:	ORDER NO.:	DATE:
ENGINEER:	SUBMITTED BY:	DATE:
CONTRACTOR:	APPROVED BY:	DATE:



4x4x11B

Series e-80

In-Line Mounted Centrifugal Pumps

SPECIFICATIONS

FLOW _____ HEAD _____

HP _____ RPM _____

VOLTS _____

CYCLE _____ INPUT PHASE _____

ENCLOSURE _____

APPROX. WEIGHT _____

SPECIALS _____

MATERIALS OF CONSTRUCTION

Stainless Steel Fitted

MAXIMUM WORKING PRESSURE

- 175 psi (12 bar) with 125# ANSI flange drilling
- 250 psi (17 bar) with 250# ANSI flange drilling (requires 80-S)
- 300 psi (21 bar) W.P. with 250# ANSI flange drilling (Requires -S and EPR-Silicon Carbide-Silicon Carbide Seal)

MOUNTING


- In-Line Piping
- Flange Supports

PUMP VARIABLE SPEED CONTROL


- Integrated Technologic® Sensorless Control (ITSC)
- Integrated Technologic® (IT)
 - External input by others
 - Pressure Sensor(s)
 - Differential Pressure Sensor(s)
 - Flow Sensor(s)
- By Others

TYPE OF SEAL

- F Standard Seal w/ Flush Line (Buna-Carbon/Ceramic)
- S Stuffing Box construction w/ Flushed Mechanical Single Seal (EPR-Tungsten Carbide/Carbon)
- PF Stuffing Box Construction w/ Flushed Packing (Graphite Impregnated PTFE)

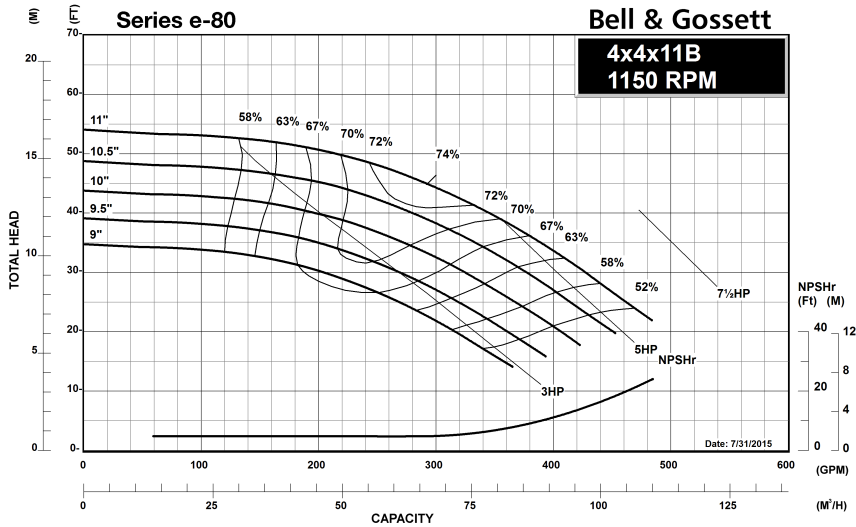

JOB:	REPRESENTATIVE:	
UNIT TAG:	ORDER NO.:	DATE:
ENGINEER:	SUBMITTED BY:	DATE:
CONTRACTOR:	APPROVED BY:	DATE:



4x4x11B Series e-80 In-Line Mounted Centrifugal Pumps

SPECIFICATIONS

FLOW _____ HEAD _____
 HP _____ RPM _____
 VOLTS _____
 CYCLE _____ INPUT PHASE _____
 ENCLOSURE _____
 APPROX. WEIGHT _____
 SPECIALS _____

MATERIALS OF CONSTRUCTION

Stainless Steel Fitted

MAXIMUM WORKING PRESSURE

- 175 psi (12 bar) with 125# ANSI flange drilling
- 250 psi (17 bar) with 250# ANSI flange drilling (requires 80-S)
- 300 psi (21 bar) W.P. with 250# ANSI flange drilling (Requires -S and EPR-Silicon Carbide-Silicon Carbide Seal)

MOUNTING


- In-Line Piping
- Flange Supports


PUMP VARIABLE SPEED CONTROL

- Integrated Technologic® Sensorless Control (ITSC)
- Integrated Technologic® (IT)
 - External input by others
 - Pressure Sensor(s)
 - Differential Pressure Sensor(s)
 - Flow Sensor(s)
- By Others

TYPE OF SEAL

- F Standard Seal w/ Flush Line (Buna-Carbon/Ceramic)
- S Stuffing Box construction w/ Flushed Mechanical Single Seal (EPR-Tungsten Carbide/Carbon)
- PF Stuffing Box Construction w/ Flushed Packing (Graphite Impregnated PTFE)

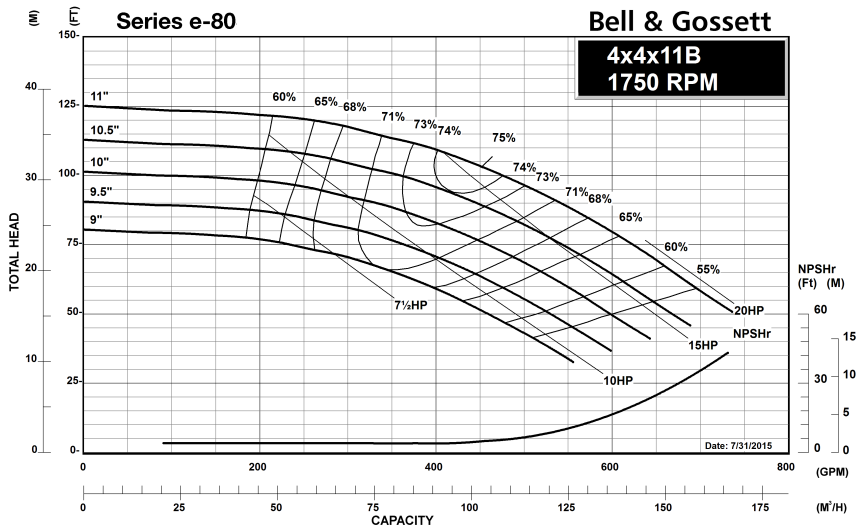

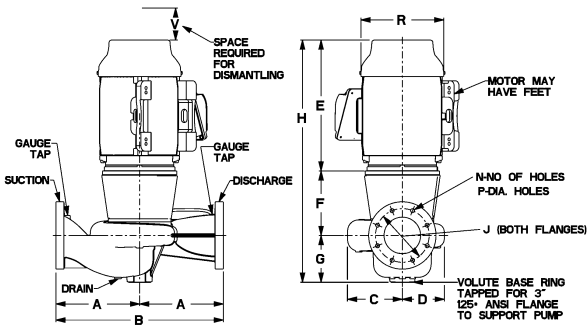

4x4x11B Series e-80 Centrifugal Pump Submittal - In-Line Piping

DIMENSIONS - Inches (mm)

STANDARD SEAL

MOTOR FRAME	A	B	C	D	E (max)	F	G	H (max)	125# ANSI			250# ANSI			R	S (Max)*	V (min)	Suct/Disch Gauge Taps (NPT)	Drain Tap (NPT)
									J	N	P	J	N	P					
									184JM	13.00 (330)	26.00 (660)	7.01 (178)	8.22 (209)	15.31 (389)					
213JM	13.00 (330)	26.00 (660)	7.01 (178)	8.22 (209)	19.25 (489)	4.38 (111)	7.50 (191)	31.13 (791)	7.50 (191)	8 (19)	0.75 (19)	7.88 (200)	8 (22)	0.88 (22)	14.00 (356)	-	5.25 (133)	0.25	0.25
215JM	13.00 (330)	26.00 (660)	7.01 (178)	8.22 (209)	19.25 (489)	4.38 (111)	7.50 (191)	31.13 (791)	7.50 (191)	8 (19)	0.75 (19)	7.88 (200)	8 (22)	0.88 (22)	14.00 (356)	-	5.25 (133)	0.25	0.25
254JM	13.00 (330)	26.00 (660)	7.01 (178)	8.22 (209)	24.13 (613)	4.86 (123)	7.50 (191)	36.48 (927)	7.50 (191)	8 (19)	0.75 (19)	7.88 (200)	8 (22)	0.88 (22)	17.00 (432)	-	5.25 (133)	0.25	0.25
256JM	13.00 (330)	26.00 (660)	7.01 (178)	8.22 (209)	24.13 (613)	4.86 (123)	7.50 (191)	36.48 (927)	7.50 (191)	8 (19)	0.75 (19)	7.88 (200)	8 (22)	0.88 (22)	17.00 (432)	-	5.25 (133)	0.25	0.25


STUFFING BOX

MOTOR FRAME	A	B	C	D	E (max)	F	G	H (max)	125# ANSI			250# ANSI			R	S (Max)*	V (min)	Suct/Disch Gauge Taps (NPT)	Drain Tap (NPT)
									J	N	P	J	N	P					
									184JP	13.00 (330)	26.00 (660)	7.01 (178)	8.22 (209)	15.31 (389)					
213JP	13.00 (330)	26.00 (660)	7.01 (178)	8.22 (209)	19.25 (489)	7.38 (187)	7.50 (191)	34.13 (867)	7.50 (191)	8 (19)	0.75 (19)	7.88 (200)	8 (22)	0.88 (22)	14.00 (356)	-	5.25 (133)	0.25	0.25
215JP	13.00 (330)	26.00 (660)	7.01 (178)	8.22 (209)	19.25 (489)	7.38 (187)	7.50 (191)	34.13 (867)	7.50 (191)	8 (19)	0.75 (19)	7.88 (200)	8 (22)	0.88 (22)	14.00 (356)	-	5.25 (133)	0.25	0.25
254JP	13.00 (330)	26.00 (660)	7.01 (178)	8.22 (209)	24.13 (613)	7.69 (195)	7.50 (191)	39.31 (999)	7.50 (191)	8 (19)	0.75 (19)	7.88 (200)	8 (22)	0.88 (22)	17.00 (432)	-	5.25 (133)	0.25	0.25
256JP	13.00 (330)	26.00 (660)	7.01 (178)	8.22 (209)	24.13 (613)	7.69 (195)	7.50 (191)	39.31 (999)	7.50 (191)	8 (19)	0.75 (19)	7.88 (200)	8 (22)	0.88 (22)	17.00 (432)	-	5.25 (133)	0.25	0.25
284JP	9.50 (241)	19.00 (483)	5.88 (149)	6.25 (159)	23.63 (600)	8.56 (217)	4.50 (114)	36.75 (933)	3.88 (98)	4 (16)	0.63 (16)	4.50 (114)	4 (22)	0.88 (22)	16.13 (410)	4.63 (117)	4.00 (102)	0.25	0.25
286JP	9.50 (241)	19.00 (483)	5.88 (149)	6.25 (159)	25.13 (638)	8.56 (217)	4.50 (114)	38.13 (968)	3.88 (98)	4 (16)	0.63 (16)	4.50 (114)	4 (22)	0.88 (22)	16.13 (410)	4.63 (117)	4.00 (102)	0.25	0.25

Dimensions are subject to change. Not to be used for construction purposes unless certified.

NOTE: For Single phase Motors add 1" to dimensions E & H.

*Dimensions are for ODP Motors. For TEFC add S dimension to dimensions E & H.

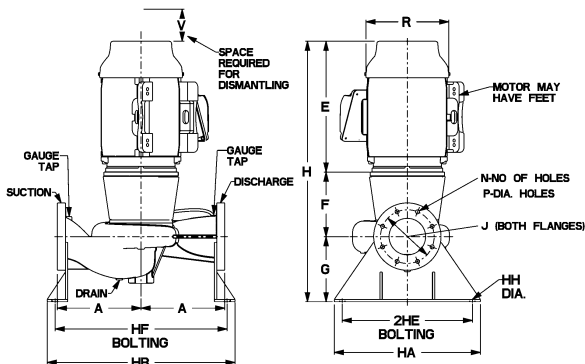

4x4x11B Series e-80 Centrifugal Pump Submittal - Flange Support Mounting

DIMENSIONS - Inches (mm)

STANDARD SEAL

MOTOR FRAME	A	HF BOLTING	HB	2HE BOLTING	HA	HH DIA	E (max)	F	G	H (max)	125# ANSI			250# ANSI			R	S (Max)*	V (min)	Suct/Disch Gauge Taps (NPT)	Drain Tap (NPT)
											J	N	P	J	N	P					
184JM	13.00 (330)	27.66 (703)	31.16 (791)	21.50 (546)	25.00 (635)	0.88 (22)	15.31 (389)	4.38 (111)	7.50 (191)	27.19 (691)	7.50 (191)	8 (19)	0.75 (19)	7.88 (200)	8 (22)	0.88 (22)	11.38 (289)	1.00 (25)	5.25 (133)	0.25	0.25
213JM	13.00 (330)	27.66 (703)	31.16 (791)	21.50 (546)	25.00 (635)	0.88 (22)	19.25 (489)	4.38 (111)	7.50 (191)	31.13 (791)	7.50 (191)	8 (19)	0.75 (19)	7.88 (200)	8 (22)	0.88 (22)	14.00 (356)	-	5.25 (133)	0.25	0.25
215JM	13.00 (330)	27.66 (703)	31.16 (791)	21.50 (546)	25.00 (635)	0.88 (22)	19.25 (489)	4.38 (111)	7.50 (191)	31.13 (791)	7.50 (191)	8 (19)	0.75 (19)	7.88 (200)	8 (22)	0.88 (22)	14.00 (356)	-	5.25 (133)	0.25	0.25
254JM	13.00 (330)	27.66 (703)	31.16 (791)	21.50 (546)	25.00 (635)	0.88 (22)	24.13 (613)	4.86 (123)	7.50 (191)	36.48 (927)	7.50 (191)	8 (19)	0.75 (19)	7.88 (200)	8 (22)	0.88 (22)	17.00 (432)	-	5.25 (133)	0.25	0.25
256JM	13.00 (330)	27.66 (703)	31.16 (791)	21.50 (546)	25.00 (635)	0.88 (22)	24.13 (613)	4.86 (123)	7.50 (191)	36.48 (927)	7.50 (191)	8 (19)	0.75 (19)	7.88 (200)	8 (22)	0.88 (22)	17.00 (432)	-	5.25 (133)	0.25	0.25


STUFFING BOX

MOTOR FRAME	A	HF BOLTING	HB	2HE BOLTING	HA	HH DIA	E (max)	F	G	H (max)	125# ANSI			250# ANSI			R	S (Max)*	V (min)	Suct/Disch Gauge Taps (NPT)	Drain Tap (NPT)
											J	N	P	J	N	P					
184JP	13.00 (330)	27.66 (703)	31.16 (791)	21.50 (546)	25.00 (635)	0.88 (22)	15.31 (389)	7.38 (187)	7.50 (191)	30.19 (767)	7.50 (191)	8 (19)	0.75 (19)	7.88 (200)	8 (22)	0.88 (22)	11.38 (289)	1.00 (25)	5.25 (133)	0.25	0.25
213JP	13.00 (330)	27.66 (703)	31.16 (791)	21.50 (546)	25.00 (635)	0.88 (22)	19.25 (489)	7.38 (187)	7.50 (191)	34.13 (867)	7.50 (191)	8 (19)	0.75 (19)	7.88 (200)	8 (22)	0.88 (22)	14.00 (356)	-	5.25 (133)	0.25	0.25
215JP	13.00 (330)	27.66 (703)	31.16 (791)	21.50 (546)	25.00 (635)	0.88 (22)	19.25 (489)	7.38 (187)	7.50 (191)	34.13 (867)	7.50 (191)	8 (19)	0.75 (19)	7.88 (200)	8 (22)	0.88 (22)	14.00 (356)	-	5.25 (133)	0.25	0.25
254JP	13.00 (330)	27.66 (703)	31.16 (791)	21.50 (546)	25.00 (635)	0.88 (22)	24.13 (613)	7.69 (195)	7.50 (191)	39.31 (999)	7.50 (191)	8 (19)	0.75 (19)	7.88 (200)	8 (22)	0.88 (22)	17.00 (432)	-	5.25 (133)	0.25	0.25
256JP	13.00 (330)	27.66 (703)	31.16 (791)	21.50 (546)	25.00 (635)	0.88 (22)	24.13 (613)	7.69 (195)	7.50 (191)	39.31 (999)	7.50 (191)	8 (19)	0.75 (19)	7.88 (200)	8 (22)	0.88 (22)	17.00 (432)	-	5.25 (133)	0.25	0.25

Dimensions are subject to change. Not to be used for construction purposes unless certified.



NOTE: For Single phase Motors add 1" to dimensions E & H.

*Dimensions are for ODP Motors. For TEFC add S dimension to dimensions E & H.



4x4x11B Series e-80 In-Line Mounted Centrifugal Pumps With Integrated Technologic® Control

TECHNOLOGIC STANDARD FEATURES	
CONTROL METHOD WITH INTEGRATED TECHNOLOGIC® SENSORLESS CONTROL (ITSC)	Factory configured for sensorless operation.
CONTROL METHOD WITH INTEGRATED TECHNOLOGIC® (IT)	Field configurable for sensor by others, building management system input, or optional sensor(s) provided.
ENCLOSURE	NEMA 12 (same as IP55 & UL type 12)
POWER DISCONNECT SWITCH	Included standard. Fused Disconnect Switch optional with three phase input voltage.
HARMONIC SUPPRESSION	Integrated non-saturating dual DC link reactors provide better harmonic performance than a 5% AC line reactor.
COOLING	Fan-cooled through temperature controlled and easy replacement.
AMBIENT TEMPERATURE RATING	14°F to 113°F (-10°C to 45°C)
COMMUNICATION PROTOCOLS	BACnet, Modbus RTU, N2 Metasys, FLN Apogee
ANALOG INPUTS	2 configurable for either voltage (0 to 10VDC) or current(0/4 to 20mA)
ANALOG OUTPUTS	1 (0/4 to 20mA) up to 500 ohm load accurate to 1% of full scale
DIGITAL INPUTS	4 (0 to 24VDC), NPN or PNP, 0 to 24VDC, on 5 msec scan interval, Up to 2 can be configured as pulse inputs.
DIGITAL OUTPUTS	2 (0 to 24VDC), 40mA max current, configurable as pulse outputs.
RELAY OUTPUTS	2 programmable, 240VAC or 400VAC up to 2 A
MINIMUM CONTROL HEAD	_____ ft (default set to 40% of design head if not unknown)

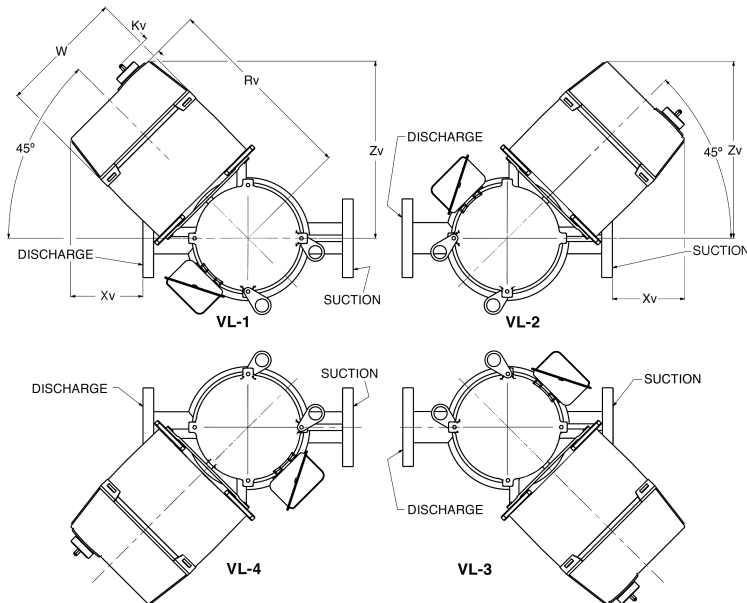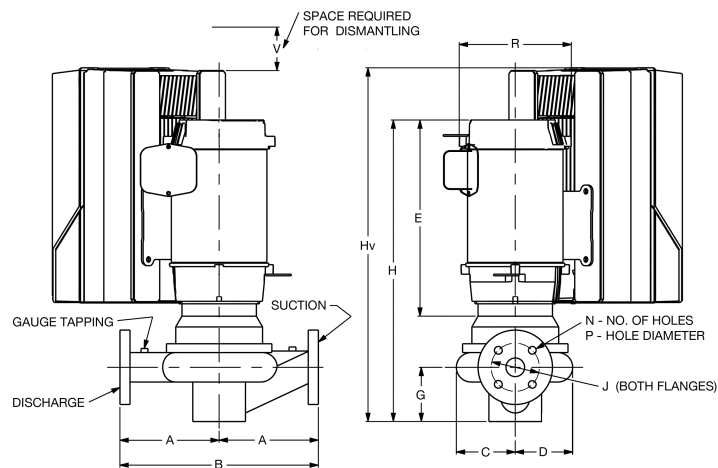

Series e-80 4x4x11B

In-Line Mounted Centrifugal Pumps

With Integrated Technologic® Control

B-139.22

DIMENSIONS - Inches (mm)							STANDARD SEAL						STUFFING BOX							
MOTOR FRAME	VFD	Rv	Zv	W	Hv	Xv	MOTOR FRAME	VFD	Rv	Zv	W	Hv	Xv	MOTOR FRAME	VFD	Rv	Zv	W	Hv	Xv
184JM	A5	12.78 (325)	12.03 (306)	9.50 (241)	30.34 (771)	0.97 (25)	184JP	A5	12.78 (325)	12.03 (306)	9.50 (241)	33.34 (847)	0.97 (25)	184JP	A5	12.78 (325)	12.03 (306)	9.50 (241)	33.34 (847)	0.97 (25)
	B1	15.07 (383)	13.63 (346)	9.50 (241)	31.34 (796)	2.57 (65)		B1	15.07 (383)	13.63 (346)	9.50 (241)	34.34 (872)	2.57 (65)		B1	15.07 (383)	13.63 (346)	9.50 (241)	34.34 (872)	2.57 (65)
213JM	A5	13.53 (344)	12.56 (319)	9.50 (241)	34.70 (881)	0.44 (11)	213JP	A5	13.53 (344)	12.56 (319)	9.50 (241)	37.70 (958)	0.44 (11)	213JP	A5	13.53 (344)	12.56 (319)	9.50 (241)	37.70 (958)	0.44 (11)
	B1	15.82 (402)	14.16 (360)	9.50 (241)	35.95 (913)	2.04 (52)		B1	15.82 (402)	14.16 (360)	9.50 (241)	38.95 (989)	2.04 (52)		B1	15.82 (402)	14.16 (360)	9.50 (241)	38.95 (989)	2.04 (52)
	B2	15.82 (402)	14.16 (360)	9.50 (241)	41.69 (1059)	2.04 (52)		B2	15.82 (402)	14.16 (360)	9.50 (241)	44.69 (1135)	2.04 (52)		B2	15.82 (402)	14.16 (360)	9.50 (241)	44.69 (1135)	2.04 (52)
215JM	A5	13.53 (344)	12.56 (319)	9.50 (241)	33.23 (844)	0.44 (11)	215JP	A5	13.53 (344)	12.56 (319)	9.50 (241)	36.23 (920)	0.44 (11)	215JP	A5	13.53 (344)	12.56 (319)	9.50 (241)	36.23 (920)	0.44 (11)
	B1	15.82 (402)	14.16 (360)	9.50 (241)	34.48 (876)	2.04 (52)		B1	15.82 (402)	14.16 (360)	9.50 (241)	37.48 (952)	2.04 (52)		B1	15.82 (402)	14.16 (360)	9.50 (241)	37.48 (952)	2.04 (52)
	B2	15.82 (402)	14.16 (360)	9.50 (241)	40.22 (1022)	2.04 (52)		B2	15.82 (402)	14.16 (360)	9.50 (241)	43.22 (1098)	2.04 (52)		B2	15.82 (402)	14.16 (360)	9.50 (241)	43.22 (1098)	2.04 (52)
	C1	17.79 (452)	17.36 (441)	12.10 (307)	42.24 (1073)	5.24 (133)		C1	17.79 (452)	17.36 (441)	12.10 (307)	45.24 (1149)	5.24 (133)		C1	17.79 (452)	17.36 (441)	12.10 (307)	45.24 (1149)	5.24 (133)
254JM	A5	14.53 (369)	13.27 (337)	9.50 (241)	36.48 (927)	0.27 (7)	254JP	A5	14.53 (369)	13.27 (337)	9.50 (241)	39.31 (999)	0.27 (7)	254JP	A5	14.53 (369)	13.27 (337)	9.50 (241)	39.31 (999)	0.27 (7)
	B1	16.83 (427)	14.92 (379)	9.50 (241)	39.48 (1003)	1.92 (49)		B1	16.83 (427)	14.92 (379)	9.50 (241)	42.31 (1075)	1.92 (49)		B1	16.83 (427)	14.92 (379)	9.50 (241)	42.31 (1075)	1.92 (49)
	B2	16.83 (427)	14.92 (379)	9.50 (241)	43.94 (1116)	1.92 (49)		B2	16.83 (427)	14.92 (379)	9.50 (241)	46.77 (1188)	1.92 (49)		B2	16.83 (427)	14.92 (379)	9.50 (241)	46.77 (1188)	1.92 (49)
	C1	18.80 (477)	18.12 (460)	12.10 (307)	45.20 (1148)	5.12 (130)		C1	18.80 (477)	18.12 (460)	12.10 (307)	48.03 (1220)	5.12 (130)		C1	18.80 (477)	18.12 (460)	12.10 (307)	48.03 (1220)	5.12 (130)
256JM	B1	16.83 (427)	14.92 (379)	9.50 (241)	38.86 (987)	1.92 (49)	256JP	B1	16.83 (427)	14.92 (379)	9.50 (241)	41.69 (1059)	1.92 (49)	256JP	B1	16.83 (427)	14.92 (379)	9.50 (241)	41.69 (1059)	1.92 (49)
	B2	16.83 (427)	14.92 (379)	9.50 (241)	43.31 (1100)	1.92 (49)		B2	16.83 (427)	14.92 (379)	9.50 (241)	46.14 (1172)	1.92 (49)		B2	16.83 (427)	14.92 (379)	9.50 (241)	46.14 (1172)	1.92 (49)
	C1	18.80 (477)	18.12 (460)	12.10 (307)	44.57 (1132)	5.12 (130)		C1	18.80 (477)	18.12 (460)	12.10 (307)	47.40 (1204)	5.12 (130)		C1	18.80 (477)	18.12 (460)	12.10 (307)	47.40 (1204)	5.12 (130)
	C2	19.58 (497)	20.42 (519)	14.60 (371)	49.23 (1250)	7.42 (189)		C2	19.58 (497)	20.42 (519)	14.60 (371)	52.06 (1322)	7.42 (189)		C2	19.58 (497)	20.42 (519)	14.60 (371)	52.06 (1322)	7.42 (189)

NOTE: Drives with single phase input have three phase output and include three phase motors.
Kv=2 (50)




Pressure Sensor/Transmitter For Pumps with TECHNOLOGIC® Drives

FEATURES

- 4-20mA output
- 10-28 VDC supply voltage
- Operating Temperature -40 to 85°C (-40 to 185°F)
- Storage Temperature -40 to 100°C (-40 to 212°F)
- Enclosure IP-66 (housing only)
- High Strength Stainless Steel Construction
- No Oil, Welds or Internal O-rings
- Wide Operating Temperature
- Low Static and Thermal Errors
- Compatible with Wide Variety of Liquids and Gases
- EMI/RFI Protection
- UL/cUL 508 Approved (with housing)
- 1lb. (0.45 kg) approximate weight

TECHNOLOGIC ANALOG SENSOR WIRING

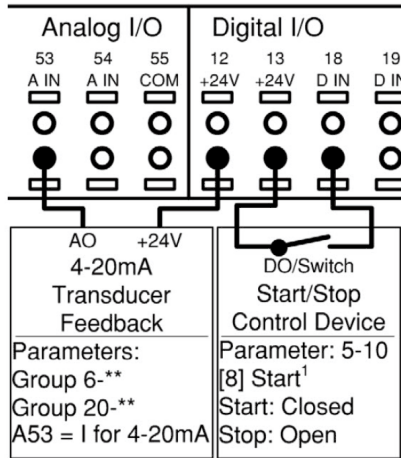

B&G PART NUMBERS

- S13203 Pressure range: 0-100 psi (0-689 kPa)
- S13204 Pressure range: 0-300 psi (0-2068 kPa)


Consult factory for other ranges.


INSTALLATION CONSIDERATIONS

- Standard 24 AWG (0.61 mm dia.) 2 wire shielded cable located in a conduit separate from high voltage wiring
- 24 vdc power supplied from Technologic Controller

DIMENSIONAL INFORMATION

Dimensions in Inches (Millimeters)

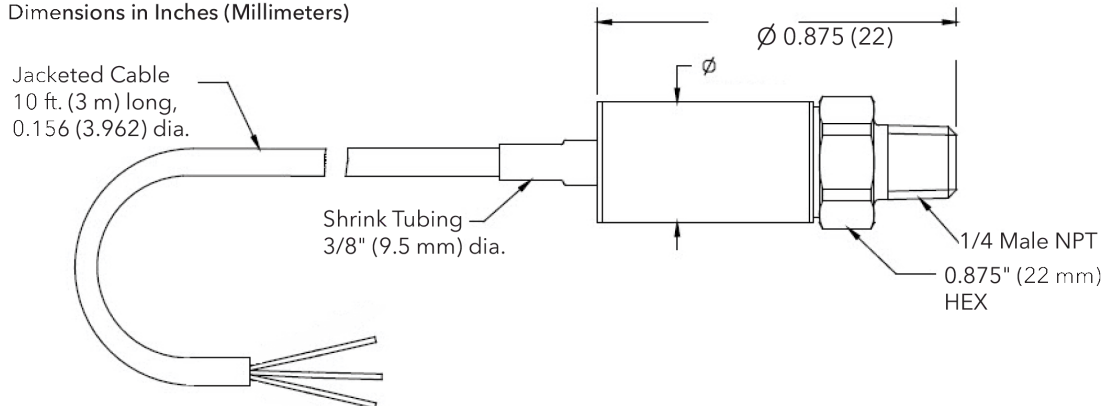

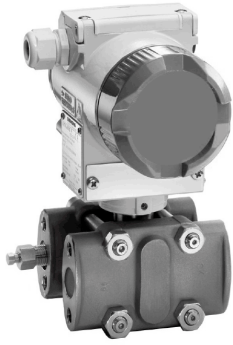


Differential Pressure Sensor/ Transmitter For Pumps with TECHNOLOGIC® Drives

FEATURES

- Relays reading to the Technologic controller up to 2000 ft. (610 m) away
- All wetted parts are 316 stainless steel
- Built-in RFI filter effective from 20 to 1000 MHz
- Withstands static pressures up to 2300 PSI (15858 kPa)
- 3 Valve bypass manifold (optional)
- 10 lbs. (4.5 kg) approximate weight

TECHNOLOGIC ANALOG SENSOR WIRING

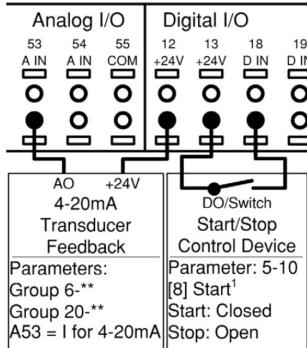

B&G PART NUMBERS

- S100089 Pressure range: 0 - 40 psi (0 - 276 kPa)
- S100091 Pressure range: 0 - 70 psi (0 - 483 kPa)
- S100092 Pressure range: 0 - 100 psi (0 - 689 kPa)


Consult factory for other ranges.

INSTALLATION CONSIDERATIONS

- Standard 18 AWG (1.194 mm dia.) 2 wire shielded cable located in a conduit separate from high voltage wiring
- 24 vdc power supplied from Technologic Controller for distance <2000 ft (610 m)

DIMENSIONAL INFORMATION

Dimensions in Inches (Millimeters)

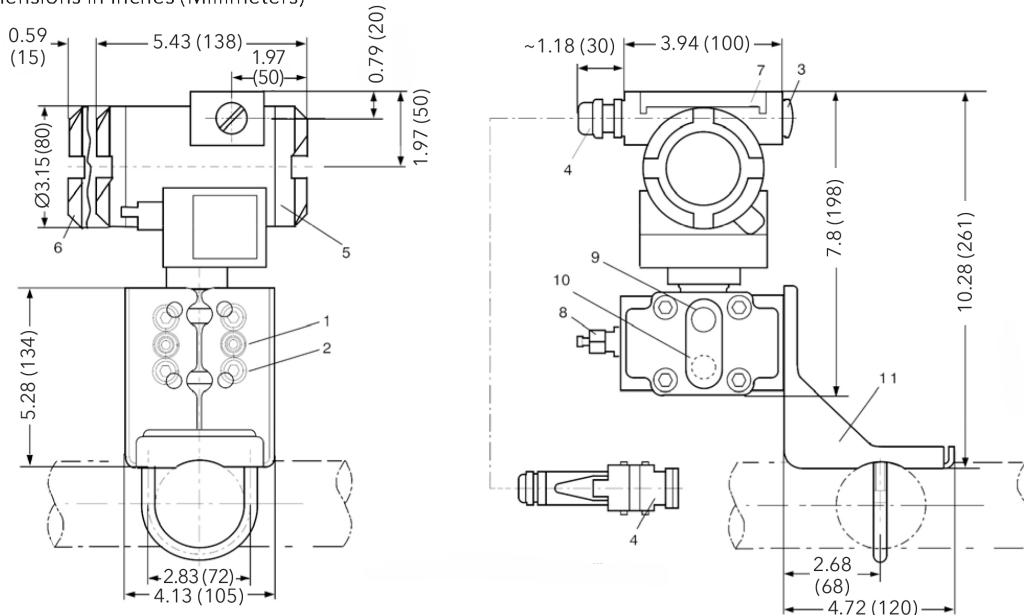

- 1 Process connection 1/4-18NPT for absolute pressure (+) side
- 2 Mounting thread 7/16-20 UNF to EN 61518
- 3 Dummy plug
- 4 Electrical connection: Screwed gland 1/2-14 NPT
- 5 Connection side

- 6 Electronic side, no digital display
- 7 Access cover over magnetic pushbuttons
- 8 Sealing screw with vent shown (optional)
- 9 Side vent for measuring liquid
- 10 Side vent for measuring gas (supplement H02)
- 11 Mounting bracket (2 shackles, 4 nuts, 4 U-plates, 1 angle) made of steel



Flow Sensor/Transmitter For Pumps with TECHNOLOGIC® Drives


The rugged Bell & Gossett Flow Sensor/Transmitter precisely measures system flow and transmits a proportional 4 to 20 mA DC signal to the Technologic Controller for display or program calculations.

FEATURES



- Suitable for mounting in vertical pipe
- Suitable for mounting in horizontal pipe within 45° of top dead center
- Non-magnetically sensed, non-fouling paddle wheel
- NEMA 4X Transmitter Enclosure
- Maximum Pressure Ratings:
1000 psi @ 100°F, 900 psi @ 200°F,
750 psi @ 300°F (6895 kPa @ 38°C, 6205 kPa @ 93°C,
5171 kPa @ 149°C)
- Maximum Temperature Ratings:
Fluid - 300°F (149°C) continuous service
Electronics - 150°F (66°C)
- Optional software and cable available for field programming
- 9.9 lbs (4.5 kg) approximate weight

DIMENSIONAL INFORMATION

Dimensions in Inches (Millimeters)

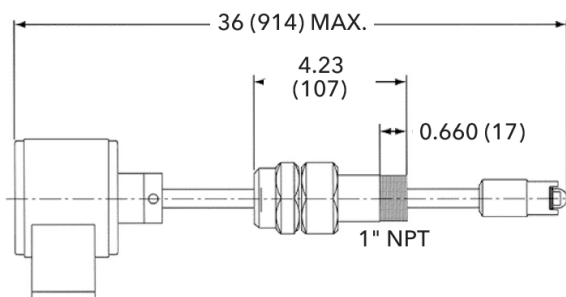

TECHNOLOGIC ANALOG SENSOR WIRING

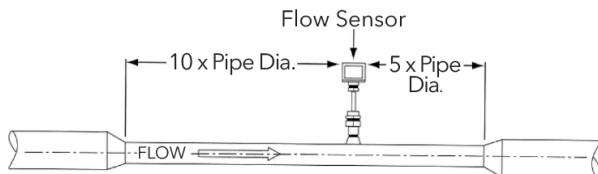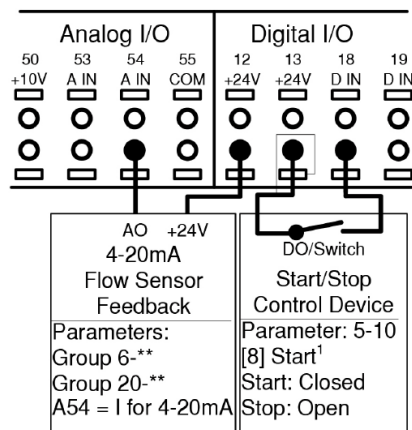


INSTALLATION CONSIDERATIONS

- Standard 18 AWG (1.194 mm dia.) gauge 3 wire shielded cable located in conduit separate from high voltage wiring
- 24 vdc power supplied from Technologic Controller
- Takes accurate readings and relays them to the Technologic Controller up to 2,000 ft. (610 m) away, when 10 pipe diameters upstream and 5 pipe diameters downstream of straight uninterrupted flow is present.

CALIBRATION CHART		
B&G Part No.	Pipe Size	Max. Flow
137411	3" Sch 40	250 gpm (16 l/sec)
137412	4" Sch 40	400 gpm (25 l/sec)
137413	6" Sch 40	850 gpm (54 l/sec)
137414	8" Sch 40	1750 gpm (110 l/sec)
137415	10" Sch 40	3150 gpm (199 l/sec)
137416	12" Sch 40	5000 gpm (315 l/sec)
137417	14" Sch 40	6400 gpm (404 l/sec)
137418	16" Sch 40	9100 gpm (574 l/sec)
137419	18" Sch 40	12400 gpm (782 l/sec)
137420	20" Sch 40	16500 gpm (1041 l/sec)

Consult factory for custom flow range calibration.

JOB:	REPRESENTATIVE:	
UNIT TAG:	ORDER NO.:	DATE:
ENGINEER:	SUBMITTED BY:	DATE:
CONTRACTOR:	APPROVED BY:	DATE:



4x4x13.5

Series e-80

In-Line Mounted Centrifugal Pumps

SPECIFICATIONS

FLOW _____ HEAD _____

HP _____ RPM _____

VOLTS _____

CYCLE _____ INPUT PHASE _____

ENCLOSURE _____

APPROX. WEIGHT _____

SPECIALS _____

MATERIALS OF CONSTRUCTION

Stainless Steel Fitted

MAXIMUM WORKING PRESSURE

- 175 psi (12 bar) with 125# ANSI flange drilling
- 250 psi (17 bar) with 250# ANSI flange drilling (requires 80-S)
- 300 psi (21 bar) W.P. with 250# ANSI flange drilling (Requires -S and EPR-Silicon Carbide-Silicon Carbide Seal)

MOUNTING


- In-Line Piping
- Flange Supports

PUMP VARIABLE SPEED CONTROL


- Integrated Technologic® Sensorless Control (ITSC)
- Integrated Technologic® (IT)
 - External input by others
 - Pressure Sensor(s)
 - Differential Pressure Sensor(s)
 - Flow Sensor(s)
- By Others

TYPE OF SEAL

- F Standard Seal w/ Flush Line (Buna-Carbon/Ceramic)
- S Stuffing Box construction w/ Flushed Mechanical Single Seal (EPR-Tungsten Carbide/Carbon)
- PF Stuffing Box Construction w/ Flushed Packing (Graphite Impregnated PTFE)

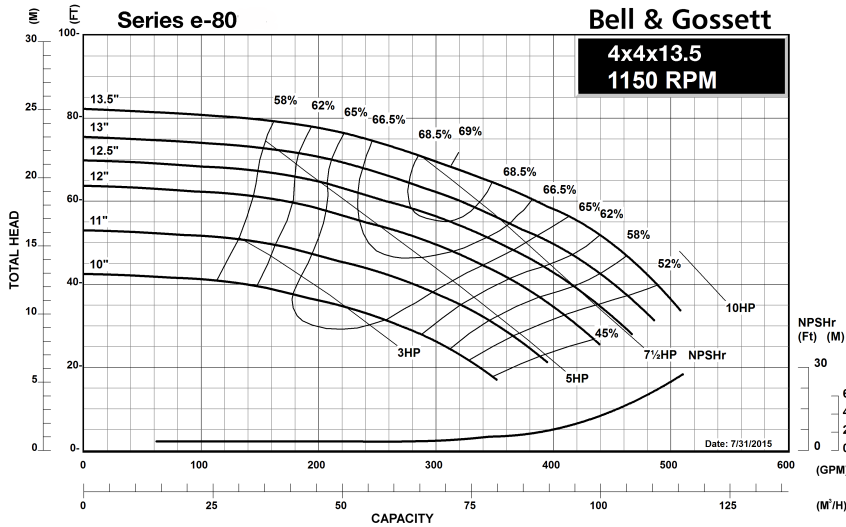

JOB:	REPRESENTATIVE:	
UNIT TAG:	ORDER NO.:	DATE:
ENGINEER:	SUBMITTED BY:	DATE:
CONTRACTOR:	APPROVED BY:	DATE:



4x4x13.5

Series e-80

In-Line Mounted Centrifugal Pumps

SPECIFICATIONS

FLOW _____ HEAD _____

HP _____ RPM _____

VOLTS _____

CYCLE _____ INPUT PHASE _____

ENCLOSURE _____

APPROX. WEIGHT _____

SPECIALS _____

MATERIALS OF CONSTRUCTION

Stainless Steel Fitted

MAXIMUM WORKING PRESSURE

- 175 psi (12 bar) with 125# ANSI flange drilling
- 250 psi (17 bar) with 250# ANSI flange drilling (requires 80-S)
- 300 psi (21 bar) W.P. with 250# ANSI flange drilling (Requires -S and EPR-Silicon Carbide-Silicon Carbide Seal)

MOUNTING


In-Line Piping Flange Supports


PUMP VARIABLE SPEED CONTROL

- Integrated Technologic® Sensorless Control (ITSC)
- Integrated Technologic® (IT)
 - External input by others
 - Pressure Sensor(s)
 - Differential Pressure Sensor(s)
 - Flow Sensor(s)
- By Others

TYPE OF SEAL

- F Standard Seal w/ Flush Line (Buna-Carbon/Ceramic)
- S Stuffing Box construction w/ Flushed Mechanical Single Seal (EPR-Tungsten Carbide/Carbon)
- PF Stuffing Box Construction w/ Flushed Packing (Graphite Impregnated PTFE)

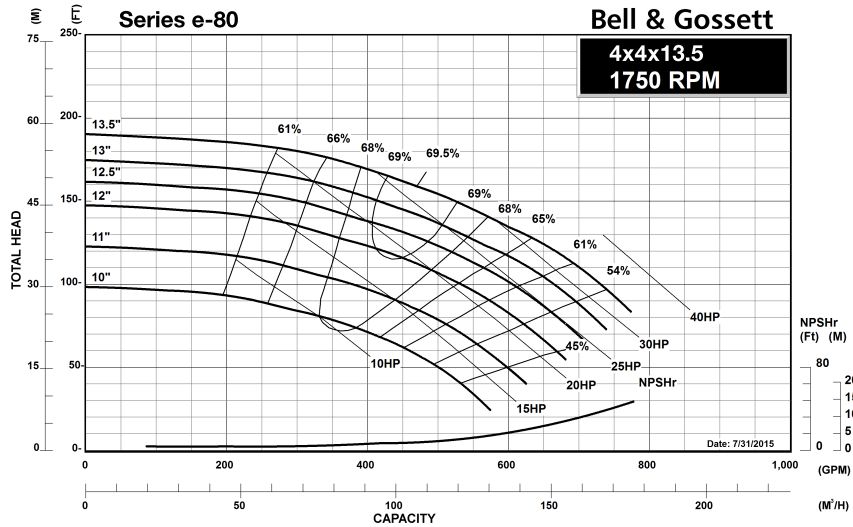

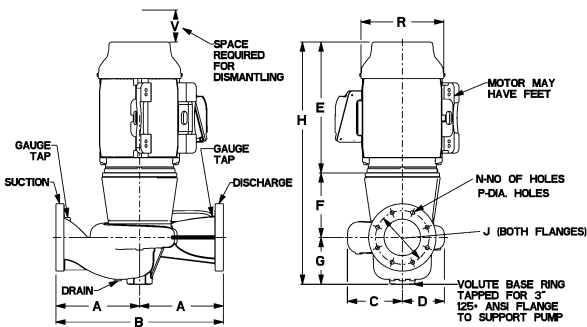

4x4x13.5 Series e-80 Centrifugal Pump Submittal - In-Line Piping

DIMENSIONS - Inches (mm)

STANDARD SEAL

MOTOR FRAME	A	B	C	D	E (max)	F	G	H (max)	125# ANSI			250# ANSI			R	S (Max)*	V (min)	Suct/Disch Gauge Taps (NPT)	Drain Tap (NPT)
									J	N	P	J	N	P					
									254JM	14.50 (368)	29.00 (737)	8.28 (210)	9.42 (239)	24.13 (613)					
256JM	14.50 (368)	29.00 (737)	8.28 (210)	9.42 (239)	24.13 (613)	4.48 (114)	8.02 (204)	36.63 (930)	7.50 (191)	8 (19)	0.75 (19)	7.88 (200)	8 (22)	0.88 (432)	17.00 (432)	-	5.75 (146)	0.25	0.25
284JM	14.50 (368)	29.00 (737)	8.28 (210)	9.42 (239)	23.63 (600)	4.48 (114)	8.02 (204)	36.13 (918)	7.50 (191)	8 (19)	0.75 (19)	7.88 (200)	8 (22)	0.88 (410)	16.13 (410)	4.63 (117)	5.75 (146)	0.25	0.25
286JM	14.50 (368)	29.00 (737)	8.28 (210)	9.42 (239)	25.13 (638)	4.48 (114)	8.02 (204)	37.63 (956)	7.50 (191)	8 (19)	0.75 (19)	7.88 (200)	8 (22)	0.88 (410)	16.13 (410)	4.63 (117)	5.75 (146)	0.25	0.25
324JM	14.50 (368)	29.00 (737)	8.28 (210)	9.42 (239)	26.00 (660)	4.48 (114)	8.02 (204)	38.50 (978)	7.50 (191)	8 (19)	0.75 (19)	7.88 (200)	8 (22)	0.88 (476)	18.75 (476)	4.63 (117)	5.75 (146)	0.25	0.25
326JM	14.50 (368)	29.00 (737)	8.28 (210)	9.42 (239)	26.00 (660)	4.48 (114)	8.02 (204)	38.50 (978)	7.50 (191)	8 (19)	0.75 (19)	7.88 (200)	8 (22)	0.88 (476)	18.75 (476)	4.63 (117)	5.75 (146)	0.25	0.25


STUFFING BOX

MOTOR FRAME	A	B	C	D	E (max)	F	G	H (max)	125# ANSI			250# ANSI			R	S (Max)*	V (min)	Suct/Disch Gauge Taps (NPT)	Drain Tap (NPT)
									J	N	P	J	N	P					
									254JP	14.50 (368)	29.00 (737)	8.28 (210)	9.42 (239)	24.13 (613)					
256JP	14.50 (368)	29.00 (737)	8.28 (210)	9.42 (239)	24.13 (613)	7.38 (187)	8.02 (204)	39.52 (1004)	7.50 (191)	8 (19)	0.75 (19)	7.88 (200)	8 (22)	0.88 (432)	17.00 (432)	-	5.75 (146)	0.25	0.25
284JP	14.50 (368)	29.00 (737)	8.28 (210)	9.42 (239)	23.63 (600)	7.38 (187)	8.02 (204)	39.02 (991)	7.50 (191)	8 (19)	0.75 (19)	7.88 (200)	8 (22)	0.88 (410)	16.13 (410)	4.63 (117)	5.75 (146)	0.25	0.25
286JP	14.50 (368)	29.00 (737)	8.28 (210)	9.42 (239)	25.13 (638)	7.38 (187)	8.02 (204)	40.52 (1029)	7.50 (191)	8 (19)	0.75 (19)	7.88 (200)	8 (22)	0.88 (410)	16.13 (410)	4.63 (117)	5.75 (146)	0.25	0.25
324JP	14.50 (368)	29.00 (737)	8.28 (210)	9.42 (239)	26.00 (660)	7.38 (187)	8.02 (204)	41.40 (1052)	7.50 (191)	8 (19)	0.75 (19)	7.88 (200)	8 (22)	0.88 (476)	18.75 (476)	4.63 (117)	5.75 (146)	0.25	0.25
284JP	14.50 (368)	29.00 (737)	8.28 (210)	9.42 (239)	26.00 (660)	7.38 (187)	8.02 (204)	36.75 (933)	3.88 (98)	4 (16)	0.63 (16)	4.50 (114)	4 (22)	0.88 (410)	16.13 (410)	4.63 (117)	5.75 (146)	0.25	0.25
286JP	9.50 (241)	29.00 (737)	8.28 (210)	9.42 (239)	25.13 (638)	7.38 (187)	4.50 (114)	38.13 (968)	3.88 (98)	4 (16)	0.63 (16)	4.50 (114)	4 (22)	0.88 (410)	16.13 (410)	4.63 (117)	4.00 (102)	0.25	0.25
326JP	14.50 (368)	29.00 (737)	8.28 (210)	9.42 (239)	26.00 (660)	7.38 (187)	8.02 (204)	41.40 (1052)	7.50 (191)	8 (19)	0.75 (19)	7.88 (200)	8 (22)	0.88 (476)	18.75 (476)	4.63 (117)	5.75 (146)	0.25	0.25

Dimensions are subject to change. Not to be used for construction purposes unless certified.

NOTE: For Single phase Motors add 1" to dimensions E & H.

*Dimensions are for ODP Motors. For TEFC add S dimension to dimensions E & H.

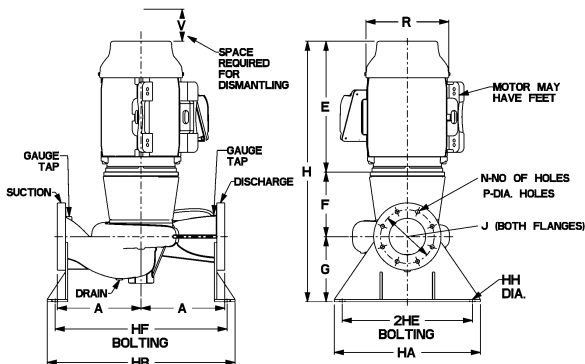

4x4x13.5 Series e-80 Centrifugal Pump Submittal - Flange Support Mounting

DIMENSIONS - Inches (mm)

STANDARD SEAL

MOTOR FRAME	A	HF BOLTING	HB	2HE BOLTING	HA	HH DIA	E (max)	F	G	H (max)	125# ANSI			250# ANSI			R	S (Max)*	V (min)	Suct/Disch Gauge Taps (NPT)	Drain Tap (NPT)
											J	N	P	J	N	P					
254JM	14.50 (368)	30.66 (779)	34.16 (868)	21.50 (546)	25.00 (635)	0.88 (22)	24.13 (613)	4.48 (114)	8.02 (204)	36.63 (930)	7.50 (191)	8 (19)	0.75 (19)	7.88 (200)	8 (22)	0.88 (432)	17.00 (432)	-	5.75 (146)	0.25	0.25
256JM	14.50 (368)	30.66 (779)	34.16 (868)	21.50 (546)	25.00 (635)	0.88 (22)	24.13 (613)	4.48 (114)	8.02 (204)	36.63 (930)	7.50 (191)	8 (19)	0.75 (19)	7.88 (200)	8 (22)	0.88 (432)	17.00 (432)	-	5.75 (146)	0.25	0.25
284JM	14.50 (368)	30.66 (779)	34.16 (868)	21.50 (546)	25.00 (635)	0.88 (22)	23.63 (600)	4.48 (114)	8.02 (204)	36.13 (918)	7.50 (191)	8 (19)	0.75 (19)	7.88 (200)	8 (22)	0.88 (410)	16.13 (410)	4.63 (117)	5.75 (146)	0.25	0.25
286JM	14.50 (368)	30.66 (779)	34.16 (868)	21.50 (546)	25.00 (635)	0.88 (22)	25.13 (638)	4.48 (114)	8.02 (204)	37.63 (956)	7.50 (191)	8 (19)	0.75 (19)	7.88 (200)	8 (22)	0.88 (410)	16.13 (410)	4.63 (117)	5.75 (146)	0.25	0.25
324JM	14.50 (368)	30.66 (779)	34.16 (868)	21.50 (546)	25.00 (635)	0.88 (22)	26.00 (660)	4.48 (114)	8.02 (204)	38.50 (978)	7.50 (191)	8 (19)	0.75 (19)	7.88 (200)	8 (22)	0.88 (476)	18.75 (476)	4.63 (117)	5.75 (146)	0.25	0.25
326JM	14.50 (368)	30.66 (779)	34.16 (868)	21.50 (546)	25.00 (635)	0.88 (22)	26.00 (660)	4.48 (114)	8.02 (204)	38.50 (978)	7.50 (191)	8 (19)	0.75 (19)	7.88 (200)	8 (22)	0.88 (476)	18.75 (476)	4.63 (117)	5.75 (146)	0.25	0.25


STUFFING BOX

MOTOR FRAME	A	HF BOLTING	HB	2HE BOLTING	HA	HH DIA	E (max)	F	G	H (max)	125# ANSI			250# ANSI			R	S (Max)*	V (min)	Suct/Disch Gauge Taps (NPT)	Drain Tap (NPT)
											J	N	P	J	N	P					
254JP	14.50 (368)	30.66 (779)	34.16 (868)	21.50 (546)	25.00 (635)	0.88 (22)	24.13 (613)	7.38 (187)	8.02 (204)	39.52 (1004)	7.50 (191)	8 (19)	0.75 (19)	7.88 (200)	8 (22)	0.88 (432)	17.00 (432)	-	5.75 (146)	0.25	0.25
256JP	14.50 (368)	30.66 (779)	34.16 (868)	21.50 (546)	25.00 (635)	0.88 (22)	24.13 (613)	7.38 (187)	8.02 (204)	39.52 (1004)	7.50 (191)	8 (19)	0.75 (19)	7.88 (200)	8 (22)	0.88 (432)	17.00 (432)	-	5.75 (146)	0.25	0.25
284JP	14.50 (368)	30.66 (779)	34.16 (868)	21.50 (546)	25.00 (635)	0.88 (22)	23.63 (600)	7.38 (187)	8.02 (204)	39.02 (991)	7.50 (191)	8 (19)	0.75 (19)	7.88 (200)	8 (22)	0.88 (410)	16.13 (410)	4.63 (117)	5.75 (146)	0.25	0.25
286JP	14.50 (368)	30.66 (779)	34.16 (868)	21.50 (546)	25.00 (635)	0.88 (22)	25.13 (638)	7.38 (187)	8.02 (204)	40.52 (1029)	7.50 (191)	8 (19)	0.75 (19)	7.88 (200)	8 (22)	0.88 (410)	16.13 (410)	4.63 (117)	5.75 (146)	0.25	0.25
324JP	14.50 (368)	30.66 (779)	34.16 (868)	21.50 (546)	25.00 (635)	0.88 (22)	26.00 (660)	7.38 (187)	8.02 (204)	41.40 (1052)	7.50 (191)	8 (19)	0.75 (19)	7.88 (200)	8 (22)	0.88 (476)	18.75 (476)	4.63 (117)	5.75 (146)	0.25	0.25
326JP	14.50 (368)	30.66 (779)	34.16 (868)	21.50 (546)	25.00 (635)	0.88 (22)	26.00 (660)	7.38 (187)	8.02 (204)	41.40 (1052)	7.50 (191)	8 (19)	0.75 (19)	7.88 (200)	8 (22)	0.88 (476)	18.75 (476)	4.63 (117)	5.75 (146)	0.25	0.25

Dimensions are subject to change. Not to be used for construction purposes unless certified.



NOTE: For Single phase Motors add 1" to dimensions E & H.

*Dimensions are for ODP Motors. For TEFC add S dimension to dimensions E & H.



4x4x13.5 Series e-80 In-Line Mounted Centrifugal Pumps With Integrated Technologic® Control

TECHNOLOGIC STANDARD FEATURES	
CONTROL METHOD WITH INTEGRATED TECHNOLOGIC® SENSORLESS CONTROL (ITSC)	Factory configured for sensorless operation.
CONTROL METHOD WITH INTEGRATED TECHNOLOGIC® (IT)	Field configurable for sensor by others, building management system input, or optional sensor(s) provided.
ENCLOSURE	NEMA 12 (same as IP55 & UL type 12)
POWER DISCONNECT SWITCH	Included standard. Fused Disconnect Switch optional with three phase input voltage.
HARMONIC SUPPRESSION	Integrated non-saturating dual DC link reactors provide better harmonic performance than a 5% AC line reactor.
COOLING	Fan-cooled through temperature controlled and easy replacement.
AMBIENT TEMPERATURE RATING	14°F to 113°F (-10°C to 45°C)
COMMUNICATION PROTOCOLS	BACnet, Modbus RTU, N2 Metasys, FLN Apogee
ANALOG INPUTS	2 configurable for either voltage (0 to 10VDC) or current(0/4 to 20mA)
ANALOG OUTPUTS	1 (0/4 to 20mA) up to 500 ohm load accurate to 1% of full scale
DIGITAL INPUTS	4 (0 to 24VDC), NPN or PNP, 0 to 24VDC, on 5 msec scan interval, Up to 2 can be configured as pulse inputs.
DIGITAL OUTPUTS	2 (0 to 24VDC), 40mA max current, configurable as pulse outputs.
RELAY OUTPUTS	2 programmable, 240VAC or 400VAC up to 2 A
MINIMUM CONTROL HEAD	_____ ft (default set to 40% of design head if not unknown)

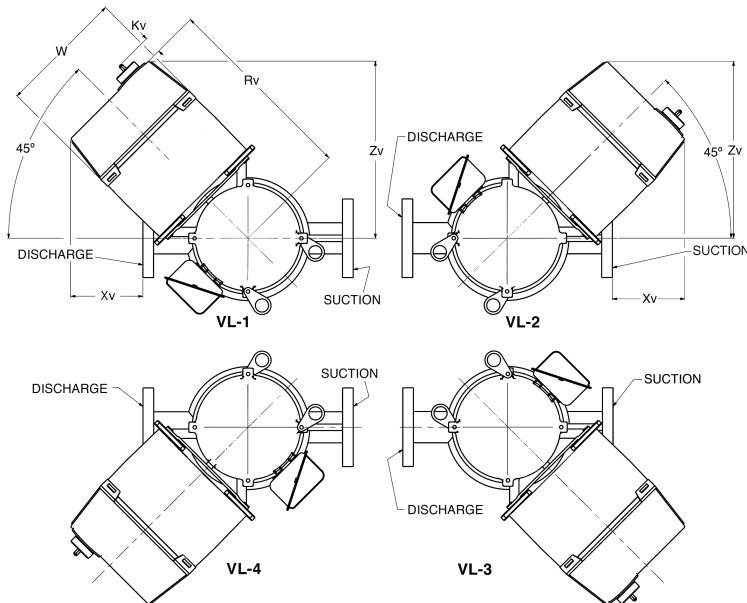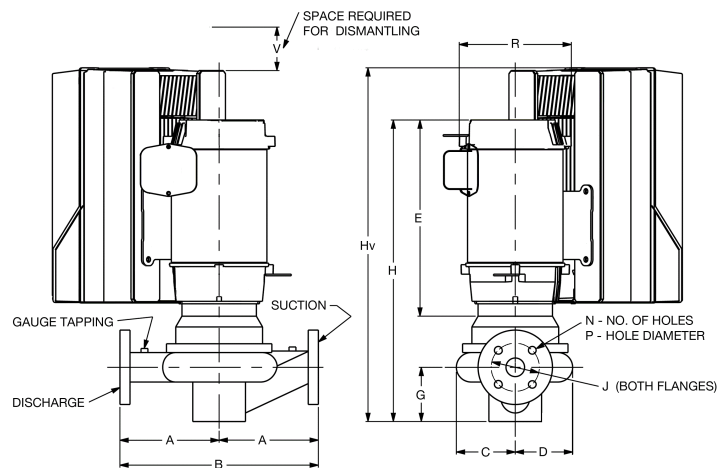

Series e-80 4x4x13.5

In-Line Mounted Centrifugal Pumps

With Integrated Technologic® Control

B-139.24

DIMENSIONS - Inches (mm)		STANDARD SEAL					STUFFING BOX						
MOTOR FRAME	VFD	Rv	Zv	W	Hv	Xv	MOTOR FRAME	VFD	Rv	Zv	W	Hv	Xv
254JM	B1	16.83 (427)	14.92 (379)	9.50 (241)	39.63 (1007)	1.14 (29)	254JP	B1	16.83 (427)	14.92 (379)	9.50 (241)	42.52 (1080)	1.14 (29)
	B2	16.83 (427)	14.92 (379)	9.50 (241)	44.09 (1120)	1.14 (29)		B2	16.83 (427)	14.92 (379)	9.50 (241)	46.98 (1193)	1.14 (29)
	C1	18.80 (477)	18.12 (460)	12.10 (307)	45.35 (1152)	4.34 (110)		C1	18.80 (477)	18.12 (460)	12.10 (307)	48.24 (1225)	4.34 (110)
256JM	B1	16.83 (427)	14.92 (379)	9.50 (241)	39.01 (991)	1.14 (29)	256JP	B1	16.83 (427)	14.92 (379)	9.50 (241)	41.90 (1064)	1.14 (29)
	B2	16.83 (427)	14.92 (379)	9.50 (241)	43.47 (1104)	1.14 (29)		B2	16.83 (427)	14.92 (379)	9.50 (241)	46.36 (1177)	1.14 (29)
	C1	18.80 (477)	18.12 (460)	12.10 (307)	44.73 (1136)	4.34 (110)		C1	18.80 (477)	18.12 (460)	12.10 (307)	47.62 (1209)	4.34 (110)
	C2	19.58 (497)	20.42 (519)	14.60 (371)	49.39 (1254)	6.64 (169)		C2	19.58 (497)	20.42 (519)	14.60 (371)	52.28 (1328)	6.64 (169)
284JM	B1	17.58 (446)	15.45 (393)	9.50 (241)	38.38 (975)	1.68 (43)	284JP	B1	17.58 (446)	15.45 (393)	9.50 (241)	41.27 (1048)	1.68 (43)
	B2	17.58 (446)	15.45 (393)	9.50 (241)	42.84 (1088)	1.68 (43)		B2	17.58 (446)	15.45 (393)	9.50 (241)	45.73 (1162)	1.68 (43)
	C1	19.58 (497)	17.63 (448)	12.09 (307)	45.24 (1149)	4.00 (102)		C1	19.58 (497)	17.63 (448)	12.09 (307)	48.13 (1222)	4.00 (102)
	C2	20.36 (517)	19.93 (506)	14.59 (371)	48.39 (1229)	6.30 (160)		C2	20.36 (517)	19.93 (506)	14.59 (371)	51.28 (1302)	6.30 (160)
286JM	B2	17.58 (446)	15.45 (393)	9.50 (241)	44.33 (1126)	1.68 (43)	286JP	B2	17.58 (446)	15.45 (393)	9.50 (241)	47.22 (1199)	1.68 (43)
	C1	19.58 (497)	17.63 (448)	12.09 (307)	46.74 (1187)	4.00 (102)		C1	19.58 (497)	17.63 (448)	12.09 (307)	49.63 (1261)	4.00 (102)
	C2	20.36 (517)	19.93 (506)	14.59 (371)	49.89 (1267)	6.30 (160)		C2	20.36 (517)	19.93 (506)	14.59 (371)	52.78 (1341)	6.30 (160)
324JM	B2	18.58 (472)	16.16 (410)	9.50 (241)	43.67 (1109)	2.40 (61)	324JP	B2	18.58 (472)	16.16 (410)	9.50 (241)	46.57 (1183)	2.40 (61)
	C1	20.58 (523)	18.33 (466)	12.09 (307)	44.02 (1118)	4.75 (121)		C1	20.58 (523)	18.33 (466)	12.09 (307)	46.92 (1192)	4.75 (121)
326JM	C1	20.58 (523)	18.33 (466)	12.09 (307)	44.02 (1118)	4.75 (121)	326JP	C1	20.58 (523)	18.33 (466)	12.09 (307)	46.92 (1192)	4.75 (121)
	C2	21.58 (548)	19.88 (505)	14.59 (371)	48.58 (1234)	6.33 (161)		C2	21.58 (548)	19.88 (505)	14.59 (371)	51.48 (1308)	6.33 (161)

NOTE: Drives with single phase input have three phase output and include three phase motors.
Kv=2 (50)




Pressure Sensor/Transmitter For Pumps with TECHNOLOGIC® Drives

FEATURES

- 4-20mA output
- 10-28 VDC supply voltage
- Operating Temperature -40 to 85°C (-40 to 185°F)
- Storage Temperature -40 to 100°C (-40 to 212°F)
- Enclosure IP-66 (housing only)
- High Strength Stainless Steel Construction
- No Oil, Welds or Internal O-rings
- Wide Operating Temperature
- Low Static and Thermal Errors
- Compatible with Wide Variety of Liquids and Gases
- EMI/RFI Protection
- UL/cUL 508 Approved (with housing)
- 1lb. (0.45 kg) approximate weight

TECHNOLOGIC ANALOG SENSOR WIRING

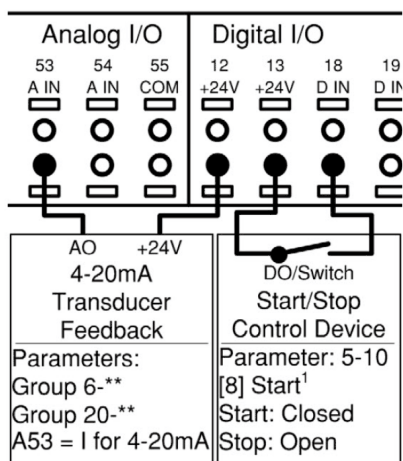

B&G PART NUMBERS

- S13203 Pressure range: 0-100 psi (0-689 kPa)
- S13204 Pressure range: 0-300 psi (0-2068 kPa)


Consult factory for other ranges.


INSTALLATION CONSIDERATIONS

- Standard 24 AWG (0.61 mm dia.) 2 wire shielded cable located in a conduit separate from high voltage wiring
- 24 vdc power supplied from Technologic Controller

DIMENSIONAL INFORMATION

Dimensions in Inches (Millimeters)

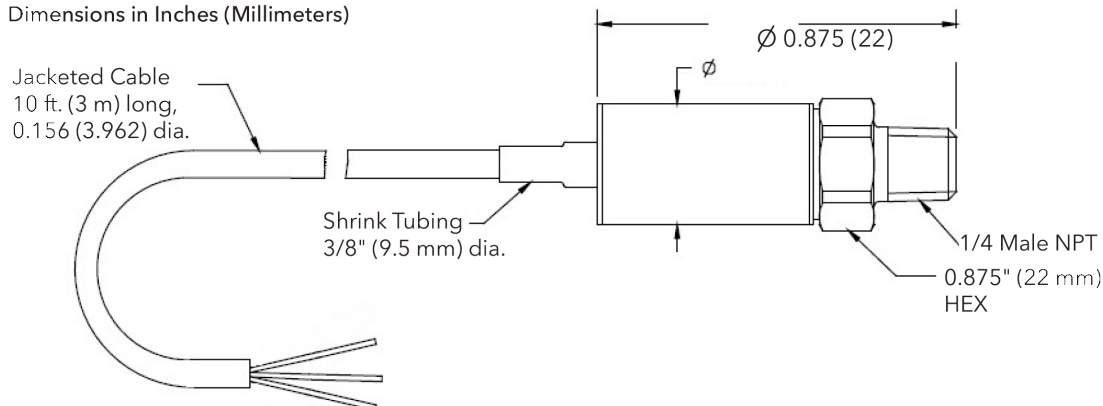

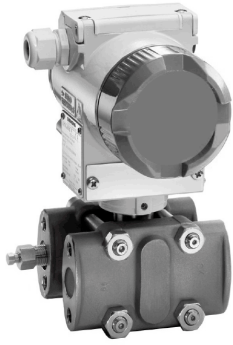


Differential Pressure Sensor/ Transmitter For Pumps with TECHNOLOGIC® Drives

FEATURES

- Relays reading to the Technologic controller up to 2000 ft. (610 m) away
- All wetted parts are 316 stainless steel
- Built-in RFI filter effective from 20 to 1000 MHz
- Withstands static pressures up to 2300 PSI (15858 kPa)
- 3 Valve bypass manifold (optional)
- 10 lbs. (4.5 kg) approximate weight

TECHNOLOGIC ANALOG SENSOR WIRING

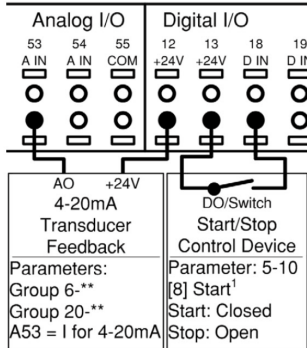

B&G PART NUMBERS

- S100089 Pressure range: 0 - 40 psi (0 - 276 kPa)
- S100091 Pressure range: 0 - 70 psi (0 - 483 kPa)
- S100092 Pressure range: 0 - 100 psi (0 - 689 kPa)


Consult factory for other ranges.

INSTALLATION CONSIDERATIONS

- Standard 18 AWG (1.194 mm dia.) 2 wire shielded cable located in a conduit separate from high voltage wiring
- 24 vdc power supplied from Technologic Controller for distance <2000 ft (610 m)

DIMENSIONAL INFORMATION

Dimensions in Inches (Millimeters)

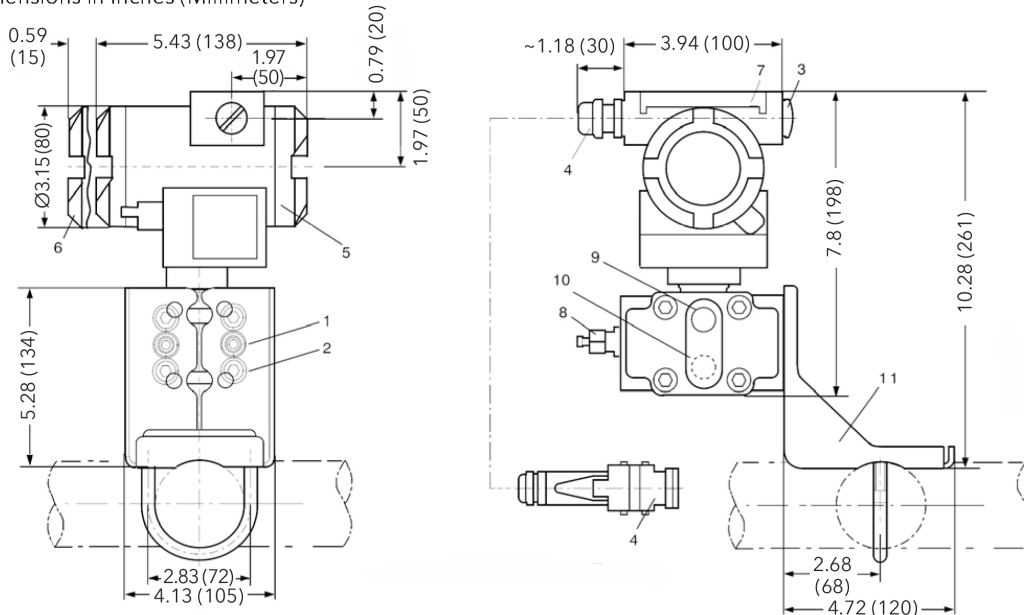

- 1 Process connection 1/4-18NPT for absolute pressure (+) side
- 2 Mounting thread 7/16-20 UNF to EN 61518
- 3 Dummy plug
- 4 Electrical connection: Screwed gland 1/2-14 NPT
- 5 Connection side

- 6 Electronic side, no digital display
- 7 Access cover over magnetic pushbuttons
- 8 Sealing screw with vent shown (optional)
- 9 Side vent for measuring liquid
- 10 Side vent for measuring gas (supplement H02)
- 11 Mounting bracket (2 shackles, 4 nuts, 4 U-plates, 1 angle) made of steel



Flow Sensor/Transmitter For Pumps with TECHNOLOGIC® Drives


The rugged Bell & Gossett Flow Sensor/Transmitter precisely measures system flow and transmits a proportional 4 to 20 mA DC signal to the Technologic Controller for display or program calculations.

FEATURES



- Suitable for mounting in vertical pipe
- Suitable for mounting in horizontal pipe within 45° of top dead center
- Non-magnetically sensed, non-fouling paddle wheel
- NEMA 4X Transmitter Enclosure
- Maximum Pressure Ratings:
1000 psi @ 100°F, 900 psi @ 200°F,
750 psi @ 300°F (6895 kPa @ 38°C, 6205 kPa @ 93°C,
5171 kPa @ 149°C)
- Maximum Temperature Ratings:
Fluid - 300°F (149°C) continuous service
Electronics - 150°F (66°C)
- Optional software and cable available for field programming
- 9.9 lbs (4.5 kg) approximate weight

DIMENSIONAL INFORMATION

Dimensions in Inches (Millimeters)

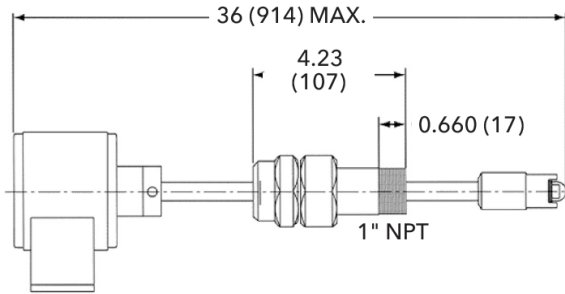

TECHNOLOGIC ANALOG SENSOR WIRING

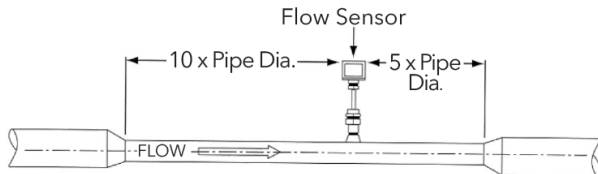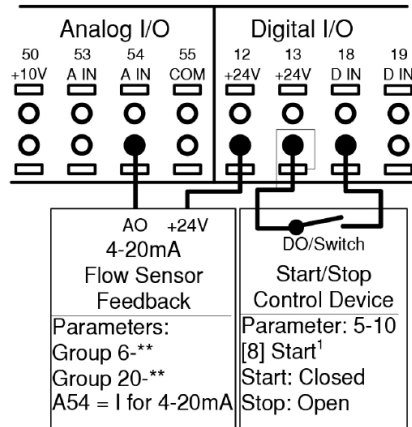

INSTALLATION CONSIDERATIONS


- Standard 18 AWG (1.194 mm dia.) gauge 3 wire shielded cable located in conduit separate from high voltage wiring
- 24 vdc power supplied from Technologic Controller
- Takes accurate readings and relays them to the Technologic Controller up to 2,000 ft. (610 m) away, when 10 pipe diameters upstream and 5 pipe diameters downstream of straight uninterrupted flow is present.

CALIBRATION CHART

B&G Part No.	Pipe Size	Max. Flow
137411	3" Sch 40	250 gpm (16 l/sec)
137412	4" Sch 40	400 gpm (25 l/sec)
137413	6" Sch 40	850 gpm (54 l/sec)
137414	8" Sch 40	1750 gpm (110 l/sec)
137415	10" Sch 40	3150 gpm (199 l/sec)
137416	12" Sch 40	5000 gpm (315 l/sec)
137417	14" Sch 40	6400 gpm (404 l/sec)
137418	16" Sch 40	9100 gpm (574 l/sec)
137419	18" Sch 40	12400 gpm (782 l/sec)
137420	20" Sch 40	16500 gpm (1041 l/sec)

Consult factory for custom flow range calibration.

JOB:	REPRESENTATIVE:	
UNIT TAG:	ORDER NO.:	DATE:
ENGINEER:	SUBMITTED BY:	DATE:
CONTRACTOR:	APPROVED BY:	DATE:



5x5x7B Series e-80 In-Line Mounted Centrifugal Pumps

SPECIFICATIONS

FLOW _____ HEAD _____
 HP _____ RPM _____
 VOLTS _____
 CYCLE _____ INPUT PHASE _____
 ENCLOSURE _____
 APPROX. WEIGHT _____
 SPECIALS _____

MATERIALS OF CONSTRUCTION

Stainless Steel Fitted

MAXIMUM WORKING PRESSURE

- 175 psi (12 bar) with 125# ANSI flange drilling
- 250 psi (17 bar) with 250# ANSI flange drilling (requires 80-S)
- 300 psi (21 bar) W.P. with 250# ANSI flange drilling (Requires -S and EPR-Silicon Carbide-Silicon Carbide Seal)

MOUNTING


- In-Line Piping
- Flange Supports

PUMP VARIABLE SPEED CONTROL


- Integrated Technologic® Sensorless Control (ITSC)
- Integrated Technologic® (IT)
 - External input by others
 - Pressure Sensor(s)
 - Differential Pressure Sensor(s)
 - Flow Sensor(s)
- By Others

TYPE OF SEAL

- F Standard Seal w/ Flush Line (Buna-Carbon/Ceramic)
- S Stuffing Box construction w/ Flushed Mechanical Single Seal (EPR-Tungsten Carbide/Carbon)
- PF Stuffing Box Construction w/ Flushed Packing (Graphite Impregnated PTFE)

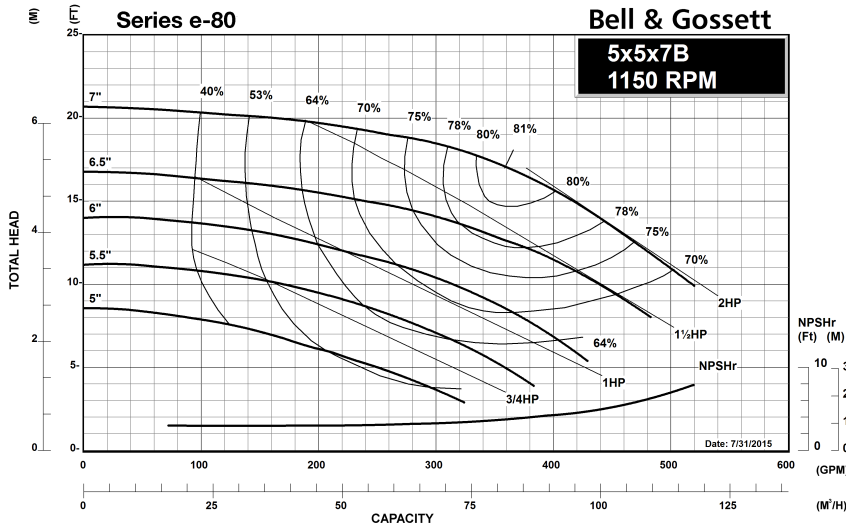

JOB:	REPRESENTATIVE:	
UNIT TAG:	ORDER NO.:	DATE:
ENGINEER:	SUBMITTED BY:	DATE:
CONTRACTOR:	APPROVED BY:	DATE:



5x5x7B

Series e-80

In-Line Mounted Centrifugal Pumps

SPECIFICATIONS

FLOW _____ HEAD _____

HP _____ RPM _____

VOLTS _____

CYCLE _____ INPUT PHASE _____

ENCLOSURE _____

APPROX. WEIGHT _____

SPECIALS _____

MATERIALS OF CONSTRUCTION

Stainless Steel Fitted

MAXIMUM WORKING PRESSURE

- 175 psi (12 bar) with 125# ANSI flange drilling
- 250 psi (17 bar) with 250# ANSI flange drilling (requires 80-S)
- 300 psi (21 bar) W.P. with 250# ANSI flange drilling (Requires -S and EPR-Silicon Carbide-Silicon Carbide Seal)

MOUNTING


- In-Line Piping
- Flange Supports

PUMP VARIABLE SPEED CONTROL


- Integrated Technologic® Sensorless Control (ITSC)
- Integrated Technologic® (IT)
 - External input by others
 - Pressure Sensor(s)
 - Differential Pressure Sensor(s)
 - Flow Sensor(s)
- By Others

TYPE OF SEAL

- F Standard Seal w/ Flush Line (Buna-Carbon/Ceramic)
- S Stuffing Box construction w/ Flushed Mechanical Single Seal (EPR-Tungsten Carbide/Carbon)
- PF Stuffing Box Construction w/ Flushed Packing (Graphite Impregnated PTFE)

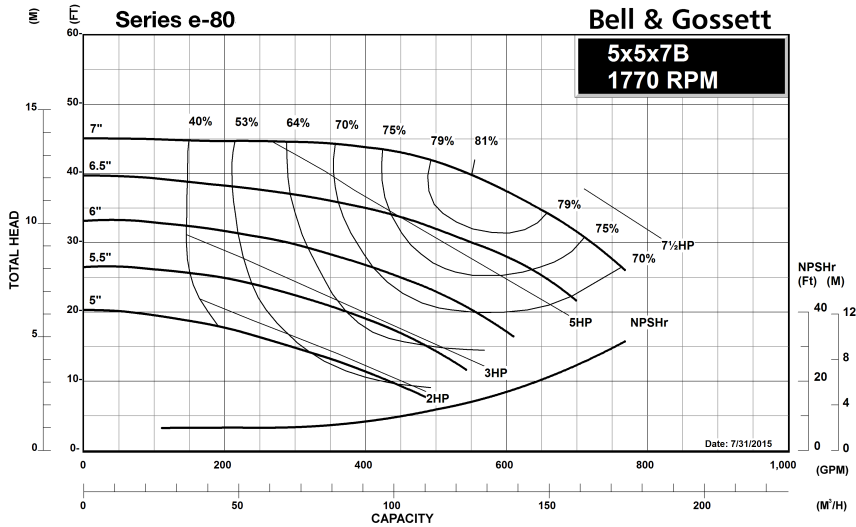

JOB:	REPRESENTATIVE:	
UNIT TAG:	ORDER NO.:	DATE:
ENGINEER:	SUBMITTED BY:	DATE:
CONTRACTOR:	APPROVED BY:	DATE:



5x5x7B Series e-80 In-Line Mounted Centrifugal Pumps

SPECIFICATIONS

FLOW _____ HEAD _____
 HP _____ RPM _____
 VOLTS _____
 CYCLE _____ INPUT PHASE _____
 ENCLOSURE _____
 APPROX. WEIGHT _____
 SPECIALS _____

MATERIALS OF CONSTRUCTION

Stainless Steel Fitted

MAXIMUM WORKING PRESSURE

- 175 psi (12 bar) with 125# ANSI flange drilling
- 250 psi (17 bar) with 250# ANSI flange drilling (requires 80-S)
- 300 psi (21 bar) W.P. with 250# ANSI flange drilling (Requires -S and EPR-Silicon Carbide-Silicon Carbide Seal)

MOUNTING


- In-Line Piping
- Flange Supports


PUMP VARIABLE SPEED CONTROL

- Integrated Technologic® Sensorless Control (ITSC)
- Integrated Technologic® (IT)
 - External input by others
 - Pressure Sensor(s)
 - Differential Pressure Sensor(s)
 - Flow Sensor(s)
- By Others

TYPE OF SEAL

- F Standard Seal w/ Flush Line (Buna-Carbon/Ceramic)
- S Stuffing Box construction w/ Flushed Mechanical Single Seal (EPR-Tungsten Carbide/Carbon)
- PF Stuffing Box Construction w/ Flushed Packing (Graphite Impregnated PTFE)

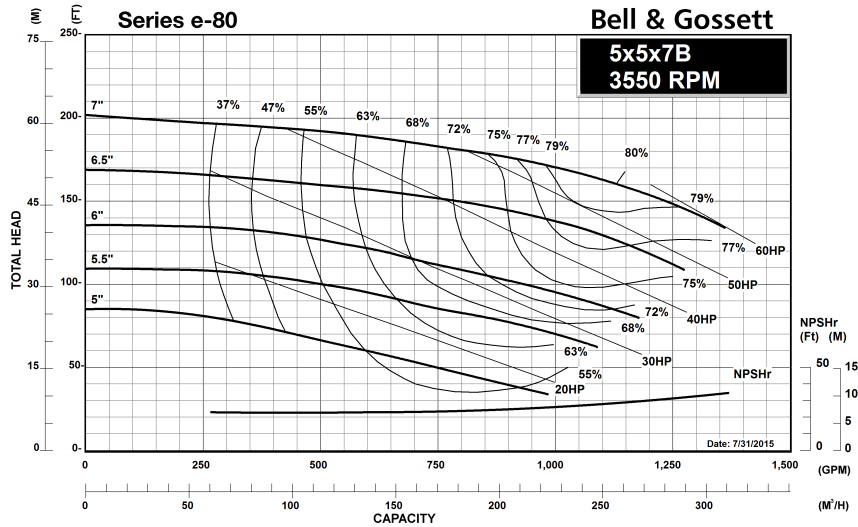

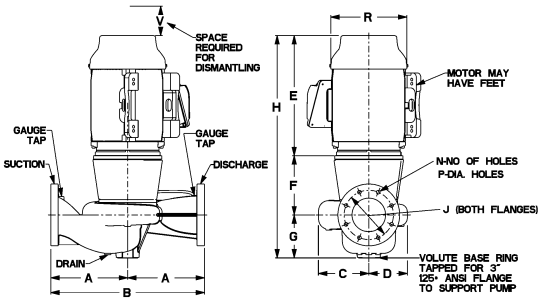

5x5x7B Series e-80 Centrifugal Pump Submittal - In-Line Piping

DIMENSIONS - Inches (mm)

STANDARD SEAL

MOTOR FRAME	A	B	C	D	E (max)	F	G	H (max)	125# ANSI			250# ANSI			R	S (Max)*	V (min)	Suct/Disch Gauge Taps (NPT)	Drain Tap (NPT)
									J	N	P	J	N	P					
145JM	12.00 (305)	24.00 (610)	5.69 (145)	8.31 (211)	12.63 (321)	5.50 (140)	7.28 (185)	25.41 (645)	8.50 (216)	8 (22)	0.88 (22)	9.25 (235)	8 (22)	0.88 (22)	9.75 (248)	1.50 (38)	4.50 (114)	0.25	0.25
182JM	12.00 (305)	24.00 (610)	5.69 (145)	8.31 (211)	15.31 (389)	5.50 (140)	7.28 (185)	28.09 (714)	8.50 (216)	8 (22)	0.88 (22)	9.25 (235)	8 (22)	0.88 (22)	11.75 (298)	1.00 (25)	4.50 (114)	0.25	0.25
184JM	12.00 (305)	24.00 (610)	5.69 (145)	8.31 (211)	15.31 (389)	5.50 (140)	7.28 (185)	28.09 (714)	8.50 (216)	8 (22)	0.88 (22)	9.25 (235)	8 (22)	0.88 (22)	11.75 (298)	1.00 (25)	4.50 (114)	0.25	0.25
213JM	12.00 (305)	24.00 (610)	5.69 (145)	8.31 (211)	19.25 (489)	5.50 (140)	7.28 (185)	32.03 (814)	8.50 (216)	8 (22)	0.88 (22)	9.25 (235)	8 (22)	0.88 (22)	14.00 (356)	-	4.50 (114)	0.25	0.25
215JM	12.00 (305)	24.00 (610)	5.69 (145)	8.31 (211)	19.25 (489)	5.50 (140)	7.28 (185)	32.03 (814)	8.50 (216)	8 (22)	0.88 (22)	9.25 (235)	8 (22)	0.88 (22)	14.00 (356)	-	4.50 (114)	0.25	0.25
254JM	12.00 (305)	24.00 (610)	5.69 (145)	8.31 (211)	24.13 (613)	6.50 (165)	7.28 (185)	37.91 (963)	8.50 (216)	8 (22)	0.88 (22)	9.25 (235)	8 (22)	0.88 (22)	17.00 (432)	-	4.50 (114)	0.25	0.25
256JM	12.00 (305)	24.00 (610)	5.69 (145)	8.31 (211)	24.13 (613)	6.50 (165)	7.28 (185)	37.91 (963)	8.50 (216)	8 (22)	0.88 (22)	9.25 (235)	8 (22)	0.88 (22)	17.00 (432)	-	4.50 (114)	0.25	0.25
284JM	12.00 (305)	24.00 (610)	5.69 (145)	8.31 (211)	23.63 (600)	6.50 (165)	7.28 (185)	37.41 (950)	8.50 (216)	8 (22)	0.88 (22)	9.25 (235)	8 (22)	0.88 (22)	16.13 (410)	4.63 (117)	4.50 (114)	0.25	0.25
286JP	12.00 (305)	24.00 (610)	5.69 (145)	8.31 (211)	25.13 (638)	6.50 (165)	7.28 (185)	38.91 (988)	8.50 (216)	8 (22)	0.88 (22)	9.25 (235)	8 (22)	0.88 (22)	16.13 (410)	4.63 (117)	4.50 (114)	0.25	0.25
324JM	12.00 (305)	24.00 (610)	5.69 (145)	8.31 (211)	26.00 (660)	6.50 (165)	7.28 (185)	39.78 (1010)	8.50 (216)	8 (22)	0.88 (22)	9.25 (235)	8 (22)	0.88 (22)	18.75 (476)	4.63 (117)	4.50 (114)	0.25	0.25
326JM	12.00 (305)	24.00 (610)	5.69 (145)	8.31 (211)	26.00 (660)	6.50 (165)	7.28 (185)	39.78 (1010)	8.50 (216)	8 (22)	0.88 (22)	9.25 (235)	8 (22)	0.88 (22)	18.75 (476)	4.63 (117)	4.50 (114)	0.25	0.25

STUFFING BOX

MOTOR FRAME	A	B	C	D	E (max)	F	G	H (max)	125# ANSI			250# ANSI			R	S (Max)*	V (min)	Suct/Disch Gauge Taps (NPT)	Drain Tap (NPT)
									J	N	P	J	N	P					
145JP	12.00 (305)	24.00 (610)	5.69 (145)	8.31 (211)	12.63 (321)	8.63 (219)	7.28 (185)	28.53 (725)	8.50 (216)	8 (22)	0.88 (22)	9.25 (235)	8 (22)	0.88 (22)	9.75 (248)	1.50 (38)	4.50 (114)	0.25	0.25
182JP	12.00 (305)	24.00 (610)	5.69 (145)	8.31 (211)	15.31 (389)	8.63 (219)	7.28 (185)	31.22 (793)	8.50 (216)	8 (22)	0.88 (22)	9.25 (235)	8 (22)	0.88 (22)	11.75 (298)	1.00 (25)	4.50 (114)	0.25	0.25
184JP	12.00 (305)	24.00 (610)	5.69 (145)	8.31 (211)	15.31 (389)	8.63 (219)	7.28 (185)	31.22 (793)	8.50 (216)	8 (22)	0.88 (22)	9.25 (235)	8 (22)	0.88 (22)	11.75 (298)	1.00 (25)	4.50 (114)	0.25	0.25
213JP	12.00 (305)	24.00 (610)	5.69 (145)	8.31 (211)	19.25 (489)	9.38 (238)	7.28 (185)	35.91 (912)	8.50 (216)	8 (22)	0.88 (22)	9.25 (235)	8 (22)	0.88 (22)	14.00 (356)	-	4.50 (114)	0.25	0.25
215JP	12.00 (305)	24.00 (610)	5.69 (145)	8.31 (211)	19.25 (489)	9.38 (238)	7.28 (185)	35.91 (912)	8.50 (216)	8 (22)	0.88 (22)	9.25 (235)	8 (22)	0.88 (22)	14.00 (356)	-	4.50 (114)	0.25	0.25
254JP	12.00 (305)	24.00 (610)	5.69 (145)	8.31 (211)	24.13 (613)	9.38 (238)	7.28 (185)	40.78 (1036)	8.50 (216)	8 (22)	0.88 (22)	9.25 (235)	8 (22)	0.88 (22)	17.00 (432)	-	4.50 (114)	0.25	0.25
256JP	12.00 (305)	24.00 (610)	5.69 (145)	8.31 (211)	24.13 (613)	9.38 (238)	7.28 (185)	40.78 (1036)	8.50 (216)	8 (22)	0.88 (22)	9.25 (235)	8 (22)	0.88 (22)	17.00 (432)	-	4.50 (114)	0.25	0.25
284JP	12.00 (305)	24.00 (610)	5.69 (145)	8.31 (211)	23.63 (600)	9.38 (238)	7.28 (185)	40.28 (1023)	8.50 (216)	8 (22)	0.88 (22)	9.25 (235)	8 (22)	0.88 (22)	16.13 (410)	4.63 (117)	4.50 (114)	0.25	0.25
286JP	12.00 (305)	24.00 (610)	5.69 (145)	8.31 (211)	25.13 (638)	9.38 (238)	7.28 (185)	41.78 (1061)	8.50 (216)	8 (22)	0.88 (22)	9.25 (235)	8 (22)	0.88 (22)	16.13 (410)	4.63 (117)	4.50 (114)	0.25	0.25
286JP	12.00 (305)	24.00 (610)	5.69 (145)	8.31 (211)	25.13 (638)	9.38 (238)	7.28 (185)	41.78 (1061)	8.50 (216)	8 (22)	0.88 (22)	9.25 (235)	8 (22)	0.88 (22)	16.13 (410)	4.63 (117)	4.50 (114)	0.25	0.25
324JP	12.00 (305)	24.00 (610)	5.69 (145)	8.31 (211)	26.00 (660)	9.38 (238)	7.28 (185)	42.66 (1083)	8.50 (216)	8 (22)	0.88 (22)	9.25 (235)	8 (22)	0.88 (22)	18.75 (476)	4.63 (117)	4.50 (114)	0.25	0.25
326JP	12.00 (305)	24.00 (610)	5.69 (145)	8.31 (211)	26.00 (660)	9.38 (238)	7.28 (185)	42.66 (1083)	8.50 (216)	8 (22)	0.88 (22)	9.25 (235)	8 (22)	0.88 (22)	18.75 (476)	4.63 (117)	4.50 (114)	0.25	0.25


Dimensions are subject to change. Not to be used for construction purposes unless certified.

NOTE: For Single phase Motors add 1" to dimensions E & H.

*Dimensions are for ODP Motors. For TEFC add S dimension to dimensions E & H.

Xylem Inc.
8200 N. Austin Avenue, Morton Grove, IL 60053
Phone: (847)966-3700 Fax: (847)965-8379
www.bellgossett.com
Bell & Gossett is a trademark of Xylem Inc. or one of its subsidiaries.
© 2015 Xylem Inc.



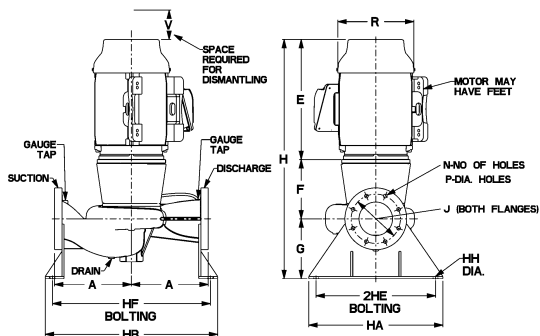

5x5x7B Series e-80 Centrifugal Pump Submittal - Flange Support Mounting

DIMENSIONS - Inches (mm)

STANDARD SEAL

MOTOR FRAME	A	HF BOLTING	HB	2HE BOLTING	HA	HH DIA	E (max)	F	G	H (max)	125# ANSI			250# ANSI			R	S (Max)*	V (min)	Suct/Disch Gauge Taps (NPT)	Drain Tap (NPT)
											J	N	P	J	N	P					
145JM	12.00 (305)	24.44 (621)	28.94 (735)	21.50 (546)	25.00 (635)	1.00 (25)	12.63 (321)	5.50 (140)	7.28 (185)	25.41 (645)	8.50 (216)	8 (22)	0.88 (235)	9.25 (235)	8 (22)	0.88 (22)	9.75 (248)	1.50 (38)	4.50 (114)	0.25	0.25
182JM	12.00 (305)	24.44 (621)	28.94 (735)	21.50 (546)	25.00 (635)	1.00 (25)	15.31 (389)	5.50 (140)	7.28 (185)	28.09 (714)	8.50 (216)	8 (22)	0.88 (235)	9.25 (235)	8 (22)	0.88 (22)	11.75 (298)	1.00 (25)	4.50 (114)	0.25	0.25
184JM	12.00 (305)	24.44 (621)	28.94 (735)	21.50 (546)	25.00 (635)	1.00 (25)	15.31 (389)	5.50 (140)	7.28 (185)	28.09 (714)	8.50 (216)	8 (22)	0.88 (235)	9.25 (235)	8 (22)	0.88 (22)	11.75 (298)	1.00 (25)	4.50 (114)	0.25	0.25
213JM	12.00 (305)	24.44 (621)	28.94 (735)	21.50 (546)	25.00 (635)	1.00 (25)	19.25 (489)	5.50 (140)	7.28 (185)	32.03 (814)	8.50 (216)	8 (22)	0.88 (235)	9.25 (235)	8 (22)	0.88 (22)	14.00 (356)	-	4.50 (114)	0.25	0.25
215JM	12.00 (305)	24.44 (621)	28.94 (735)	21.50 (546)	25.00 (635)	1.00 (25)	19.25 (489)	5.50 (140)	7.28 (185)	32.03 (814)	8.50 (216)	8 (22)	0.88 (235)	9.25 (235)	8 (22)	0.88 (22)	14.00 (356)	-	4.50 (114)	0.25	0.25
254JM	12.00 (305)	24.44 (621)	28.94 (735)	21.50 (546)	25.00 (635)	1.00 (25)	24.13 (613)	6.50 (165)	7.28 (185)	37.91 (963)	8.50 (216)	8 (22)	0.88 (235)	9.25 (235)	8 (22)	0.88 (22)	17.00 (432)	-	4.50 (114)	0.25	0.25
256JM	12.00 (305)	24.44 (621)	28.94 (735)	21.50 (546)	25.00 (635)	1.00 (25)	24.13 (613)	6.50 (165)	7.28 (185)	37.91 (963)	8.50 (216)	8 (22)	0.88 (235)	9.25 (235)	8 (22)	0.88 (22)	17.00 (432)	-	4.50 (114)	0.25	0.25
284JM	12.00 (305)	24.44 (621)	28.94 (735)	21.50 (546)	25.00 (635)	1.00 (25)	23.63 (600)	6.50 (165)	7.28 (185)	37.41 (950)	8.50 (216)	8 (22)	0.88 (235)	9.25 (235)	8 (22)	0.88 (22)	16.13 (410)	4.63 (117)	4.50 (114)	0.25	0.25
286JM	12.00 (305)	24.44 (621)	28.94 (735)	21.50 (546)	25.00 (635)	1.00 (25)	25.13 (638)	6.50 (165)	7.28 (185)	38.91 (988)	8.50 (216)	8 (22)	0.88 (235)	9.25 (235)	8 (22)	0.88 (22)	16.13 (410)	4.63 (117)	4.50 (114)	0.25	0.25
324JM	12.00 (305)	24.44 (621)	28.94 (735)	21.50 (546)	25.00 (635)	1.00 (25)	26.00 (660)	6.50 (165)	7.28 (185)	39.78 (1010)	8.50 (216)	8 (22)	0.88 (235)	9.25 (235)	8 (22)	0.88 (22)	18.75 (476)	4.63 (117)	4.50 (114)	0.25	0.25
326JM	12.00 (305)	24.44 (621)	28.94 (735)	21.50 (546)	25.00 (635)	1.00 (25)	26.00 (660)	6.50 (165)	7.28 (185)	39.78 (1010)	8.50 (216)	8 (22)	0.88 (235)	9.25 (235)	8 (22)	0.88 (22)	18.75 (476)	4.63 (117)	4.50 (114)	0.25	0.25


STUFFING BOX

MOTOR FRAME	A	HF BOLTING	HB	2HE BOLTING	HA	HH DIA	E (max)	F	G	H (max)	125# ANSI			250# ANSI			R	S (Max)*	V (min)	Suct/Disch Gauge Taps (NPT)	Drain Tap (NPT)
											J	N	P	J	N	P					
145JP	12.00 (305)	24.44 (621)	28.94 (735)	21.50 (546)	25.00 (635)	1.00 (25)	12.63 (321)	8.63 (219)	7.28 (185)	28.53 (725)	8.50 (216)	8 (22)	0.88 (235)	9.25 (235)	8 (22)	0.88 (22)	9.75 (248)	1.50 (38)	4.50 (114)	0.25	0.25
182JP	12.00 (305)	24.44 (621)	28.94 (735)	21.50 (546)	25.00 (635)	1.00 (25)	15.31 (389)	8.63 (219)	7.28 (185)	31.22 (793)	8.50 (216)	8 (22)	0.88 (235)	9.25 (235)	8 (22)	0.88 (22)	11.75 (298)	1.00 (25)	4.50 (114)	0.25	0.25
184JP	12.00 (305)	24.44 (621)	28.94 (735)	21.50 (546)	25.00 (635)	1.00 (25)	15.31 (389)	8.63 (219)	7.28 (185)	31.22 (793)	8.50 (216)	8 (22)	0.88 (235)	9.25 (235)	8 (22)	0.88 (22)	11.75 (298)	1.00 (25)	4.50 (114)	0.25	0.25
213JP	12.00 (305)	24.44 (621)	28.94 (735)	21.50 (546)	25.00 (635)	1.00 (25)	19.25 (489)	9.38 (238)	7.28 (185)	35.91 (912)	8.50 (216)	8 (22)	0.88 (235)	9.25 (235)	8 (22)	0.88 (22)	14.00 (356)	-	4.50 (114)	0.25	0.25
215JP	12.00 (305)	24.44 (621)	28.94 (735)	21.50 (546)	25.00 (635)	1.00 (25)	19.25 (489)	9.38 (238)	7.28 (185)	35.91 (912)	8.50 (216)	8 (22)	0.88 (235)	9.25 (235)	8 (22)	0.88 (22)	14.00 (356)	-	4.50 (114)	0.25	0.25
254JP	12.00 (305)	24.44 (621)	28.94 (735)	21.50 (546)	25.00 (635)	1.00 (25)	24.13 (613)	9.38 (238)	7.28 (185)	40.78 (1036)	8.50 (216)	8 (22)	0.88 (235)	9.25 (235)	8 (22)	0.88 (22)	17.00 (432)	-	4.50 (114)	0.25	0.25
256JP	12.00 (305)	24.44 (621)	28.94 (735)	21.50 (546)	25.00 (635)	1.00 (25)	24.13 (613)	9.38 (238)	7.28 (185)	40.78 (1036)	8.50 (216)	8 (22)	0.88 (235)	9.25 (235)	8 (22)	0.88 (22)	17.00 (432)	-	4.50 (114)	0.25	0.25
284JP	12.00 (305)	24.44 (621)	28.94 (735)	21.50 (546)	25.00 (635)	1.00 (25)	23.63 (600)	9.38 (238)	7.28 (185)	40.28 (1023)	8.50 (216)	8 (22)	0.88 (235)	9.25 (235)	8 (22)	0.88 (22)	16.13 (410)	4.63 (117)	4.50 (114)	0.25	0.25
286JP	12.00 (305)	24.44 (621)	28.94 (735)	21.50 (546)	25.00 (635)	1.00 (25)	25.13 (638)	9.38 (238)	7.28 (185)	41.78 (1061)	8.50 (216)	8 (22)	0.88 (235)	9.25 (235)	8 (22)	0.88 (22)	16.13 (410)	4.63 (117)	4.50 (114)	0.25	0.25
324JP	12.00 (305)	24.44 (621)	28.94 (735)	21.50 (546)	25.00 (635)	1.00 (25)	26.00 (660)	9.38 (238)	7.28 (185)	42.66 (1083)	8.50 (216)	8 (22)	0.88 (235)	9.25 (235)	8 (22)	0.88 (22)	18.75 (476)	4.63 (117)	4.50 (114)	0.25	0.25
326JP	12.00 (305)	24.44 (621)	28.94 (735)	21.50 (546)	25.00 (635)	1.00 (25)	26.00 (660)	9.38 (238)	7.28 (185)	42.66 (1083)	8.50 (216)	8 (22)	0.88 (235)	9.25 (235)	8 (22)	0.88 (22)	18.75 (476)	4.63 (117)	4.50 (114)	0.25	0.25

Dimensions are subject to change. Not to be used for construction purposes unless certified.

NOTE: For Single phase Motors add 1" to dimensions E & H.



*Dimensions are for ODP Motors. For TEFC add S dimension to dimensions E & H.



5x5x7B Series e-80

In-Line Mounted Centrifugal Pumps
With Integrated Technologic® Control

TECHNOLOGIC STANDARD FEATURES	
CONTROL METHOD WITH INTEGRATED TECHNOLOGIC® SENSORLESS CONTROL (ITSC)	Factory configured for sensorless operation.
CONTROL METHOD WITH INTEGRATED TECHNOLOGIC® (IT)	Field configurable for sensor by others, building management system input, or optional sensor(s) provided.
ENCLOSURE	NEMA 12 (same as IP55 & UL type 12)
POWER DISCONNECT SWITCH	Included standard. Fused Disconnect Switch optional with three phase input voltage.
HARMONIC SUPPRESSION	Integrated non-saturating dual DC link reactors provide better harmonic performance than a 5% AC line reactor.
COOLING	Fan-cooled through temperature controlled and easy replacement.
AMBIENT TEMPERATURE RATING	14°F to 113°F (-10°C to 45°C)
COMMUNICATION PROTOCOLS	BACnet, Modbus RTU, N2 Metasys, FLN Apogee
ANALOG INPUTS	2 configurable for either voltage (0 to 10VDC) or current(0/4 to 20mA)
ANALOG OUTPUTS	1 (0/4 to 20mA) up to 500 ohm load accurate to 1% of full scale
DIGITAL INPUTS	4 (0 to 24VDC), NPN or PNP, 0 to 24VDC, on 5 msec scan interval, Up to 2 can be configured as pulse inputs.
DIGITAL OUTPUTS	2 (0 to 24VDC), 40mA max current, configurable as pulse outputs.
RELAY OUTPUTS	2 programmable, 240VAC or 400VAC up to 2 A
MINIMUM CONTROL HEAD	_____ ft (default set to 40% of design head if not unknown)

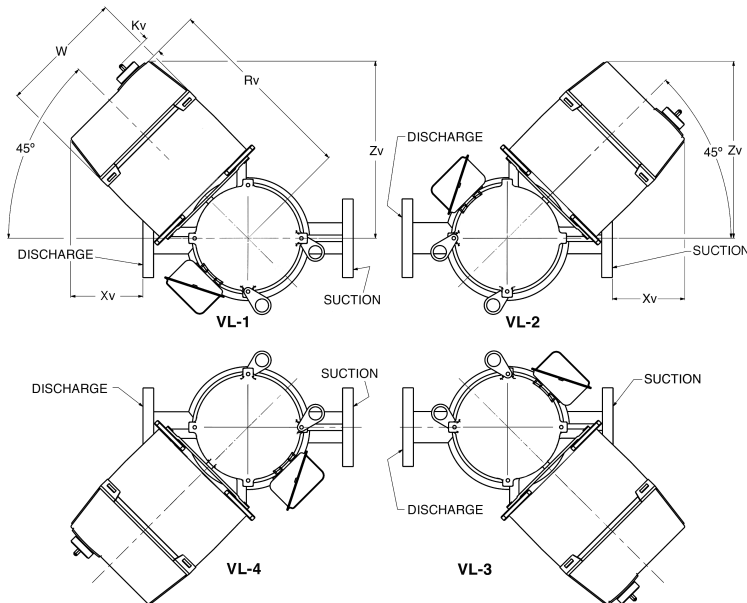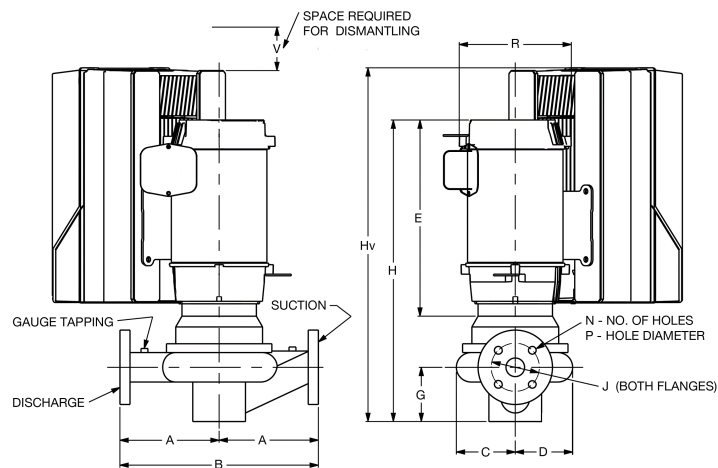

Series e-80 5x5x7B

In-Line Mounted Centrifugal Pumps

With Integrated Technologic® Control

B-139.26

DIMENSIONS - Inches (mm)

STANDARD SEAL

MOTOR FRAME	VDF	Rv	Zv	W	Hv	Xv
145JM	A5	11.78 (299)	11.33 (288)	9.50 (241)	32.05 (814)	0.06 (2)
	B1	14.07 (357)	12.93 (328)	9.50 (241)	34.40 (874)	1.66 (42)
182JM	A5	12.78 (325)	12.03 (306)	9.50 (241)	31.25 (794)	0.80 (20)
	B1	15.07 (383)	13.63 (346)	9.50 (241)	32.25 (819)	2.40 (61)
184JM	A5	12.78 (325)	12.03 (306)	9.50 (241)	31.25 (794)	0.80 (20)
	B1	15.07 (383)	13.63 (346)	9.50 (241)	32.25 (819)	2.40 (61)
213JM	A5	13.53 (344)	12.56 (319)	9.50 (241)	34.61 (879)	1.33 (34)
	B1	15.84 (402)	14.22 (361)	9.50 (241)	36.20 (920)	3.00 (76)
	B2	15.84 (402)	14.22 (361)	9.50 (241)	41.94 (1065)	3.00 (76)
215JM	A5	13.53 (344)	12.56 (319)	9.50 (241)	33.14 (842)	1.33 (34)
	B1	15.84 (402)	14.22 (361)	9.50 (241)	34.67 (881)	3.00 (76)
	B2	15.84 (402)	14.22 (361)	9.50 (241)	40.41 (1026)	3.00 (76)
	C1	17.81 (452)	17.42 (442)	12.10 (307)	42.43 (1078)	6.20 (157)
254JM	B1	16.83 (427)	14.92 (379)	9.50 (241)	40.90 (1039)	3.63 (92)
	B2	16.83 (427)	14.92 (379)	9.50 (241)	45.36 (1152)	3.63 (92)
	C1	18.80 (477)	18.12 (460)	12.10 (307)	46.62 (1184)	6.83 (173)
256JM	B1	16.83 (427)	14.92 (379)	9.50 (241)	40.28 (1023)	3.63 (92)
	B2	16.83 (427)	14.92 (379)	9.50 (241)	44.74 (1136)	3.63 (92)
	C1	18.80 (477)	18.12 (460)	12.10 (307)	46.00 (1168)	6.83 (173)
	C2	19.58 (497)	20.42 (519)	14.60 (371)	50.66 (1287)	9.13 (232)
284JM	B1	17.58 (446)	15.45 (393)	9.50 (241)	39.65 (1007)	4.17 (106)
	B2	17.58 (446)	15.45 (393)	9.50 (241)	44.11 (1120)	4.17 (106)
	C1	19.58 (497)	17.63 (448)	12.09 (307)	46.52 (1182)	6.50 (165)
	C2	20.36 (517)	19.93 (506)	14.59 (371)	49.67 (1262)	8.80 (224)
286JM	B2	17.58 (446)	15.45 (393)	9.50 (241)	45.61 (1159)	4.17 (106)
	C1	19.58 (497)	17.63 (448)	12.09 (307)	48.02 (1220)	6.50 (165)
	C2	20.36 (517)	19.93 (506)	14.59 (371)	51.17 (1300)	8.80 (224)
324JM	B2	18.58 (472)	16.16 (410)	9.50 (241)	44.95 (1142)	4.88 (124)
	C1	20.58 (523)	18.33 (466)	12.09 (307)	45.30 (1151)	7.22 (183)
	C2	21.58 (548)	19.88 (505)	14.59 (371)	49.86 (1266)	8.80 (224)
326JM	C1	20.58 (523)	18.33 (466)	12.09 (307)	45.30 (1151)	7.22 (183)
	C2	21.58 (548)	19.88 (505)	14.59 (371)	49.86 (1266)	8.80 (224)

STUFFING BOX

MOTOR FRAME	VDF	Rv	Zv	W	Hv	Xv
145JP	A5	11.78 (299)	11.33 (288)	9.50 (241)	35.17 (893)	0.06 (2)
	B1	14.07 (357)	12.93 (328)	9.50 (241)	37.52 (953)	1.66 (42)
182JP	A5	12.78 (325)	12.03 (306)	9.50 (241)	34.38 (873)	0.80 (20)
	B1	15.07 (383)	13.63 (346)	9.50 (241)	35.38 (899)	2.40 (61)
184JP	A5	12.78 (325)	12.03 (306)	9.50 (241)	34.38 (873)	0.80 (20)
	B1	15.07 (383)	13.63 (346)	9.50 (241)	35.38 (899)	2.40 (61)
213JP	A5	13.53 (344)	12.56 (319)	9.50 (241)	38.49 (978)	1.33 (34)
	B1	15.84 (402)	14.22 (361)	9.50 (241)	40.08 (1018)	3.00 (76)
	B2	15.84 (402)	14.22 (361)	9.50 (241)	45.82 (1164)	3.00 (76)
215JP	A5	13.53 (344)	12.56 (319)	9.50 (241)	37.02 (940)	1.33 (34)
	B1	15.84 (402)	14.22 (361)	9.50 (241)	38.55 (979)	3.00 (76)
	B2	15.84 (402)	14.22 (361)	9.50 (241)	44.29 (1125)	3.00 (76)
	C1	17.81 (452)	17.42 (442)	12.10 (307)	46.31 (1176)	6.20 (157)
254JP	B1	16.83 (427)	14.92 (379)	9.50 (241)	43.77 (1112)	3.63 (92)
	B2	16.83 (427)	14.92 (379)	9.50 (241)	48.23 (1225)	3.63 (92)
	C1	18.80 (477)	18.12 (460)	12.10 (307)	49.49 (1257)	6.83 (173)
256JP	B1	16.83 (427)	14.92 (379)	9.50 (241)	43.15 (1096)	3.63 (92)
	B2	16.83 (427)	14.92 (379)	9.50 (241)	47.61 (1209)	3.63 (92)
	C1	18.80 (477)	18.12 (460)	12.10 (307)	48.87 (1241)	6.83 (173)
	C2	19.58 (497)	20.42 (519)	14.60 (371)	53.53 (1360)	9.13 (232)
284JP	B1	17.58 (446)	15.45 (393)	9.50 (241)	42.52 (1080)	4.17 (106)
	B2	17.58 (446)	15.45 (393)	9.50 (241)	46.98 (1193)	4.17 (106)
	C1	19.58 (497)	17.63 (448)	12.09 (307)	49.39 (1254)	6.50 (165)
	C2	20.36 (517)	19.93 (506)	14.59 (371)	52.54 (1335)	8.80 (224)
286JP	B2	17.58 (446)	15.45 (393)	9.50 (241)	48.48 (1231)	4.17 (106)
	C1	19.58 (497)	17.63 (448)	12.09 (307)	50.89 (1293)	6.50 (165)
	C2	20.36 (517)	19.93 (506)	14.59 (371)	54.04 (1373)	8.80 (224)
324JP	B2	18.58 (472)	16.16 (410)	9.50 (241)	47.83 (1215)	4.88 (124)
	C1	20.58 (523)	18.33 (466)	12.09 (307)	48.18 (1224)	7.22 (183)
	C2	21.58 (548)	19.88 (505)	14.59 (371)	52.74 (1340)	8.80 (224)
326JP	C1	20.58 (523)	18.33 (466)	12.09 (307)	48.18 (1224)	7.22 (183)
	C2	21.58 (548)	19.88 (505)	14.59 (371)	52.74 (1340)	8.80 (224)

NOTE: Drives with single phase input have three phase output and include three phase motors.

Kv=2 (50)

Xylem Inc.
 8200 N. Austin Avenue, Morton Grove, IL 60053
 Phone: (847)966-3700 Fax: (847)965-8379
 www.bellgossett.com
 Bell & Gossett is a trademark of Xylem Inc. or one of its subsidiaries.
 © 2015 Xylem Inc.






Pressure Sensor/Transmitter For Pumps with TECHNOLOGIC® Drives

FEATURES

- 4-20mA output
- 10-28 VDC supply voltage
- Operating Temperature -40 to 85°C (-40 to 185°F)
- Storage Temperature -40 to 100°C (-40 to 212°F)
- Enclosure IP-66 (housing only)
- High Strength Stainless Steel Construction
- No Oil, Welds or Internal O-rings
- Wide Operating Temperature
- Low Static and Thermal Errors
- Compatible with Wide Variety of Liquids and Gases
- EMI/RFI Protection
- UL/cUL 508 Approved (with housing)
- 1lb. (0.45 kg) approximate weight

TECHNOLOGIC ANALOG SENSOR WIRING

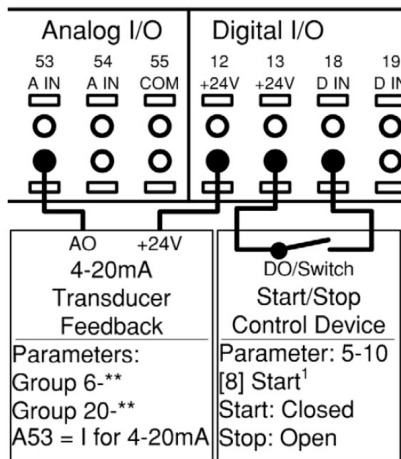

B&G PART NUMBERS

- S13203 Pressure range: 0-100 psi (0-689 kPa)
- S13204 Pressure range: 0-300 psi (0-2068 kPa)


Consult factory for other ranges.


INSTALLATION CONSIDERATIONS

- Standard 24 AWG (0.61 mm dia.) 2 wire shielded cable located in a conduit separate from high voltage wiring
- 24 vdc power supplied from Technologic Controller

DIMENSIONAL INFORMATION

Dimensions in Inches (Millimeters)

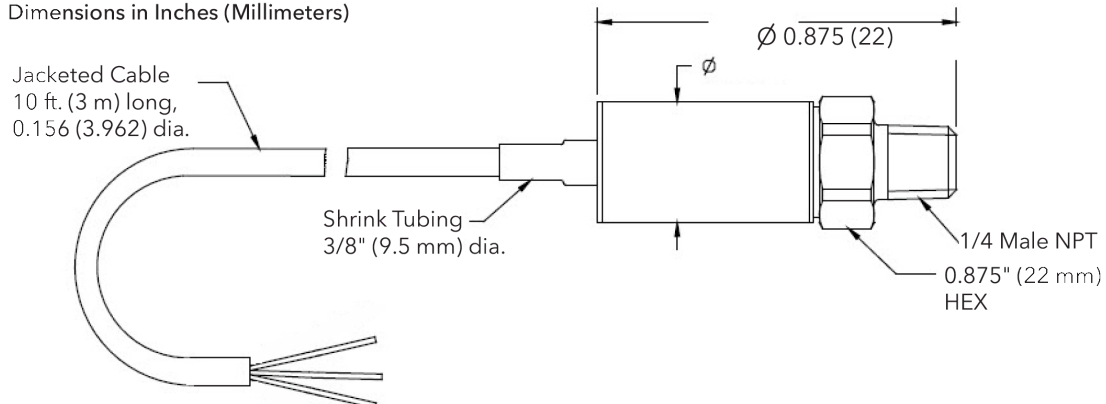

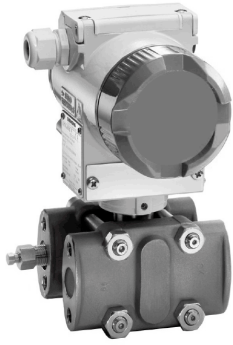


Differential Pressure Sensor/ Transmitter For Pumps with TECHNOLOGIC® Drives

FEATURES

- Relays reading to the Technologic controller up to 2000 ft. (610 m) away
- All wetted parts are 316 stainless steel
- Built-in RFI filter effective from 20 to 1000 MHz
- Withstands static pressures up to 2300 PSI (15858 kPa)
- 3 Valve bypass manifold (optional)
- 10 lbs. (4.5 kg) approximate weight

TECHNOLOGIC ANALOG SENSOR WIRING

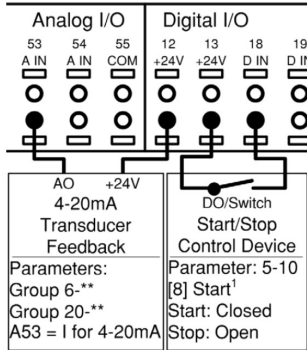

B&G PART NUMBERS

- S100089 Pressure range: 0 - 40 psi (0 - 276 kPa)
- S100091 Pressure range: 0 - 70 psi (0 - 483 kPa)
- S100092 Pressure range: 0 - 100 psi (0 - 689 kPa)


Consult factory for other ranges.

INSTALLATION CONSIDERATIONS

- Standard 18 AWG (1.194 mm dia.) 2 wire shielded cable located in a conduit separate from high voltage wiring
- 24 vdc power supplied from Technologic Controller for distance <2000 ft (610 m)

DIMENSIONAL INFORMATION

Dimensions in Inches (Millimeters)

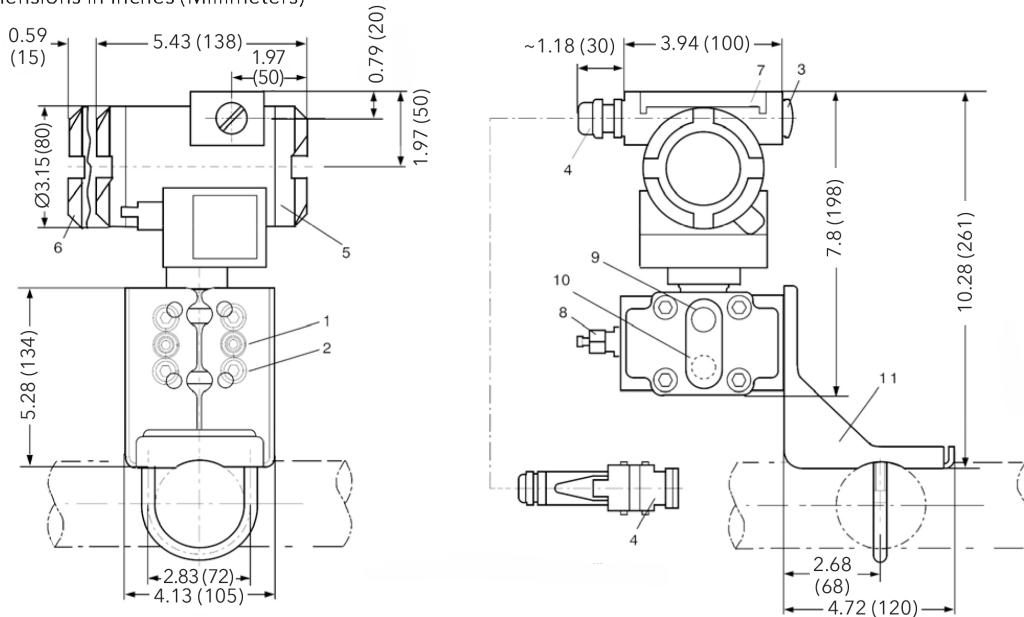

- 1 Process connection 1/4-18NPT for absolute pressure (+) side
- 2 Mounting thread 7/16-20 UNF to EN 61518
- 3 Dummy plug
- 4 Electrical connection: Screwed gland 1/2-14 NPT
- 5 Connection side

- 6 Electronic side, no digital display
- 7 Access cover over magnetic pushbuttons
- 8 Sealing screw with vent shown (optional)
- 9 Side vent for measuring liquid
- 10 Side vent for measuring gas (supplement H02)
- 11 Mounting bracket (2 shackles, 4 nuts, 4 U-plates, 1 angle) made of steel



Flow Sensor/Transmitter For Pumps with TECHNOLOGIC® Drives


The rugged Bell & Gossett Flow Sensor/Transmitter precisely measures system flow and transmits a proportional 4 to 20 mA DC signal to the Technologic Controller for display or program calculations.

FEATURES



- Suitable for mounting in vertical pipe
- Suitable for mounting in horizontal pipe within 45° of top dead center
- Non-magnetically sensed, non-fouling paddle wheel
- NEMA 4X Transmitter Enclosure
- Maximum Pressure Ratings:
 - 1000 psi @ 100°F, 900 psi @ 200°F,
 - 750 psi @ 300°F (6895 kPa @ 38°C, 6205 kPa @ 93°C, 5171 kPa @ 149°C)
- Maximum Temperature Ratings:
 - Fluid - 300°F (149°C) continuous service
 - Electronics - 150°F (66°C)
- Optional software and cable available for field programming
- 9.9 lbs (4.5 kg) approximate weight

DIMENSIONAL INFORMATION

Dimensions in Inches (Millimeters)

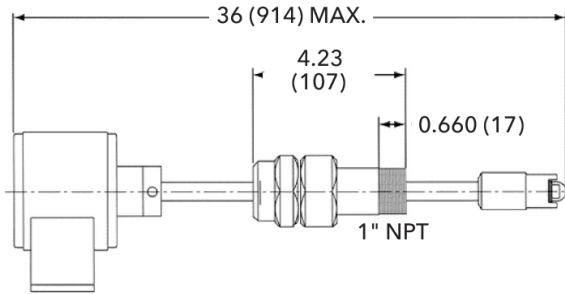

TECHNOLOGIC ANALOG SENSOR WIRING

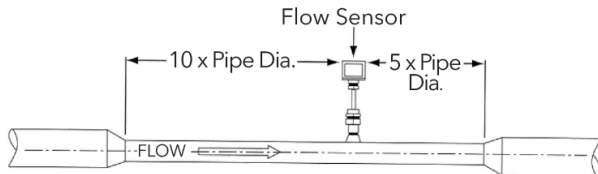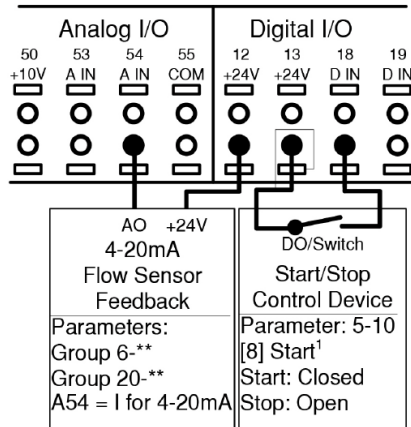


INSTALLATION CONSIDERATIONS

- Standard 18 AWG (1.194 mm dia.) gauge 3 wire shielded cable located in conduit separate from high voltage wiring
- 24 vdc power supplied from Technologic Controller
- Takes accurate readings and relays them to the Technologic Controller up to 2,000 ft. (610 m) away, when 10 pipe diameters upstream and 5 pipe diameters downstream of straight uninterrupted flow is present.

CALIBRATION CHART		
B&G Part No.	Pipe Size	Max. Flow
137411	3" Sch 40	250 gpm (16 l/sec)
137412	4" Sch 40	400 gpm (25 l/sec)
137413	6" Sch 40	850 gpm (54 l/sec)
137414	8" Sch 40	1750 gpm (110 l/sec)
137415	10" Sch 40	3150 gpm (199 l/sec)
137416	12" Sch 40	5000 gpm (315 l/sec)
137417	14" Sch 40	6400 gpm (404 l/sec)
137418	16" Sch 40	9100 gpm (574 l/sec)
137419	18" Sch 40	12400 gpm (782 l/sec)
137420	20" Sch 40	16500 gpm (1041 l/sec)

Consult factory for custom flow range calibration.

JOB:	REPRESENTATIVE:	
UNIT TAG:	ORDER NO.:	DATE:
ENGINEER:	SUBMITTED BY:	DATE:
CONTRACTOR:	APPROVED BY:	DATE:



5x5x9.5B Series e-80 In-Line Mounted Centrifugal Pumps

SPECIFICATIONS

FLOW _____ HEAD _____
 HP _____ RPM _____
 VOLTS _____
 CYCLE _____ INPUT PHASE _____
 ENCLOSURE _____
 APPROX. WEIGHT _____
 SPECIALS _____

MATERIALS OF CONSTRUCTION

Stainless Steel Fitted

MAXIMUM WORKING PRESSURE

- 175 psi (12 bar) with 125# ANSI flange drilling
- 250 psi (17 bar) with 250# ANSI flange drilling (requires 80-S)
- 300 psi (21 bar) W.P. with 250# ANSI flange drilling (Requires -S and EPR-Silicon Carbide-Silicon Carbide Seal)

MOUNTING


- In-Line Piping
- Flange Supports

PUMP VARIABLE SPEED CONTROL


- Integrated Technologic® Sensorless Control (ITSC)
- Integrated Technologic® (IT)
 - External input by others
 - Pressure Sensor(s)
 - Differential Pressure Sensor(s)
 - Flow Sensor(s)
- By Others

TYPE OF SEAL

- F Standard Seal w/ Flush Line (Buna-Carbon/Ceramic)
- S Stuffing Box construction w/ Flushed Mechanical Single Seal (EPR-Tungsten Carbide/Carbon)
- PF Stuffing Box Construction w/ Flushed Packing (Graphite Impregnated PTFE)

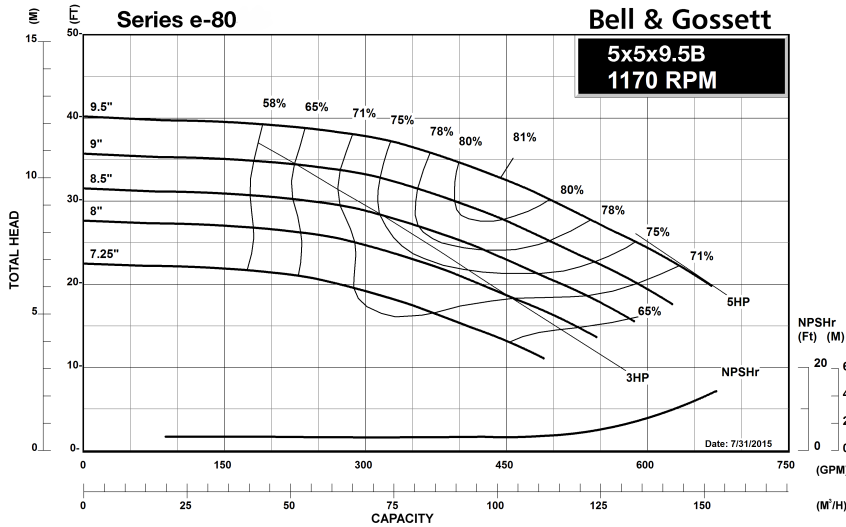

JOB:	REPRESENTATIVE:	
UNIT TAG:	ORDER NO.	DATE:
ENGINEER:	SUBMITTED BY:	DATE:
CONTRACTOR:	APPROVED BY:	DATE:



5x5x9.5B Series e-80 In-Line Mounted Centrifugal Pumps

SPECIFICATIONS

FLOW _____ HEAD _____
 HP _____ RPM _____
 VOLTS _____
 CYCLE _____ INPUT PHASE _____
 ENCLOSURE _____
 APPROX. WEIGHT _____
 SPECIALS _____

MATERIALS OF CONSTRUCTION

Stainless Steel Fitted

MAXIMUM WORKING PRESSURE

- 175 psi (12 bar) with 125# ANSI flange drilling
- 250 psi (17 bar) with 250# ANSI flange drilling (requires 80-S)
- 300 psi (21 bar) W.P. with 250# ANSI flange drilling (Requires -S and EPR-Silicon Carbide-Silicon Carbide Seal)

MOUNTING


- In-Line Piping
- Flange Supports


PUMP VARIABLE SPEED CONTROL

- Integrated Technologic® Sensorless Control (ITSC)
- Integrated Technologic® (IT)
 - External input by others
 - Pressure Sensor(s)
 - Differential Pressure Sensor(s)
 - Flow Sensor(s)
- By Others

TYPE OF SEAL

- F Standard Seal w/ Flush Line (Buna-Carbon/Ceramic)
- S Stuffing Box construction w/ Flushed Mechanical Single Seal (EPR-Tungsten Carbide/Carbon)
- PF Stuffing Box Construction w/ Flushed Packing (Graphite Impregnated PTFE)

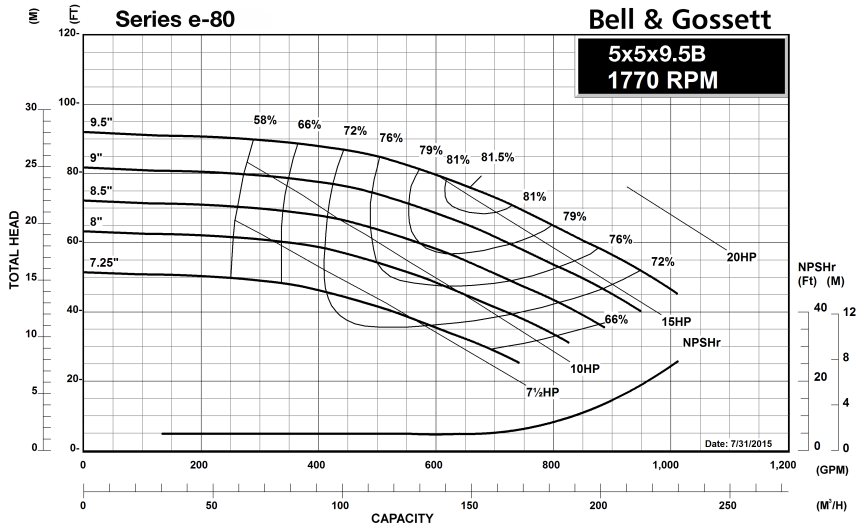

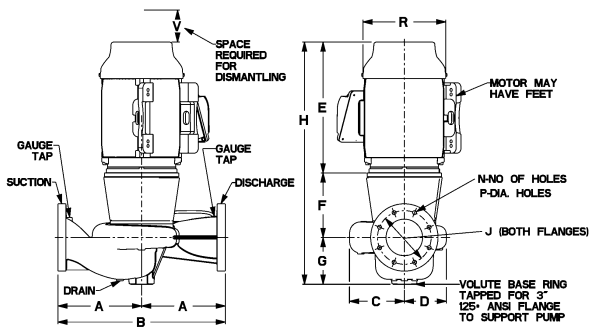

5x5x9.5B Series e-80 Centrifugal Pump Submittal - In-Line Piping

DIMENSIONS - Inches (mm)

STANDARD SEAL

MOTOR FRAME	A	B	C	D	E (max)	F	G	H (max)	125# ANSI			250# ANSI			R	S (Max)*	V (min)	Suct/Disch Gauge Taps (NPT)	Drain Tap (NPT)
									J	N	P	J	N	P					
									213JM	14.50 (368)	29.00 (737)	7.02 (178)	9.57 (243)	19.25 (489)					
215JM	14.50 (368)	29.00 (737)	7.02 (178)	9.57 (243)	19.25 (489)	5.13 (130)	7.70 (196)	32.08 (815)	8.50 (216)	8 (22)	0.88 (22)	9.25 (235)	8 (22)	0.88 (22)	14.00 (356)	-	5.00 (127)	0.25	0.25
254JM	14.50 (368)	29.00 (737)	7.02 (178)	9.57 (243)	24.13 (613)	6.13 (156)	7.70 (196)	37.95 (964)	8.50 (216)	8 (22)	0.88 (22)	9.25 (235)	8 (22)	0.88 (22)	17.00 (432)	-	5.00 (127)	0.25	0.25
256JM	14.50 (368)	29.00 (737)	7.02 (178)	9.57 (243)	24.13 (613)	6.13 (156)	7.70 (196)	37.95 (964)	8.50 (216)	8 (22)	0.88 (22)	9.25 (235)	8 (22)	0.88 (22)	17.00 (432)	-	5.00 (127)	0.25	0.25


STUFFING BOX

MOTOR FRAME	A	B	C	D	E (max)	F	G	H (max)	125# ANSI			250# ANSI			R	S (Max)*	V (min)	Suct/Disch Gauge Taps (NPT)	Drain Tap (NPT)
									J	N	P	J	N	P					
									213JP	14.50 (368)	29.00 (737)	7.02 (178)	9.57 (243)	19.25 (489)					
215JP	14.50 (368)	29.00 (737)	7.02 (178)	9.57 (243)	19.25 (489)	9.00 (229)	7.70 (196)	35.95 (913)	8.50 (216)	8 (22)	0.88 (22)	9.25 (235)	8 (22)	0.88 (22)	14.00 (356)	-	5.00 (127)	0.25	0.25
254JP	14.50 (368)	29.00 (737)	7.02 (178)	9.57 (243)	24.13 (613)	9.00 (229)	7.70 (196)	40.83 (1037)	8.50 (216)	8 (22)	0.88 (22)	9.25 (235)	8 (22)	0.88 (22)	17.00 (432)	-	5.00 (127)	0.25	0.25
256JP	14.50 (368)	29.00 (737)	7.02 (178)	9.57 (243)	24.13 (613)	9.00 (229)	7.70 (196)	40.83 (1037)	8.50 (216)	8 (22)	0.88 (22)	9.25 (235)	8 (22)	0.88 (22)	17.00 (432)	-	5.00 (127)	0.25	0.25

Dimensions are subject to change. Not to be used for construction purposes unless certified.

NOTE: For Single phase Motors add 1" to dimensions E & H.

*Dimensions are for ODP Motors. For TEFC add S dimension to dimensions E & H.

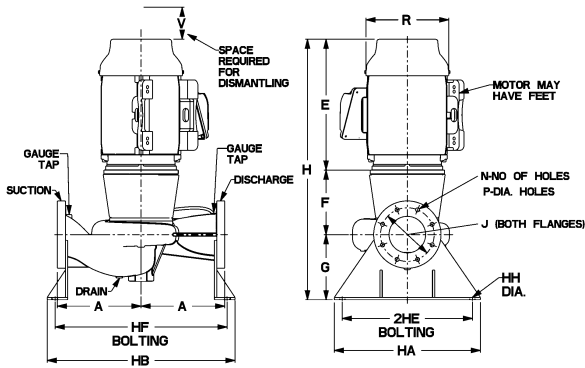

5x5x9.5B Series e-80 Centrifugal Pump Submittal - Flange Support Mounting

DIMENSIONS - Inches (mm)

STANDARD SEAL

MOTOR FRAME	A	HF BOLTING	HB	2HE BOLTING	HA	HH DIA	E (max)	F	G	H (max)	125# ANSI			250# ANSI			R	S (Max)*	V (min)	Suct/Disch Gauge Taps (NPT)	Drain Tap (NPT)
											J	N	P	J	N	P					
											213JM	14.50 (368)	30.44 (773)	33.94 (862)	21.50 (546)	25.00 (635)					
215JM	14.50 (368)	30.44 (773)	33.94 (862)	21.50 (546)	25.00 (635)	1.00 (25)	19.25 (489)	5.13 (130)	7.70 (196)	32.08 (815)	8.50 (216)	8 (22)	0.88 (22)	9.25 (235)	8 (22)	0.88 (22)	14.00 (356)	-	5.00 (127)	0.25	0.25
254JM	14.50 (368)	30.44 (773)	33.94 (862)	21.50 (546)	25.00 (635)	1.00 (25)	24.13 (613)	6.13 (156)	7.70 (196)	37.95 (964)	8.50 (216)	8 (22)	0.88 (22)	9.25 (235)	8 (22)	0.88 (22)	17.00 (432)	-	5.00 (127)	0.25	0.25
256JM	14.50 (368)	30.44 (773)	33.94 (862)	21.50 (546)	25.00 (635)	1.00 (25)	24.13 (613)	6.13 (156)	7.70 (196)	37.95 (964)	8.50 (216)	8 (22)	0.88 (22)	9.25 (235)	8 (22)	0.88 (22)	17.00 (432)	-	5.00 (127)	0.25	0.25


STUFFING BOX

MOTOR FRAME	A	HF BOLTING	HB	2HE BOLTING	HA	HH DIA	E (max)	F	G	H (max)	125# ANSI			250# ANSI			R	S (Max)*	V (min)	Suct/Disch Gauge Taps (NPT)	Drain Tap (NPT)
											J	N	P	J	N	P					
											213JP	14.50 (368)	30.44 (773)	33.94 (862)	21.50 (546)	25.00 (635)					
215JP	14.50 (368)	30.44 (773)	33.94 (862)	21.50 (546)	25.00 (635)	1.00 (25)	19.25 (489)	9.00 (229)	7.70 (196)	35.95 (913)	8.50 (216)	8 (22)	0.88 (22)	9.25 (235)	8 (22)	0.88 (22)	14.00 (356)	-	5.00 (127)	0.25	0.25
254JP	14.50 (368)	30.44 (773)	33.94 (862)	21.50 (546)	25.00 (635)	1.00 (25)	24.13 (613)	9.00 (229)	7.70 (196)	40.83 (1037)	8.50 (216)	8 (22)	0.88 (22)	9.25 (235)	8 (22)	0.88 (22)	17.00 (432)	-	5.00 (127)	0.25	0.25
256JP	14.50 (368)	30.44 (773)	33.94 (862)	21.50 (546)	25.00 (635)	1.00 (25)	24.13 (613)	9.00 (229)	7.70 (196)	40.83 (1037)	8.50 (216)	8 (22)	0.88 (22)	9.25 (235)	8 (22)	0.88 (22)	17.00 (432)	-	5.00 (127)	0.25	0.25

Dimensions are subject to change. Not to be used for construction purposes unless certified.


NOTE: For Single phase Motors add 1" to dimensions E & H.

*Dimensions are for ODP Motors. For TEFC add S dimension to dimensions E & H.



5x5x9.5B Series e-80 In-Line Mounted Centrifugal Pumps With Integrated Technologic® Control

TECHNOLOGIC STANDARD FEATURES	
CONTROL METHOD WITH INTEGRATED TECHNOLOGIC® SENSORLESS CONTROL (ITSC)	Factory configured for sensorless operation.
CONTROL METHOD WITH INTEGRATED TECHNOLOGIC® (IT)	Field configurable for sensor by others, building management system input, or optional sensor(s) provided.
ENCLOSURE	NEMA 12 (same as IP55 & UL type 12)
POWER DISCONNECT SWITCH	Included standard. Fused Disconnect Switch optional with three phase input voltage.
HARMONIC SUPPRESSION	Integrated non-saturating dual DC link reactors provide better harmonic performance than a 5% AC line reactor.
COOLING	Fan-cooled through temperature controlled and easy replacement.
AMBIENT TEMPERATURE RATING	14°F to 113°F (-10°C to 45°C)
COMMUNICATION PROTOCOLS	BACnet, Modbus RTU, N2 Metasys, FLN Apogee
ANALOG INPUTS	2 configurable for either voltage (0 to 10VDC) or current(0/4 to 20mA)
ANALOG OUTPUTS	1 (0/4 to 20mA) up to 500 ohm load accurate to 1% of full scale
DIGITAL INPUTS	4 (0 to 24VDC), NPN or PNP, 0 to 24VDC, on 5 msec scan interval, Up to 2 can be configured as pulse inputs.
DIGITAL OUTPUTS	2 (0 to 24VDC), 40mA max current, configurable as pulse outputs.
RELAY OUTPUTS	2 programmable, 240VAC or 400VAC up to 2 A
MINIMUM CONTROL HEAD	_____ ft (default set to 40% of design head if not unknown)

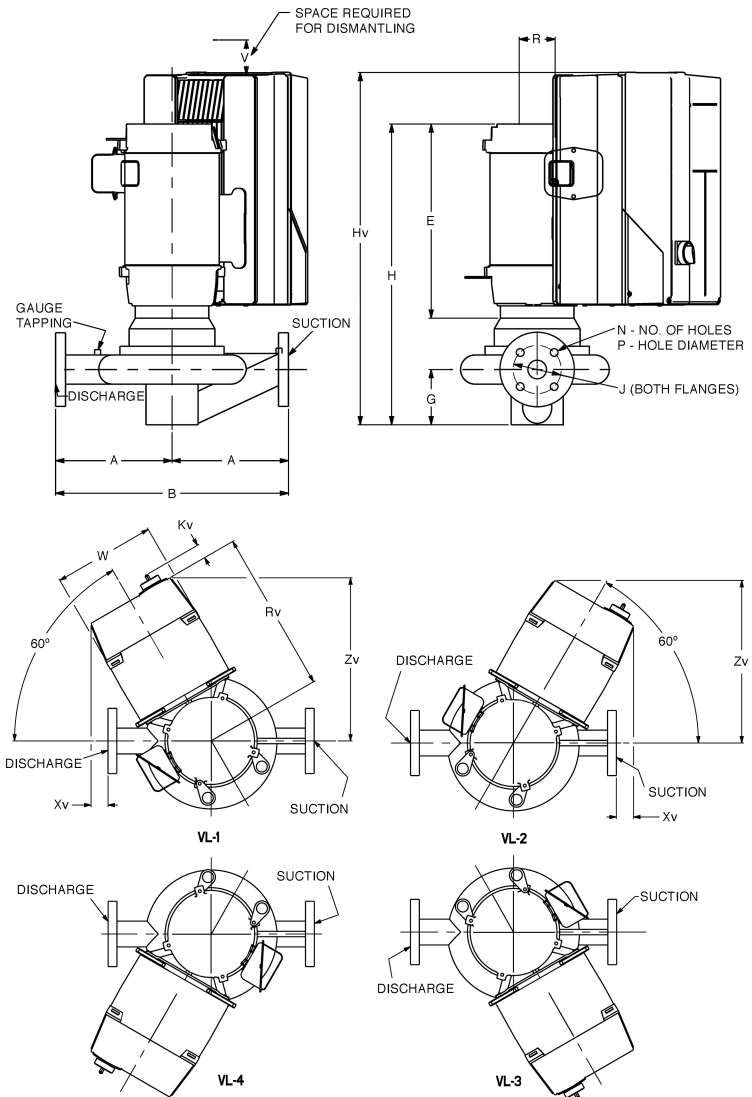

Series e-80 5x5x9.5B

B-139.28

In-Line Mounted Centrifugal Pumps
With Integrated Technologic® Control

DIMENSIONS - Inches (mm)		STANDARD SEAL					STUFFING BOX						
MOTOR FRAME	VFD	Rv	Zv	W	Hv	Xv	MOTOR FRAME	VFD	Rv	Zv	W	Hv	Xv
213JM	A5	13.53 (344)	13.83 (351)	9.50 (241)	33.95 (862)	4.06 (103)	213JP	A5	13.53 (344)	13.83 (351)	9.50 (241)	37.83 (961)	4.06 (103)
	B1	15.83 (402)	15.84 (402)	9.50 (241)	35.55 (903)	2.88 (73)		B1	15.84 (402)	15.84 (402)	9.50 (241)	39.42 (1001)	2.88 (73)
	B2	15.83 (402)	15.84 (402)	9.50 (241)	41.29 (1049)	2.88 (73)		B2	15.84 (402)	15.84 (402)	9.50 (241)	45.16 (1147)	2.88 (73)
215JM	A5	13.53 (344)	13.83 (351)	9.50 (241)	32.48 (825)	4.06 (103)	215JP	A5	13.53 (344)	13.83 (351)	9.50 (241)	36.36 (924)	4.06 (103)
	B1	15.83 (402)	15.84 (402)	9.50 (241)	34.02 (864)	2.88 (73)		B1	15.84 (402)	15.84 (402)	9.50 (241)	37.89 (962)	2.88 (73)
	B2	15.83 (402)	15.84 (402)	9.50 (241)	39.76 (1010)	2.88 (73)		B2	15.84 (402)	15.84 (402)	9.50 (241)	43.63 (1108)	2.88 (73)
	C1	17.80 (452)	19.04 (484)	12.10 (307)	41.78 (1061)	6.08 (154)		C1	17.81 (452)	19.04 (484)	12.10 (307)	45.65 (1160)	6.08 (154)
254JM	B1	16.83 (427)	16.70 (424)	9.50 (241)	40.25 (1022)	2.38 (60)	254JP	B1	16.83 (427)	16.70 (424)	9.50 (241)	43.13 (1095)	2.38 (60)
	B2	16.83 (427)	16.70 (424)	9.50 (241)	44.71 (1136)	2.38 (60)		B2	16.83 (427)	16.70 (424)	9.50 (241)	47.59 (1209)	2.38 (60)
	C1	18.80 (477)	19.90 (506)	12.10 (307)	45.97 (1168)	5.58 (142)		C1	18.80 (477)	19.90 (506)	12.10 (307)	48.85 (1241)	5.58 (142)
256JM	B1	16.83 (427)	16.70 (424)	9.50 (241)	39.63 (1006)	2.38 (60)	256JP	B1	16.83 (427)	16.70 (424)	9.50 (241)	42.50 (1080)	2.38 (60)
	B2	16.83 (427)	16.70 (424)	9.50 (241)	44.08 (1120)	2.38 (60)		B2	16.83 (427)	16.70 (424)	9.50 (241)	46.95 (1193)	2.38 (60)
	C1	18.80 (477)	19.90 (506)	12.10 (307)	45.34 (1152)	5.58 (142)		C1	18.80 (477)	19.90 (506)	12.10 (307)	48.21 (1225)	5.58 (142)
	C2	19.58 (497)	22.20 (564)	14.60 (371)	50.00 (1270)	7.88 (200)		C2	19.58 (497)	22.20 (564)	14.60 (371)	52.87 (1343)	7.88 (200)

NOTE: Drives with single phase input have three phase output and include three phase motors.
Kv=2 (50)




Pressure Sensor/Transmitter For Pumps with TECHNOLOGIC® Drives

FEATURES

- 4-20mA output
- 10-28 VDC supply voltage
- Operating Temperature -40 to 85°C (-40 to 185°F)
- Storage Temperature -40 to 100°C (-40 to 212°F)
- Enclosure IP-66 (housing only)
- High Strength Stainless Steel Construction
- No Oil, Welds or Internal O-rings
- Wide Operating Temperature
- Low Static and Thermal Errors
- Compatible with Wide Variety of Liquids and Gases
- EMI/RFI Protection
- UL/cUL 508 Approved (with housing)
- 1lb. (0.45 kg) approximate weight

TECHNOLOGIC ANALOG SENSOR WIRING

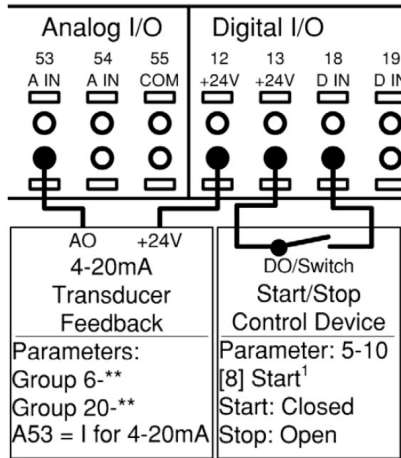

B&G PART NUMBERS

- S13203 Pressure range: 0-100 psi (0-689 kPa)
- S13204 Pressure range: 0-300 psi (0-2068 kPa)


Consult factory for other ranges.


INSTALLATION CONSIDERATIONS

- Standard 24 AWG (0.61 mm dia.) 2 wire shielded cable located in a conduit separate from high voltage wiring
- 24 vdc power supplied from Technologic Controller

DIMENSIONAL INFORMATION

Dimensions in Inches (Millimeters)

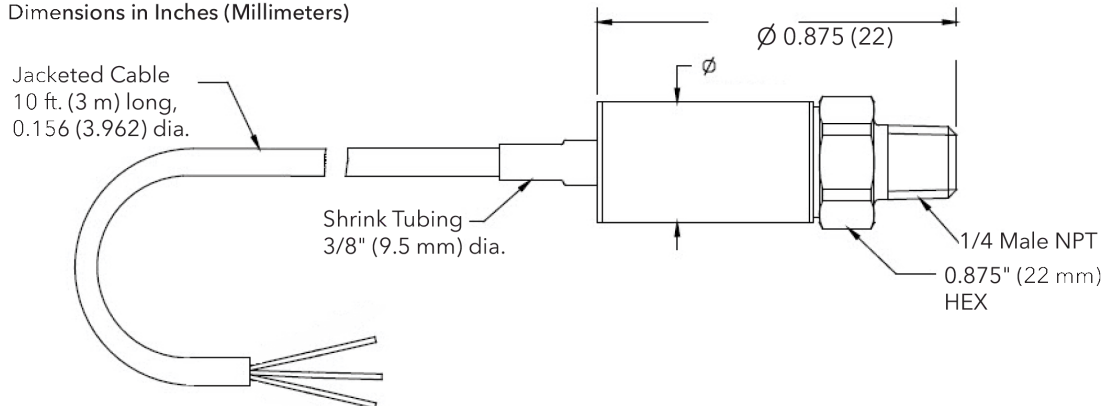

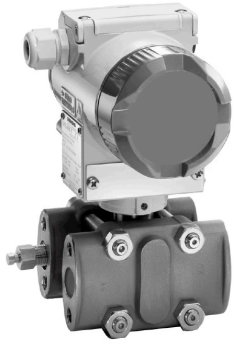


Differential Pressure Sensor/ Transmitter For Pumps with TECHNOLOGIC® Drives

FEATURES

- Relays reading to the Technologic controller up to 2000 ft. (610 m) away
- All wetted parts are 316 stainless steel
- Built-in RFI filter effective from 20 to 1000 MHz
- Withstands static pressures up to 2300 PSI (15858 kPa)
- 3 Valve bypass manifold (optional)
- 10 lbs. (4.5 kg) approximate weight

TECHNOLOGIC ANALOG SENSOR WIRING

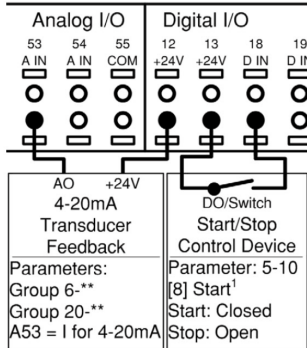

B&G PART NUMBERS

- S100089 Pressure range: 0 - 40 psi (0 - 276 kPa)
- S100091 Pressure range: 0 - 70 psi (0 - 483 kPa)
- S100092 Pressure range: 0 - 100 psi (0 - 689 kPa)


Consult factory for other ranges.

INSTALLATION CONSIDERATIONS

- Standard 18 AWG (1.194 mm dia.) 2 wire shielded cable located in a conduit separate from high voltage wiring
- 24 vdc power supplied from Technologic Controller for distance <2000 ft (610 m)

DIMENSIONAL INFORMATION

Dimensions in Inches (Millimeters)

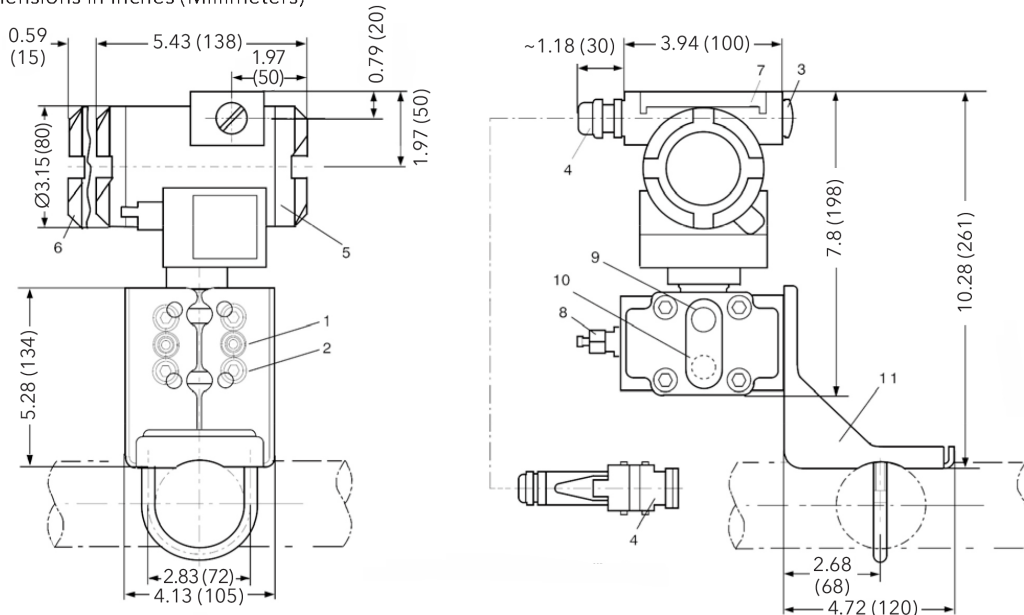

- 1 Process connection 1/4-18NPT for absolute pressure (+) side
- 2 Mounting thread 7/16-20 UNF to EN 61518
- 3 Dummy plug
- 4 Electrical connection: Screwed gland 1/2-14 NPT
- 5 Connection side

- 6 Electronic side, no digital display
- 7 Access cover over magnetic pushbuttons
- 8 Sealing screw with vent shown (optional)
- 9 Side vent for measuring liquid
- 10 Side vent for measuring gas (supplement H02)
- 11 Mounting bracket (2 shackles, 4 nuts, 4 U-plates, 1 angle) made of steel



Flow Sensor/Transmitter For Pumps with TECHNOLOGIC® Drives


The rugged Bell & Gossett Flow Sensor/Transmitter precisely measures system flow and transmits a proportional 4 to 20 mA DC signal to the Technologic Controller for display or program calculations.

FEATURES



- Suitable for mounting in vertical pipe
- Suitable for mounting in horizontal pipe within 45° of top dead center
- Non-magnetically sensed, non-fouling paddle wheel
- NEMA 4X Transmitter Enclosure
- Maximum Pressure Ratings:
 - 1000 psi @ 100°F, 900 psi @ 200°F,
 - 750 psi @ 300°F (6895 kPa @ 38°C, 6205 kPa @ 93°C, 5171 kPa @ 149°C)
- Maximum Temperature Ratings:
 - Fluid - 300°F (149°C) continuous service
 - Electronics - 150°F (66°C)
- Optional software and cable available for field programming
- 9.9 lbs (4.5 kg) approximate weight

DIMENSIONAL INFORMATION

Dimensions in Inches (Millimeters)

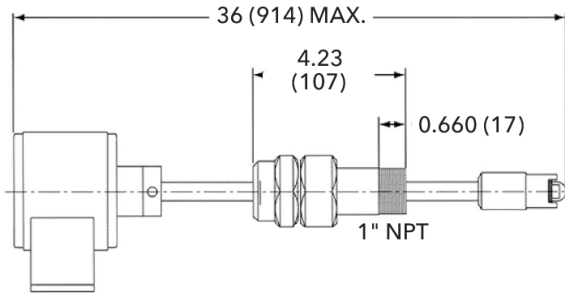

TECHNOLOGIC ANALOG SENSOR WIRING

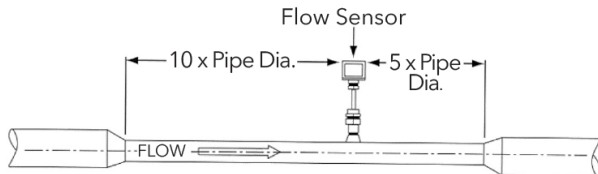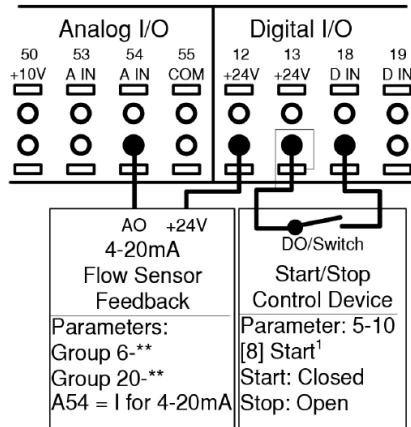


INSTALLATION CONSIDERATIONS

- Standard 18 AWG (1.194 mm dia.) gauge 3 wire shielded cable located in conduit separate from high voltage wiring
- 24 vdc power supplied from Technologic Controller
- Takes accurate readings and relays them to the Technologic Controller up to 2,000 ft. (610 m) away, when 10 pipe diameters upstream and 5 pipe diameters downstream of straight uninterrupted flow is present.

CALIBRATION CHART		
B&G Part No.	Pipe Size	Max. Flow
137411	3" Sch 40	250 gpm (16 l/sec)
137412	4" Sch 40	400 gpm (25 l/sec)
137413	6" Sch 40	850 gpm (54 l/sec)
137414	8" Sch 40	1750 gpm (110 l/sec)
137415	10" Sch 40	3150 gpm (199 l/sec)
137416	12" Sch 40	5000 gpm (315 l/sec)
137417	14" Sch 40	6400 gpm (404 l/sec)
137418	16" Sch 40	9100 gpm (574 l/sec)
137419	18" Sch 40	12400 gpm (782 l/sec)
137420	20" Sch 40	16500 gpm (1041 l/sec)

Consult factory for custom flow range calibration.

JOB:	REPRESENTATIVE:	
UNIT TAG:	ORDER NO.:	DATE:
ENGINEER:	SUBMITTED BY:	DATE:
CONTRACTOR:	APPROVED BY:	DATE:



5x5x13.5

Series e-80

In-Line Mounted Centrifugal Pumps

SPECIFICATIONS

FLOW _____ HEAD _____

HP _____ RPM _____

VOLTS _____

CYCLE _____ INPUT PHASE _____

ENCLOSURE _____

APPROX. WEIGHT _____

SPECIALS _____

MATERIALS OF CONSTRUCTION

Stainless Steel Fitted

MAXIMUM WORKING PRESSURE

- 175 psi (12 bar) with 125# ANSI flange drilling
- 250 psi (17 bar) with 250# ANSI flange drilling (requires 80-S)
- 300 psi (21 bar) W.P. with 250# ANSI flange drilling (Requires -S and EPR-Silicon Carbide-Silicon Carbide Seal)

MOUNTING


- In-Line Piping
- Flange Supports

PUMP VARIABLE SPEED CONTROL


- Integrated Technologic® Sensorless Control (ITSC)
- Integrated Technologic® (IT)
 - External input by others
 - Pressure Sensor(s)
 - Differential Pressure Sensor(s)
 - Flow Sensor(s)
- By Others

TYPE OF SEAL

- F Standard Seal w/ Flush Line (Buna-Carbon/Ceramic)
- S Stuffing Box construction w/ Flushed Mechanical Single Seal (EPR-Tungsten Carbide/Carbon)
- PF Stuffing Box Construction w/ Flushed Packing (Graphite Impregnated PTFE)

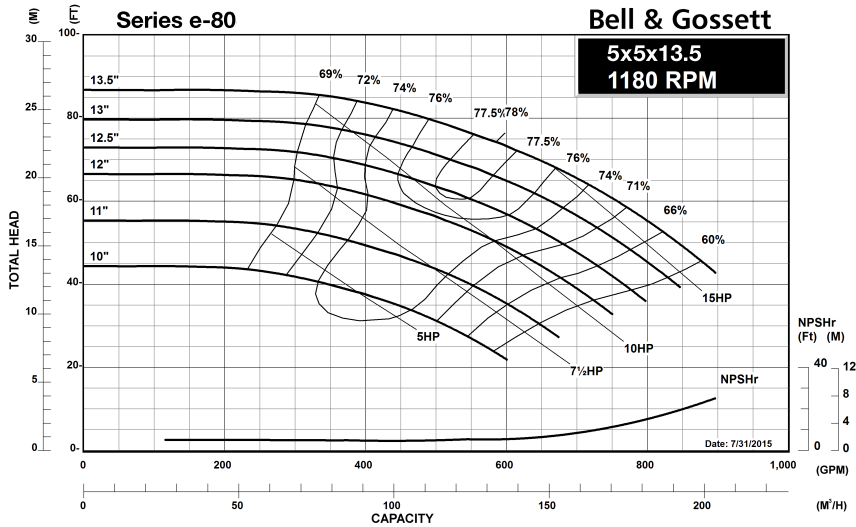

JOB:	REPRESENTATIVE:	
UNIT TAG:	ORDER NO.:	DATE:
ENGINEER:	SUBMITTED BY:	DATE:
CONTRACTOR:	APPROVED BY:	DATE:



5x5x13.5 Series e-80 In-Line Mounted Centrifugal Pumps

SPECIFICATIONS

FLOW _____ HEAD _____
 HP _____ RPM _____
 VOLTS _____
 CYCLE _____ INPUT PHASE _____
 ENCLOSURE _____
 APPROX. WEIGHT _____
 SPECIALS _____

MATERIALS OF CONSTRUCTION

Stainless Steel Fitted

MAXIMUM WORKING PRESSURE

- 175 psi (12 bar) with 125# ANSI flange drilling
- 250 psi (17 bar) with 250# ANSI flange drilling (requires 80-S)
- 300 psi (21 bar) W.P. with 250# ANSI flange drilling (Requires -S and EPR-Silicon Carbide-Silicon Carbide Seal)

MOUNTING


- In-Line Piping Flange Supports


PUMP VARIABLE SPEED CONTROL

- Integrated Technologic® Sensorless Control (ITSC)
- Integrated Technologic® (IT)
 - External input by others
 - Pressure Sensor(s)
 - Differential Pressure Sensor(s)
 - Flow Sensor(s)
- By Others

TYPE OF SEAL

- F Standard Seal w/ Flush Line (Buna-Carbon/Ceramic)
- S Stuffing Box construction w/ Flushed Mechanical Single Seal (EPR-Tungsten Carbide/Carbon)
- PF Stuffing Box Construction w/ Flushed Packing (Graphite Impregnated PTFE)

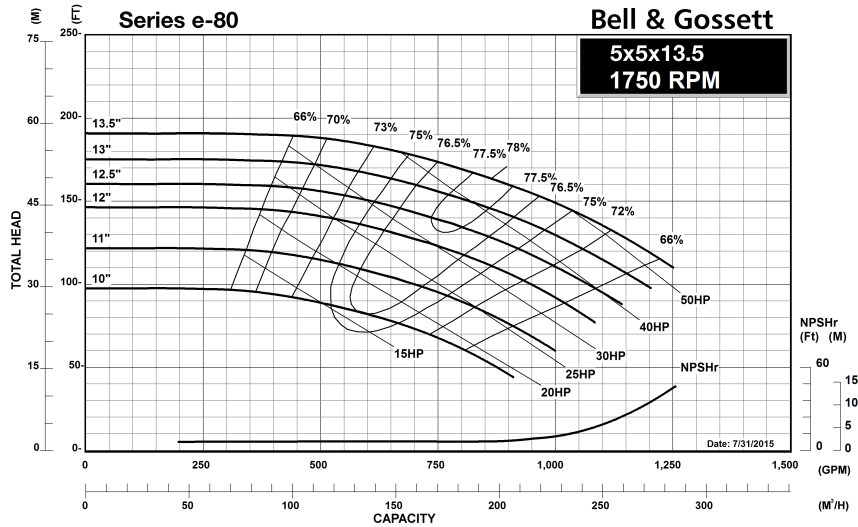

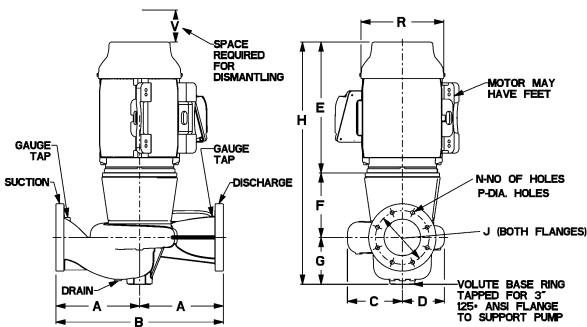

5x5x13.5 Series e-80 Centrifugal Pump Submittal - In-Line Piping

DIMENSIONS - Inches (mm)

STANDARD SEAL

MOTOR FRAME	A	B	C	D	E (max)	F	G	H (max)	125# ANSI			250# ANSI			R	S (Max)*	V (min)	Suct/Disch Gauge Taps (NPT)	Drain Tap (NPT)
									J	N	P	J	N	P					
									254JM	16.50 (419)	33.00 (838)	8.78 (223)	10.29 (261)	24.13 (613)					
256JM	16.50 (419)	33.00 (838)	8.78 (223)	10.29 (261)	24.13 (613)	4.61 (117)	8.50 (216)	37.24 (946)	8.50 (216)	8 (22)	0.88 (22)	9.25 (235)	8 (22)	0.88 (22)	17.00 (432)	-	5.75 (146)	0.25	0.25
284JM	16.50 (419)	33.00 (838)	8.78 (223)	10.29 (261)	23.63 (600)	4.61 (117)	8.50 (216)	36.74 (933)	8.50 (216)	8 (22)	0.88 (22)	9.25 (235)	8 (22)	0.88 (22)	16.13 (410)	4.63 (117)	5.75 (146)	0.25	0.25
286JM	16.50 (419)	33.00 (838)	8.78 (223)	10.29 (261)	25.13 (638)	4.61 (117)	8.50 (216)	38.24 (971)	8.50 (216)	8 (22)	0.88 (22)	9.25 (235)	8 (22)	0.88 (22)	16.13 (410)	4.63 (117)	5.75 (146)	0.25	0.25
324JM	16.50 (419)	33.00 (838)	8.78 (223)	10.29 (261)	26.00 (660)	4.61 (117)	8.50 (216)	39.11 (993)	8.50 (216)	8 (22)	0.88 (22)	9.25 (235)	8 (22)	0.88 (22)	18.75 (476)	4.63 (117)	5.75 (146)	0.25	0.25
326JM	16.50 (419)	33.00 (838)	8.78 (223)	10.29 (261)	26.00 (660)	4.61 (117)	8.50 (216)	39.11 (993)	8.50 (216)	8 (22)	0.88 (22)	9.25 (235)	8 (22)	0.88 (22)	18.75 (476)	4.63 (117)	5.75 (146)	0.25	0.25


STUFFING BOX

MOTOR FRAME	A	B	C	D	E (max)	F	G	H (max)	125# ANSI			250# ANSI			R	S (Max)*	V (min)	Suct/Disch Gauge Taps (NPT)	Drain Tap (NPT)
									J	N	P	J	N	P					
									254JP	16.50 (419)	33.00 (838)	8.78 (223)	10.29 (261)	24.13 (613)					
256JP	16.50 (419)	33.00 (838)	8.78 (223)	10.29 (261)	24.13 (613)	7.50 (191)	8.50 (216)	40.13 (1019)	8.50 (216)	8 (22)	0.88 (22)	9.25 (235)	8 (22)	0.88 (22)	17.00 (432)	-	5.75 (146)	0.25	0.25
284JP	16.50 (419)	33.00 (838)	8.78 (223)	10.29 (261)	23.63 (600)	7.50 (191)	8.50 (216)	39.63 (1007)	8.50 (216)	8 (22)	0.88 (22)	9.25 (235)	8 (22)	0.88 (22)	16.13 (410)	4.63 (117)	5.75 (146)	0.25	0.25
286JP	16.50 (419)	33.00 (838)	8.78 (223)	10.29 (261)	25.13 (638)	7.50 (191)	8.50 (216)	41.13 (1045)	8.50 (216)	8 (22)	0.88 (22)	9.25 (235)	8 (22)	0.88 (22)	16.13 (410)	4.63 (117)	5.75 (146)	0.25	0.25
324JP	16.50 (419)	33.00 (838)	8.78 (223)	10.29 (261)	26.00 (660)	7.50 (191)	8.50 (216)	42.00 (1067)	8.50 (216)	8 (22)	0.88 (22)	9.25 (235)	8 (22)	0.88 (22)	18.75 (476)	4.63 (117)	5.75 (146)	0.25	0.25
284JP	16.50 (419)	33.00 (838)	8.78 (223)	10.29 (261)	26.00 (660)	7.50 (191)	8.50 (216)	36.75 (933)	8.50 (216)	8 (22)	0.88 (22)	9.25 (235)	8 (22)	0.88 (22)	16.13 (410)	4.63 (117)	5.75 (146)	0.25	0.25
286JP	16.50 (419)	33.00 (838)	8.78 (223)	10.29 (261)	25.13 (638)	7.50 (191)	8.50 (216)	38.13 (968)	8.50 (216)	8 (22)	0.88 (22)	9.25 (235)	8 (22)	0.88 (22)	16.13 (410)	4.63 (117)	4.00 (102)	0.25	0.25
326JP	16.50 (419)	33.00 (838)	8.78 (223)	10.29 (261)	26.00 (660)	7.50 (191)	8.50 (216)	42.00 (1067)	8.50 (216)	8 (22)	0.88 (22)	9.25 (235)	8 (22)	0.88 (22)	18.75 (476)	4.63 (117)	5.75 (146)	0.25	0.25

Dimensions are subject to change. Not to be used for construction purposes unless certified.

NOTE: For Single phase Motors add 1" to dimensions E & H.

*Dimensions are for ODP Motors. For TEFC add S dimension to dimensions E & H.

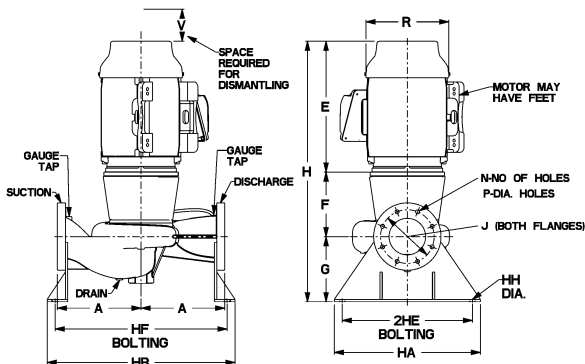

5x5x13.5 Series e-80 Centrifugal Pump Submittal - Flange Support Mounting

DIMENSIONS - Inches (mm)

STANDARD SEAL

MOTOR FRAME	A	HF BOLTING	HB	2HE BOLTING	HA	HH DIA	E (max)	F	G	H (max)	125# ANSI			250# ANSI			R	S (Max)*	V (min)	Suct/Disch Gauge Taps (NPT)	Drain Tap (NPT)
											J	N	P	J	N	P					
254JM	16.50 (419)	34.42 (874)	37.92 (963)	21.50 (546)	25.00 (635)	1.00 (25)	24.13 (613)	4.61 (117)	8.50 (216)	37.24 (946)	8.50 (216)	8 (22)	0.88 (22)	9.25 (235)	8 (22)	0.88 (22)	17.00 (432)	-	5.75 (146)	0.25	0.25
256JM	16.50 (419)	34.42 (874)	37.92 (963)	21.50 (546)	25.00 (635)	1.00 (25)	24.13 (613)	4.61 (117)	8.50 (216)	37.24 (946)	8.50 (216)	8 (22)	0.88 (22)	9.25 (235)	8 (22)	0.88 (22)	17.00 (432)	-	5.75 (146)	0.25	0.25
284JM	16.50 (419)	34.42 (874)	37.92 (963)	21.50 (546)	25.00 (635)	1.00 (25)	23.63 (600)	4.61 (117)	8.50 (216)	36.74 (933)	8.50 (216)	8 (22)	0.88 (22)	9.25 (235)	8 (22)	0.88 (22)	16.13 (410)	4.63 (117)	5.75 (146)	0.25	0.25
286JM	16.50 (419)	34.42 (874)	37.92 (963)	21.50 (546)	25.00 (635)	1.00 (25)	25.13 (638)	4.61 (117)	8.50 (216)	38.24 (971)	8.50 (216)	8 (22)	0.88 (22)	9.25 (235)	8 (22)	0.88 (22)	16.13 (410)	4.63 (117)	5.75 (146)	0.25	0.25
324JM	16.50 (419)	34.42 (874)	37.92 (963)	21.50 (546)	25.00 (635)	1.00 (25)	26.00 (660)	4.61 (117)	8.50 (216)	39.11 (993)	8.50 (216)	8 (22)	0.88 (22)	9.25 (235)	8 (22)	0.88 (22)	18.75 (476)	4.63 (117)	5.75 (146)	0.25	0.25
326JM	16.50 (419)	34.42 (874)	37.92 (963)	21.50 (546)	25.00 (635)	1.00 (25)	26.00 (660)	4.61 (117)	8.50 (216)	39.11 (993)	8.50 (216)	8 (22)	0.88 (22)	9.25 (235)	8 (22)	0.88 (22)	18.75 (476)	4.63 (117)	5.75 (146)	0.25	0.25


STUFFING BOX

MOTOR FRAME	A	HF BOLTING	HB	2HE BOLTING	HA	HH DIA	E (max)	F	G	H (max)	125# ANSI			250# ANSI			R	S (Max)*	V (min)	Suct/Disch Gauge Taps (NPT)	Drain Tap (NPT)
											J	N	P	J	N	P					
254JP	16.50 (419)	34.42 (874)	37.92 (963)	21.50 (546)	25.00 (635)	1.00 (25)	24.13 (613)	7.50 (191)	8.50 (216)	40.13 (1019)	8.50 (216)	8 (22)	0.88 (22)	9.25 (235)	8 (22)	0.88 (22)	17.00 (432)	-	5.75 (146)	0.25	0.25
256JP	16.50 (419)	34.42 (874)	37.92 (963)	21.50 (546)	25.00 (635)	1.00 (25)	24.13 (613)	7.50 (191)	8.50 (216)	40.13 (1019)	8.50 (216)	8 (22)	0.88 (22)	9.25 (235)	8 (22)	0.88 (22)	17.00 (432)	-	5.75 (146)	0.25	0.25
284JP	16.50 (419)	34.42 (874)	37.92 (963)	21.50 (546)	25.00 (635)	1.00 (25)	23.63 (600)	7.50 (191)	8.50 (216)	39.63 (1007)	8.50 (216)	8 (22)	0.88 (22)	9.25 (235)	8 (22)	0.88 (22)	16.13 (410)	4.63 (117)	5.75 (146)	0.25	0.25
286JP	16.50 (419)	34.42 (874)	37.92 (963)	21.50 (546)	25.00 (635)	1.00 (25)	25.13 (638)	7.50 (191)	8.50 (216)	41.13 (1045)	8.50 (216)	8 (22)	0.88 (22)	9.25 (235)	8 (22)	0.88 (22)	16.13 (410)	4.63 (117)	5.75 (146)	0.25	0.25
324JP	16.50 (419)	34.42 (874)	37.92 (963)	21.50 (546)	25.00 (635)	1.00 (25)	26.00 (660)	7.50 (191)	8.50 (216)	42.00 (1067)	8.50 (216)	8 (22)	0.88 (22)	9.25 (235)	8 (22)	0.88 (22)	18.75 (476)	4.63 (117)	5.75 (146)	0.25	0.25
326JP	16.50 (419)	34.42 (874)	37.92 (963)	21.50 (546)	25.00 (635)	1.00 (25)	26.00 (660)	7.50 (191)	8.50 (216)	42.00 (1067)	8.50 (216)	8 (22)	0.88 (22)	9.25 (235)	8 (22)	0.88 (22)	18.75 (476)	4.63 (117)	5.75 (146)	0.25	0.25

Dimensions are subject to change. Not to be used for construction purposes unless certified.



NOTE: For Single phase Motors add 1" to dimensions E & H.

*Dimensions are for ODP Motors. For TEFC add S dimension to dimensions E & H.



5x5x13.5 Series e-80 In-Line Mounted Centrifugal Pumps With Integrated Technologic® Control

TECHNOLOGIC STANDARD FEATURES	
CONTROL METHOD WITH INTEGRATED TECHNOLOGIC® SENSORLESS CONTROL (ITSC)	Factory configured for sensorless operation.
CONTROL METHOD WITH INTEGRATED TECHNOLOGIC® (IT)	Field configurable for sensor by others, building management system input, or optional sensor(s) provided.
ENCLOSURE	NEMA 12 (same as IP55 & UL type 12)
POWER DISCONNECT SWITCH	Included standard. Fused Disconnect Switch optional with three phase input voltage.
HARMONIC SUPPRESSION	Integrated non-saturating dual DC link reactors provide better harmonic performance than a 5% AC line reactor.
COOLING	Fan-cooled through temperature controlled and easy replacement.
AMBIENT TEMPERATURE RATING	14°F to 113°F (-10°C to 45°C)
COMMUNICATION PROTOCOLS	BACnet, Modbus RTU, N2 Metasys, FLN Apogee
ANALOG INPUTS	2 configurable for either voltage (0 to 10VDC) or current(0/4 to 20mA)
ANALOG OUTPUTS	1 (0/4 to 20mA) up to 500 ohm load accurate to 1% of full scale
DIGITAL INPUTS	4 (0 to 24VDC), NPN or PNP, 0 to 24VDC, on 5 msec scan interval, Up to 2 can be configured as pulse inputs.
DIGITAL OUTPUTS	2 (0 to 24VDC), 40mA max current, configurable as pulse outputs.
RELAY OUTPUTS	2 programmable, 240VAC or 400VAC up to 2 A
MINIMUM CONTROL HEAD	_____ ft (default set to 40% of design head if not unknown)

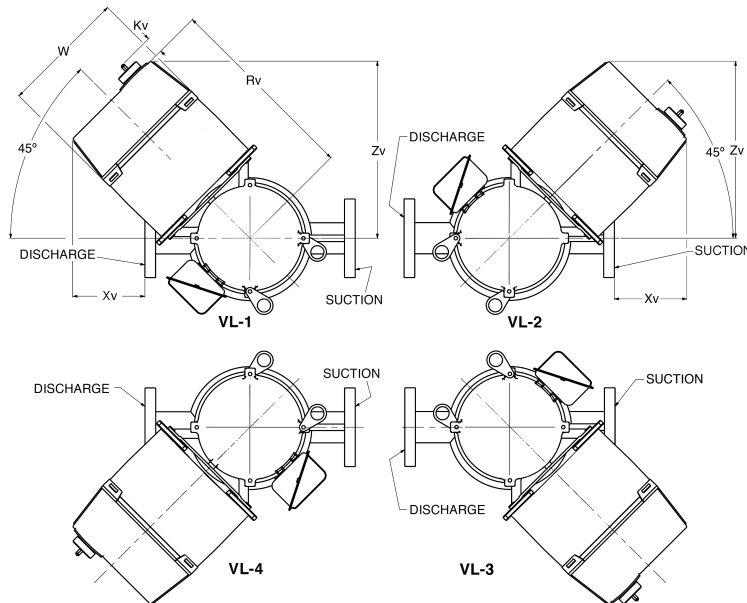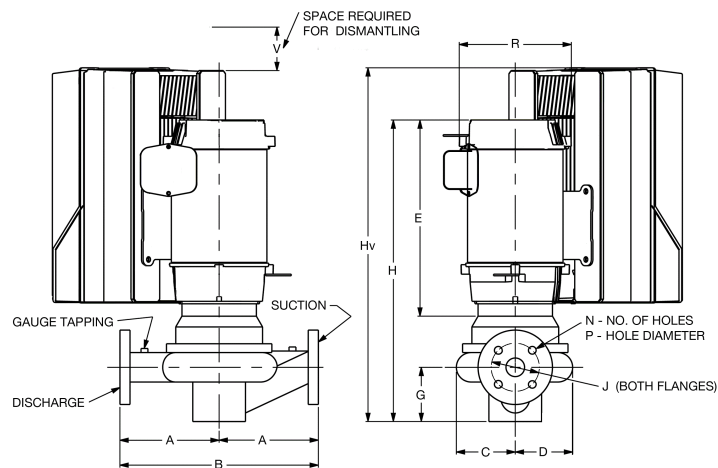

Series e-80 5x5x13.5

In-Line Mounted Centrifugal Pumps

With Integrated Technologic® Control

B-139.30

DIMENSIONS - Inches (mm)							STANDARD SEAL						STUFFING BOX							
MOTOR FRAME	VFD	Rv	Zv	W	Hv	Xv	MOTOR FRAME	VFD	Rv	Zv	W	Hv	Xv	MOTOR FRAME	VFD	Rv	Zv	W	Hv	Xv
254JM	B1	16.83 (427)	14.92 (379)	9.50 (241)	40.24 (1022)	0.86 (22)	254JP	B1	16.83 (427)	14.92 (379)	9.50 (241)	43.13 (1096)	0.86 (22)	254JP	B1	16.83 (427)	14.92 (379)	9.50 (241)	42.51 (1080)	0.86 (22)
	B2	16.83 (427)	14.92 (379)	9.50 (241)	44.70 (1135)	0.86 (22)		B2	16.83 (427)	14.92 (379)	9.50 (241)	47.59 (1209)	0.86 (22)		B2	16.83 (427)	14.92 (379)	9.50 (241)	46.96 (1193)	0.86 (22)
	C1	18.80 (477)	18.12 (460)	12.10 (307)	45.96 (1167)	4.06 (103)		C1	18.80 (477)	18.12 (460)	12.10 (307)	48.85 (1241)	4.06 (103)		C1	18.80 (477)	18.12 (460)	12.10 (307)	48.22 (1225)	4.06 (103)
256JM	B1	16.83 (427)	14.92 (379)	9.50 (241)	39.62 (1006)	0.86 (22)	256JP	B1	16.83 (427)	14.92 (379)	9.50 (241)	42.51 (1080)	0.86 (22)	256JP	B1	16.83 (427)	14.92 (379)	9.50 (241)	42.51 (1080)	0.86 (22)
	B2	16.83 (427)	14.92 (379)	9.50 (241)	44.07 (1119)	0.86 (22)		B2	16.83 (427)	14.92 (379)	9.50 (241)	46.96 (1193)	0.86 (22)		B2	16.83 (427)	14.92 (379)	9.50 (241)	46.96 (1193)	0.86 (22)
	C1	18.80 (477)	18.12 (460)	12.10 (307)	45.33 (1151)	4.06 (103)		C1	18.80 (477)	18.12 (460)	12.10 (307)	48.22 (1225)	4.06 (103)		C1	18.80 (477)	18.12 (460)	12.10 (307)	48.22 (1225)	4.06 (103)
	C2	19.58 (497)	20.42 (519)	14.60 (371)	49.99 (1270)	6.36 (162)		C2	19.58 (497)	20.42 (519)	14.60 (371)	52.88 (1343)	6.36 (162)		C2	19.58 (497)	20.42 (519)	14.60 (371)	52.88 (1343)	6.36 (162)
284JM	B1	17.58 (446)	15.45 (393)	9.50 (241)	38.99 (990)	0.33 (8)	284JP	B1	17.58 (446)	15.45 (393)	9.50 (241)	41.88 (1064)	0.33 (8)	284JP	B1	17.58 (446)	15.45 (393)	9.50 (241)	41.88 (1064)	0.33 (8)
	B2	17.58 (446)	15.45 (393)	9.50 (241)	43.45 (1104)	0.33 (8)		B2	17.58 (446)	15.45 (393)	9.50 (241)	46.34 (1177)	0.33 (8)		B2	17.58 (446)	15.45 (393)	9.50 (241)	46.34 (1177)	0.33 (8)
	C1	19.58 (497)	17.63 (448)	12.09 (307)	45.85 (1165)	2.00 (51)		C1	19.58 (497)	17.63 (448)	12.09 (307)	48.74 (1238)	2.00 (51)		C1	19.58 (497)	17.63 (448)	12.09 (307)	48.74 (1238)	2.00 (51)
	C2	20.36 (517)	19.93 (506)	14.59 (371)	49.00 (1245)	4.30 (109)		C2	20.36 (517)	19.93 (506)	14.59 (371)	51.89 (1318)	4.30 (109)		C2	20.36 (517)	19.93 (506)	14.59 (371)	51.89 (1318)	4.30 (109)
286JM	B2	17.58 (446)	15.45 (393)	9.50 (241)	44.94 (1142)	0.33 (8)	286JP	B2	17.58 (446)	15.45 (393)	9.50 (241)	47.83 (1215)	0.33 (8)	286JP	B2	17.58 (446)	15.45 (393)	9.50 (241)	47.83 (1215)	0.33 (8)
	C1	19.58 (497)	17.63 (448)	12.09 (307)	47.35 (1203)	2.00 (51)		C1	19.58 (497)	17.63 (448)	12.09 (307)	50.24 (1276)	2.00 (51)		C1	19.58 (497)	17.63 (448)	12.09 (307)	50.24 (1276)	2.00 (51)
	C2	20.36 (517)	19.93 (506)	14.59 (371)	50.50 (1283)	4.30 (109)		C2	20.36 (517)	19.93 (506)	14.59 (371)	53.39 (1356)	4.30 (109)		C2	20.36 (517)	19.93 (506)	14.59 (371)	53.39 (1356)	4.30 (109)
324JM	B2	18.58 (472)	16.16 (410)	9.50 (241)	44.28 (1125)	0.39 (10)	324JP	B2	18.58 (472)	16.16 (410)	9.50 (241)	47.17 (1198)	0.39 (10)	324JP	B2	18.58 (472)	16.16 (410)	9.50 (241)	47.17 (1198)	0.39 (10)
	C1	20.58 (523)	18.33 (466)	12.09 (307)	44.63 (1133)	2.73 (69)		C1	20.58 (523)	18.33 (466)	12.09 (307)	47.52 (1207)	2.73 (69)		C1	20.58 (523)	18.33 (466)	12.09 (307)	47.52 (1207)	2.73 (69)
326JM	C1	20.58 (523)	18.33 (466)	12.09 (307)	44.28 (1125)	2.73 (69)	326JP	C1	20.58 (523)	18.33 (466)	12.09 (307)	47.17 (1198)	2.73 (69)	326JP	C1	20.58 (523)	18.33 (466)	12.09 (307)	47.17 (1198)	2.73 (69)
	C2	21.58 (548)	19.88 (505)	14.59 (371)	44.63 (1133)	4.32 (110)		C2	21.58 (548)	19.88 (505)	14.59 (371)	47.52 (1207)	4.32 (110)		C2	21.58 (548)	19.88 (505)	14.59 (371)	47.52 (1207)	4.32 (110)

NOTE: Drives with single phase input have three phase output and include three phase motors.
Kv=2 (50)




Pressure Sensor/Transmitter For Pumps with TECHNOLOGIC® Drives

FEATURES

- 4-20mA output
- 10-28 VDC supply voltage
- Operating Temperature -40 to 85°C (-40 to 185°F)
- Storage Temperature -40 to 100°C (-40 to 212°F)
- Enclosure IP-66 (housing only)
- High Strength Stainless Steel Construction
- No Oil, Welds or Internal O-rings
- Wide Operating Temperature
- Low Static and Thermal Errors
- Compatible with Wide Variety of Liquids and Gases
- EMI/RFI Protection
- UL/cUL 508 Approved (with housing)
- 1lb. (0.45 kg) approximate weight

TECHNOLOGIC ANALOG SENSOR WIRING

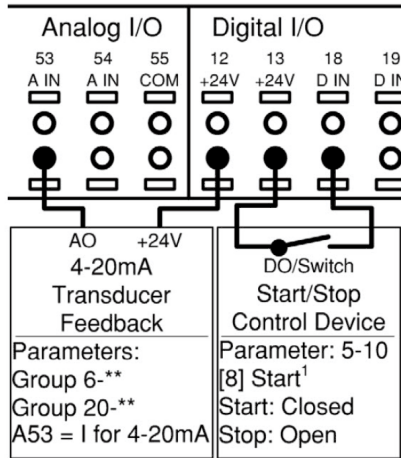

B&G PART NUMBERS

- S13203 Pressure range: 0-100 psi (0-689 kPa)
- S13204 Pressure range: 0-300 psi (0-2068 kPa)


Consult factory for other ranges.


INSTALLATION CONSIDERATIONS

- Standard 24 AWG (0.61 mm dia.) 2 wire shielded cable located in a conduit separate from high voltage wiring
- 24 vdc power supplied from Technologic Controller

DIMENSIONAL INFORMATION

Dimensions in Inches (Millimeters)

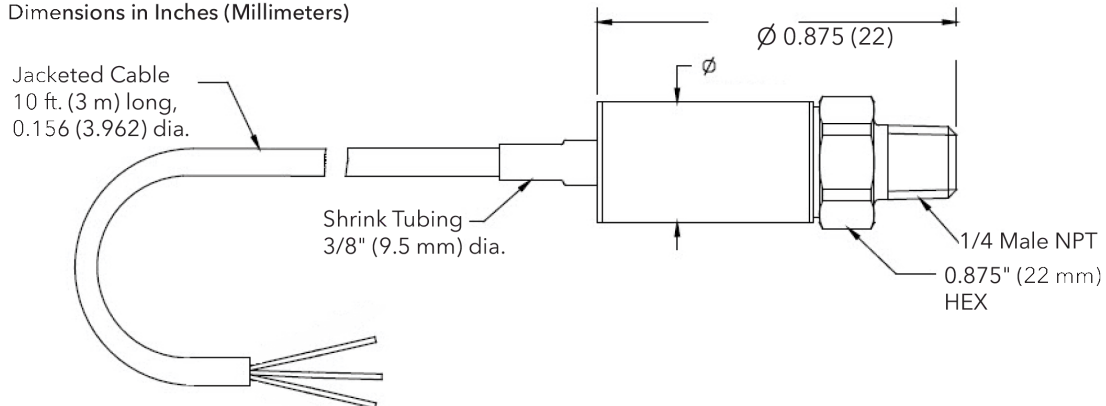

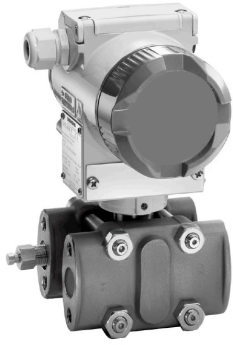


Differential Pressure Sensor/ Transmitter For Pumps with TECHNOLOGIC® Drives

FEATURES

- Relays reading to the Technologic controller up to 2000 ft. (610 m) away
- All wetted parts are 316 stainless steel
- Built-in RFI filter effective from 20 to 1000 MHz
- Withstands static pressures up to 2300 PSI (15858 kPa)
- 3 Valve bypass manifold (optional)
- 10 lbs. (4.5 kg) approximate weight

TECHNOLOGIC ANALOG SENSOR WIRING

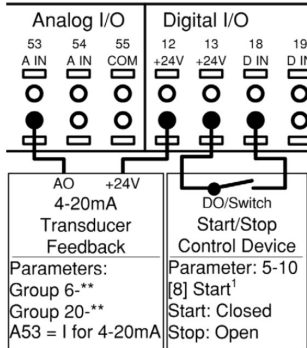

B&G PART NUMBERS

- S100089 Pressure range: 0 - 40 psi (0 - 276 kPa)
- S100091 Pressure range: 0 - 70 psi (0 - 483 kPa)
- S100092 Pressure range: 0 - 100 psi (0 - 689 kPa)


Consult factory for other ranges.

INSTALLATION CONSIDERATIONS

- Standard 18 AWG (1.194 mm dia.) 2 wire shielded cable located in a conduit separate from high voltage wiring
- 24 vdc power supplied from Technologic Controller for distance <2000 ft (610 m)

DIMENSIONAL INFORMATION

Dimensions in Inches (Millimeters)

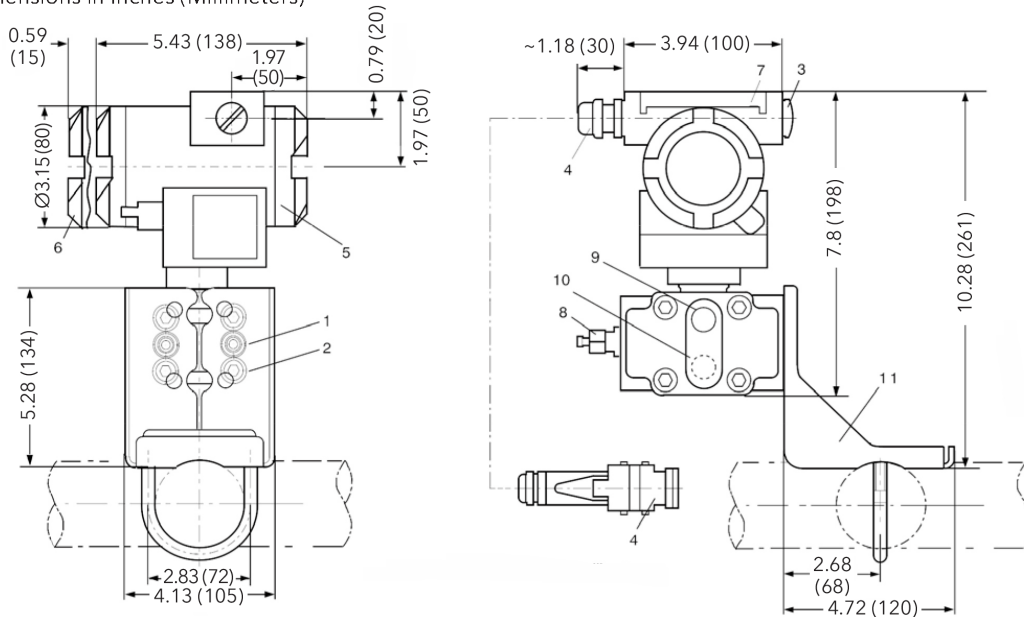

- 1 Process connection 1/4-18NPT for absolute pressure (+) side
- 2 Mounting thread 7/16-20 UNF to EN 61518
- 3 Dummy plug
- 4 Electrical connection: Screwed gland 1/2-14 NPT
- 5 Connection side

- 6 Electronic side, no digital display
- 7 Access cover over magnetic pushbuttons
- 8 Sealing screw with vent shown (optional)
- 9 Side vent for measuring liquid
- 10 Side vent for measuring gas (supplement H02)
- 11 Mounting bracket (2 shackles, 4 nuts, 4 U-plates, 1 angle) made of steel



Flow Sensor/Transmitter For Pumps with TECHNOLOGIC® Drives


The rugged Bell & Gossett Flow Sensor/Transmitter precisely measures system flow and transmits a proportional 4 to 20 mA DC signal to the Technologic Controller for display or program calculations.

FEATURES



- Suitable for mounting in vertical pipe
- Suitable for mounting in horizontal pipe within 45° of top dead center
- Non-magnetically sensed, non-fouling paddle wheel
- NEMA 4X Transmitter Enclosure
- Maximum Pressure Ratings:
 - 1000 psi @ 100°F, 900 psi @ 200°F,
 - 750 psi @ 300°F (6895 kPa @ 38°C, 6205 kPa @ 93°C, 5171 kPa @ 149°C)
- Maximum Temperature Ratings:
 - Fluid - 300°F (149°C) continuous service
 - Electronics - 150°F (66°C)
- Optional software and cable available for field programming
- 9.9 lbs (4.5 kg) approximate weight

DIMENSIONAL INFORMATION

Dimensions in Inches (Millimeters)

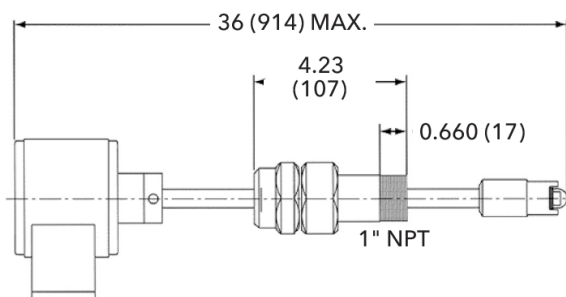

TECHNOLOGIC ANALOG SENSOR WIRING

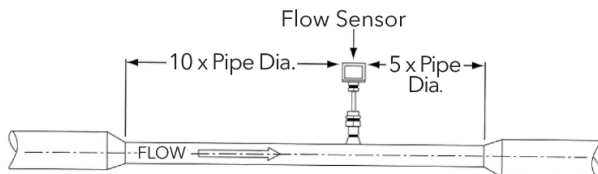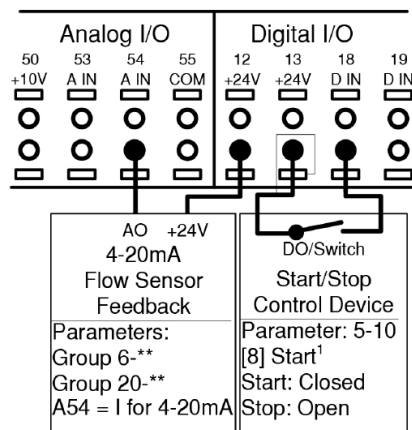


INSTALLATION CONSIDERATIONS

- Standard 18 AWG (1.194 mm dia.) gauge 3 wire shielded cable located in conduit separate from high voltage wiring
- 24 vdc power supplied from Technologic Controller
- Takes accurate readings and relays them to the Technologic Controller up to 2,000 ft. (610 m) away, when 10 pipe diameters upstream and 5 pipe diameters downstream of straight uninterrupted flow is present.

CALIBRATION CHART		
B&G Part No.	Pipe Size	Max. Flow
137411	3" Sch 40	250 gpm (16 l/sec)
137412	4" Sch 40	400 gpm (25 l/sec)
137413	6" Sch 40	850 gpm (54 l/sec)
137414	8" Sch 40	1750 gpm (110 l/sec)
137415	10" Sch 40	3150 gpm (199 l/sec)
137416	12" Sch 40	5000 gpm (315 l/sec)
137417	14" Sch 40	6400 gpm (404 l/sec)
137418	16" Sch 40	9100 gpm (574 l/sec)
137419	18" Sch 40	12400 gpm (782 l/sec)
137420	20" Sch 40	16500 gpm (1041 l/sec)

Consult factory for custom flow range calibration.

JOB:	REPRESENTATIVE:	
UNIT TAG:	ORDER NO.:	DATE:
ENGINEER:	SUBMITTED BY:	DATE:
CONTRACTOR:	APPROVED BY:	DATE:



6x6x7B Series e-80 In-Line Mounted Centrifugal Pumps

SPECIFICATIONS

FLOW _____ HEAD _____
 HP _____ RPM _____
 VOLTS _____
 CYCLE _____ INPUT PHASE _____
 ENCLOSURE _____
 APPROX. WEIGHT _____
 SPECIALS _____

MATERIALS OF CONSTRUCTION

Stainless Steel Fitted

MAXIMUM WORKING PRESSURE

- 175 psi (12 bar) with 125# ANSI flange drilling
- 250 psi (17 bar) with 250# ANSI flange drilling (requires 80-S)
- 300 psi (21 bar) W.P. with 250# ANSI flange drilling (Requires -S and EPR-Silicon Carbide-Silicon Carbide Seal)

MOUNTING


- In-Line Piping
- Flange Supports

PUMP VARIABLE SPEED CONTROL


- Integrated Technologic® Sensorless Control (ITSC)
- Integrated Technologic® (IT)
 - External input by others
 - Pressure Sensor(s)
 - Differential Pressure Sensor(s)
 - Flow Sensor(s)
- By Others

TYPE OF SEAL

- F Standard Seal w/ Flush Line (Buna-Carbon/Ceramic)
- S Stuffing Box construction w/ Flushed Mechanical Single Seal (EPR-Tungsten Carbide/Carbon)
- PF Stuffing Box Construction w/ Flushed Packing (Graphite Impregnated PTFE)

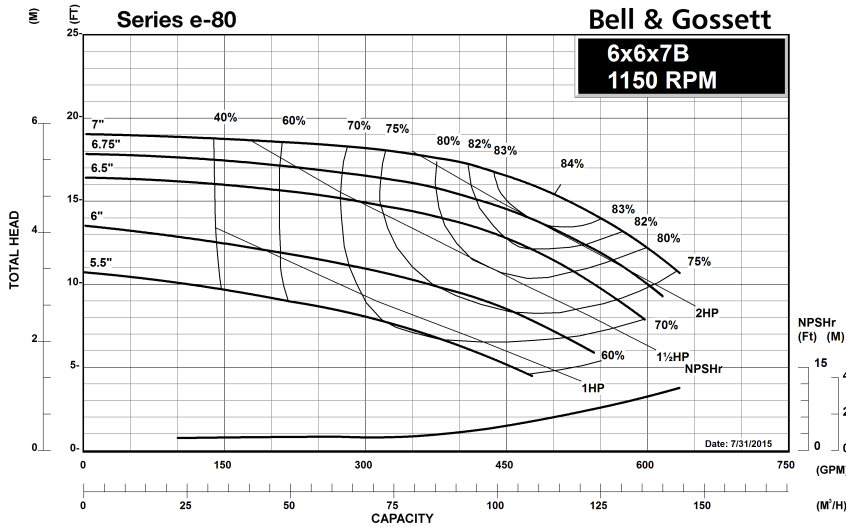

JOB:	REPRESENTATIVE:	
UNIT TAG:	ORDER NO.:	DATE:
ENGINEER:	SUBMITTED BY:	DATE:
CONTRACTOR:	APPROVED BY:	DATE:



6x6x7B Series e-80 In-Line Mounted Centrifugal Pumps

SPECIFICATIONS

FLOW _____ HEAD _____
 HP _____ RPM _____
 VOLTS _____
 CYCLE _____ INPUT PHASE _____
 ENCLOSURE _____
 APPROX. WEIGHT _____
 SPECIALS _____

MATERIALS OF CONSTRUCTION

Stainless Steel Fitted

MAXIMUM WORKING PRESSURE

- 175 psi (12 bar) with 125# ANSI flange drilling
- 250 psi (17 bar) with 250# ANSI flange drilling (requires 80-S)
- 300 psi (21 bar) W.P. with 250# ANSI flange drilling (Requires -S and EPR-Silicon Carbide-Silicon Carbide Seal)

MOUNTING


- In-Line Piping
- Flange Supports

PUMP VARIABLE SPEED CONTROL


- Integrated Technologic® Sensorless Control (ITSC)
- Integrated Technologic® (IT)
 - External input by others
 - Pressure Sensor(s)
 - Differential Pressure Sensor(s)
 - Flow Sensor(s)
- By Others

TYPE OF SEAL

- F Standard Seal w/ Flush Line (Buna-Carbon/Ceramic)
- S Stuffing Box construction w/ Flushed Mechanical Single Seal (EPR-Tungsten Carbide/Carbon)
- PF Stuffing Box Construction w/ Flushed Packing (Graphite Impregnated PTFE)

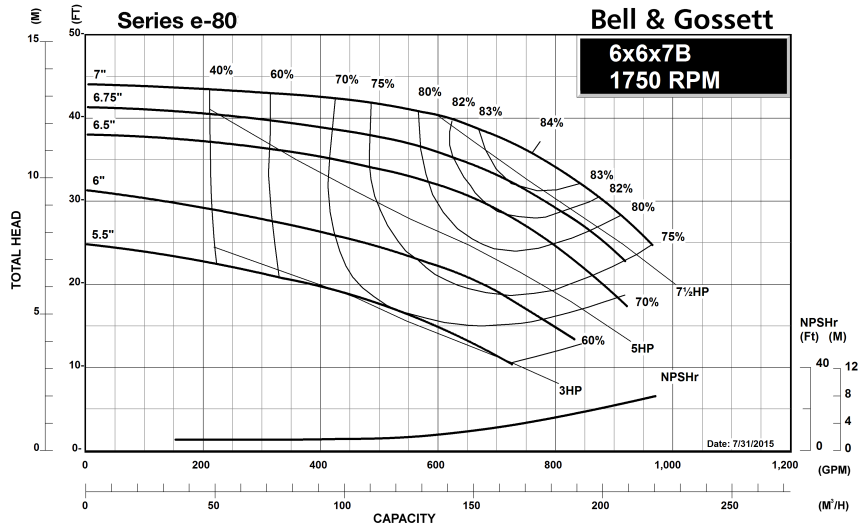

JOB:	REPRESENTATIVE:	
UNIT TAG:	ORDER NO.:	DATE:
ENGINEER:	SUBMITTED BY:	DATE:
CONTRACTOR:	APPROVED BY:	DATE:



6x6x7B Series e-80 In-Line Mounted Centrifugal Pumps

SPECIFICATIONS

FLOW _____ HEAD _____
 HP _____ RPM _____
 VOLTS _____
 CYCLE _____ INPUT PHASE _____
 ENCLOSURE _____
 APPROX. WEIGHT _____
 SPECIALS _____

MATERIALS OF CONSTRUCTION

Stainless Steel Fitted

MAXIMUM WORKING PRESSURE

- 175 psi (12 bar) with 125# ANSI flange drilling
- 250 psi (17 bar) with 250# ANSI flange drilling (requires 80-S)
- 300 psi (21 bar) W.P. with 250# ANSI flange drilling (Requires -S and EPR-Silicon Carbide-Silicon Carbide Seal)

MOUNTING


In-Line Piping Flange Supports


PUMP VARIABLE SPEED CONTROL

- Integrated Technologic® Sensorless Control (ITSC)
- Integrated Technologic® (IT)
 - External input by others
 - Pressure Sensor(s)
 - Differential Pressure Sensor(s)
 - Flow Sensor(s)
- By Others

TYPE OF SEAL

- F Standard Seal w/ Flush Line (Buna-Carbon/Ceramic)
- S Stuffing Box construction w/ Flushed Mechanical Single Seal (EPR-Tungsten Carbide/Carbon)
- PF Stuffing Box Construction w/ Flushed Packing (Graphite Impregnated PTFE)

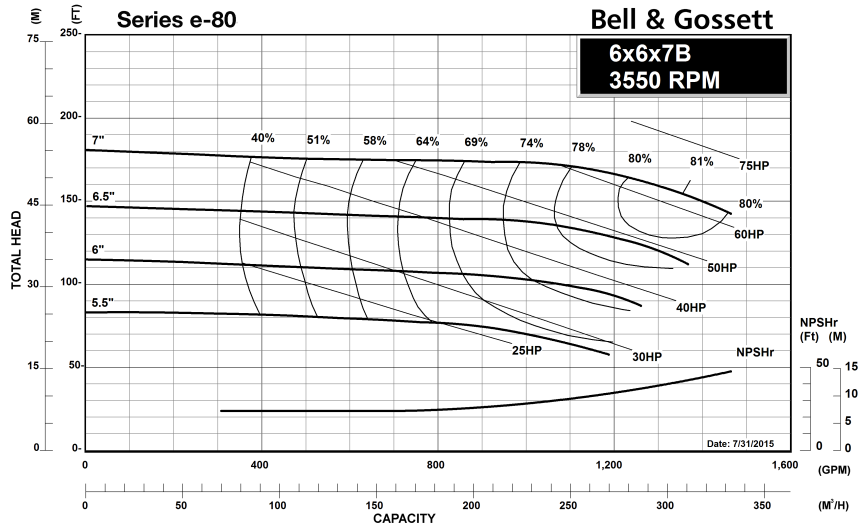

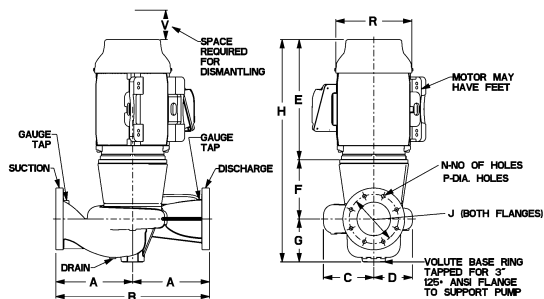

6x6x7B Series e-80 Centrifugal Pump Submittal - In-Line Piping

DIMENSIONS - Inches (mm)

STANDARD SEAL

MOTOR FRAME	A	B	C	D	E (max)	F	G	H (max)	125# ANSI			250# ANSI			R	S (Max)*	V (min)	Suct/Disch Gauge Taps (NPT)	Drain Tap (NPT)
									J	N	P	J	N	P					
182JM	14.00 (356)	28.00 (711)	6.50 (165)	8.50 (216)	15.31 (389)	6.06 (154)	8.13 (206)	29.50 (749)	9.50 (241)	8	0.88 (22)	10.63 (270)	12	0.88 (22)	11.75 (298)	1.00 (25)	5.25 (133)	0.25	0.25
184JM	14.00 (356)	28.00 (711)	6.50 (165)	8.50 (216)	15.31 (389)	6.06 (154)	8.13 (206)	29.50 (749)	9.50 (241)	8	0.88 (22)	10.63 (270)	12	0.88 (22)	11.75 (298)	1.00 (25)	5.25 (133)	0.25	0.25
213JM	14.00 (356)	28.00 (711)	6.50 (165)	8.50 (216)	19.25 (489)	6.06 (154)	8.13 (206)	33.44 (849)	9.50 (241)	8	0.88 (22)	10.63 (270)	12	0.88 (22)	14.00 (356)	-	5.25 (133)	0.25	0.25
215JM	14.00 (356)	28.00 (711)	6.50 (165)	8.50 (216)	19.25 (489)	6.06 (154)	8.13 (206)	33.44 (849)	9.50 (241)	8	0.88 (22)	10.63 (270)	12	0.88 (22)	14.00 (356)	-	5.25 (133)	0.25	0.25
254JM	14.00 (356)	28.00 (711)	6.50 (165)	8.50 (216)	24.13 (613)	7.06 (179)	8.13 (206)	39.31 (999)	9.50 (241)	8	0.88 (22)	10.63 (270)	12	0.88 (22)	17.00 (432)	-	5.25 (133)	0.25	0.25
256JM	14.00 (356)	28.00 (711)	6.50 (165)	8.50 (216)	24.13 (613)	7.06 (179)	8.13 (206)	39.31 (999)	9.50 (241)	8	0.88 (22)	10.63 (270)	12	0.88 (22)	17.00 (432)	-	5.25 (133)	0.25	0.25
284JM	14.00 (356)	28.00 (711)	6.50 (165)	8.50 (216)	23.63 (600)	7.06 (179)	8.13 (206)	38.81 (986)	9.50 (241)	8	0.88 (22)	10.63 (270)	12	0.88 (22)	16.13 (410)	4.63 (117)	5.25 (133)	0.25	0.25
286JP	14.00 (356)	28.00 (711)	6.50 (165)	8.50 (216)	25.13 (638)	7.06 (179)	8.13 (206)	40.31 (1024)	9.50 (241)	8	0.88 (22)	10.63 (270)	12	0.88 (22)	16.13 (410)	4.63 (117)	5.25 (133)	0.25	0.25
324JM	14.00 (356)	28.00 (711)	6.50 (165)	8.50 (216)	26.00 (660)	7.06 (179)	8.13 (206)	41.19 (1046)	9.50 (241)	8	0.88 (22)	10.63 (270)	12	0.88 (22)	18.75 (476)	4.63 (117)	5.25 (133)	0.25	0.25
326JM	14.00 (356)	28.00 (711)	6.50 (165)	8.50 (216)	26.00 (660)	7.06 (179)	8.13 (206)	41.19 (1046)	9.50 (241)	8	0.88 (22)	10.63 (270)	12	0.88 (22)	18.75 (476)	4.63 (117)	5.25 (133)	0.25	0.25

STUFFING BOX

MOTOR FRAME	A	B	C	D	E (max)	F	G	H (max)	125# ANSI			250# ANSI			R	S (Max)*	V (min)	Suct/Disch Gauge Taps (NPT)	Drain Tap (NPT)
									J	N	P	J	N	P					
182JP	14.00 (356)	28.00 (711)	6.50 (165)	8.50 (216)	15.31 (389)	9.25 (235)	8.13 (206)	32.69 (830)	9.50 (241)	8	0.88 (22)	10.63 (270)	12	0.88 (22)	11.75 (298)	1.00 (25)	5.25 (133)	0.25	0.25
184JP	14.00 (356)	28.00 (711)	6.50 (165)	8.50 (216)	15.31 (389)	9.25 (235)	8.13 (206)	32.69 (830)	9.50 (241)	8	0.88 (22)	10.63 (270)	12	0.88 (22)	11.75 (298)	1.00 (25)	5.25 (133)	0.25	0.25
213JP	14.00 (356)	28.00 (711)	6.50 (165)	8.50 (216)	19.25 (489)	9.94 (252)	8.13 (206)	37.31 (948)	9.50 (241)	8	0.88 (22)	10.63 (270)	12	0.88 (22)	14.00 (356)	-	5.25 (133)	0.25	0.25
215JP	14.00 (356)	28.00 (711)	6.50 (165)	8.50 (216)	19.25 (489)	9.94 (252)	8.13 (206)	37.31 (948)	9.50 (241)	8	0.88 (22)	10.63 (270)	12	0.88 (22)	14.00 (356)	-	5.25 (133)	0.25	0.25
254JP	14.00 (356)	28.00 (711)	6.50 (165)	8.50 (216)	24.13 (613)	9.94 (252)	8.13 (206)	42.19 (1072)	9.50 (241)	8	0.88 (22)	10.63 (270)	12	0.88 (22)	17.00 (432)	-	5.25 (133)	0.25	0.25
256JP	14.00 (356)	28.00 (711)	6.50 (165)	8.50 (216)	24.13 (613)	9.94 (252)	8.13 (206)	42.19 (1072)	9.50 (241)	8	0.88 (22)	10.63 (270)	12	0.88 (22)	17.00 (432)	-	5.25 (133)	0.25	0.25
284JP	14.00 (356)	28.00 (711)	6.50 (165)	8.50 (216)	23.63 (600)	9.94 (252)	8.13 (206)	41.69 (1059)	9.50 (241)	8	0.88 (22)	10.63 (270)	12	0.88 (22)	16.13 (410)	4.63 (117)	5.25 (133)	0.25	0.25
286JP	14.00 (356)	28.00 (711)	6.50 (165)	8.50 (216)	25.13 (638)	9.94 (252)	8.13 (206)	43.19 (1097)	9.50 (241)	8	0.88 (22)	10.63 (270)	12	0.88 (22)	16.13 (410)	4.63 (117)	5.25 (133)	0.25	0.25
286JP	14.00 (356)	28.00 (711)	6.50 (165)	8.50 (216)	25.13 (638)	9.94 (252)	8.13 (206)	43.19 (1097)	9.50 (241)	8	0.88 (22)	10.63 (270)	12	0.88 (22)	16.13 (410)	4.63 (117)	5.25 (133)	0.25	0.25
324JP	14.00 (356)	28.00 (711)	6.50 (165)	8.50 (216)	26.00 (660)	9.94 (252)	8.13 (206)	44.06 (1119)	9.50 (241)	8	0.88 (22)	10.63 (270)	12	0.88 (22)	18.75 (476)	4.63 (117)	5.25 (133)	0.25	0.25
326JP	14.00 (356)	28.00 (711)	6.50 (165)	8.50 (216)	26.00 (660)	9.94 (252)	8.13 (206)	44.06 (1119)	9.50 (241)	8	0.88 (22)	10.63 (270)	12	0.88 (22)	18.75 (476)	4.63 (117)	5.25 (133)	0.25	0.25


Dimensions are subject to change. Not to be used for construction purposes unless certified.

NOTE: For Single phase Motors add 1" to dimensions E & H.

*Dimensions are for ODP Motors. For TEFC add S dimension to dimensions E & H.

Xylem Inc.
8200 N. Austin Avenue, Morton Grove, IL 60053
Phone: (847)966-3700 Fax: (847)965-8379
www.bellgossett.com
Bell & Gossett is a trademark of Xylem Inc. or one of its subsidiaries.
© 2015 Xylem Inc.



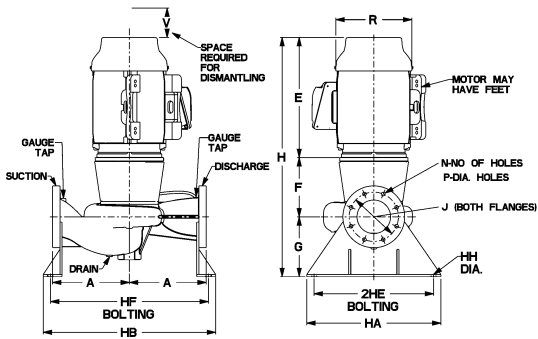

6x6x7B Series e-80 Centrifugal Pump Submittal - Flange Support Mounting

DIMENSIONS - Inches (mm)

STANDARD SEAL

MOTOR FRAME	A	HF BOLTING	HB	2HE BOLTING	HA	HH DIA	E (max)	F	G	H (max)	125# ANSI			250# ANSI			R	S (Max)*	V (min)	Suct/Disch Gauge Taps (NPT)	Drain Tap (NPT)
											J	N	P	J	N	P					
182JM	14.00 (356)	31.50 (800)	35.00 (889)	22.50 (572)	26.00 (660)	1.00 (25)	15.31 (389)	6.06 (154)	8.13 (206)	29.50 (749)	9.50 (241)	8 (22)	0.88 (22)	10.63 (270)	12 (22)	0.88 (22)	11.75 (298)	1.00 (25)	5.25 (133)	0.25	0.25
184JM	14.00 (356)	31.50 (800)	35.00 (889)	22.50 (572)	26.00 (660)	1.00 (25)	15.31 (389)	6.06 (154)	8.13 (206)	29.50 (749)	9.50 (241)	8 (22)	0.88 (22)	10.63 (270)	12 (22)	0.88 (22)	11.75 (298)	1.00 (25)	5.25 (133)	0.25	0.25
213JM	14.00 (356)	31.50 (800)	35.00 (889)	22.50 (572)	26.00 (660)	1.00 (25)	19.25 (489)	6.06 (154)	8.13 (206)	33.44 (849)	9.50 (241)	8 (22)	0.88 (22)	10.63 (270)	12 (22)	0.88 (22)	14.00 (356)	-	5.25 (133)	0.25	0.25
215JM	14.00 (356)	31.50 (800)	35.00 (889)	22.50 (572)	26.00 (660)	1.00 (25)	19.25 (489)	6.06 (154)	8.13 (206)	33.44 (849)	9.50 (241)	8 (22)	0.88 (22)	10.63 (270)	12 (22)	0.88 (22)	14.00 (356)	-	5.25 (133)	0.25	0.25
254JM	14.00 (356)	31.50 (800)	35.00 (889)	22.50 (572)	26.00 (660)	1.00 (25)	24.13 (613)	7.06 (179)	8.13 (206)	39.31 (999)	9.50 (241)	8 (22)	0.88 (22)	10.63 (270)	12 (22)	0.88 (22)	17.00 (432)	-	5.25 (133)	0.25	0.25
256JM	14.00 (356)	31.50 (800)	35.00 (889)	22.50 (572)	26.00 (660)	1.00 (25)	24.13 (613)	7.06 (179)	8.13 (206)	39.31 (999)	9.50 (241)	8 (22)	0.88 (22)	10.63 (270)	12 (22)	0.88 (22)	17.00 (432)	-	5.25 (133)	0.25	0.25
284JM	14.00 (356)	31.50 (800)	35.00 (889)	22.50 (572)	26.00 (660)	1.00 (25)	23.63 (600)	7.06 (179)	8.13 (206)	38.81 (986)	9.50 (241)	8 (22)	0.88 (22)	10.63 (270)	12 (22)	0.88 (22)	16.13 (410)	4.63 (117)	5.25 (133)	0.25	0.25
286JM	14.00 (356)	31.50 (800)	35.00 (889)	22.50 (572)	26.00 (660)	1.00 (25)	25.13 (638)	7.06 (179)	8.13 (206)	40.31 (1024)	9.50 (241)	8 (22)	0.88 (22)	10.63 (270)	12 (22)	0.88 (22)	16.13 (410)	4.63 (117)	5.25 (133)	0.25	0.25
324JM	14.00 (356)	31.50 (800)	35.00 (889)	22.50 (572)	26.00 (660)	1.00 (25)	26.00 (660)	7.06 (179)	8.13 (206)	41.19 (1046)	9.50 (241)	8 (22)	0.88 (22)	10.63 (270)	12 (22)	0.88 (22)	18.75 (476)	4.63 (117)	5.25 (133)	0.25	0.25
326JM	14.00 (356)	31.50 (800)	35.00 (889)	22.50 (572)	26.00 (660)	1.00 (25)	26.00 (660)	7.06 (179)	8.13 (206)	41.19 (1046)	9.50 (241)	8 (22)	0.88 (22)	10.63 (270)	12 (22)	0.88 (22)	18.75 (476)	4.63 (117)	5.25 (133)	0.25	0.25


STUFFING BOX

MOTOR FRAME	A	HF BOLTING	HB	2HE BOLTING	HA	HH DIA	E (max)	F	G	H (max)	125# ANSI			250# ANSI			R	S (Max)*	V (min)	Suct/Disch Gauge Taps (NPT)	Drain Tap (NPT)
											J	N	P	J	N	P					
182JP	14.00 (356)	31.50 (800)	35.00 (889)	22.50 (572)	26.00 (660)	1.00 (25)	15.31 (389)	9.25 (235)	8.13 (206)	32.69 (830)	9.50 (241)	8 (22)	0.88 (22)	10.63 (270)	12 (22)	0.88 (22)	11.75 (298)	1.00 (25)	5.25 (133)	0.25	0.25
184JP	14.00 (356)	31.50 (800)	35.00 (889)	22.50 (572)	26.00 (660)	1.00 (25)	15.31 (389)	9.25 (235)	8.13 (206)	32.69 (830)	9.50 (241)	8 (22)	0.88 (22)	10.63 (270)	12 (22)	0.88 (22)	11.75 (298)	1.00 (25)	5.25 (133)	0.25	0.25
213JP	14.00 (356)	31.50 (800)	35.00 (889)	22.50 (572)	26.00 (660)	1.00 (25)	19.25 (489)	9.94 (252)	8.13 (206)	37.31 (948)	9.50 (241)	8 (22)	0.88 (22)	10.63 (270)	12 (22)	0.88 (22)	14.00 (356)	-	5.25 (133)	0.25	0.25
215JP	14.00 (356)	31.50 (800)	35.00 (889)	22.50 (572)	26.00 (660)	1.00 (25)	19.25 (489)	9.94 (252)	8.13 (206)	37.31 (948)	9.50 (241)	8 (22)	0.88 (22)	10.63 (270)	12 (22)	0.88 (22)	14.00 (356)	-	5.25 (133)	0.25	0.25
254JP	14.00 (356)	31.50 (800)	35.00 (889)	22.50 (572)	26.00 (660)	1.00 (25)	24.13 (613)	9.94 (252)	8.13 (206)	42.19 (1072)	9.50 (241)	8 (22)	0.88 (22)	10.63 (270)	12 (22)	0.88 (22)	17.00 (432)	-	5.25 (133)	0.25	0.25
256JP	14.00 (356)	31.50 (800)	35.00 (889)	22.50 (572)	26.00 (660)	1.00 (25)	24.13 (613)	9.94 (252)	8.13 (206)	42.19 (1072)	9.50 (241)	8 (22)	0.88 (22)	10.63 (270)	12 (22)	0.88 (22)	17.00 (432)	-	5.25 (133)	0.25	0.25
284JP	14.00 (356)	31.50 (800)	35.00 (889)	22.50 (572)	26.00 (660)	1.00 (25)	23.63 (600)	9.94 (252)	8.13 (206)	41.69 (1059)	9.50 (241)	8 (22)	0.88 (22)	10.63 (270)	12 (22)	0.88 (22)	16.13 (410)	4.63 (117)	5.25 (133)	0.25	0.25
286JP	14.00 (356)	31.50 (800)	35.00 (889)	22.50 (572)	26.00 (660)	1.00 (25)	25.13 (638)	9.94 (252)	8.13 (206)	43.19 (1097)	9.50 (241)	8 (22)	0.88 (22)	10.63 (270)	12 (22)	0.88 (22)	16.13 (410)	4.63 (117)	5.25 (133)	0.25	0.25
324JP	14.00 (356)	31.50 (800)	35.00 (889)	22.50 (572)	26.00 (660)	1.00 (25)	26.00 (660)	9.94 (252)	8.13 (206)	44.06 (1119)	9.50 (241)	8 (22)	0.88 (22)	10.63 (270)	12 (22)	0.88 (22)	18.75 (476)	4.63 (117)	5.25 (133)	0.25	0.25
326JP	14.00 (356)	31.50 (800)	35.00 (889)	22.50 (572)	26.00 (660)	1.00 (25)	26.00 (660)	9.94 (252)	8.13 (206)	44.06 (1119)	9.50 (241)	8 (22)	0.88 (22)	10.63 (270)	12 (22)	0.88 (22)	18.75 (476)	4.63 (117)	5.25 (133)	0.25	0.25

Dimensions are subject to change. Not to be used for construction purposes unless certified.

NOTE: For Single phase Motors add 1" to dimensions E & H.



*Dimensions are for ODP Motors. For TEFC add S dimension to dimensions E & H.



6x6x7B Series e-80

In-Line Mounted Centrifugal Pumps
With Integrated Technologic® Control

TECHNOLOGIC STANDARD FEATURES	
CONTROL METHOD WITH INTEGRATED TECHNOLOGIC® SENSORLESS CONTROL (ITSC)	Factory configured for sensorless operation.
CONTROL METHOD WITH INTEGRATED TECHNOLOGIC® (IT)	Field configurable for sensor by others, building management system input, or optional sensor(s) provided.
ENCLOSURE	NEMA 12 (same as IP55 & UL type 12)
POWER DISCONNECT SWITCH	Included standard. Fused Disconnect Switch optional with three phase input voltage.
HARMONIC SUPPRESSION	Integrated non-saturating dual DC link reactors provide better harmonic performance than a 5% AC line reactor.
COOLING	Fan-cooled through temperature controlled and easy replacement.
AMBIENT TEMPERATURE RATING	14°F to 113°F (-10°C to 45°C)
COMMUNICATION PROTOCOLS	BACnet, Modbus RTU, N2 Metasys, FLN Apogee
ANALOG INPUTS	2 configurable for either voltage (0 to 10VDC) or current(0/4 to 20mA)
ANALOG OUTPUTS	1 (0/4 to 20mA) up to 500 ohm load accurate to 1% of full scale
DIGITAL INPUTS	4 (0 to 24VDC), NPN or PNP, 0 to 24VDC, on 5 msec scan interval, Up to 2 can be configured as pulse inputs.
DIGITAL OUTPUTS	2 (0 to 24VDC), 40mA max current, configurable as pulse outputs.
RELAY OUTPUTS	2 programmable, 240VAC or 400VAC up to 2 A
MINIMUM CONTROL HEAD	_____ ft (default set to 40% of design head if not unknown)

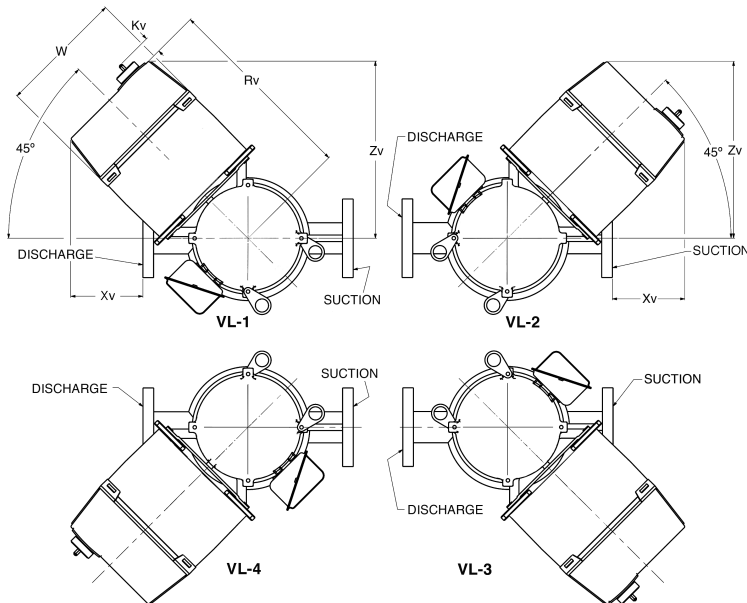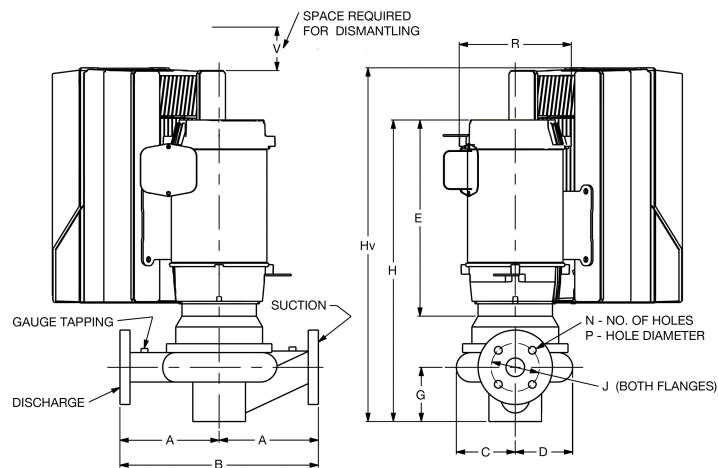

Series e-80 6x6x7B

In-Line Mounted Centrifugal Pumps

With Integrated Technologic® Control

B-139.32

DIMENSIONS - Inches (mm)

STANDARD SEAL

STUFFING BOX

MOTOR FRAME	VDF	Rv	Zv	W	Hv	Xv	MOTOR FRAME	VDF	Rv	Zv	W	Hv	Xv
182JM	A5	12.78 (325)	12.03 (306)	9.50 (241)	32.66 (829)	1.97 (50)	182JP	A5	12.78 (325)	12.03 (306)	9.50 (241)	35.84 (910)	1.97 (50)
	B1	15.07 (383)	13.63 (346)	9.50 (241)	33.66 (855)	3.57 (91)		B1	15.07 (383)	13.63 (346)	9.50 (241)	36.84 (936)	3.57 (91)
184JM	A5	12.78 (325)	12.03 (306)	9.50 (241)	32.66 (829)	1.97 (50)	184JP	A5	12.78 (325)	12.03 (306)	9.50 (241)	35.84 (910)	1.97 (50)
	B1	15.07 (383)	13.63 (346)	9.50 (241)	33.66 (855)	3.57 (91)		B1	15.07 (383)	13.63 (346)	9.50 (241)	36.84 (936)	3.57 (91)
213JM	A5	13.53 (344)	12.56 (319)	9.50 (241)	36.02 (915)	1.44 (37)	213JP	A5	13.53 (344)	12.56 (319)	9.50 (241)	39.89 (1013)	1.44 (37)
	B1	15.84 (402)	14.22 (361)	9.50 (241)	37.61 (955)	0.22 (6)		B1	15.84 (402)	14.22 (361)	9.50 (241)	41.48 (1054)	0.22 (6)
	B2	15.84 (402)	14.22 (361)	9.50 (241)	43.35 (1101)	0.22 (6)		B2	15.84 (402)	14.22 (361)	9.50 (241)	47.22 (1199)	0.22 (6)
215JM	A5	13.53 (344)	12.56 (319)	9.50 (241)	34.55 (877)	1.44 (37)	215JP	A5	13.53 (344)	12.56 (319)	9.50 (241)	38.42 (976)	1.44 (37)
	B1	15.84 (402)	14.22 (361)	9.50 (241)	36.08 (916)	0.22 (6)		B1	15.84 (402)	14.22 (361)	9.50 (241)	39.95 (1015)	0.22 (6)
	B2	15.84 (402)	14.22 (361)	9.50 (241)	41.82 (1062)	0.22 (6)		B2	15.84 (402)	14.22 (361)	9.50 (241)	45.69 (1161)	0.22 (6)
	C1	17.81 (452)	17.42 (442)	12.10 (307)	43.84 (1113)	3.42 (87)		C1	17.81 (452)	17.42 (442)	12.10 (307)	47.71 (1212)	3.42 (87)
254JM	B1	16.83 (427)	14.92 (379)	9.50 (241)	42.31 (1075)	0.92 (23)	254JP	B1	16.83 (427)	14.92 (379)	9.50 (241)	45.18 (1148)	0.92 (23)
	B2	16.83 (427)	14.92 (379)	9.50 (241)	46.77 (1188)	0.92 (23)		B2	16.83 (427)	14.92 (379)	9.50 (241)	49.64 (1261)	0.92 (23)
	C1	18.80 (477)	18.12 (460)	12.10 (307)	48.03 (1220)	4.12 (105)		C1	18.80 (477)	18.12 (460)	12.10 (307)	50.90 (1293)	4.12 (105)
256JM	B1	16.83 (427)	14.92 (379)	9.50 (241)	41.68 (1059)	0.92 (23)	256JP	B1	16.83 (427)	14.92 (379)	9.50 (241)	44.56 (1132)	0.92 (23)
	B2	16.83 (427)	14.92 (379)	9.50 (241)	46.14 (1172)	0.92 (23)		B2	16.83 (427)	14.92 (379)	9.50 (241)	49.02 (1245)	0.92 (23)
	C1	18.80 (477)	18.12 (460)	12.10 (307)	47.40 (1204)	4.12 (105)		C1	18.80 (477)	18.12 (460)	12.10 (307)	50.28 (1277)	4.12 (105)
	C2	19.58 (497)	20.42 (519)	14.60 (371)	52.06 (1322)	6.42 (163)		C2	19.58 (497)	20.42 (519)	14.60 (371)	54.94 (1395)	6.42 (163)
284JM	B1	17.58 (446)	15.45 (393)	9.50 (241)	41.06 (1043)	1.44 (37)	284JP	B1	17.58 (446)	15.45 (393)	9.50 (241)	43.93 (1116)	1.45 (37)
	B2	17.58 (446)	15.45 (393)	9.50 (241)	45.52 (1156)	1.44 (37)		B2	17.58 (446)	15.45 (393)	9.50 (241)	48.39 (1229)	1.45 (37)
	C1	19.58 (497)	17.63 (448)	12.09 (307)	47.92 (1217)	3.63 (92)		C1	19.58 (497)	17.63 (448)	12.09 (307)	50.80 (1290)	3.63 (92)
	C2	20.36 (517)	19.93 (506)	14.59 (371)	51.07 (1297)	5.93 (150)		C2	20.36 (517)	19.93 (506)	14.59 (371)	53.95 (1370)	5.93 (150)
286JM	B2	17.58 (446)	15.45 (393)	9.50 (241)	47.02 (1194)	1.44 (37)	286JP	B2	17.58 (446)	15.45 (393)	9.50 (241)	49.89 (1267)	1.45 (37)
	C1	19.58 (497)	17.63 (448)	12.09 (307)	49.42 (1255)	3.63 (92)		C1	19.58 (497)	17.63 (448)	12.09 (307)	52.30 (1328)	3.63 (92)
	C2	20.36 (517)	19.93 (506)	14.59 (371)	52.57 (1335)	5.93 (150)		C2	20.36 (517)	19.93 (506)	14.59 (371)	55.45 (1408)	5.93 (150)
324JM	B2	18.58 (472)	16.16 (410)	9.50 (241)	46.36 (1178)	2.16 (55)	324JP	B2	18.58 (472)	16.16 (410)	9.50 (241)	49.23 (1251)	2.16 (55)
	C1	20.58 (523)	18.33 (466)	12.09 (307)	46.70 (1186)	4.33 (110)		C1	20.58 (523)	18.33 (466)	12.09 (307)	49.58 (1259)	4.33 (110)
	C2	21.58 (548)	19.88 (505)	14.59 (371)	51.27 (1302)	5.88 (149)		C2	21.58 (548)	19.88 (505)	14.59 (371)	54.14 (1375)	5.88 (149)
326JM	C1	20.58 (523)	18.33 (466)	12.09 (307)	46.70 (1186)	4.33 (110)	326JP	C1	20.58 (523)	18.33 (466)	12.09 (307)	49.58 (1259)	4.33 (110)
	C2	21.58 (548)	19.88 (505)	14.59 (371)	51.27 (1302)	5.88 (149)		C2	21.58 (548)	19.88 (505)	14.59 (371)	54.14 (1375)	5.88 (149)

NOTE: Drives with single phase input have three phase output and include three phase motors.

Kv=2 (50)

Xylem Inc.
 8200 N. Austin Avenue, Morton Grove, IL 60053
 Phone: (847)966-3700 Fax: (847)965-8379
 www.bellgossett.com
 Bell & Gossett is a trademark of Xylem Inc. or one of its subsidiaries.
 © 2015 Xylem Inc.






Pressure Sensor/Transmitter For Pumps with TECHNOLOGIC® Drives

FEATURES

- 4-20mA output
- 10-28 VDC supply voltage
- Operating Temperature -40 to 85°C (-40 to 185°F)
- Storage Temperature -40 to 100°C (-40 to 212°F)
- Enclosure IP-66 (housing only)
- High Strength Stainless Steel Construction
- No Oil, Welds or Internal O-rings
- Wide Operating Temperature
- Low Static and Thermal Errors
- Compatible with Wide Variety of Liquids and Gases
- EMI/RFI Protection
- UL/cUL 508 Approved (with housing)
- 1lb. (0.45 kg) approximate weight

TECHNOLOGIC ANALOG SENSOR WIRING

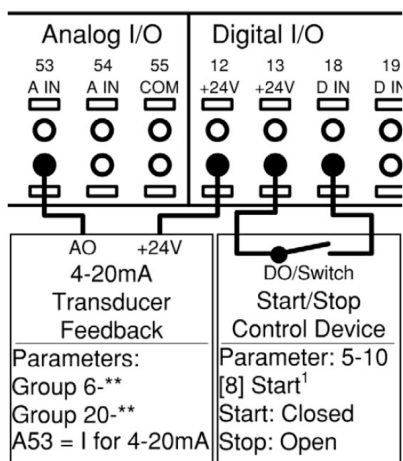

B&G PART NUMBERS

- S13203 Pressure range: 0-100 psi (0-689 kPa)
- S13204 Pressure range: 0-300 psi (0-2068 kPa)


Consult factory for other ranges.


INSTALLATION CONSIDERATIONS

- Standard 24 AWG (0.61 mm dia.) 2 wire shielded cable located in a conduit separate from high voltage wiring
- 24 vdc power supplied from Technologic Controller

DIMENSIONAL INFORMATION

Dimensions in Inches (Millimeters)

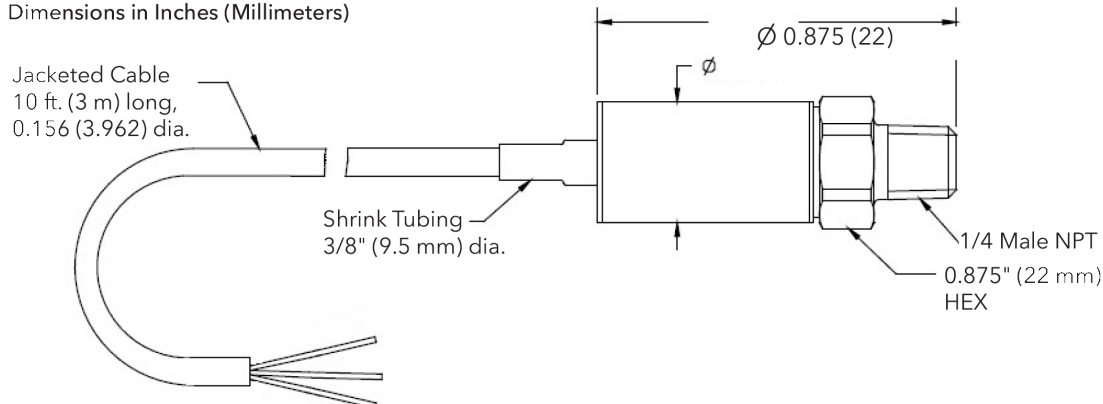

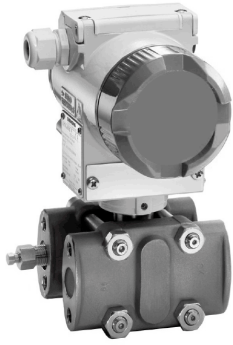


Differential Pressure Sensor/ Transmitter For Pumps with TECHNOLOGIC® Drives

FEATURES

- Relays reading to the Technologic controller up to 2000 ft. (610 m) away
- All wetted parts are 316 stainless steel
- Built-in RFI filter effective from 20 to 1000 MHz
- Withstands static pressures up to 2300 PSI (15858 kPa)
- 3 Valve bypass manifold (optional)
- 10 lbs. (4.5 kg) approximate weight

TECHNOLOGIC ANALOG SENSOR WIRING

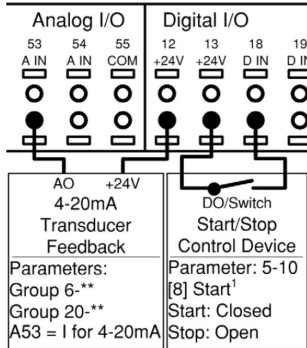

B&G PART NUMBERS

- S100089 Pressure range: 0 - 40 psi (0 - 276 kPa)
- S100091 Pressure range: 0 - 70 psi (0 - 483 kPa)
- S100092 Pressure range: 0 - 100 psi (0 - 689 kPa)


Consult factory for other ranges.

INSTALLATION CONSIDERATIONS

- Standard 18 AWG (1.194 mm dia.) 2 wire shielded cable located in a conduit separate from high voltage wiring
- 24 vdc power supplied from Technologic Controller for distance <2000 ft (610 m)

DIMENSIONAL INFORMATION

Dimensions in Inches (Millimeters)

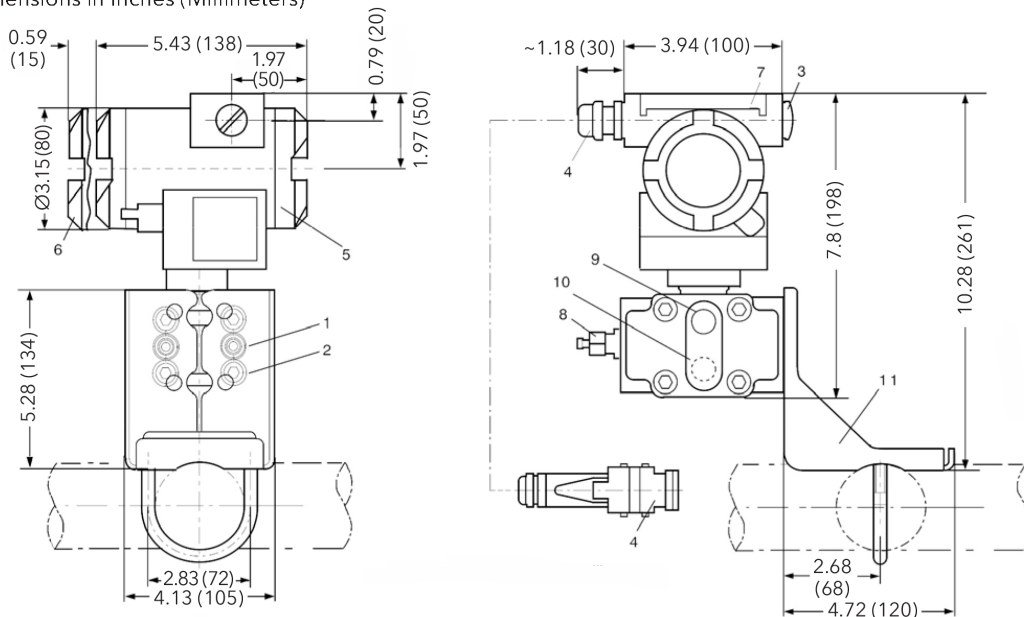

- 1 Process connection 1/4-18NPT for absolute pressure (+) side
- 2 Mounting thread 7/16-20 UNF to EN 61518
- 3 Dummy plug
- 4 Electrical connection: Screwed gland 1/2-14 NPT
- 5 Connection side

- 6 Electronic side, no digital display
- 7 Access cover over magnetic pushbuttons
- 8 Sealing screw with vent shown (optional)
- 9 Side vent for measuring liquid
- 10 Side vent for measuring gas (supplement H02)
- 11 Mounting bracket (2 shackles, 4 nuts, 4 U-plates, 1 angle) made of steel



Flow Sensor/Transmitter For Pumps with TECHNOLOGIC® Drives


The rugged Bell & Gossett Flow Sensor/Transmitter precisely measures system flow and transmits a proportional 4 to 20 mA DC signal to the Technologic Controller for display or program calculations.

FEATURES



- Suitable for mounting in vertical pipe
- Suitable for mounting in horizontal pipe within 45° of top dead center
- Non-magnetically sensed, non-fouling paddle wheel
- NEMA 4X Transmitter Enclosure
- Maximum Pressure Ratings:
 - 1000 psi @ 100°F, 900 psi @ 200°F,
 - 750 psi @ 300°F (6895 kPa @ 38°C, 6205 kPa @ 93°C, 5171 kPa @ 149°C)
- Maximum Temperature Ratings:
 - Fluid - 300°F (149°C) continuous service
 - Electronics - 150°F (66°C)
- Optional software and cable available for field programming
- 9.9 lbs (4.5 kg) approximate weight

DIMENSIONAL INFORMATION

Dimensions in Inches (Millimeters)

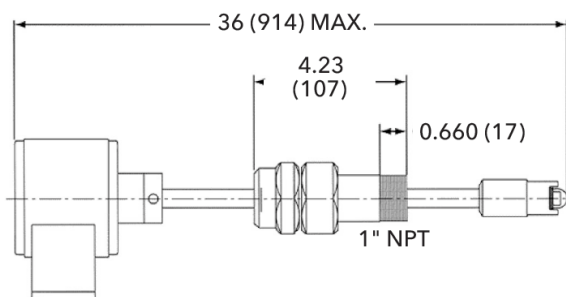

TECHNOLOGIC ANALOG SENSOR WIRING

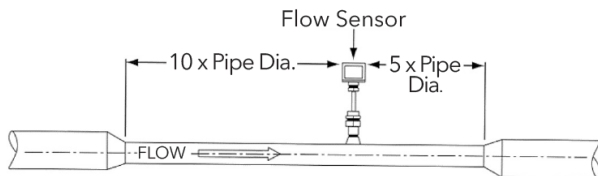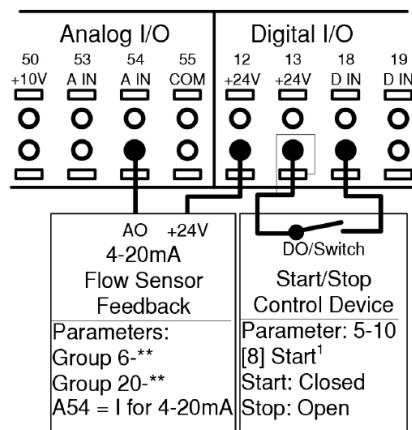


INSTALLATION CONSIDERATIONS

- Standard 18 AWG (1.194 mm dia.) gauge 3 wire shielded cable located in conduit separate from high voltage wiring
- 24 vdc power supplied from Technologic Controller
- Takes accurate readings and relays them to the Technologic Controller up to 2,000 ft. (610 m) away, when 10 pipe diameters upstream and 5 pipe diameters downstream of straight uninterrupted flow is present.

CALIBRATION CHART		
B&G Part No.	Pipe Size	Max. Flow
137411	3" Sch 40	250 gpm (16 l/sec)
137412	4" Sch 40	400 gpm (25 l/sec)
137413	6" Sch 40	850 gpm (54 l/sec)
137414	8" Sch 40	1750 gpm (110 l/sec)
137415	10" Sch 40	3150 gpm (199 l/sec)
137416	12" Sch 40	5000 gpm (315 l/sec)
137417	14" Sch 40	6400 gpm (404 l/sec)
137418	16" Sch 40	9100 gpm (574 l/sec)
137419	18" Sch 40	12400 gpm (782 l/sec)
137420	20" Sch 40	16500 gpm (1041 l/sec)

Consult factory for custom flow range calibration.

JOB:	REPRESENTATIVE:	
UNIT TAG:	ORDER NO.:	DATE:
ENGINEER:	SUBMITTED BY:	DATE:
CONTRACTOR:	APPROVED BY:	DATE:



6x6x9.5B

Series e-80

In-Line Mounted Centrifugal Pumps

SPECIFICATIONS

FLOW _____ HEAD _____

HP _____ RPM _____

VOLTS _____

CYCLE _____ INPUT PHASE _____

ENCLOSURE _____

APPROX. WEIGHT _____

SPECIALS _____

MATERIALS OF CONSTRUCTION

Stainless Steel Fitted

MAXIMUM WORKING PRESSURE

- 175 psi (12 bar) with 125# ANSI flange drilling
- 250 psi (17 bar) with 250# ANSI flange drilling (requires 80-S)
- 300 psi (21 bar) W.P. with 250# ANSI flange drilling (Requires -S and EPR-Silicon Carbide-Silicon Carbide Seal)

MOUNTING


In-Line Piping Flange Supports

PUMP VARIABLE SPEED CONTROL


- Integrated Technologic® Sensorless Control (ITSC)
- Integrated Technologic® (IT)
 - External input by others
 - Pressure Sensor(s)
 - Differential Pressure Sensor(s)
 - Flow Sensor(s)
- By Others

TYPE OF SEAL

- F Standard Seal w/ Flush Line (Buna-Carbon/Ceramic)
- S Stuffing Box construction w/ Flushed Mechanical Single Seal (EPR-Tungsten Carbide/Carbon)
- PF Stuffing Box Construction w/ Flushed Packing (Graphite Impregnated PTFE)

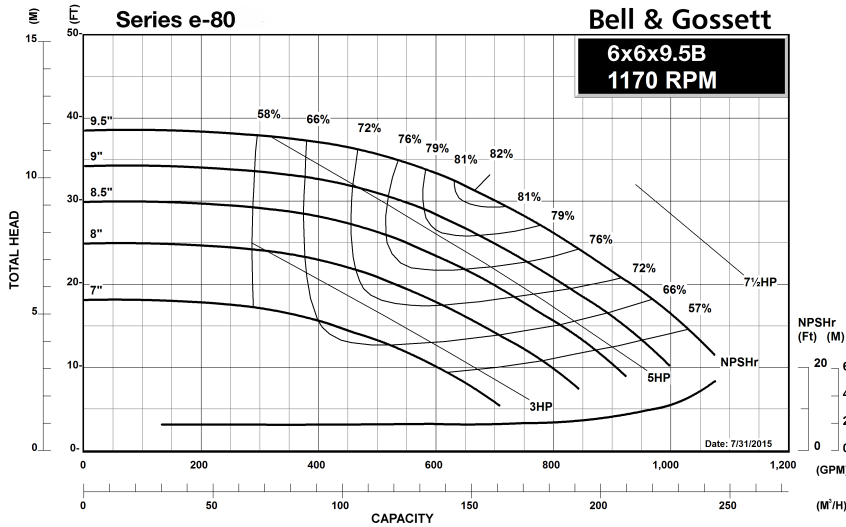

JOB:	REPRESENTATIVE:	
UNIT TAG:	ORDER NO.:	DATE:
ENGINEER:	SUBMITTED BY:	DATE:
CONTRACTOR:	APPROVED BY:	DATE:



6x6x9.5B Series e-80 In-Line Mounted Centrifugal Pumps

SPECIFICATIONS

FLOW _____ HEAD _____
 HP _____ RPM _____
 VOLTS _____
 CYCLE _____ INPUT PHASE _____
 ENCLOSURE _____
 APPROX. WEIGHT _____
 SPECIALS _____

MATERIALS OF CONSTRUCTION

Stainless Steel Fitted

MAXIMUM WORKING PRESSURE

- 175 psi (12 bar) with 125# ANSI flange drilling
- 250 psi (17 bar) with 250# ANSI flange drilling (requires 80-S)
- 300 psi (21 bar) W.P. with 250# ANSI flange drilling (Requires -S and EPR-Silicon Carbide-Silicon Carbide Seal)

MOUNTING


- In-Line Piping
- Flange Supports


PUMP VARIABLE SPEED CONTROL

- Integrated Technologic® Sensorless Control (ITSC)
- Integrated Technologic® (IT)
 - External input by others
 - Pressure Sensor(s)
 - Differential Pressure Sensor(s)
 - Flow Sensor(s)
- By Others

TYPE OF SEAL

- F Standard Seal w/ Flush Line (Buna-Carbon/Ceramic)
- S Stuffing Box construction w/ Flushed Mechanical Single Seal (EPR-Tungsten Carbide/Carbon)
- PF Stuffing Box Construction w/ Flushed Packing (Graphite Impregnated PTFE)

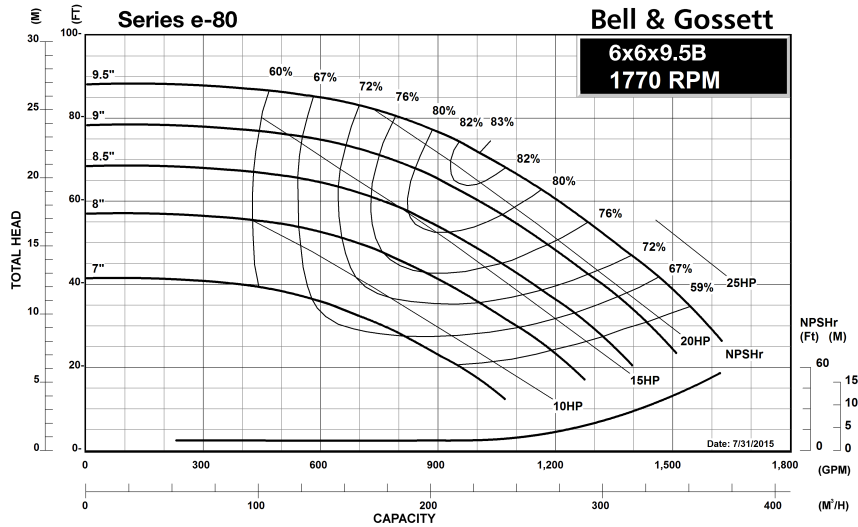

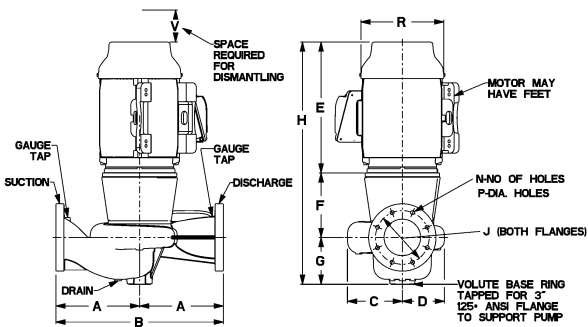

6x6x9.5B Series e-80 Centrifugal Pump Submittal - In-Line Piping

DIMENSIONS - Inches (mm)

STANDARD SEAL

MOTOR FRAME	A	B	C	D	E (max)	F	G	H (max)	125# ANSI			250# ANSI			R	S (Max)*	V (min)	Suct/Disch Gauge Taps (NPT)	Drain Tap (NPT)
									J	N	P	J	N	P					
213JM	16.75 (425)	33.50 (851)	7.57 (192)	10.67 (271)	19.25 (489)	5.38 (137)	8.88 (225)	33.50 (851)	9.50 (241)	8 (22)	0.88 (22)	10.63 (270)	12 (22)	0.88 (22)	14.00 (356)	-	5.00 (127)	0.25	0.25
215JM	16.75 (425)	33.50 (851)	7.57 (192)	10.67 (271)	19.25 (489)	5.38 (137)	8.88 (225)	33.50 (851)	9.50 (241)	8 (22)	0.88 (22)	10.63 (270)	12 (22)	0.88 (22)	14.00 (356)	-	5.00 (127)	0.25	0.25
254JM	16.75 (425)	33.50 (851)	7.57 (192)	10.67 (271)	24.13 (613)	6.25 (159)	8.88 (225)	39.25 (997)	9.50 (241)	8 (22)	0.88 (22)	10.63 (270)	12 (22)	0.88 (22)	17.00 (432)	-	5.00 (127)	0.25	0.25
256JM	16.75 (425)	33.50 (851)	7.57 (192)	10.67 (271)	24.13 (613)	6.25 (159)	8.88 (225)	39.25 (997)	9.50 (241)	8 (22)	0.88 (22)	10.63 (270)	12 (22)	0.88 (22)	17.00 (432)	-	5.00 (127)	0.25	0.25
284JM	16.75 (425)	33.50 (851)	7.57 (192)	10.67 (271)	23.63 (600)	6.25 (159)	8.88 (225)	38.75 (984)	9.50 (241)	8 (22)	0.88 (22)	10.63 (270)	12 (22)	0.88 (22)	16.13 (410)	4.63 (117)	5.00 (127)	0.25	0.25


STUFFING BOX

MOTOR FRAME	A	B	C	D	E (max)	F	G	H (max)	125# ANSI			250# ANSI			R	S (Max)*	V (min)	Suct/Disch Gauge Taps (NPT)	Drain Tap (NPT)
									J	N	P	J	N	P					
213JP	16.75 (425)	33.50 (851)	7.57 (192)	10.67 (271)	19.25 (489)	9.25 (235)	8.88 (225)	37.38 (949)	9.50 (241)	8 (22)	0.88 (22)	10.63 (270)	12 (22)	0.88 (22)	14.00 (356)	-	5.00 (127)	0.25	0.25
215JP	16.75 (425)	33.50 (851)	7.57 (192)	10.67 (271)	19.25 (489)	9.25 (235)	8.88 (225)	37.38 (949)	9.50 (241)	8 (22)	0.88 (22)	10.63 (270)	12 (22)	0.88 (22)	14.00 (356)	-	5.00 (127)	0.25	0.25
254JP	16.75 (425)	33.50 (851)	7.57 (192)	10.67 (271)	24.13 (613)	9.25 (235)	8.88 (225)	42.25 (1073)	9.50 (241)	8 (22)	0.88 (22)	10.63 (270)	12 (22)	0.88 (22)	17.00 (432)	-	5.00 (127)	0.25	0.25
256JP	16.75 (425)	33.50 (851)	7.57 (192)	10.67 (271)	24.13 (613)	9.25 (235)	8.88 (225)	42.25 (1073)	9.50 (241)	8 (22)	0.88 (22)	10.63 (270)	12 (22)	0.88 (22)	17.00 (432)	-	5.00 (127)	0.25	0.25
284JP	16.75 (425)	33.50 (851)	7.57 (192)	10.67 (271)	23.63 (600)	9.25 (235)	8.88 (225)	41.75 (1060)	9.50 (241)	8 (22)	0.88 (22)	10.63 (270)	12 (22)	0.88 (22)	16.13 (410)	4.63 (117)	5.00 (127)	0.25	0.25

Dimensions are subject to change. Not to be used for construction purposes unless certified.

NOTE: For Single phase Motors add 1" to dimensions E & H.

*Dimensions are for ODP Motors. For TEFC add S dimension to dimensions E & H.

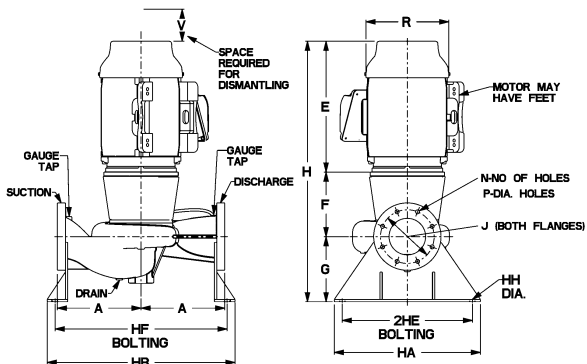

6x6x9.5B Series e-80

-80 5x5x9.5B Centrifugal Pump Submittal - Flange Support Mounting

DIMENSIONS - Inches (mm)

STANDARD SEAL

MOTOR FRAME	A	HF BOLTING	HB	2HE BOLTING	HA	HH DIA	E (max)	F	G	H (max)	125# ANSI			250# ANSI			R	S (Max)*	V (min)	Suct/Disch Gauge Taps (NPT)	Drain Tap (NPT)
											J	N	P	J	N	P					
213JM	16.75 (425)	34.78 (883)	38.28 (972)	22.50 (572)	26.00 (660)	1.00 (25)	19.25 (489)	5.38 (137)	8.88 (225)	33.50 (851)	9.50 (241)	8 (22)	0.88 (22)	10.63 (270)	12 (22)	0.88 (356)	14.00 (356)	-	5.00 (127)	0.25	0.25
215JM	16.75 (425)	34.78 (883)	38.28 (972)	22.50 (572)	26.00 (660)	1.00 (25)	19.25 (489)	5.38 (137)	8.88 (225)	33.50 (851)	9.50 (241)	8 (22)	0.88 (22)	10.63 (270)	12 (22)	0.88 (356)	14.00 (356)	-	5.00 (127)	0.25	0.25
254JM	16.75 (425)	34.78 (883)	38.28 (972)	22.50 (572)	26.00 (660)	1.00 (25)	24.13 (613)	6.25 (159)	8.88 (225)	39.25 (997)	9.50 (241)	8 (22)	0.88 (22)	10.63 (270)	12 (22)	0.88 (432)	17.00 (432)	-	5.00 (127)	0.25	0.25
256JM	16.75 (425)	34.78 (883)	38.28 (972)	22.50 (572)	26.00 (660)	1.00 (25)	24.13 (613)	6.25 (159)	8.88 (225)	39.25 (997)	9.50 (241)	8 (22)	0.88 (22)	10.63 (270)	12 (22)	0.88 (432)	17.00 (432)	-	5.00 (127)	0.25	0.25
284JM	16.75 (425)	34.78 (883)	38.28 (972)	22.50 (572)	26.00 (660)	1.00 (25)	23.63 (600)	6.25 (159)	8.88 (225)	38.75 (984)	9.50 (241)	8 (22)	0.88 (22)	10.63 (270)	12 (22)	0.88 (410)	16.13 (410)	4.63 (117)	5.00 (127)	0.25	0.25


STUFFING BOX

MOTOR FRAME	A	HF BOLTING	HB	2HE BOLTING	HA	HH DIA	E (max)	F	G	H (max)	125# ANSI			250# ANSI			R	S (Max)*	V (min)	Suct/Disch Gauge Taps (NPT)	Drain Tap (NPT)
											J	N	P	J	N	P					
213JP	16.75 (425)	34.78 (883)	38.28 (972)	22.50 (572)	26.00 (660)	1.00 (25)	19.25 (489)	9.25 (235)	8.88 (225)	37.38 (949)	9.50 (241)	8 (22)	0.88 (22)	10.63 (270)	12 (22)	0.88 (356)	14.00 (356)	-	5.00 (127)	0.25	0.25
215JP	16.75 (425)	34.78 (883)	38.28 (972)	22.50 (572)	26.00 (660)	1.00 (25)	19.25 (489)	9.25 (235)	8.88 (225)	37.38 (949)	9.50 (241)	8 (22)	0.88 (22)	10.63 (270)	12 (22)	0.88 (356)	14.00 (356)	-	5.00 (127)	0.25	0.25
254JP	16.75 (425)	34.78 (883)	38.28 (972)	22.50 (572)	26.00 (660)	1.00 (25)	24.13 (613)	9.25 (235)	8.88 (225)	42.25 (1073)	9.50 (241)	8 (22)	0.88 (22)	10.63 (270)	12 (22)	0.88 (432)	17.00 (432)	-	5.00 (127)	0.25	0.25
256JP	16.75 (425)	34.78 (883)	38.28 (972)	22.50 (572)	26.00 (660)	1.00 (25)	24.13 (613)	9.25 (235)	8.88 (225)	42.25 (1073)	9.50 (241)	8 (22)	0.88 (22)	10.63 (270)	12 (22)	0.88 (432)	17.00 (432)	-	5.00 (127)	0.25	0.25
284JP	16.75 (425)	34.78 (883)	38.28 (972)	22.50 (572)	26.00 (660)	1.00 (25)	23.63 (600)	9.25 (235)	8.88 (225)	41.75 (1060)	9.50 (241)	8 (22)	0.88 (22)	10.63 (270)	12 (22)	0.88 (410)	16.13 (410)	4.63 (117)	5.00 (127)	0.25	0.25

Dimensions are subject to change. Not to be used for construction purposes unless certified.


NOTE: For Single phase Motors add 1" to dimensions E & H.

*Dimensions are for ODP Motors. For TEFC add S dimension to dimensions E & H.



6x6x9.5B Series e-80 In-Line Mounted Centrifugal Pumps With Integrated Technologic® Control

TECHNOLOGIC STANDARD FEATURES	
CONTROL METHOD WITH INTEGRATED TECHNOLOGIC® SENSORLESS CONTROL (ITSC)	Factory configured for sensorless operation.
CONTROL METHOD WITH INTEGRATED TECHNOLOGIC® (IT)	Field configurable for sensor by others, building management system input, or optional sensor(s) provided.
ENCLOSURE	NEMA 12 (same as IP55 & UL type 12)
POWER DISCONNECT SWITCH	Included standard. Fused Disconnect Switch optional with three phase input voltage.
HARMONIC SUPPRESSION	Integrated non-saturating dual DC link reactors provide better harmonic performance than a 5% AC line reactor.
COOLING	Fan-cooled through temperature controlled and easy replacement.
AMBIENT TEMPERATURE RATING	14°F to 113°F (-10°C to 45°C)
COMMUNICATION PROTOCOLS	BACnet, Modbus RTU, N2 Metasys, FLN Apogee
ANALOG INPUTS	2 configurable for either voltage (0 to 10VDC) or current(0/4 to 20mA)
ANALOG OUTPUTS	1 (0/4 to 20mA) up to 500 ohm load accurate to 1% of full scale
DIGITAL INPUTS	4 (0 to 24VDC), NPN or PNP, 0 to 24VDC, on 5 msec scan interval, Up to 2 can be configured as pulse inputs.
DIGITAL OUTPUTS	2 (0 to 24VDC), 40mA max current, configurable as pulse outputs.
RELAY OUTPUTS	2 programmable, 240VAC or 400VAC up to 2 A
MINIMUM CONTROL HEAD	_____ ft (default set to 40% of design head if not unknown)

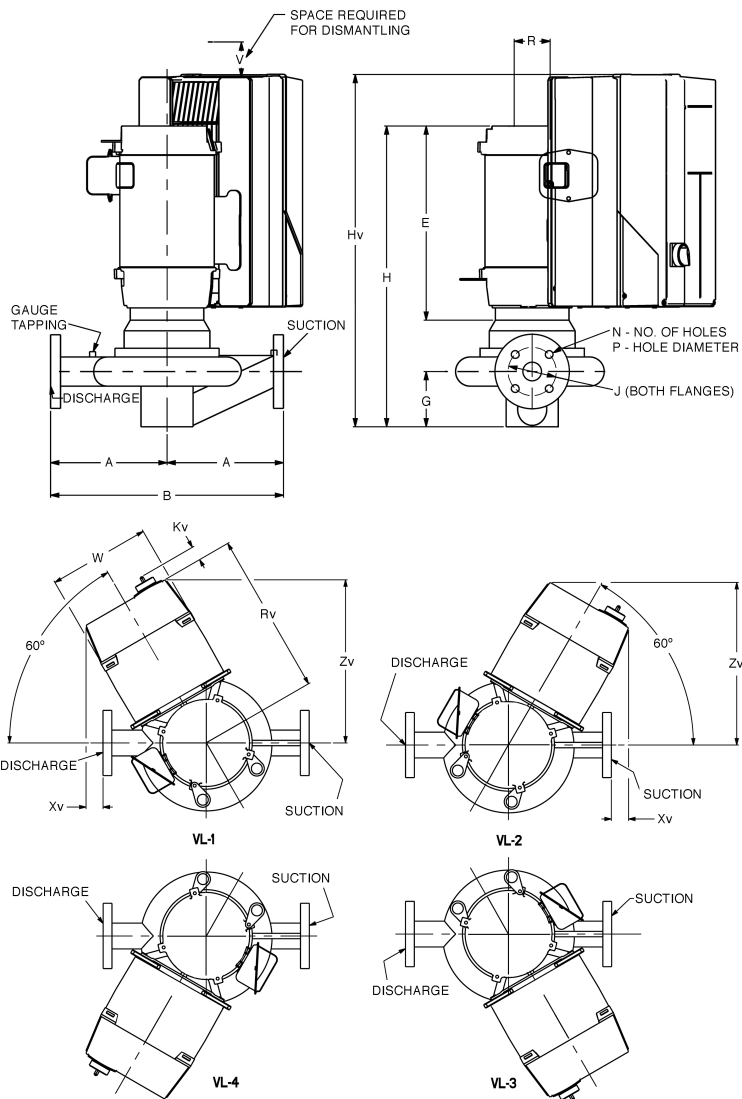

Series e-80 6x6x9.5B

B-139.34

In-Line Mounted Centrifugal Pumps

With Integrated Technologic® Control

DIMENSIONS - Inches (mm)		STANDARD SEAL					STUFFING BOX						
MOTOR FRAME	VFD	Rv	Zv	W	Hv	Xv	MOTOR FRAME	VFD	Rv	Zv	W	Hv	Xv
213JM	A5	13.53 (344)	13.83 (351)	9.50 (241)	35.95 (913)	6.31 (160)	213JP	A5	13.53 (344)	13.83 (351)	9.50 (241)	39.83 (1012)	6.31 (160)
	B1	15.82 (402)	15.43 (392)	9.50 (241)	37.20 (945)	7.91 (201)		B1	15.82 (402)	15.43 (392)	0.00 ()	41.08 (1043)	7.91 (201)
	B2	15.82 (402)	15.43 (392)	9.50 (241)	42.94 (1091)	7.91 (201)		B2	15.82 (402)	15.43 (392)	0.00 ()	46.82 (1189)	7.91 (201)
215JM	A5	13.53 (344)	13.83 (351)	9.50 (241)	34.48 (876)	6.31 (160)	215JP	A5	13.53 (344)	13.83 (351)	9.50 (241)	38.36 (974)	6.31 (160)
	B1	15.83 (402)	15.84 (402)	9.50 (241)	36.02 (915)	5.13 (130)		B1	15.83 (402)	15.84 (402)	9.50 (241)	39.89 (1013)	5.13 (130)
	B2	15.83 (402)	15.84 (402)	9.50 (241)	41.76 (1061)	5.13 (130)		B2	15.83 (402)	15.84 (402)	0.00 ()	45.63 (1159)	5.13 (130)
	C1	17.80 (452)	19.04 (484)	12.10 (307)	43.78 (1112)	8.32 (211)		C1	17.80 (452)	19.04 (484)	2.60 (66)	47.65 (1210)	8.32 (211)
254JM	A5	14.53 (369)	14.70 (373)	9.50 (241)	39.25 (997)	5.81 (148)	254JP	A5	14.53 (369)	14.70 (373)	9.50 (241)	42.13 (1070)	5.81 (148)
	B1	16.83 (427)	16.70 (424)	9.50 (241)	42.25 (1073)	4.63 (117)		B1	16.83 (427)	16.70 (424)	9.50 (241)	45.13 (1146)	4.63 (117)
	B2	16.83 (427)	16.70 (424)	9.50 (241)	46.71 (1186)	4.63 (117)		B2	18.80 (477)	19.90 (506)	12.10 (307)	46.39 (1178)	7.83 (199)
	C1	18.80 (477)	19.90 (506)	12.10 (307)	47.97 (1218)	7.83 (199)		C1	19.58 (497)	22.20 (564)	14.60 (371)	51.05 (1297)	10.13 (257)
256JM	B1	16.83 (427)	16.70 (424)	9.50 (241)	41.63 (1057)	4.63 (117)	256JP	B1	16.83 (427)	16.70 (424)	9.50 (241)	44.50 (1130)	4.63 (117)
	B2	16.83 (427)	16.70 (424)	9.50 (241)	46.08 (1170)	4.63 (117)		B2	16.83 (427)	16.70 (424)	9.50 (241)	48.95 (1243)	4.63 (117)
	C1	18.80 (477)	19.90 (506)	12.10 (307)	47.34 (1202)	7.83 (199)		C1	18.80 (477)	19.90 (506)	12.10 (307)	50.21 (1275)	7.83 (199)
	C2	19.58 (497)	22.20 (564)	14.60 (371)	52.00 (1321)	10.13 (257)		C2	19.58 (497)	22.20 (564)	14.60 (371)	54.87 (1394)	10.13 (257)
284JM	B1	17.58 (446)	17.36 (441)	9.50 (241)	41.00 (1041)	4.25 (108)	284JP	B1	17.58 (446)	17.36 (441)	9.50 (241)	43.88 (1114)	4.25 (108)
	B2	17.58 (446)	17.36 (441)	0.00 ()	45.46 (1155)	4.25 (108)		B2	17.58 (446)	17.36 (441)	0.00 ()	48.34 (1228)	4.25 (108)
	C1	19.58 (497)	19.63 (498)	12.09 (307)	47.86 (1216)	2.34 (60)		C1	19.58 (497)	19.63 (498)	12.09 (307)	50.73 (1289)	2.34 (60)
	C2	20.36 (517)	21.93 (557)	14.59 (371)	51.01 (1296)	4.64 (118)		C2	20.36 (517)	21.93 (557)	14.59 (371)	53.88 (1369)	4.64 (118)

NOTE: Drives with single phase input have three phase output and include three phase motors.

Kv=2 (50)




Pressure Sensor/Transmitter For Pumps with TECHNOLOGIC® Drives

FEATURES

- 4-20mA output
- 10-28 VDC supply voltage
- Operating Temperature -40 to 85°C (-40 to 185°F)
- Storage Temperature -40 to 100°C (-40 to 212°F)
- Enclosure IP-66 (housing only)
- High Strength Stainless Steel Construction
- No Oil, Welds or Internal O-rings
- Wide Operating Temperature
- Low Static and Thermal Errors
- Compatible with Wide Variety of Liquids and Gases
- EMI/RFI Protection
- UL/cUL 508 Approved (with housing)
- 1lb. (0.45 kg) approximate weight

TECHNOLOGIC ANALOG SENSOR WIRING

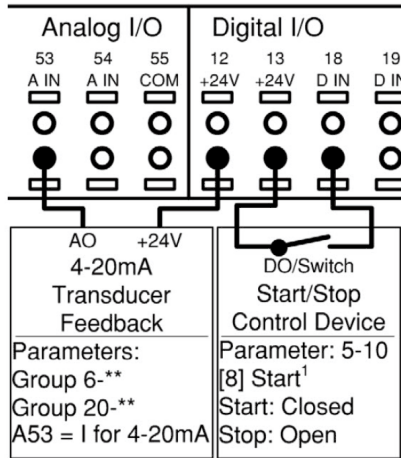

B&G PART NUMBERS

- S13203 Pressure range: 0-100 psi (0-689 kPa)
- S13204 Pressure range: 0-300 psi (0-2068 kPa)


Consult factory for other ranges.

INSTALLATION CONSIDERATIONS

- Standard 24 AWG (0.61 mm dia.) 2 wire shielded cable located in a conduit separate from high voltage wiring
- 24 vdc power supplied from Technologic Controller

DIMENSIONAL INFORMATION

Dimensions in Inches (Millimeters)

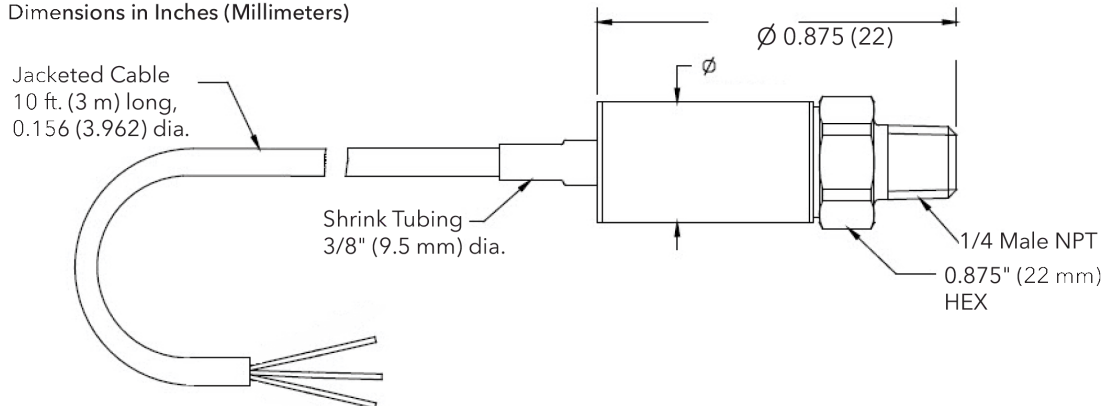



Flow Sensor/Transmitter For Pumps with TECHNOLOGIC® Drives


The rugged Bell & Gossett Flow Sensor/Transmitter precisely measures system flow and transmits a proportional 4 to 20 mA DC signal to the Technologic Controller for display or program calculations.

FEATURES



- Suitable for mounting in vertical pipe
- Suitable for mounting in horizontal pipe within 45° of top dead center
- Non-magnetically sensed, non-fouling paddle wheel
- NEMA 4X Transmitter Enclosure
- Maximum Pressure Ratings:
 - 1000 psi @ 100°F, 900 psi @ 200°F,
 - 750 psi @ 300°F (6895 kPa @ 38°C, 6205 kPa @ 93°C, 5171 kPa @ 149°C)
- Maximum Temperature Ratings:
 - Fluid - 300°F (149°C) continuous service
 - Electronics - 150°F (66°C)
- Optional software and cable available for field programming
- 9.9 lbs (4.5 kg) approximate weight

DIMENSIONAL INFORMATION

Dimensions in Inches (Millimeters)

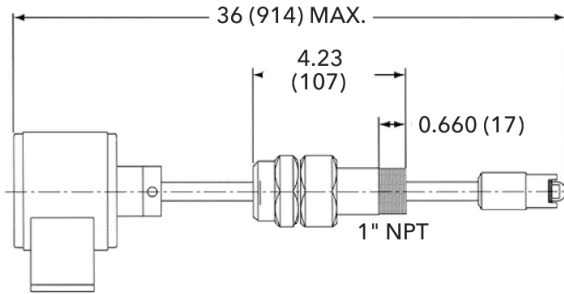

TECHNOLOGIC ANALOG SENSOR WIRING

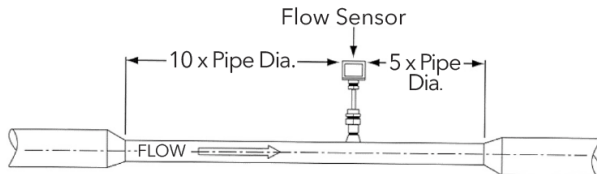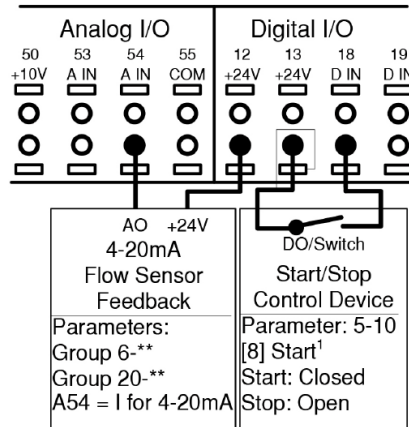


INSTALLATION CONSIDERATIONS

- Standard 18 AWG (1.194 mm dia.) gauge 3 wire shielded cable located in conduit separate from high voltage wiring
- 24 vdc power supplied from Technologic Controller
- Takes accurate readings and relays them to the Technologic Controller up to 2,000 ft. (610 m) away, when 10 pipe diameters upstream and 5 pipe diameters downstream of straight uninterrupted flow is present.

CALIBRATION CHART		
B&G Part No.	Pipe Size	Max. Flow
137411	3" Sch 40	250 gpm (16 l/sec)
137412	4" Sch 40	400 gpm (25 l/sec)
137413	6" Sch 40	850 gpm (54 l/sec)
137414	8" Sch 40	1750 gpm (110 l/sec)
137415	10" Sch 40	3150 gpm (199 l/sec)
137416	12" Sch 40	5000 gpm (315 l/sec)
137417	14" Sch 40	6400 gpm (404 l/sec)
137418	16" Sch 40	9100 gpm (574 l/sec)
137419	18" Sch 40	12400 gpm (782 l/sec)
137420	20" Sch 40	16500 gpm (1041 l/sec)

Consult factory for custom flow range calibration.

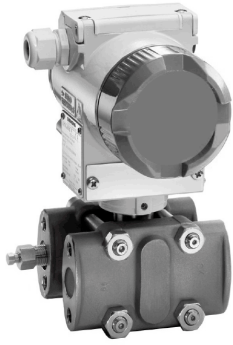


Differential Pressure Sensor/ Transmitter For Pumps with TECHNOLOGIC® Drives

FEATURES

- Relays reading to the Technologic controller up to 2000 ft. (610 m) away
- All wetted parts are 316 stainless steel
- Built-in RFI filter effective from 20 to 1000 MHz
- Withstands static pressures up to 2300 PSI (15858 kPa)
- 3 Valve bypass manifold (optional)
- 10 lbs. (4.5 kg) approximate weight

TECHNOLOGIC ANALOG SENSOR WIRING

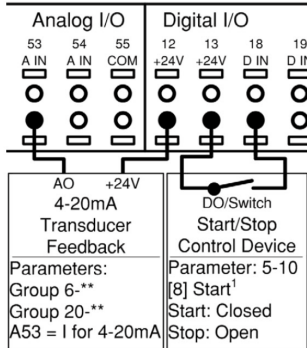

B&G PART NUMBERS

- S100089 Pressure range: 0 - 40 psi (0 - 276 kPa)
- S100091 Pressure range: 0 - 70 psi (0 - 483 kPa)
- S100092 Pressure range: 0 - 100 psi (0 - 689 kPa)


Consult factory for other ranges.

INSTALLATION CONSIDERATIONS

- Standard 18 AWG (1.194 mm dia.) 2 wire shielded cable located in a conduit separate from high voltage wiring
- 24 vdc power supplied from Technologic Controller for distance <2000 ft (610 m)

DIMENSIONAL INFORMATION

Dimensions in Inches (Millimeters)

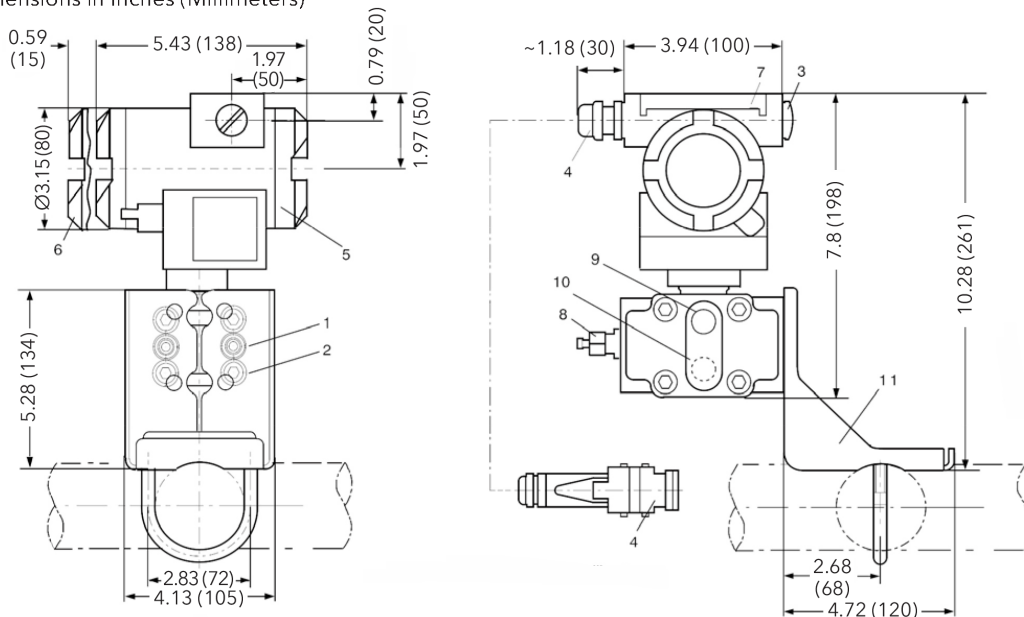

- 1 Process connection 1/4-18NPT for absolute pressure (+) side
- 2 Mounting thread 7/16-20 UNF to EN 61518
- 3 Dummy plug
- 4 Electrical connection: Screwed gland 1/2-14 NPT
- 5 Connection side

- 6 Electronic side, no digital display
- 7 Access cover over magnetic pushbuttons
- 8 Sealing screw with vent shown (optional)
- 9 Side vent for measuring liquid
- 10 Side vent for measuring gas (supplement H02)
- 11 Mounting bracket (2 shackles, 4 nuts, 4 U-plates, 1 angle) made of steel



Flow Sensor/Transmitter For Pumps with TECHNOLOGIC® Drives


The rugged Bell & Gossett Flow Sensor/Transmitter precisely measures system flow and transmits a proportional 4 to 20 mA DC signal to the Technologic Controller for display or program calculations.

FEATURES



- Suitable for mounting in vertical pipe
- Suitable for mounting in horizontal pipe within 45° of top dead center
- Non-magnetically sensed, non-fouling paddle wheel
- NEMA 4X Transmitter Enclosure
- Maximum Pressure Ratings:
 - 1000 psi @ 100°F, 900 psi @ 200°F,
 - 750 psi @ 300°F (6895 kPa @ 38°C, 6205 kPa @ 93°C, 5171 kPa @ 149°C)
- Maximum Temperature Ratings:
 - Fluid - 300°F (149°C) continuous service
 - Electronics - 150°F (66°C)
- Optional software and cable available for field programming
- 9.9 lbs (4.5 kg) approximate weight

DIMENSIONAL INFORMATION

Dimensions in Inches (Millimeters)

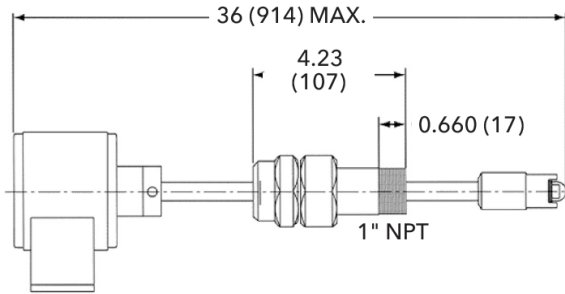

TECHNOLOGIC ANALOG SENSOR WIRING

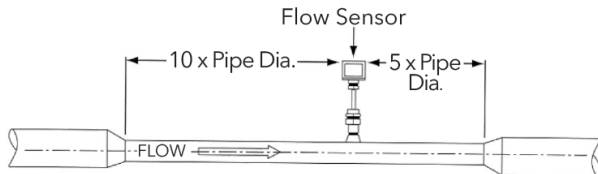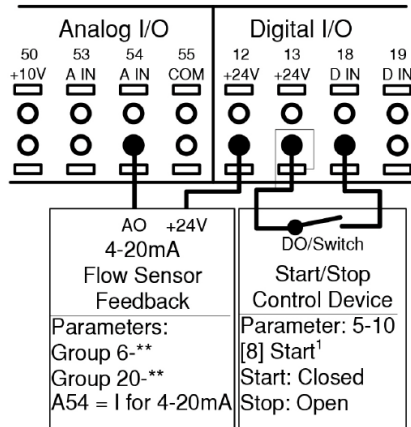


INSTALLATION CONSIDERATIONS

- Standard 18 AWG (1.194 mm dia.) gauge 3 wire shielded cable located in conduit separate from high voltage wiring
- 24 vdc power supplied from Technologic Controller
- Takes accurate readings and relays them to the Technologic Controller up to 2,000 ft. (610 m) away, when 10 pipe diameters upstream and 5 pipe diameters downstream of straight uninterrupted flow is present.

CALIBRATION CHART		
B&G Part No.	Pipe Size	Max. Flow
137411	3" Sch 40	250 gpm (16 l/sec)
137412	4" Sch 40	400 gpm (25 l/sec)
137413	6" Sch 40	850 gpm (54 l/sec)
137414	8" Sch 40	1750 gpm (110 l/sec)
137415	10" Sch 40	3150 gpm (199 l/sec)
137416	12" Sch 40	5000 gpm (315 l/sec)
137417	14" Sch 40	6400 gpm (404 l/sec)
137418	16" Sch 40	9100 gpm (574 l/sec)
137419	18" Sch 40	12400 gpm (782 l/sec)
137420	20" Sch 40	16500 gpm (1041 l/sec)

Consult factory for custom flow range calibration.

JOB:	REPRESENTATIVE:	
UNIT TAG:	ORDER NO.:	DATE:
ENGINEER:	SUBMITTED BY:	DATE:
CONTRACTOR:	APPROVED BY:	DATE:



8x8x9.5B

Series e-80

In-Line Mounted Centrifugal Pumps

SPECIFICATIONS

FLOW _____ HEAD _____

HP _____ RPM _____

VOLTS _____

CYCLE _____ INPUT PHASE _____

ENCLOSURE _____

APPROX. WEIGHT _____

SPECIALS _____

MATERIALS OF CONSTRUCTION

Stainless Steel Fitted

MAXIMUM WORKING PRESSURE

- 175 psi (12 bar) with 125# ANSI flange drilling
- 250 psi (17 bar) with 250# ANSI flange drilling (requires 80-S)
- 300 psi (21 bar) W.P. with 250# ANSI flange drilling (Requires -S and EPR-Silicon Carbide-Silicon Carbide Seal)

MOUNTING


- In-Line Piping
- Flange Supports

PUMP VARIABLE SPEED CONTROL


- Integrated Technologic® Sensorless Control (ITSC)
- Integrated Technologic® (IT)
 - External input by others
 - Pressure Sensor(s)
 - Differential Pressure Sensor(s)
 - Flow Sensor(s)
- By Others

TYPE OF SEAL

- F Standard Seal w/ Flush Line (Buna-Carbon/Ceramic)
- S Stuffing Box construction w/ Flushed Mechanical Single Seal (EPR-Tungsten Carbide/Carbon)
- PF Stuffing Box Construction w/ Flushed Packing (Graphite Impregnated PTFE)

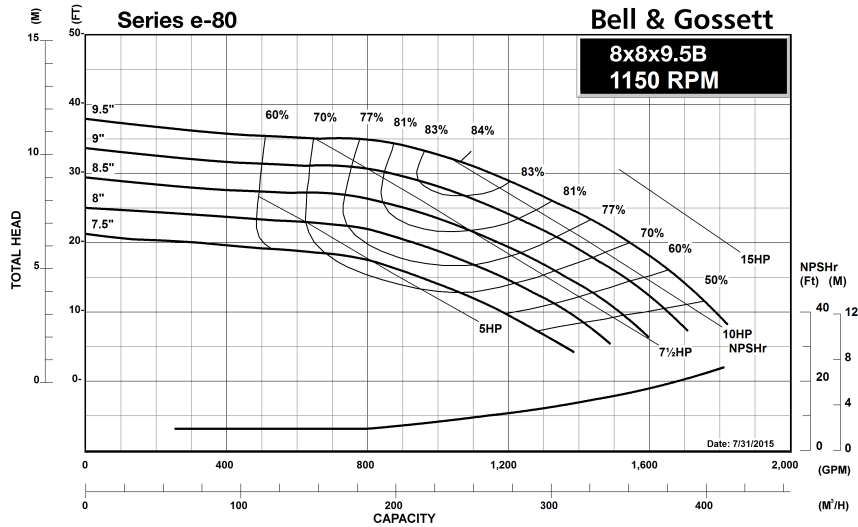

JOB:	REPRESENTATIVE:	
UNIT TAG:	ORDER NO.:	DATE:
ENGINEER:	SUBMITTED BY:	DATE:
CONTRACTOR:	APPROVED BY:	DATE:



8x8x9.5B

Series e-80

In-Line Mounted Centrifugal Pumps

SPECIFICATIONS

FLOW _____ HEAD _____

HP _____ RPM _____

VOLTS _____

CYCLE _____ INPUT PHASE _____

ENCLOSURE _____

APPROX. WEIGHT _____

SPECIALS _____

MATERIALS OF CONSTRUCTION

Stainless Steel Fitted

MAXIMUM WORKING PRESSURE

- 175 psi (12 bar) with 125# ANSI flange drilling
- 250 psi (17 bar) with 250# ANSI flange drilling (requires 80-S)
- 300 psi (21 bar) W.P. with 250# ANSI flange drilling (Requires -S and EPR-Silicon Carbide-Silicon Carbide Seal)

MOUNTING


- In-Line Piping
- Flange Supports


PUMP VARIABLE SPEED CONTROL

- Integrated Technologic® Sensorless Control (ITSC)
- Integrated Technologic® (IT)
 - External input by others
 - Pressure Sensor(s)
 - Differential Pressure Sensor(s)
 - Flow Sensor(s)
- By Others

TYPE OF SEAL

- F Standard Seal w/ Flush Line (Buna-Carbon/Ceramic)
- S Stuffing Box construction w/ Flushed Mechanical Single Seal (EPR-Tungsten Carbide/Carbon)
- PF Stuffing Box Construction w/ Flushed Packing (Graphite Impregnated PTFE)

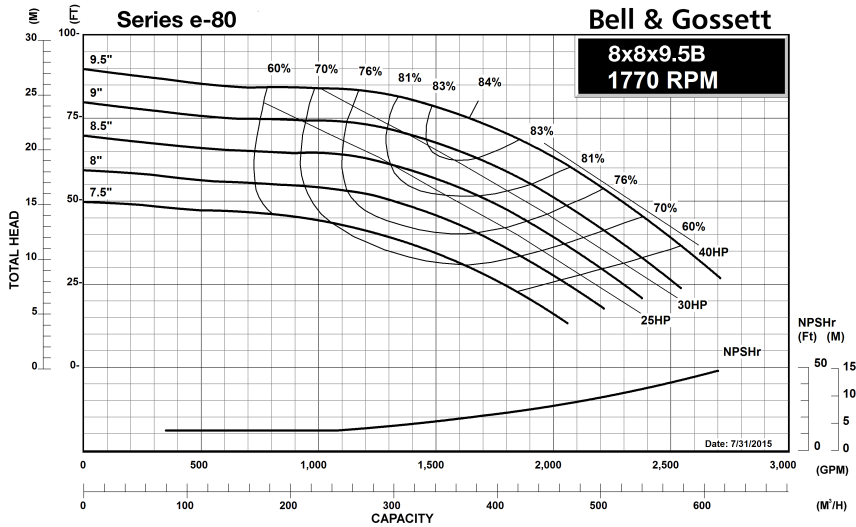

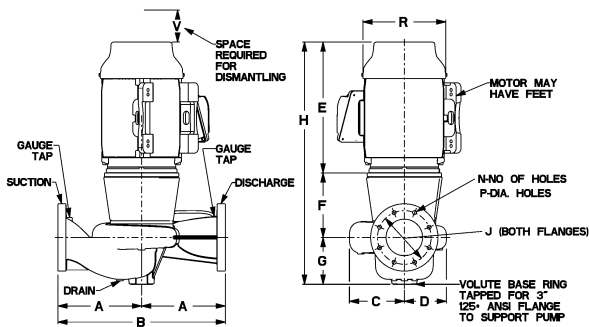

8x8x9.5B Series e-80 Centrifugal Pump Submittal - In-Line Piping

DIMENSIONS - Inches (mm)

STANDARD SEAL

MOTOR FRAME	A	B	C	D	E (max)	F	G	H (max)	125# ANSI			250# ANSI			R	S (Max)*	V (min)	Suct/Disch Gauge Taps (NPT)	Drain Tap (NPT)
									J	N	P	J	N	P					
254JM	18.00 (457)	36.00 (914)	8.55 (217)	12.75 (324)	24.13 (613)	7.38 (187)	10.25 (260)	41.75 (1060)	11.75 (298)	8 (22)	0.88 (22)	13.00 (330)	12 (25)	1.00 (432)	17.00 (432)	-	4.75 (121)	0.25	0.25
256JM	18.00 (457)	36.00 (914)	8.55 (217)	12.75 (324)	24.13 (613)	7.38 (187)	10.25 (260)	41.75 (1060)	11.75 (298)	8 (22)	0.88 (22)	13.00 (330)	12 (25)	1.00 (432)	17.00 (432)	-	4.75 (121)	0.25	0.25
284JM	18.00 (457)	36.00 (914)	8.55 (217)	12.75 (324)	23.63 (600)	7.38 (187)	10.25 (260)	41.25 (1048)	11.75 (298)	8 (22)	0.88 (22)	13.00 (330)	12 (25)	1.00 (410)	16.13 (410)	4.63 (117)	4.75 (121)	0.25	0.25
286JM	18.00 (457)	36.00 (914)	8.55 (217)	12.75 (324)	25.13 (638)	7.38 (187)	10.25 (260)	42.75 (1086)	11.75 (298)	8 (22)	0.88 (22)	13.00 (330)	12 (25)	1.00 (410)	16.13 (410)	4.63 (117)	4.75 (121)	0.25	0.25
324JM	18.00 (457)	36.00 (914)	8.55 (217)	12.75 (324)	26.00 (660)	7.38 (187)	10.25 (260)	43.63 (1108)	11.75 (298)	8 (22)	0.88 (22)	13.00 (330)	12 (25)	1.00 (476)	18.75 (476)	5.38 (137)	4.75 (121)	0.25	0.25
326JM	18.00 (457)	36.00 (914)	8.55 (217)	12.75 (324)	26.00 (660)	7.38 (187)	10.25 (260)	43.63 (1108)	11.75 (298)	8 (22)	0.88 (22)	13.00 (330)	12 (25)	1.00 (476)	18.75 (476)	5.38 (137)	4.75 (121)	0.25	0.25


STUFFING BOX

MOTOR FRAME	A	B	C	D	E (max)	F	G	H (max)	125# ANSI			250# ANSI			R	S (Max)*	V (min)	Suct/Disch Gauge Taps (NPT)	Drain Tap (NPT)
									J	N	P	J	N	P					
254JP	18.00 (457)	36.00 (914)	8.55 (217)	12.75 (324)	24.13 (613)	10.25 (260)	10.25 (260)	44.63 (1133)	11.75 (298)	8 (22)	0.88 (22)	13.00 (330)	12 (25)	1.00 (432)	17.00 (432)	-	4.75 (121)	0.25	0.25
256JP	18.00 (457)	36.00 (914)	8.55 (217)	12.75 (324)	24.13 (613)	10.25 (260)	10.25 (260)	44.63 (1133)	11.75 (298)	8 (22)	0.88 (22)	13.00 (330)	12 (25)	1.00 (432)	17.00 (432)	-	4.75 (121)	0.25	0.25
284JP	18.00 (457)	36.00 (914)	8.55 (217)	12.75 (324)	23.63 (600)	10.25 (260)	10.25 (260)	44.13 (1121)	11.75 (298)	8 (22)	0.88 (22)	13.00 (330)	12 (25)	1.00 (410)	16.13 (410)	4.63 (117)	4.75 (121)	0.25	0.25
286JP	18.00 (457)	36.00 (914)	8.55 (217)	12.75 (324)	25.13 (638)	10.25 (260)	10.25 (260)	45.63 (1159)	11.75 (298)	8 (22)	0.88 (22)	13.00 (330)	12 (25)	1.00 (410)	16.13 (410)	4.63 (117)	4.75 (121)	0.25	0.25
324JP	18.00 (457)	36.00 (914)	8.55 (217)	12.75 (324)	26.00 (660)	10.25 (260)	10.25 (260)	46.50 (1181)	11.75 (298)	8 (22)	0.88 (22)	13.00 (330)	12 (25)	1.00 (476)	18.75 (476)	5.38 (137)	4.75 (121)	0.25	0.25
326JP	18.00 (457)	36.00 (914)	8.55 (217)	12.75 (324)	26.00 (660)	10.25 (260)	10.25 (260)	46.50 (1181)	11.75 (298)	8 (22)	0.88 (22)	13.00 (330)	12 (25)	1.00 (476)	18.75 (476)	5.38 (137)	4.75 (121)	0.25	0.25

Dimensions are subject to change. Not to be used for construction purposes unless certified.

NOTE: For Single phase Motors add 1" to dimensions E & H.

*Dimensions are for ODP Motors. For TEFC add S dimension to dimensions E & H.

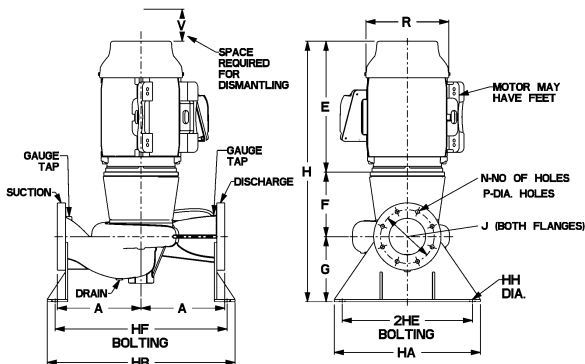

8x8x9.5B Series e-80 Centrifugal Pump Submittal - Flange Support Mounting

DIMENSIONS - Inches (mm)

STANDARD SEAL

MOTOR FRAME	A	HF BOLTING	HB	2HE BOLTING	HA	HH DIA	E (max)	F	G	H (max)	125# ANSI			250# ANSI			R	S (Max)*	V (min)	Suct/Disch Gauge Taps (NPT)	Drain Tap (NPT)
											J	N	P	J	N	P					
254JM	18.00 (457)	36.92 (938)	40.42 (1027)	28.50 (724)	32.00 (813)	1.13 (29)	24.13 (613)	7.38 (187)	10.25 (260)	41.75 (1060)	11.75 (298)	8 (22)	0.88 (22)	13.00 (330)	12 (25)	1.00 (432)	17.00 (432)	-	4.75 (121)	0.25	0.25
256JM	18.00 (457)	36.92 (938)	40.42 (1027)	28.50 (724)	32.00 (813)	1.13 (29)	24.13 (613)	7.38 (187)	10.25 (260)	41.75 (1060)	11.75 (298)	8 (22)	0.88 (22)	13.00 (330)	12 (25)	1.00 (432)	17.00 (432)	-	4.75 (121)	0.25	0.25
284JM	18.00 (457)	36.92 (938)	40.42 (1027)	28.50 (724)	32.00 (813)	1.13 (29)	23.63 (600)	7.38 (187)	10.25 (260)	41.25 (1048)	11.75 (298)	8 (22)	0.88 (22)	13.00 (330)	12 (25)	1.00 (410)	16.13 (410)	4.63 (117)	4.75 (121)	0.25	0.25
286JM	18.00 (457)	36.92 (938)	40.42 (1027)	28.50 (724)	32.00 (813)	1.13 (29)	25.13 (638)	7.38 (187)	10.25 (260)	42.75 (1086)	11.75 (298)	8 (22)	0.88 (22)	13.00 (330)	12 (25)	1.00 (410)	16.13 (410)	4.63 (117)	4.75 (121)	0.25	0.25
324JM	18.00 (457)	36.92 (938)	40.42 (1027)	28.50 (724)	32.00 (813)	1.13 (29)	26.00 (660)	7.38 (187)	10.25 (260)	43.63 (1108)	11.75 (298)	8 (22)	0.88 (22)	13.00 (330)	12 (25)	1.00 (476)	18.75 (476)	5.38 (137)	4.75 (121)	0.25	0.25
326JM	18.00 (457)	36.92 (938)	40.42 (1027)	28.50 (724)	32.00 (813)	1.13 (29)	26.00 (660)	7.38 (187)	10.25 (260)	43.63 (1108)	11.75 (298)	8 (22)	0.88 (22)	13.00 (330)	12 (25)	1.00 (476)	18.75 (476)	5.38 (137)	4.75 (121)	0.25	0.25


STUFFING BOX

MOTOR FRAME	A	HF BOLTING	HB	2HE BOLTING	HA	HH DIA	E (max)	F	G	H (max)	125# ANSI			250# ANSI			R	S (Max)*	V (min)	Suct/Disch Gauge Taps (NPT)	Drain Tap (NPT)
											J	N	P	J	N	P					
254JP	18.00 (457)	36.92 (938)	40.42 (1027)	28.50 (724)	32.00 (813)	1.13 (29)	24.13 (613)	10.25 (260)	10.25 (260)	44.63 (1133)	11.75 (298)	8 (22)	0.88 (22)	13.00 (330)	12 (25)	1.00 (432)	17.00 (432)	-	4.75 (121)	0.25	0.25
256JP	18.00 (457)	36.92 (938)	40.42 (1027)	28.50 (724)	32.00 (813)	1.13 (29)	24.13 (613)	10.25 (260)	10.25 (260)	44.63 (1133)	11.75 (298)	8 (22)	0.88 (22)	13.00 (330)	12 (25)	1.00 (432)	17.00 (432)	-	4.75 (121)	0.25	0.25
284JP	18.00 (457)	36.92 (938)	40.42 (1027)	28.50 (724)	32.00 (813)	1.13 (29)	23.63 (600)	10.25 (260)	10.25 (260)	44.13 (1121)	11.75 (298)	8 (22)	0.88 (22)	13.00 (330)	12 (25)	1.00 (410)	16.13 (410)	4.63 (117)	4.75 (121)	0.25	0.25
286JP	18.00 (457)	36.92 (938)	40.42 (1027)	28.50 (724)	32.00 (813)	1.13 (29)	25.13 (638)	10.25 (260)	10.25 (260)	45.63 (1159)	11.75 (298)	8 (22)	0.88 (22)	13.00 (330)	12 (25)	1.00 (410)	16.13 (410)	4.63 (117)	4.75 (121)	0.25	0.25
324JM	18.00 (457)	36.92 (938)	40.42 (1027)	28.50 (724)	32.00 (813)	1.13 (29)	26.00 (660)	10.25 (260)	10.25 (260)	46.50 (1181)	11.75 (298)	8 (22)	0.88 (22)	13.00 (330)	12 (25)	1.00 (476)	18.75 (476)	5.38 (137)	4.75 (121)	0.25	0.25
326JM	18.00 (457)	36.92 (938)	40.42 (1027)	28.50 (724)	32.00 (813)	1.13 (29)	26.00 (660)	10.25 (260)	10.25 (260)	46.50 (1181)	11.75 (298)	8 (22)	0.88 (22)	13.00 (330)	12 (25)	1.00 (476)	18.75 (476)	5.38 (137)	4.75 (121)	0.25	0.25

Dimensions are subject to change. Not to be used for construction purposes unless certified.


NOTE: For Single phase Motors add 1" to dimensions E & H.

*Dimensions are for ODP Motors. For TEFC add S dimension to dimensions E & H.



8x8x9.5B Series e-80 In-Line Mounted Centrifugal Pumps With Integrated Technologic® Control

TECHNOLOGIC STANDARD FEATURES	
CONTROL METHOD WITH INTEGRATED TECHNOLOGIC® SENSORLESS CONTROL (ITSC)	Factory configured for sensorless operation.
CONTROL METHOD WITH INTEGRATED TECHNOLOGIC® (IT)	Field configurable for sensor by others, building management system input, or optional sensor(s) provided.
ENCLOSURE	NEMA 12 (same as IP55 & UL type 12)
POWER DISCONNECT SWITCH	Included standard. Fused Disconnect Switch optional with three phase input voltage.
HARMONIC SUPPRESSION	Integrated non-saturating dual DC link reactors provide better harmonic performance than a 5% AC line reactor.
COOLING	Fan-cooled through temperature controlled and easy replacement.
AMBIENT TEMPERATURE RATING	14°F to 113°F (-10°C to 45°C)
COMMUNICATION PROTOCOLS	BACnet, Modbus RTU, N2 Metasys, FLN Apogee
ANALOG INPUTS	2 configurable for either voltage (0 to 10VDC) or current(0/4 to 20mA)
ANALOG OUTPUTS	1 (0/4 to 20mA) up to 500 ohm load accurate to 1% of full scale
DIGITAL INPUTS	4 (0 to 24VDC), NPN or PNP, 0 to 24VDC, on 5 msec scan interval, Up to 2 can be configured as pulse inputs.
DIGITAL OUTPUTS	2 (0 to 24VDC), 40mA max current, configurable as pulse outputs.
RELAY OUTPUTS	2 programmable, 240VAC or 400VAC up to 2 A
MINIMUM CONTROL HEAD	_____ ft (default set to 40% of design head if not unknown)

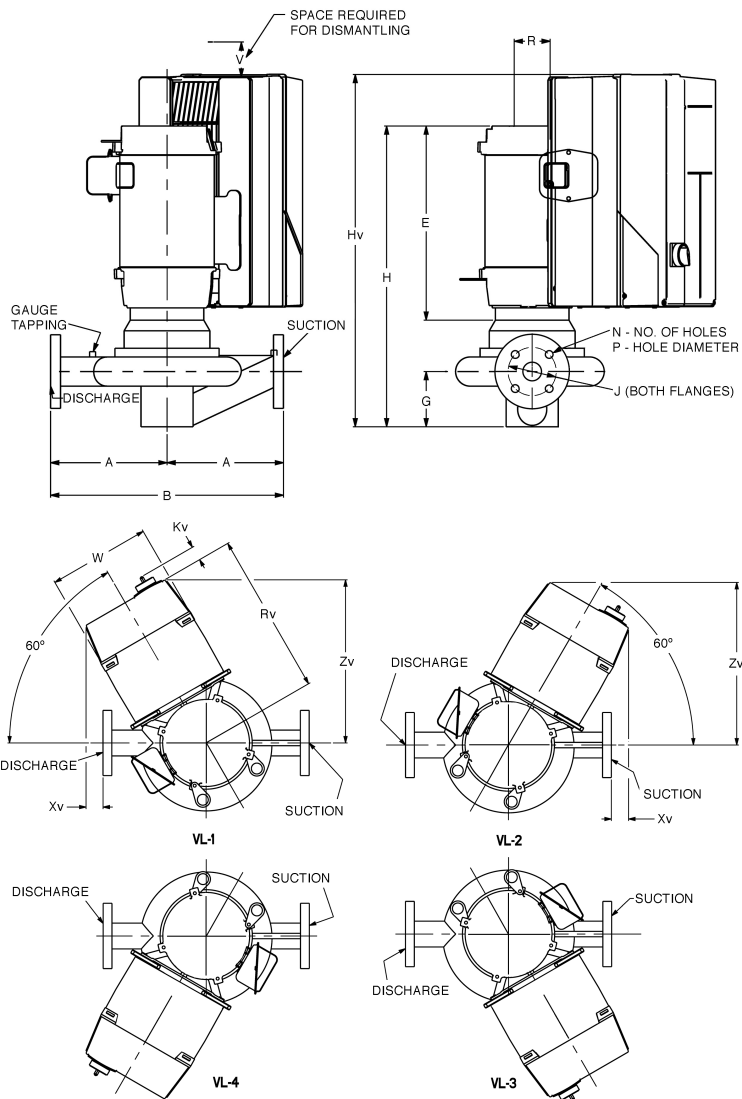

Series e-80 8x8x9.5B

B-139.38

In-Line Mounted Centrifugal Pumps
With Integrated Technologic® Control

DIMENSIONS - Inches (mm)

STANDARD SEAL

STUFFING BOX

MOTOR FRAME	VFD	Rv	Zv	W	Hv	Xv	MOTOR FRAME	VFD	Rv	Zv	W	Hv	Xv
254JM	B1	16.83 (427)	16.70 (424)	9.50 (241)	44.75 (1137)	5.88 (149)	254JP	B1	16.83 (427)	16.70 (424)	9.50 (241)	47.63 (1210)	5.88 (149)
	B2	16.83 (427)	16.70 (424)	9.50 (241)	49.21 (1250)	5.88 (149)		B2	16.83 (427)	16.70 (424)	9.50 (241)	52.09 (1323)	5.88 (149)
	C1	18.80 (477)	19.90 (506)	12.10 (307)	50.47 (1282)	9.07 (231)		C1	18.80 (477)	19.90 (506)	12.10 (307)	53.35 (1355)	9.07 (231)
256JM	B1	16.83 (427)	16.70 (424)	9.50 (241)	44.13 (1121)	5.88 (149)	256JP	B1	16.83 (427)	16.70 (424)	9.50 (241)	47.00 (1194)	5.88 (149)
	B2	16.83 (427)	16.70 (424)	9.50 (241)	48.59 (1234)	5.88 (149)		B2	16.83 (427)	16.70 (424)	9.50 (241)	51.45 (1307)	5.88 (149)
	C1	19.58 (497)	17.63 (448)	12.09 (307)	45.24 (1149)	4.00 (102)		C1	19.58 (497)	17.63 (448)	12.09 (307)	45.24 (1149)	4.00 (102)
	C2	20.36 (517)	19.93 (506)	14.59 (371)	49.90 (1267)	6.30 (160)		C2	20.36 (517)	19.93 (506)	14.59 (371)	49.90 (1267)	6.30 (160)
284JM	B1	17.58 (446)	17.36 (441)	9.50 (241)	43.50 (1105)	5.50 (140)	284JP	B1	17.58 (446)	17.36 (441)	9.50 (241)	46.38 (1178)	5.50 (140)
	B2	17.58 (446)	17.36 (441)	9.50 (241)	47.96 (1218)	5.50 (140)		B2	17.58 (446)	17.36 (441)	9.50 (241)	50.84 (1291)	5.50 (140)
	C1	19.58 (497)	19.63 (498)	12.09 (307)	50.36 (1279)	3.59 (91)		C1	19.58 (497)	19.63 (498)	12.09 (307)	53.23 (1352)	3.59 (91)
	C2	20.36 (517)	21.93 (557)	14.59 (371)	53.51 (1359)	5.89 (150)		C2	20.36 (517)	21.93 (557)	14.59 (371)	56.38 (1432)	5.89 (150)
286JM	B2	17.58 (446)	17.36 (441)	9.50 (241)	49.45 (1256)	5.50 (140)	286JP	B2	17.58 (446)	17.36 (441)	9.50 (241)	52.33 (1329)	5.50 (140)
	C1	19.58 (497)	19.63 (498)	12.09 (307)	51.86 (1317)	3.59 (91)		C1	19.58 (497)	19.63 (498)	12.09 (307)	54.73 (1390)	3.59 (91)
	C2	20.36 (517)	21.93 (557)	14.59 (371)	55.01 (1397)	5.89 (150)		C2	20.36 (517)	21.93 (557)	14.59 (371)	57.88 (1470)	5.89 (150)
324JM	B2	18.58 (472)	18.22 (463)	9.50 (241)	48.80 (1239)	5.00 (127)	324JP	B2	18.58 (472)	18.22 (463)	9.50 (241)	51.67 (1312)	5.00 (127)
	C1	20.58 (523)	20.48 (520)	12.09 (307)	49.14 (1248)	3.09 (79)		C1	20.58 (523)	20.48 (520)	12.09 (307)	52.02 (1321)	3.09 (79)
326JM	C1	20.58 (523)	20.48 (520)	12.09 (307)	49.14 (1248)	3.09 (79)	326JP	C1	20.58 (523)	20.48 (520)	12.09 (307)	52.02 (1321)	3.09 (79)
	C2	21.58 (548)	21.95 (558)	14.59 (371)	53.70 (1364)	1.56 (40)		C2	21.58 (548)	21.95 (558)	14.59 (371)	56.58 (1437)	1.56 (40)

NOTE: Drives with single phase input have three phase output and include three phase motors.
Kv=2 (50)




Pressure Sensor/Transmitter For Pumps with TECHNOLOGIC® Drives

FEATURES

- 4-20mA output
- 10-28 VDC supply voltage
- Operating Temperature -40 to 85°C (-40 to 185°F)
- Storage Temperature -40 to 100°C (-40 to 212°F)
- Enclosure IP-66 (housing only)
- High Strength Stainless Steel Construction
- No Oil, Welds or Internal O-rings
- Wide Operating Temperature
- Low Static and Thermal Errors
- Compatible with Wide Variety of Liquids and Gases
- EMI/RFI Protection
- UL/cUL 508 Approved (with housing)
- 1lb. (0.45 kg) approximate weight

TECHNOLOGIC ANALOG SENSOR WIRING

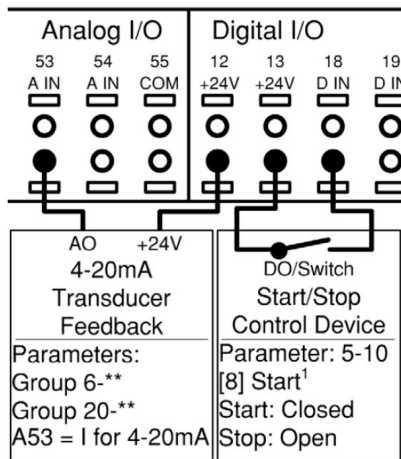

B&G PART NUMBERS

- S13203 Pressure range: 0-100 psi (0-689 kPa)
- S13204 Pressure range: 0-300 psi (0-2068 kPa)


Consult factory for other ranges.


INSTALLATION CONSIDERATIONS

- Standard 24 AWG (0.61 mm dia.) 2 wire shielded cable located in a conduit separate from high voltage wiring
- 24 vdc power supplied from Technologic Controller

DIMENSIONAL INFORMATION

Dimensions in Inches (Millimeters)

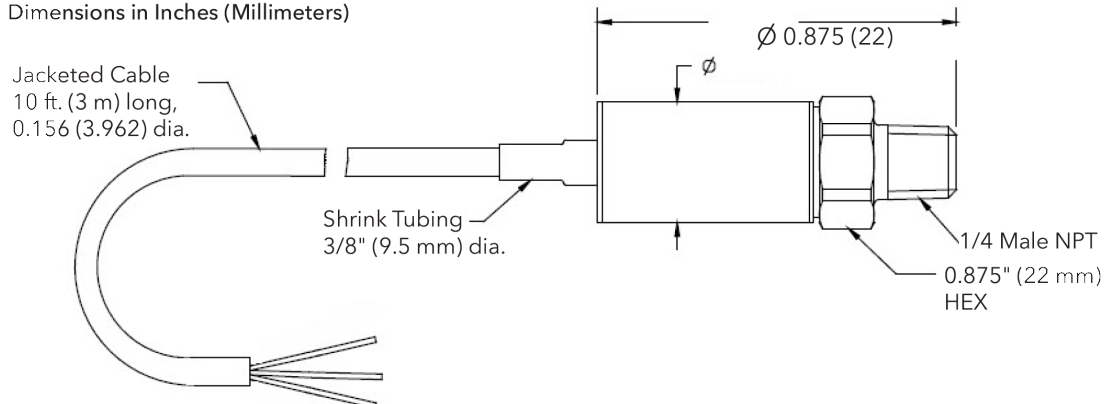

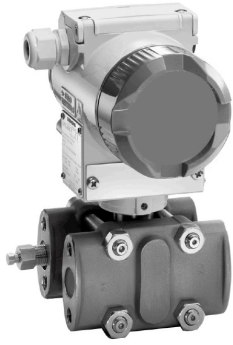


Differential Pressure Sensor/ Transmitter For Pumps with TECHNOLOGIC® Drives

FEATURES

- Relays reading to the Technologic controller up to 2000 ft. (610 m) away
- All wetted parts are 316 stainless steel
- Built-in RFI filter effective from 20 to 1000 MHz
- Withstands static pressures up to 2300 PSI (15858 kPa)
- 3 Valve bypass manifold (optional)
- 10 lbs. (4.5 kg) approximate weight

TECHNOLOGIC ANALOG SENSOR WIRING

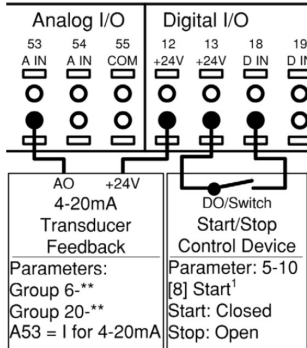

B&G PART NUMBERS

- S100089 Pressure range: 0 - 40 psi (0 - 276 kPa)
- S100091 Pressure range: 0 - 70 psi (0 - 483 kPa)
- S100092 Pressure range: 0 - 100 psi (0 - 689 kPa)


Consult factory for other ranges.

INSTALLATION CONSIDERATIONS

- Standard 18 AWG (1.194 mm dia.) 2 wire shielded cable located in a conduit separate from high voltage wiring
- 24 vdc power supplied from Technologic Controller for distance <2000 ft (610 m)

DIMENSIONAL INFORMATION

Dimensions in Inches (Millimeters)

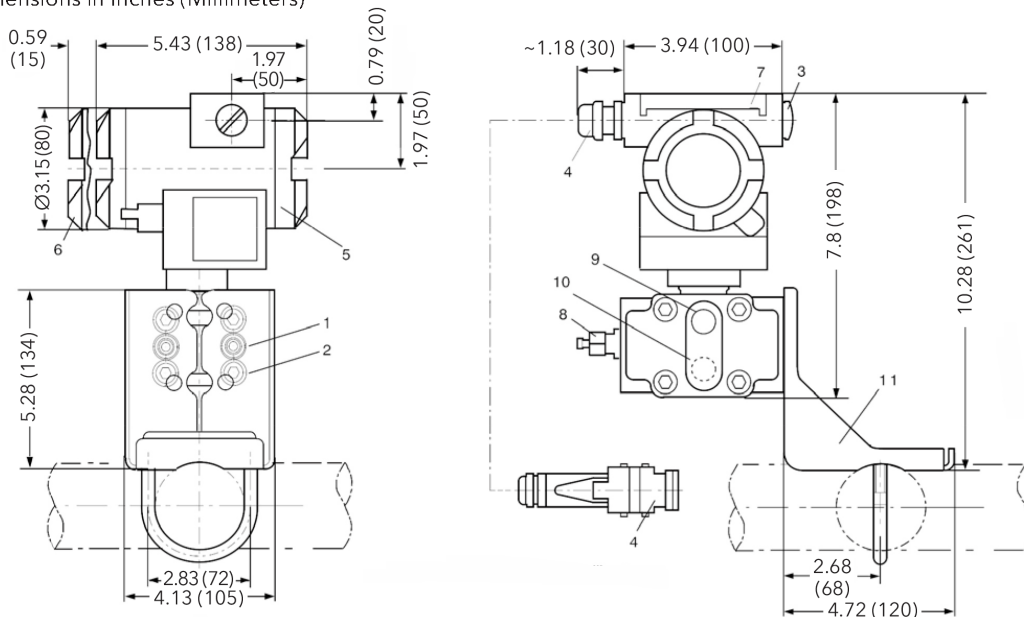

- 1 Process connection 1/4-18NPT for absolute pressure (+) side
- 2 Mounting thread 7/16-20 UNF to EN 61518
- 3 Dummy plug
- 4 Electrical connection: Screwed gland 1/2-14 NPT
- 5 Connection side

- 6 Electronic side, no digital display
- 7 Access cover over magnetic pushbuttons
- 8 Sealing screw with vent shown (optional)
- 9 Side vent for measuring liquid
- 10 Side vent for measuring gas (supplement H02)
- 11 Mounting bracket (2 shackles, 4 nuts, 4 U-plates, 1 angle) made of steel



Flow Sensor/Transmitter For Pumps with TECHNOLOGIC® Drives


The rugged Bell & Gossett Flow Sensor/Transmitter precisely measures system flow and transmits a proportional 4 to 20 mA DC signal to the Technologic Controller for display or program calculations.

FEATURES



- Suitable for mounting in vertical pipe
- Suitable for mounting in horizontal pipe within 45° of top dead center
- Non-magnetically sensed, non-fouling paddle wheel
- NEMA 4X Transmitter Enclosure
- Maximum Pressure Ratings:
 - 1000 psi @ 100°F, 900 psi @ 200°F,
 - 750 psi @ 300°F (6895 kPa @ 38°C, 6205 kPa @ 93°C, 5171 kPa @ 149°C)
- Maximum Temperature Ratings:
 - Fluid - 300°F (149°C) continuous service
 - Electronics - 150°F (66°C)
- Optional software and cable available for field programming
- 9.9 lbs (4.5 kg) approximate weight

DIMENSIONAL INFORMATION

Dimensions in Inches (Millimeters)

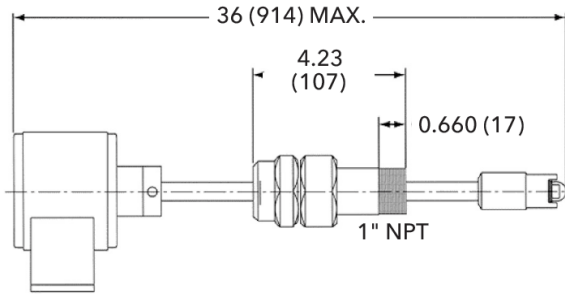

TECHNOLOGIC ANALOG SENSOR WIRING

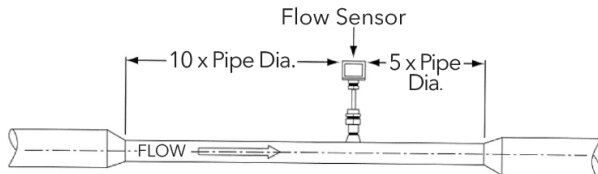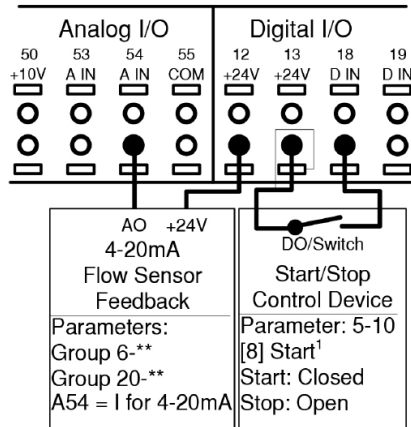


INSTALLATION CONSIDERATIONS

- Standard 18 AWG (1.194 mm dia.) gauge 3 wire shielded cable located in conduit separate from high voltage wiring
- 24 vdc power supplied from Technologic Controller
- Takes accurate readings and relays them to the Technologic Controller up to 2,000 ft. (610 m) away, when 10 pipe diameters upstream and 5 pipe diameters downstream of straight uninterrupted flow is present.

CALIBRATION CHART		
B&G Part No.	Pipe Size	Max. Flow
137411	3" Sch 40	250 gpm (16 l/sec)
137412	4" Sch 40	400 gpm (25 l/sec)
137413	6" Sch 40	850 gpm (54 l/sec)
137414	8" Sch 40	1750 gpm (110 l/sec)
137415	10" Sch 40	3150 gpm (199 l/sec)
137416	12" Sch 40	5000 gpm (315 l/sec)
137417	14" Sch 40	6400 gpm (404 l/sec)
137418	16" Sch 40	9100 gpm (574 l/sec)
137419	18" Sch 40	12400 gpm (782 l/sec)
137420	20" Sch 40	16500 gpm (1041 l/sec)

Consult factory for custom flow range calibration.

JOB:	REPRESENTATIVE:	
UNIT TAG:	ORDER NO.:	DATE:
ENGINEER:	SUBMITTED BY:	DATE:
CONTRACTOR:	APPROVED BY:	DATE:



8x8x11B

Series e-80

In-Line Mounted Centrifugal Pumps

SPECIFICATIONS

FLOW _____ HEAD _____

HP _____ RPM _____

VOLTS _____

CYCLE _____ INPUT PHASE _____

ENCLOSURE _____

APPROX. WEIGHT _____

SPECIALS _____

MATERIALS OF CONSTRUCTION

Stainless Steel Fitted

MAXIMUM WORKING PRESSURE

- 175 psi (12 bar) with 125# ANSI flange drilling
- 250 psi (17 bar) with 250# ANSI flange drilling (requires 80-S)
- 300 psi (21 bar) W.P. with 250# ANSI flange drilling (Requires -S and EPR-Silicon Carbide-Silicon Carbide Seal)

MOUNTING


- In-Line Piping
- Flange Supports

PUMP VARIABLE SPEED CONTROL


- Integrated Technologic® Sensorless Control (ITSC)
- Integrated Technologic® (IT)
 - External input by others
 - Pressure Sensor(s)
 - Differential Pressure Sensor(s)
 - Flow Sensor(s)
- By Others

TYPE OF SEAL

- F Standard Seal w/ Flush Line (Buna-Carbon/Ceramic)
- S Stuffing Box construction w/ Flushed Mechanical Single Seal (EPR-Tungsten Carbide/Carbon)
- PF Stuffing Box Construction w/ Flushed Packing (Graphite Impregnated PTFE)

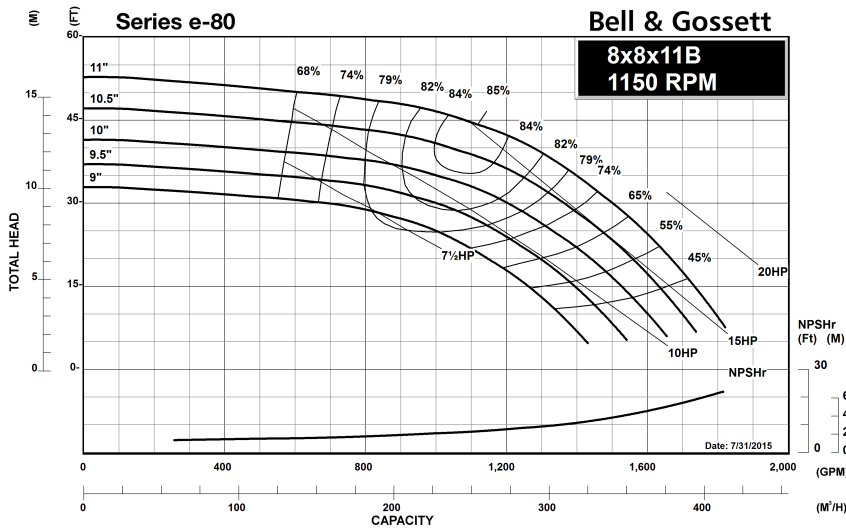

JOB:	REPRESENTATIVE:	
UNIT TAG:	ORDER NO.:	DATE:
ENGINEER:	SUBMITTED BY:	DATE:
CONTRACTOR:	APPROVED BY:	DATE:



8x8x11B

Series e-80

In-Line Mounted Centrifugal Pumps

SPECIFICATIONS

FLOW _____ HEAD _____

HP _____ RPM _____

VOLTS _____

CYCLE _____ INPUT PHASE _____

ENCLOSURE _____

APPROX. WEIGHT _____

SPECIALS _____

MATERIALS OF CONSTRUCTION

Stainless Steel Fitted

MAXIMUM WORKING PRESSURE

- 175 psi (12 bar) with 125# ANSI flange drilling
- 250 psi (17 bar) with 250# ANSI flange drilling (requires 80-S)
- 300 psi (21 bar) W.P. with 250# ANSI flange drilling (Requires -S and EPR-Silicon Carbide-Silicon Carbide Seal)

MOUNTING


- In-Line Piping
- Flange Supports


PUMP VARIABLE SPEED CONTROL

- Integrated Technologic® Sensorless Control (ITSC)
- Integrated Technologic® (IT)
 - External input by others
 - Pressure Sensor(s)
 - Differential Pressure Sensor(s)
 - Flow Sensor(s)
- By Others

TYPE OF SEAL

- F Standard Seal w/ Flush Line (Buna-Carbon/Ceramic)
- S Stuffing Box construction w/ Flushed Mechanical Single Seal (EPR-Tungsten Carbide/Carbon)
- PF Stuffing Box Construction w/ Flushed Packing (Graphite Impregnated PTFE)

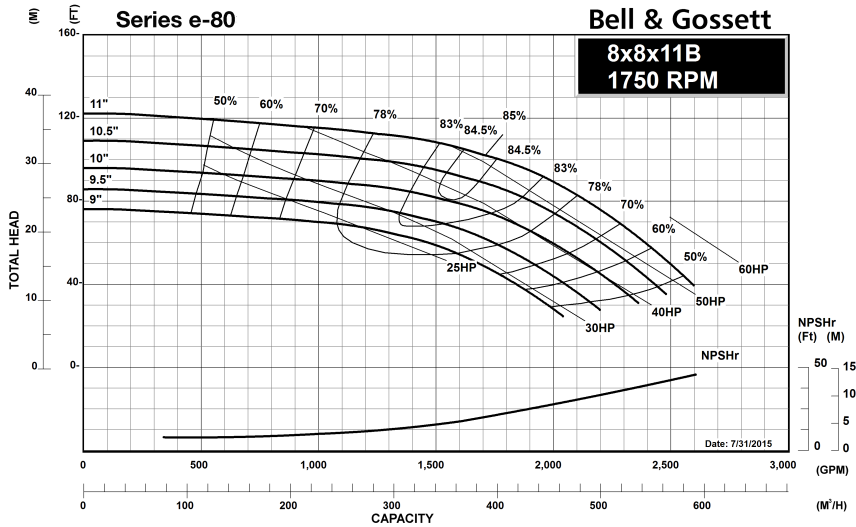

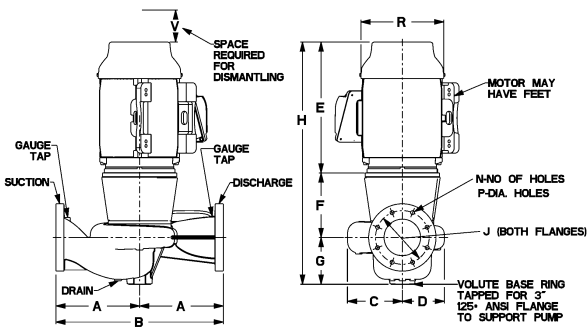

8x8x11B Series e-80 Centrifugal Pump Submittal - In-Line Piping

DIMENSIONS - Inches (mm)

STANDARD SEAL

MOTOR FRAME	A	B	C	D	E (max)	F	G	H (max)	125# ANSI			250# ANSI			R	S (Max)*	V (min)	Suct/Disch Gauge Taps (NPT)	Drain Tap (NPT)
									J	N	P	J	N	P					
254JM	18.00 (457)	36.00 (914)	9.21 (234)	12.02 (305)	24.13 (613)	5.29 (134)	10.25 (260)	39.67 (1008)	11.75 (298)	8 (22)	0.88 (22)	13.00 (330)	12 (25)	1.00 (432)	17.00 (432)	-	5.75 (146)	0.25	0.25
256JM	18.00 (457)	36.00 (914)	9.21 (234)	12.02 (305)	24.13 (613)	5.29 (134)	10.25 (260)	39.67 (1008)	11.75 (298)	8 (22)	0.88 (22)	13.00 (330)	12 (25)	1.00 (432)	17.00 (432)	-	5.75 (146)	0.25	0.25
284JM	18.00 (457)	36.00 (914)	9.21 (234)	12.02 (305)	23.63 (600)	5.29 (134)	10.25 (260)	39.17 (995)	11.75 (298)	8 (22)	0.88 (22)	13.00 (330)	12 (25)	1.00 (410)	16.13 (410)	4.63 (117)	5.75 (146)	0.25	0.25
286JM	18.00 (457)	36.00 (914)	9.21 (234)	12.02 (305)	25.13 (638)	5.29 (134)	10.25 (260)	40.67 (1033)	11.75 (298)	8 (22)	0.88 (22)	13.00 (330)	12 (25)	1.00 (410)	16.13 (410)	4.63 (117)	5.75 (146)	0.25	0.25
324JM	18.00 (457)	36.00 (914)	9.21 (234)	12.02 (305)	26.00 (660)	5.29 (134)	10.25 (260)	41.54 (1055)	11.75 (298)	8 (22)	0.88 (22)	13.00 (330)	12 (25)	1.00 (476)	18.75 (476)	4.63 (117)	5.75 (146)	0.25	0.25
326JM	18.00 (457)	36.00 (914)	9.21 (234)	12.02 (305)	26.00 (660)	5.29 (134)	10.25 (260)	41.54 (1055)	11.75 (298)	8 (22)	0.88 (22)	13.00 (330)	12 (25)	1.00 (476)	18.75 (476)	4.63 (117)	5.75 (146)	0.25	0.25


STUFFING BOX

MOTOR FRAME	A	B	C	D	E (max)	F	G	H (max)	125# ANSI			250# ANSI			R	S (Max)*	V (min)	Suct/Disch Gauge Taps (NPT)	Drain Tap (NPT)
									J	N	P	J	N	P					
254JP	18.00 (457)	36.00 (914)	9.21 (234)	12.02 (305)	24.13 (613)	8.13 (206)	10.25 (260)	42.50 (1080)	11.75 (298)	8 (22)	0.88 (22)	13.00 (330)	12 (25)	1.00 (432)	17.00 (432)	-	5.75 (146)	0.25	0.25
256JP	18.00 (457)	36.00 (914)	9.21 (234)	12.02 (305)	24.13 (613)	8.13 (206)	10.25 (260)	42.50 (1080)	11.75 (298)	8 (22)	0.88 (22)	13.00 (330)	12 (25)	1.00 (432)	17.00 (432)	-	5.75 (146)	0.25	0.25
284JP	18.00 (457)	36.00 (914)	9.21 (234)	12.02 (305)	23.63 (600)	8.13 (206)	10.25 (260)	42.00 (1067)	11.75 (298)	8 (22)	0.88 (22)	13.00 (330)	12 (25)	1.00 (410)	16.13 (410)	4.63 (117)	5.75 (146)	0.25	0.25
286P	18.00 (457)	36.00 (914)	9.21 (234)	12.02 (305)	25.13 (638)	8.13 (206)	10.25 (260)	43.50 (1105)	11.75 (298)	8 (22)	0.88 (22)	13.00 (330)	12 (25)	1.00 (410)	16.13 (410)	4.63 (117)	5.75 (146)	0.25	0.25
324JP	18.00 (457)	36.00 (914)	9.21 (234)	12.02 (305)	26.00 (660)	8.13 (206)	10.25 (260)	44.38 (1127)	11.75 (298)	8 (22)	0.88 (22)	13.00 (330)	12 (25)	1.00 (476)	18.75 (476)	4.63 (117)	5.75 (146)	0.25	0.25
326JP	18.00 (457)	36.00 (914)	9.21 (234)	12.02 (305)	26.00 (660)	8.13 (206)	10.25 (260)	44.38 (1127)	11.75 (298)	8 (22)	0.88 (22)	13.00 (330)	12 (25)	1.00 (476)	18.75 (476)	4.63 (117)	5.75 (146)	0.25	0.25
284JP	9.50 (241)	19.00 (483)	5.88 (149)	6.25 (159)	23.63 (600)	8.56 (217)	4.50 (114)	36.75 (933)	3.88 (98)	4 (16)	0.63 (16)	4.50 (114)	4 (22)	0.88 (410)	16.13 (410)	4.63 (117)	4.00 (102)	0.25	0.25
286JP	9.50 (241)	19.00 (483)	5.88 (149)	6.25 (159)	25.13 (638)	8.56 (217)	4.50 (114)	38.13 (968)	3.88 (98)	4 (16)	0.63 (16)	4.50 (114)	4 (22)	0.88 (410)	16.13 (410)	4.63 (117)	4.00 (102)	0.25	0.25

Dimensions are subject to change. Not to be used for construction purposes unless certified.

NOTE: For Single phase Motors add 1" to dimensions E & H.

*Dimensions are for ODP Motors. For TEFC add S dimension to dimensions E & H.

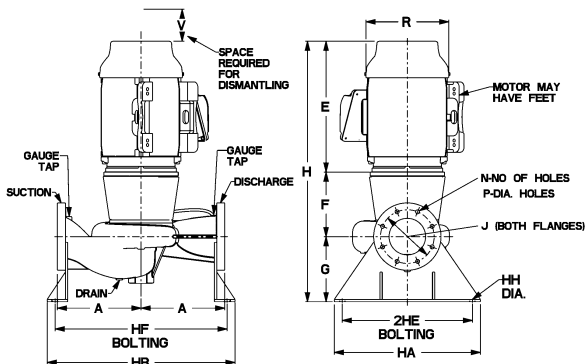

8x8x11B Series e-80 Centrifugal Pump Submittal - Flange Support Mounting

DIMENSIONS - Inches (mm)

STANDARD SEAL

MOTOR FRAME	A	HF BOLTING	HB	2HE BOLTING	HA	HH DIA	E (max)	F	G	H (max)	125# ANSI			250# ANSI			R	S (Max)*	V (min)	Suct/Disch Gauge Taps (NPT)	Drain Tap (NPT)
											J	N	P	J	N	P					
254JM	18.00 (457)	37.44 (951)	40.94 (1040)	28.50 (724)	32.00 (813)	1.13 (29)	24.13 (613)	5.29 (134)	10.25 (260)	39.67 (1008)	11.75 (298)	8 (22)	0.88 (330)	13.00 (330)	12 (25)	1.00 (432)	17.00 (432)	-	5.75 (146)	0.25	0.25
256JM	18.00 (457)	37.44 (951)	40.94 (1040)	28.50 (724)	32.00 (813)	1.13 (29)	24.13 (613)	5.29 (134)	10.25 (260)	39.67 (1008)	11.75 (298)	8 (22)	0.88 (330)	13.00 (330)	12 (25)	1.00 (432)	17.00 (432)	-	5.75 (146)	0.25	0.25
284JM	18.00 (457)	37.44 (951)	40.94 (1040)	28.50 (724)	32.00 (813)	1.13 (29)	23.63 (600)	5.29 (134)	10.25 (260)	39.17 (995)	11.75 (298)	8 (22)	0.88 (330)	13.00 (330)	12 (25)	1.00 (410)	16.13 (410)	4.63 (117)	5.75 (146)	0.25	0.25
286JM	18.00 (457)	37.44 (951)	40.94 (1040)	28.50 (724)	32.00 (813)	1.13 (29)	25.13 (638)	5.29 (134)	10.25 (260)	40.67 (1033)	11.75 (298)	8 (22)	0.88 (330)	13.00 (330)	12 (25)	1.00 (410)	16.13 (410)	4.63 (117)	5.75 (146)	0.25	0.25
324JM	18.00 (457)	37.44 (951)	40.94 (1040)	28.50 (724)	32.00 (813)	1.13 (29)	26.00 (660)	5.29 (134)	10.25 (260)	41.54 (1055)	11.75 (298)	8 (22)	0.88 (330)	13.00 (330)	12 (25)	1.00 (476)	18.75 (476)	4.63 (117)	5.75 (146)	0.25	0.25
326JM	18.00 (457)	37.44 (951)	40.94 (1040)	28.50 (724)	32.00 (813)	1.13 (29)	26.00 (660)	5.29 (134)	10.25 (260)	41.54 (1055)	11.75 (298)	8 (22)	0.88 (330)	13.00 (330)	12 (25)	1.00 (476)	18.75 (476)	4.63 (117)	5.75 (146)	0.25	0.25


STUFFING BOX

MOTOR FRAME	A	HF BOLTING	HB	2HE BOLTING	HA	HH DIA	E (max)	F	G	H (max)	125# ANSI			250# ANSI			R	S (Max)*	V (min)	Suct/Disch Gauge Taps (NPT)	Drain Tap (NPT)
											J	N	P	J	N	P					
254JP	18.00 (457)	37.44 (951)	40.94 (1040)	28.50 (724)	32.00 (813)	1.13 (29)	24.13 (613)	8.13 (206)	10.25 (260)	42.50 (1080)	11.75 (298)	8 (22)	0.88 (330)	13.00 (330)	12 (25)	1.00 (432)	17.00 (432)	-	5.75 (146)	0.25	0.25
256JP	18.00 (457)	37.44 (951)	40.94 (1040)	28.50 (724)	32.00 (813)	1.13 (29)	24.13 (613)	8.13 (206)	10.25 (260)	42.50 (1080)	11.75 (298)	8 (22)	0.88 (330)	13.00 (330)	12 (25)	1.00 (432)	17.00 (432)	-	5.75 (146)	0.25	0.25
284JP	18.00 (457)	37.44 (951)	40.94 (1040)	28.50 (724)	32.00 (813)	1.13 (29)	23.63 (600)	8.13 (206)	10.25 (260)	42.00 (1067)	11.75 (298)	8 (22)	0.88 (330)	13.00 (330)	12 (25)	1.00 (410)	16.13 (410)	4.63 (117)	5.75 (146)	0.25	0.25
286P	18.00 (457)	37.44 (951)	40.94 (1040)	28.50 (724)	32.00 (813)	1.13 (29)	25.13 (638)	8.13 (206)	10.25 (260)	43.50 (1105)	11.75 (298)	8 (22)	0.88 (330)	13.00 (330)	12 (25)	1.00 (410)	16.13 (410)	4.63 (117)	5.75 (146)	0.25	0.25
324JP	18.00 (457)	37.44 (951)	40.94 (1040)	28.50 (724)	32.00 (813)	1.13 (29)	26.00 (660)	8.13 (206)	10.25 (260)	44.38 (1127)	11.75 (298)	8 (22)	0.88 (330)	13.00 (330)	12 (25)	1.00 (476)	18.75 (476)	4.63 (117)	5.75 (146)	0.25	0.25
326JP	18.00 (457)	37.44 (951)	40.94 (1040)	28.50 (724)	32.00 (813)	1.13 (29)	26.00 (660)	8.13 (206)	10.25 (260)	44.38 (1127)	11.75 (298)	8 (22)	0.88 (330)	13.00 (330)	12 (25)	1.00 (476)	18.75 (476)	4.63 (117)	5.75 (146)	0.25	0.25

Dimensions are subject to change. Not to be used for construction purposes unless certified.

NOTE: For Single phase Motors add 1" to dimensions E & H.



*Dimensions are for ODP Motors. For TEFC add S dimension to dimensions E & H.



8x8x11B Series e-80

In-Line Mounted Centrifugal Pumps With Integrated Technologic® Control

TECHNOLOGIC STANDARD FEATURES	
CONTROL METHOD WITH INTEGRATED TECHNOLOGIC® SENSORLESS CONTROL (ITSC)	Factory configured for sensorless operation.
CONTROL METHOD WITH INTEGRATED TECHNOLOGIC® (IT)	Field configurable for sensor by others, building management system input, or optional sensor(s) provided.
ENCLOSURE	NEMA 12 (same as IP55 & UL type 12)
POWER DISCONNECT SWITCH	Included standard. Fused Disconnect Switch optional with three phase input voltage.
HARMONIC SUPPRESSION	Integrated non-saturating dual DC link reactors provide better harmonic performance than a 5% AC line reactor.
COOLING	Fan-cooled through temperature controlled and easy replacement.
AMBIENT TEMPERATURE RATING	14°F to 113°F (-10°C to 45°C)
COMMUNICATION PROTOCOLS	BACnet, Modbus RTU, N2 Metasys, FLN Apogee
ANALOG INPUTS	2 configurable for either voltage (0 to 10VDC) or current(0/4 to 20mA)
ANALOG OUTPUTS	1 (0/4 to 20mA) up to 500 ohm load accurate to 1% of full scale
DIGITAL INPUTS	4 (0 to 24VDC), NPN or PNP, 0 to 24VDC, on 5 msec scan interval, Up to 2 can be configured as pulse inputs.
DIGITAL OUTPUTS	2 (0 to 24VDC), 40mA max current, configurable as pulse outputs.
RELAY OUTPUTS	2 programmable, 240VAC or 400VAC up to 2 A
MINIMUM CONTROL HEAD	_____ ft (default set to 40% of design head if not unknown)

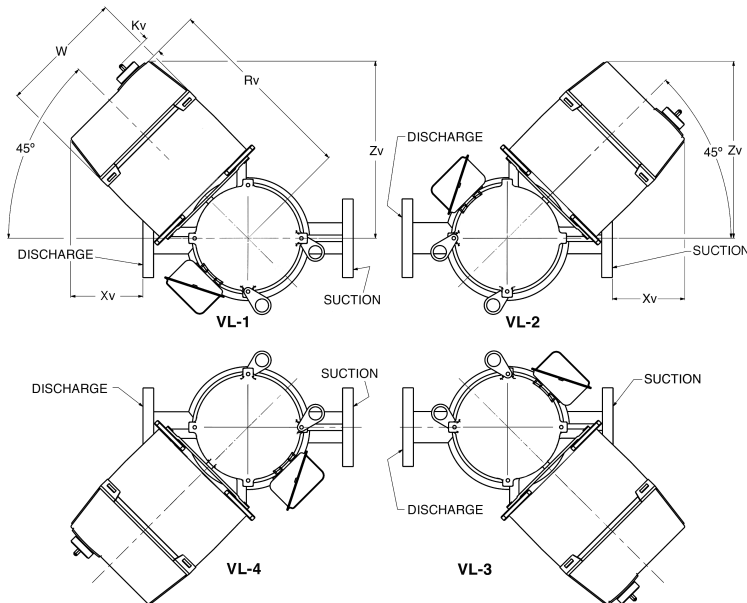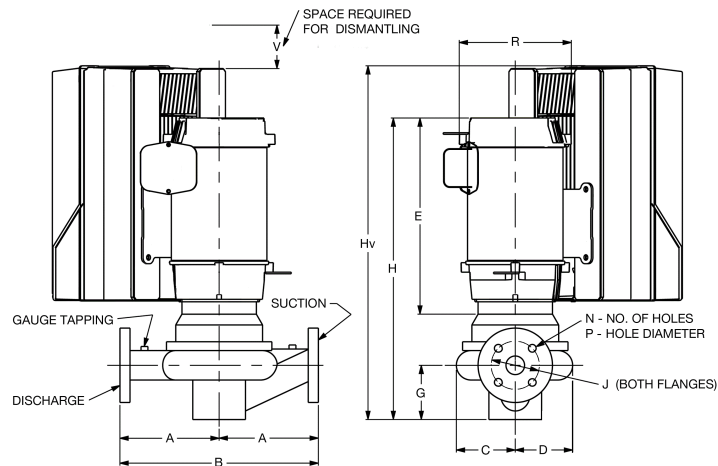

Series e-80 8x8x11B

B-139.40

In-Line Mounted Centrifugal Pumps
With Integrated Technologic® Control

DIMENSIONS - Inches (mm)		STANDARD SEAL					STUFFING BOX						
MOTOR FRAME	VFD	Rv	Zv	W	Hv	Xv	MOTOR FRAME	VFD	Rv	Zv	W	Hv	Xv
254JM	A5	14.53 (369)	13.27 (337)	9.50 (241)	39.67 (1008)	4.73 (120)	254JP	A5	14.53 (369)	13.27 (337)	9.50 (241)	42.50 (1080)	4.73 (120)
	B1	16.82 (427)	14.87 (378)	9.50 (241)	42.67 (1084)	6.33 (161)		B1	16.82 (427)	14.87 (378)	9.50 (241)	45.50 (1156)	6.33 (161)
	B2	16.82 (427)	14.87 (378)	9.50 (241)	47.13 (1197)	6.33 (161)		B2	16.82 (427)	14.87 (378)	9.50 (241)	49.96 (1269)	6.33 (161)
	C1	18.79 (477)	18.07 (459)	12.10 (307)	48.39 (1229)	9.53 (242)		C1	18.79 (477)	18.07 (459)	12.10 (307)	51.22 (1301)	9.53 (242)
256JM	A5	14.53 (369)	13.27 (337)	9.50 (241)	39.67 (1008)	4.73 (120)	256JP	A5	14.53 (369)	13.27 (337)	9.50 (241)	42.50 (1080)	4.73 (120)
	B1	16.83 (427)	14.92 (379)	9.50 (241)	42.04 (1068)	3.08 (78)		B1	16.83 (427)	14.92 (379)	9.50 (241)	44.88 (1140)	3.08 (78)
	B2	16.83 (427)	14.92 (379)	9.50 (241)	46.50 (1181)	3.08 (78)		B2	16.83 (427)	14.92 (379)	9.50 (241)	49.34 (1253)	3.08 (78)
	C1	18.80 (477)	18.12 (460)	12.10 (307)	47.76 (1213)	6.28 (159)		C1	18.80 (477)	18.12 (460)	12.10 (307)	50.60 (1285)	6.28 (159)
	C2	96.80 (2459)	20.42 (519)	14.60 (371)	52.42 (1332)	8.58 (218)		C2	96.80 (2459)	20.42 (519)	14.60 (371)	55.26 (1403)	8.58 (218)
284JM	B1	17.58 (446)	15.45 (393)	9.50 (241)	41.42 (1052)	2.55 (65)	284JP	B1	17.58 (446)	15.45 (393)	9.50 (241)	44.25 (1124)	2.55 (65)
	B2	17.58 (446)	15.45 (393)	9.50 (241)	45.88 (1165)	2.55 (65)		B2	17.58 (446)	15.45 (393)	9.50 (241)	48.71 (1237)	2.55 (65)
	C1	19.55 (497)	18.65 (474)	12.10 (307)	48.65 (1236)	5.75 (146)		C1	19.55 (497)	18.65 (474)	12.10 (307)	51.48 (1308)	5.75 (146)
	C2	97.55 (2478)	20.95 (532)	14.60 (371)	51.80 (1316)	8.05 (204)		C2	97.55 (2478)	20.95 (532)	14.60 (371)	54.63 (1388)	8.05 (204)
286JM	B1	17.58 (446)	15.45 (393)	9.50 (241)	42.92 (1090)	2.55 (65)	286JP	B1	17.58 (446)	15.45 (393)	9.50 (241)	45.75 (1162)	2.55 (65)
	B2	17.58 (446)	15.45 (393)	9.50 (241)	47.37 (1203)	2.55 (65)		B2	17.58 (446)	15.45 (393)	9.50 (241)	50.20 (1275)	2.55 (65)
	C1	19.58 (497)	17.63 (448)	12.09 (307)	49.78 (1264)	0.38 (10)		C1	19.58 (497)	17.63 (448)	12.09 (307)	52.61 (1336)	0.38 (10)
	C2	97.58 (2478)	19.93 (506)	14.59 (371)	52.93 (1344)	2.68 (68)		C2	97.58 (2478)	19.93 (506)	14.59 (371)	55.76 (1416)	2.68 (68)
324JM	B2	18.58 (472)	16.16 (410)	9.50 (241)	46.73 (1187)	1.84 (47)	324JP	B2	18.58 (472)	16.16 (410)	9.50 (241)	49.55 (1258)	1.84 (47)
	C1	20.58 (523)	18.33 (466)	12.09 (307)	47.06 (1195)	0.33 (8)		C1	20.58 (523)	18.33 (466)	12.09 (307)	49.89 (1267)	0.33 (8)
326JM	C1	20.58 (523)	18.33 (466)	12.09 (307)	47.06 (1195)	0.33 (8)	326JP	C1	20.58 (523)	18.33 (466)	12.09 (307)	49.89 (1267)	0.33 (8)
	C2	21.58 (548)	19.88 (505)	14.59 (371)	51.62 (1311)	1.88 (48)		C2	21.58 (548)	19.88 (505)	14.59 (371)	54.45 (1383)	1.88 (48)

NOTE: Drives with single phase input have three phase output and include three phase motors.

Kv=2 (50)

Xylem Inc.
8200 N. Austin Avenue, Morton Grove, IL 60053
Phone: (847)966-3700 Fax: (847)965-8379
www.bellgossett.com
Bell & Gossett is a trademark of Xylem Inc. or one of its subsidiaries.
© 2015 Xylem Inc.

xylem
Let's Solve Water




Pressure Sensor/Transmitter For Pumps with TECHNOLOGIC® Drives

FEATURES

- 4-20mA output
- 10-28 VDC supply voltage
- Operating Temperature -40 to 85°C (-40 to 185°F)
- Storage Temperature -40 to 100°C (-40 to 212°F)
- Enclosure IP-66 (housing only)
- High Strength Stainless Steel Construction
- No Oil, Welds or Internal O-rings
- Wide Operating Temperature
- Low Static and Thermal Errors
- Compatible with Wide Variety of Liquids and Gases
- EMI/RFI Protection
- UL/cUL 508 Approved (with housing)
- 1lb. (0.45 kg) approximate weight

TECHNOLOGIC ANALOG SENSOR WIRING

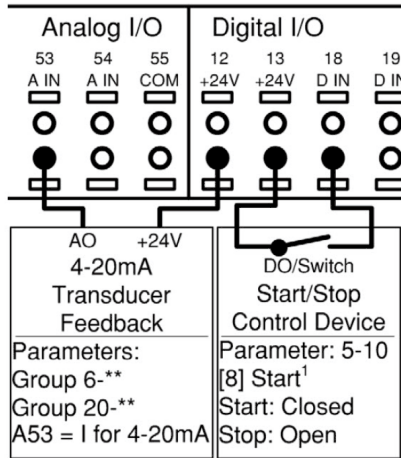

B&G PART NUMBERS

- S13203 Pressure range: 0-100 psi (0-689 kPa)
- S13204 Pressure range: 0-300 psi (0-2068 kPa)


Consult factory for other ranges.


INSTALLATION CONSIDERATIONS

- Standard 24 AWG (0.61 mm dia.) 2 wire shielded cable located in a conduit separate from high voltage wiring
- 24 vdc power supplied from Technologic Controller

DIMENSIONAL INFORMATION

Dimensions in Inches (Millimeters)

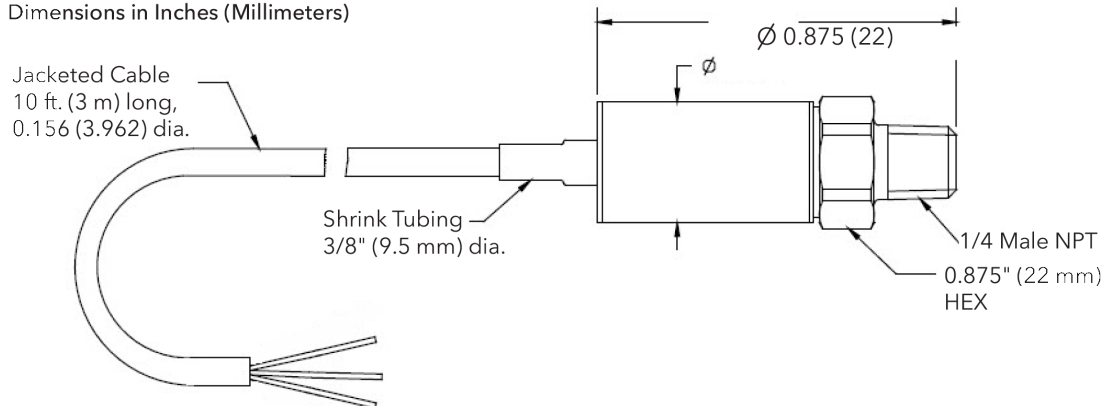

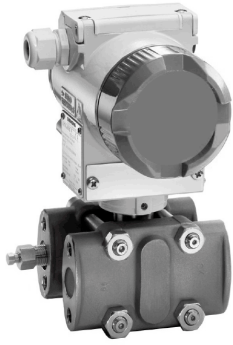


Differential Pressure Sensor/ Transmitter For Pumps with TECHNOLOGIC® Drives

FEATURES

- Relays reading to the Technologic controller up to 2000 ft. (610 m) away
- All wetted parts are 316 stainless steel
- Built-in RFI filter effective from 20 to 1000 MHz
- Withstands static pressures up to 2300 PSI (15858 kPa)
- 3 Valve bypass manifold (optional)
- 10 lbs. (4.5 kg) approximate weight

TECHNOLOGIC ANALOG SENSOR WIRING

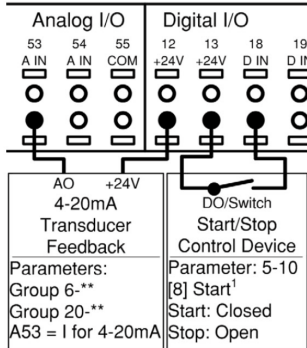

B&G PART NUMBERS

- S100089 Pressure range: 0 - 40 psi (0 - 276 kPa)
- S100091 Pressure range: 0 - 70 psi (0 - 483 kPa)
- S100092 Pressure range: 0 - 100 psi (0 - 689 kPa)


Consult factory for other ranges.

INSTALLATION CONSIDERATIONS

- Standard 18 AWG (1.194 mm dia.) 2 wire shielded cable located in a conduit separate from high voltage wiring
- 24 vdc power supplied from Technologic Controller for distance <2000 ft (610 m)

DIMENSIONAL INFORMATION

Dimensions in Inches (Millimeters)

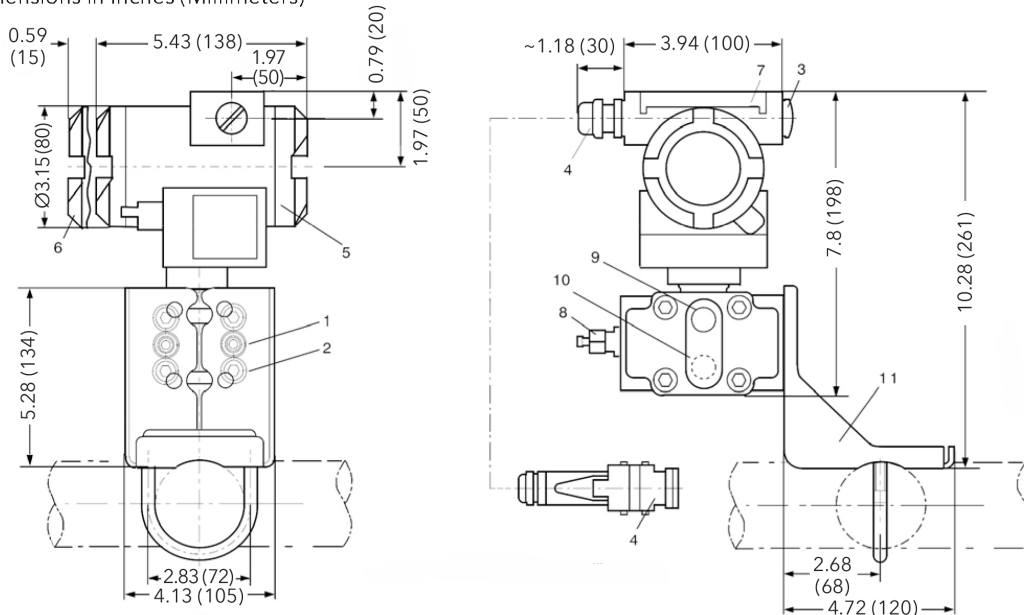

- 1 Process connection 1/4-18NPT for absolute pressure (+) side
- 2 Mounting thread 7/16-20 UNF to EN 61518
- 3 Dummy plug
- 4 Electrical connection: Screwed gland 1/2-14 NPT
- 5 Connection side

- 6 Electronic side, no digital display
- 7 Access cover over magnetic pushbuttons
- 8 Sealing screw with vent shown (optional)
- 9 Side vent for measuring liquid
- 10 Side vent for measuring gas (supplement H02)
- 11 Mounting bracket (2 shackles, 4 nuts, 4 U-plates, 1 angle) made of steel



Flow Sensor/Transmitter For Pumps with TECHNOLOGIC® Drives


The rugged Bell & Gossett Flow Sensor/Transmitter precisely measures system flow and transmits a proportional 4 to 20 mA DC signal to the Technologic Controller for display or program calculations.

FEATURES



- Suitable for mounting in vertical pipe
- Suitable for mounting in horizontal pipe within 45° of top dead center
- Non-magnetically sensed, non-fouling paddle wheel
- NEMA 4X Transmitter Enclosure
- Maximum Pressure Ratings:
 - 1000 psi @ 100°F, 900 psi @ 200°F,
 - 750 psi @ 300°F (6895 kPa @ 38°C, 6205 kPa @ 93°C, 5171 kPa @ 149°C)
- Maximum Temperature Ratings:
 - Fluid - 300°F (149°C) continuous service
 - Electronics - 150°F (66°C)
- Optional software and cable available for field programming
- 9.9 lbs (4.5 kg) approximate weight

DIMENSIONAL INFORMATION

Dimensions in Inches (Millimeters)

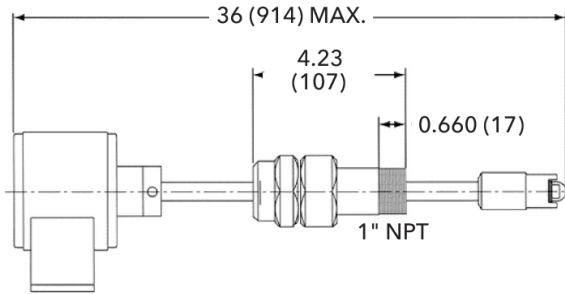

TECHNOLOGIC ANALOG SENSOR WIRING

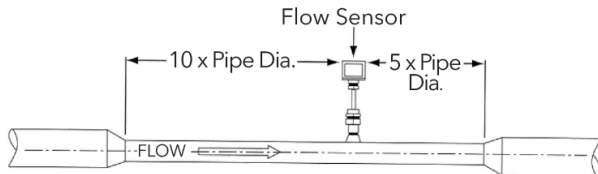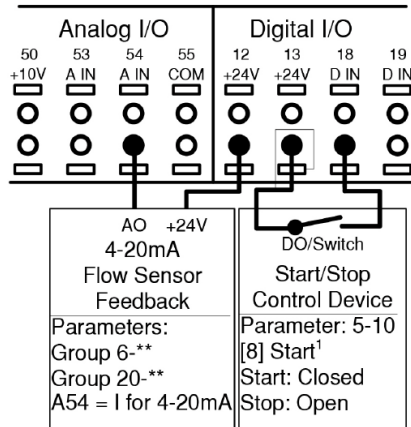

INSTALLATION CONSIDERATIONS

- Standard 18 AWG (1.194 mm dia.) gauge 3 wire shielded cable located in conduit separate from high voltage wiring
- 24 vdc power supplied from Technologic Controller
- Takes accurate readings and relays them to the Technologic Controller up to 2,000 ft. (610 m) away, when 10 pipe diameters upstream and 5 pipe diameters downstream of straight uninterrupted flow is present.

CALIBRATION CHART		
B&G Part No.	Pipe Size	Max. Flow
137411	3" Sch 40	250 gpm (16 l/sec)
137412	4" Sch 40	400 gpm (25 l/sec)
137413	6" Sch 40	850 gpm (54 l/sec)
137414	8" Sch 40	1750 gpm (110 l/sec)
137415	10" Sch 40	3150 gpm (199 l/sec)
137416	12" Sch 40	5000 gpm (315 l/sec)
137417	14" Sch 40	6400 gpm (404 l/sec)
137418	16" Sch 40	9100 gpm (574 l/sec)
137419	18" Sch 40	12400 gpm (782 l/sec)
137420	20" Sch 40	16500 gpm (1041 l/sec)

Consult factory for custom flow range calibration.