

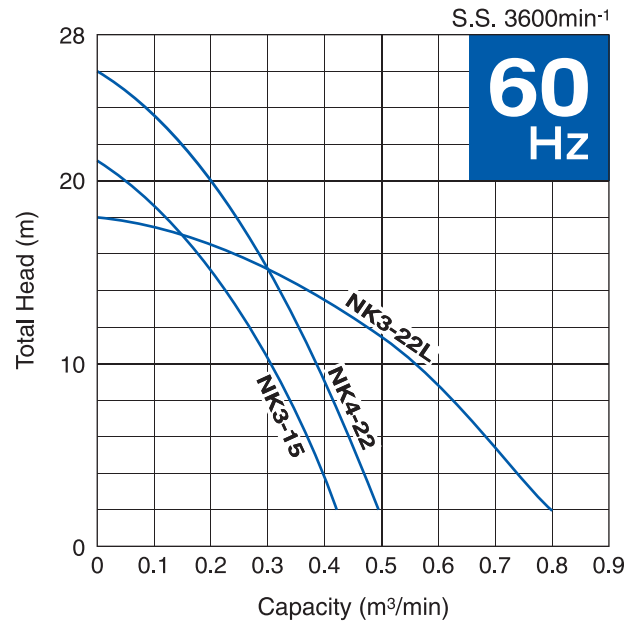


Performance Curves

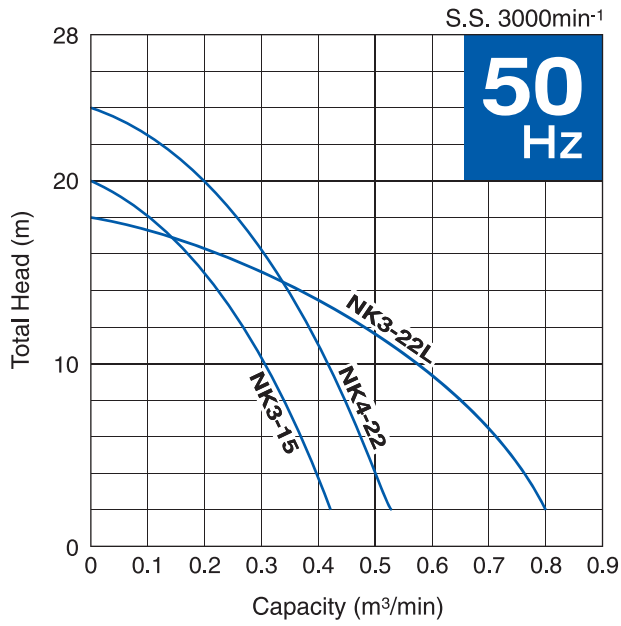

Dimensions

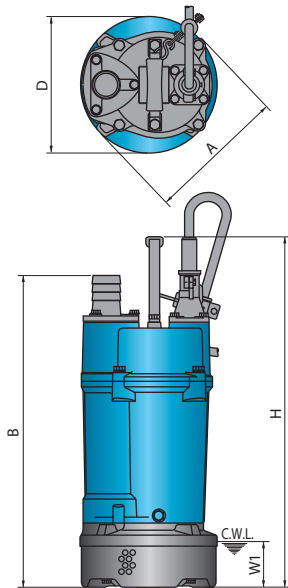

Unit: mm

Model	A	B	D	H	W1
NK3-15	240	546	243	614	80
NK4-22	240	546	243	614	80
NK3-22L	236	601	216	669	120

Model	Discharge Bore mm	Motor Output kW	Phase	Starting Method	Solids Passage mm	Dry Weight kg	Cable Length m
NK3-15	50	1.5	Single	Cpacitor Start	8.5	29	10
NK4-22	50	2.2		Cpacitor Start + Cpacitor Run	8.5	29	10
NK3-22L	80	2.2		Cpacitor Start + Cpacitor Run	8.5	40	10

- Male threaded coupling for pipe connection available on special request
- Weights excluding cable