



UPC 50-160 (SINGLE PHASE) 60 Hz

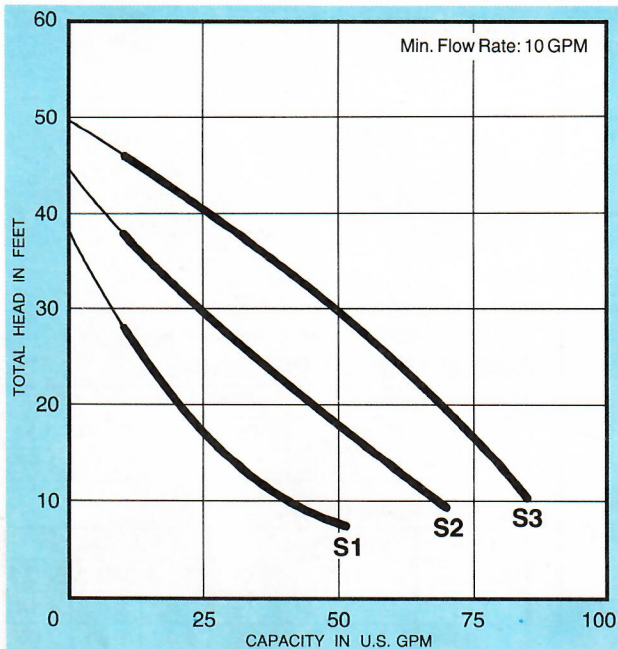

DIMENSIONS (Inches)

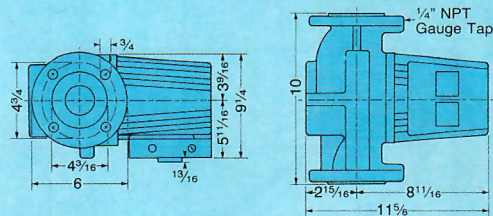

Net Wt.: 48.5 lbs. Connections: 2" ANSI 125 lb. R.F.


MINIMUM INLET PRESSURE

FLUID TEMP.	167°F	194°F	230°F
MINIMUM INLET PRESSURE	12.0 Ft.	28.0 Ft.	54.0 Ft.
	5.0 PSI	12.0 PSI	23.2 PSI


ELECTRICAL DATA

1 PH.	NOMINAL HP			F.L. AMPS		
VOLTAGE	SPD. 1	SPD. 2	SPD. 3	SPD. 1	SPD. 2	SPD. 3
115	1/8	1/2	3/4	6.96	7.80	8.04
230	1/8	1/2	3/4	3.48	3.90	4.02

UPC 50-160 (THREE PHASE) 60 Hz

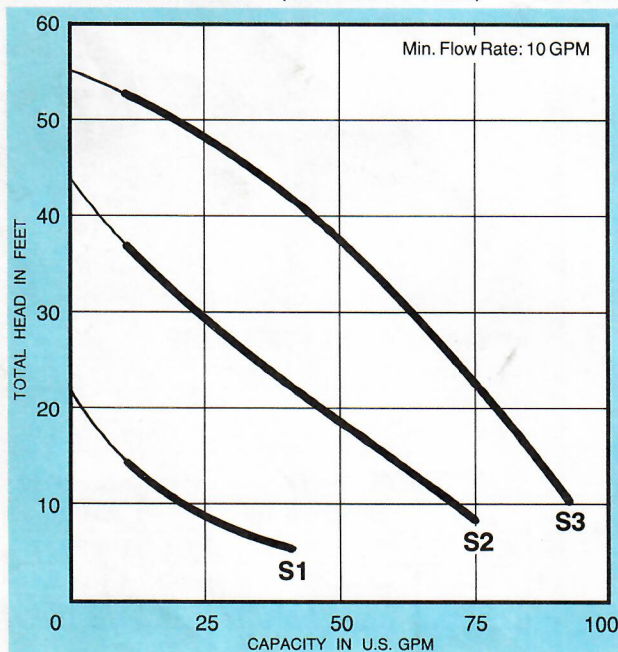

DIMENSIONS (Inches)

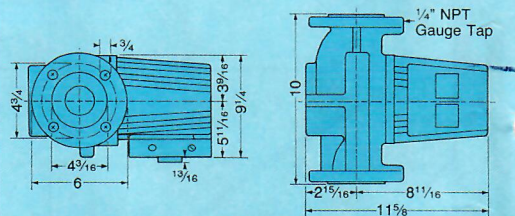

Net Wt.: 48.5 lbs. Connections: 2" ANSI 125 lb. R.F.

MINIMUM INLET PRESSURE

FLUID TEMP.	167°F	194°F	230°F
MINIMUM INLET PRESSURE	12.0 Ft.	28.0 Ft.	54.0 Ft.
	5.0 PSI	12.0 PSI	23.2 PSI

ELECTRICAL DATA

(* single speed only)

3 PH.	NOMINAL HP			F.L. AMPS		
VOLTAGE	SPD. 1	SPD. 2	SPD. 3	SPD. 1	SPD. 2	SPD. 3
208	1/8	1/2	3/4	1.13	2.32	3.79
230	1/8	1/2	3/4	1.02	2.10	3.43
460*	—	—	3/4	—	—	1.72