



Model #AUP033-6


1/3 HP Submersible Automatic Utility Pump



| | |
|---------------------|----------------------|
| Inlet | Diameter 14.4 inches |
| Discharge | NH3/4 |
| Pump Cover | PA66-GF25 |
| Motor Housing | ZL104+DMC |
| Pump Body | PP-GF30 |
| Switch Type | / |
| Impeller | PPO-GF30 |
| Seal Design | Framework oil seal |
| Seal Material | NBR |
| Oil Filled Motor | Yes |
| Power Cord | SJTW 18AWG 10ft |
| Net Weight | 8.2 |
| Gross Weight | 9.5 |
| Package Size | 7.5*6.5*11 |
| Expected Life Cycle | 4000 Hours |
| Motor Wires | Copper |
| Self-Priming | / |
| Certification | UL |

Features & Benefits:

- ❖ Automatically turns on when 1 1/2" of water is detected; turns off when water level falls below 1/4".
- ❖ Corrosion-resistant, reinforced thermoplastic construction.
- ❖ Bottom suction design filters debris and removes water down to 1/4" from surface.
- ❖ Permanent split capacitor motor and built-in automatic thermal overload protector.
- ❖ 1" NPT discharge, 3/4" adapter included.
- ❖ 10ft power cord.
- ❖ 2 year warranty.

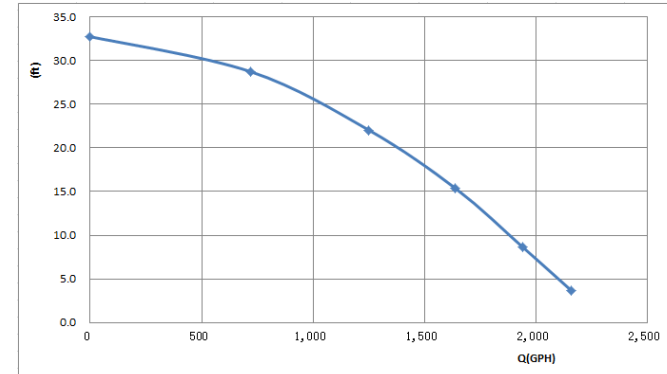

| Model | HP | Voltage | AMP | Discharge NPT(In) | GPH of water @ Total Ft. of Head | | | | | Max.Head Ft |
|-----------------|-----|---------|-----|-------------------|----------------------------------|-------|-------|-------|-------|-------------|
| | | | | | 5 ft | 10 ft | 15 ft | 20 ft | 25 ft | |
| AUP033-6 | 1/3 | 115 | 4 | 1-1/4 | 2160 | 1950 | 1700 | 1450 | 1100 | 33.5 |